

## VFM Step-Up DC/DC Converter

Rev: 00a

### General Description

The LD7280 is a VFM step-up DC/DC converter with ultra low supply current. The CMOS design results in less power consumption and high capability for battery-powered instruments.

The LD7280 is a high efficiency step-up DC/DC converter and takes only three external components to achieve the low ripple.

As well, using chip enable function will make it possible to supply current on standby minimized.


### Features

- Minimum external component counts
- Ultra low input current in switch off (TYP 5 $\mu$ A)
- $\pm 2\%$  High accuracy of output voltage
- Low ripple and low noise
- Low start-up voltage, 0.85V at no load.
- 80% efficiency with low cost inductor

### Applications

- Power source for battery -powered equipment
- Power source for DSC, PDA, Camcorders, VCRs, Pagers, and Hand-held communication equipment


### Typical Application

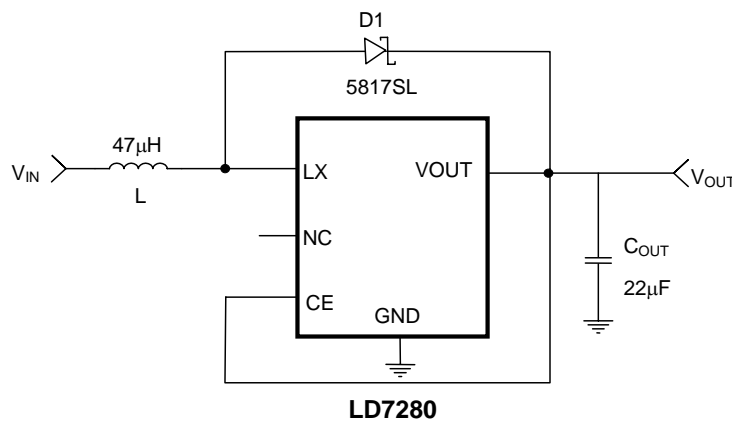

L range: 10 $\mu$ H~120 $\mu$ H

Fig. 1

## Pin Configuration

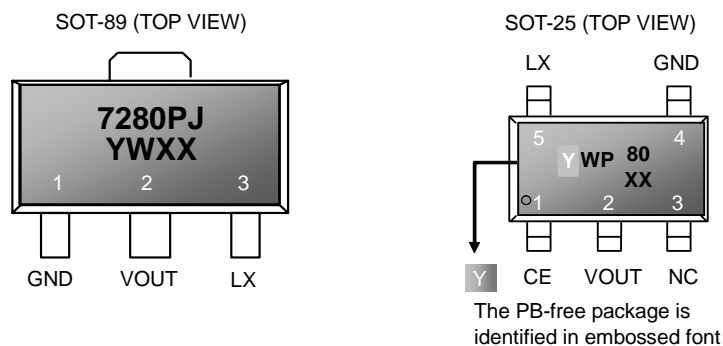

Y : Year code (D: 2004, E: 2005.....)  
W : Week code  
XX : Output Voltage

## Ordering Information


Part number	Package	Top Mark	Shipping
LD7280 PL-XX	SOT-25	YWP80/XX	3000 /tape & reel
LD7280 PJ-XX	SOT-89	7280PJ	1000 /tape & reel

The LD7280 is ROHS compliant.

XX: Output voltage: 33: 3.3V, 50: 5.0V

## Pin Descriptions

PIN		NAME	FUNCTION
PJ - XX	PL - XX		
1	4	GND	IC GND
2	2	VOUT	Output voltage
3	5	LX	Switching pin
-	1	CE	Chip enable High=enable Low=disable
-	3	NC	No connected

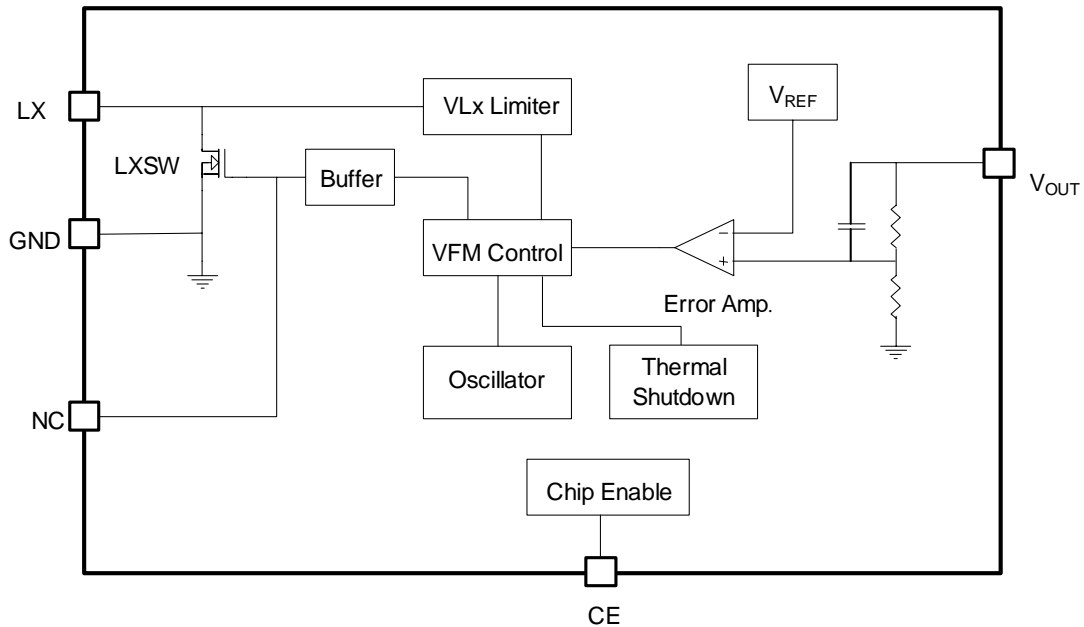**Block Diagram**

**Absolute Maximum Ratings**

Output Voltage.....	7V
LX Pin Voltage.....	7V
CE Pin Voltage.....	-0.3 to $V_{OUT}+0.3V$
LX Pin Output Current.....	400mA
Power Dissipation SOT-89.....	500mW
Thermal Resistance SOT-89, $\theta_{JA}$ .....	300°C/W
Power Dissipation SOT-25.....	250mW
Thermal Resistance SOT-25, $\theta_{JA}$ .....	250°C/W
Operating Temperature Range.....	-20°C to 85°C
Storage Temperature Range.....	-55°C to 125°C
Junction Temperature.....	125°C
Lead Temperature (Soldering, 10sec)(LD7280CL).....	230 °C
Lead Temperature (Soldering, 10sec)(LD7280PL).....	260°C

**Caution:**

Stresses beyond the ratings specified in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

**Electrical Characteristics**

Unless otherwise stated,  $T_A = +25^\circ\text{C}$ ,  $V_{IN}=2.0\text{V}$  (When  $V_{OUT}\leq 3.5\text{V}$ ),  $I_{OUT}=10\text{mA}$ ;  $V_{IN}=3.0\text{V}$  (When  $3.5\text{V}<V_{OUT}\leq 5\text{V}$ ),

$I_{OUT}=10\text{mA}$

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNITS	
<b>V<sub>OUT</sub></b>							
Output voltage accuracy			-2		+2	%	
<b>Input</b>							
Input voltage					6.5	V	
Start-up voltage			$I_{OUT}=0\text{mA}, V_{IN}=0 \rightarrow 2\text{V}$		0.85	1.1	V
Hold-on voltage			$I_{OUT}=0\text{mA}, V_{IN}=2 \rightarrow 0\text{V}$		0.7		V
No load Input current	$V_{OUT} \leq 3.5\text{V}$	$I_{OUT}=0\text{mA}$ (measured at $V_{IN}$ )		15		$\mu\text{A}$	
	$3.5\text{V} < V_{OUT} \leq 5\text{V}$			18			
IC supply current			Switch off		5	$\mu\text{A}$	
<b>Oscillator</b>							
Frequency				120		KHz	
Duty cycle				75		%	
<b>LX</b>							
LX switching current	$V_{OUT} \leq 3.5\text{V}$	$V_{LX}=0.4\text{V}$	120			mA	
	$3.5\text{V} < V_{OUT} \leq 5\text{V}$		160			mA	
$V_{LX}$ voltage limit			0.6	0.8	1.0	V	
LX leakage current			$V_{LX} < V_{OUT} + 0.3\text{V}$		0.5	$\mu\text{A}$	
<b>Chip Enable</b>							
CE "H" level			$V_{IN}=V_{OUT} \times 0.9$		$0.4V_{OUT}$	V	
CE "L" level			$V_{IN}=V_{OUT} \times 0.9$		0.2	V	
<b>Efficiency</b>							
Efficiency			$V_{IN}=2.5\text{V}, V_{OUT}=3.3\text{V}, I_{OUT}=50\text{mA}$		80	%	

**Typical Performance Characteristics**

(L=47 $\mu$ F, C<sub>OUT</sub>=22 $\mu$ F)

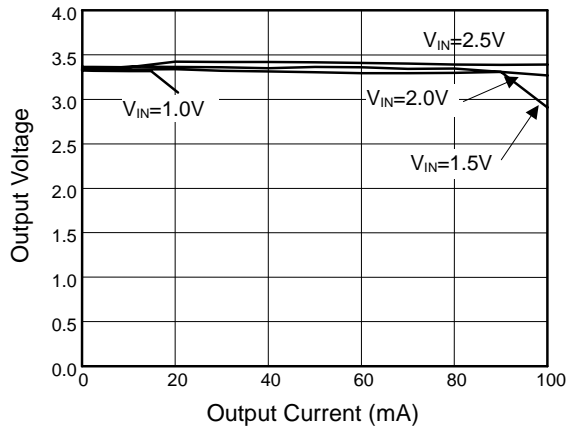


Fig. 2 Output voltage vs. Output Current (mA)

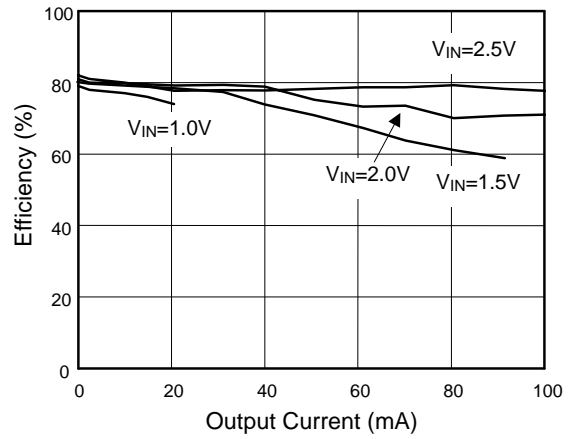


Fig. 3 Efficiency vs. Output Current

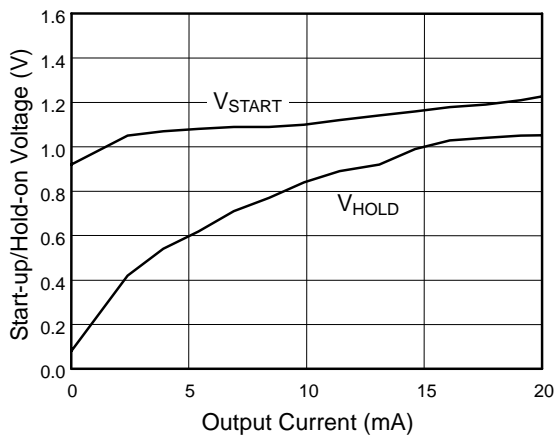


Fig. 4 Start-up/Hold-on Voltage vs. Output Current


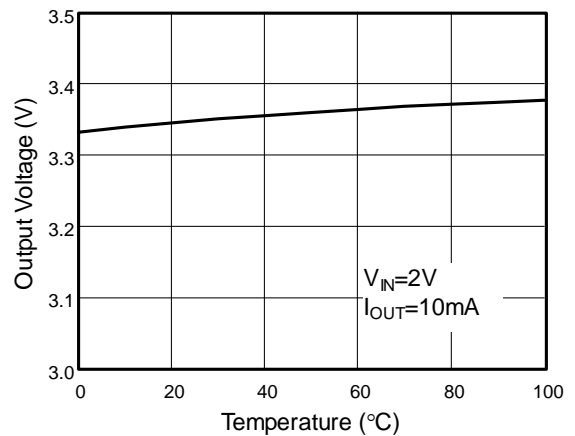



Fig. 5 Output Voltage vs. Temperature

**Package Information**

Package: SOT-25

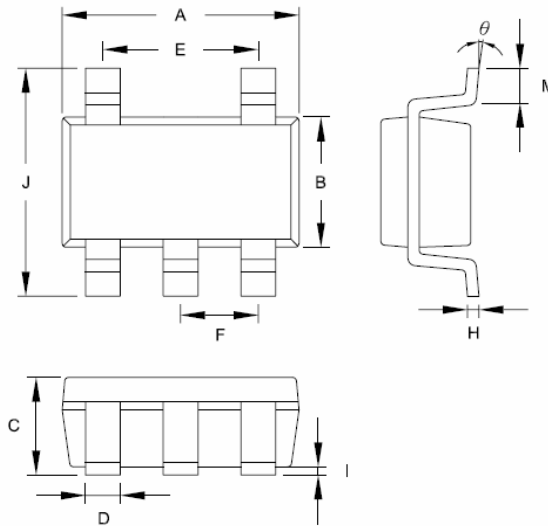

Symbol	Dimension in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	2.692	3.099	0.106	0.122
B	1.397	1.803	0.055	0.071
C	-----	1.450	-----	0.057
D	0.300	0.550	0.012	0.022
E	1.900 TYP.		0.075 TYP.	
F	0.838	1.041	0.033	0.041
H	0.080	0.254	0.003	0.010
I	0.050	0.150	0.002	0.006
J	2.600	3.000	0.102	0.118
M	0.300	0.600	0.012	0.024
θ	0°	10°	0°	10°

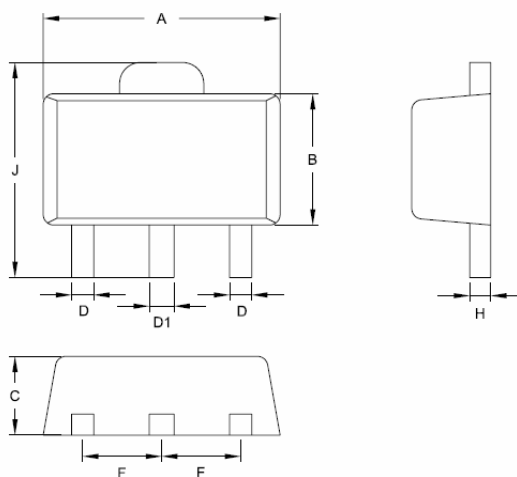**Package Information**
**Package: SOT-89**


Symbol	Dimension in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	4.394	4.597	0.173	0.181
B	2.290	2.600	0.090	0.102
C	1.397	1.600	0.055	0.063
D	0.356	0.483	0.014	0.019
D1	0.406	0.560	0.016	0.022
F	1.448	1.549	0.057	0.061
H	0.355	0.432	0.014	0.017
I	0.787	1.200	0.031	0.047
J	3.940	4.250	0.155	0.167

**Important Notice**

Leadtrend Technology Corp. reserves the right to make changes or corrections to its products at any time without notice. Customers should verify the datasheets are current and complete before placing order.

**Revision History**

Rev.	Date	Change Notice
00	5/8/06	Original Specification.
00a	5/1707	Revision: Marking Description