

# NAN YA PLASTICS CORPORATION

---

SPECIFICATION OF  
LCD MODULE  
PRODUCT NO.: LDCGANY32S27CGK\_

SPEC. NO.: LMY32-27-  $\Delta$

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT  
ELECTRONIC MATERIALS DIVISION  
NAN YA PLASTICS CORPORATION  
201, TUNG HWA N. ROAD, TAIPEI  
TEL: 886-2-27122211 EXT. 5993~5995  
FAX: 886-2-27178253  
E-mail: lcdsales@npc.com.tw

EDITED ON : JUNE.28.2006


Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN



# 1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LDCGANY32S27CGK_	-
2	Module Size	162.1 (W) x 109.0 (H) x Max. 11.5 (D)	mm
3	Dot Size	0.33 (W) x 0.33 (H)	mm
4	Dot Pitch	0.36 (W) x 0.36 (H)	mm
5	Number of Dots	320 (W) x 240 (H)	Dot
6	Duty	1/240	-
7	LCD Display Mode	Blue	-
8	Rear Polarizer	Transmission	-
9	Viewing Direction	6	O'clock
10	Backlight	LED	-
11	Controller	Excluded	-
12	DC/DC Converter	Excluded	-
13	Touch Panel	Excluded	-
14	Weight	200 (Approx.)	g

NOTE :

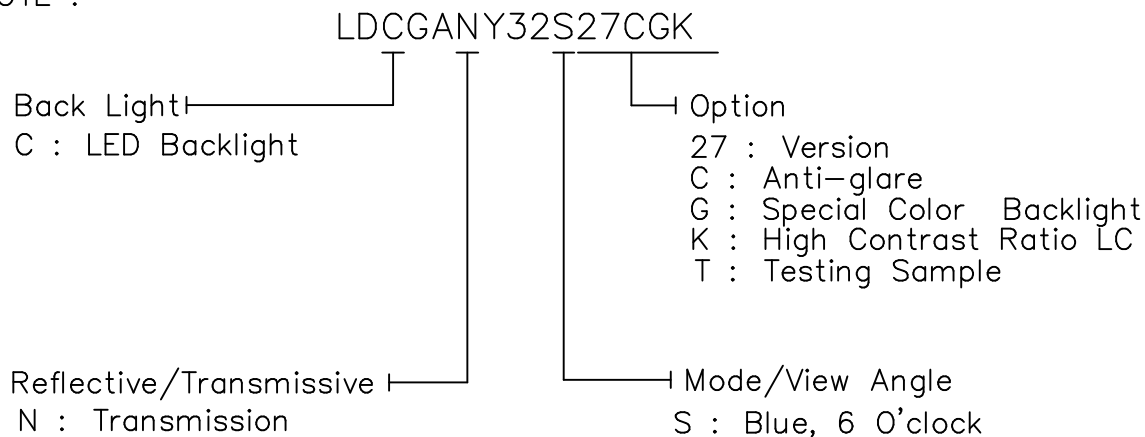

## 2. ABSOLUTE MAXIMUM RATINGS

### (1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Input Voltage	VI	-0.3	VDD+0.3	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

### (2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	WIDE TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-20	70	-40	80
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2  $T_a \leq 70^\circ\text{C}$  : 75%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.  
That phenomenon is reversible.

### 3. ELECTRICAL CHARACTERISTICS

#### 3-1. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Power Supply for Logic	VDD-VSS	-	4.75	5.0	5.25	V	
Recommended LC Driving Voltage	VDD-V0	Duty=1/240	-20°C	25.3	25.7	26.1	V
			0°C	23.7	24.1	24.5	
			25°C	22.8	23.2	23.6	
			50°C	21.4	21.8	22.2	
			70°C	20.4	20.8	21.2	
Input Voltage	VIH	H level	0.8VDD	-	VDD	V	
	VIL	L level	0	-	0.2VDD	V	
Power Supply Current	IDD	FLM = 70 Hz VDD = 5.0 V VEE = -24.0 V VDD-V0 = 23.2 V	-	50	75	mA	
	IEE	PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □	-	3	5		
Surface Luminance of LCM	L	V <sub>AK</sub> =5V I <sub>AK</sub> =160mA(Max.) Pattern: ALL ON	100	140	-	cd/m <sup>2</sup>	
		V <sub>AK</sub> =5V I <sub>AK</sub> =160mA(Max.) Pattern: ALL OFF	-	30	60		


### 3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used LED Rating (Constant Voltage Driving)

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Peak forward current	$I_P$	-	-	240	mA	-
Maximum reverse voltage	$V_R$	-	-	5	V	-
Applied forward voltage	$V_{AK}$	-	5	-	V	-
Applied forward current	$I_{AK}$	-	-	160	mA	-
LED power consumption	$P_F$	-	-	0.8	W	-
LED life time	$L_L$	-	10000	-	hrs	at $V_{AK} = 5 V$ (*1)

(\*1) LED life time is defined as follows : The final brightness is at 50% of original brightness.

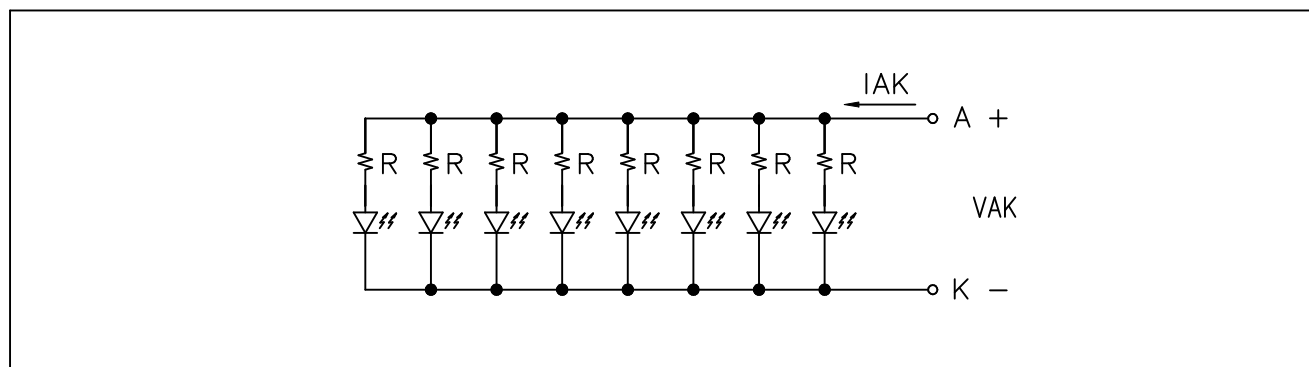

## 4. OPTICAL CHARACTERISTICS

AT V<sub>OP</sub>

ITEM		Cr(Contrast Ratio)										θ(Viewing Angle)		φ(Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
MODE		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
N	S	3.0	4.0	3.5	5.0	3.5	5.0	3.0	4.5	2.0	3.0	-	(F) <sup>35</sup> (R) <sup>25</sup>	-	(L) <sup>30</sup> (R) <sup>30</sup>
NOTE		NOTE 6										NOTE 5			

NOTE :

N : TRANSMISSION


S : BLUE

AT φ=0° θ=0°


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	3200	4000	6000	ms	NOTE 2
		0℃	400	500	750		
		25℃	200	250	375		
		50℃	80	100	150		
		70℃	65	80	120		
Response Time (fall)	Tf	-20℃	1600	2000	3000	ms	NOTE 2
		0℃	360	450	680		
		25℃	120	150	230		
		50℃	50	60	90		
		70℃	40	50	75		

(NOTE 1)

Definition of Operation Voltage(Vop)

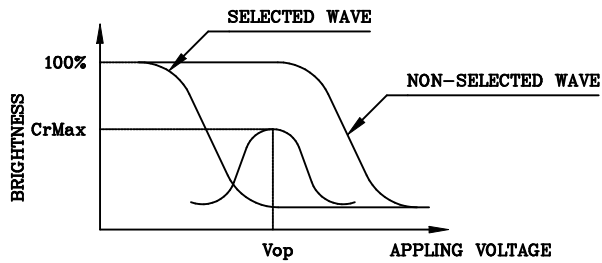

(positive type)

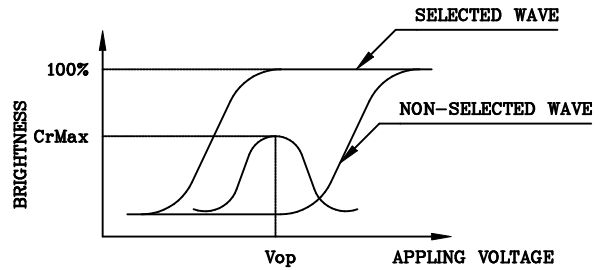


(negative type)

\*Conditions


Viewing Angle : 0  
Frame Frequency : 70Hz  
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

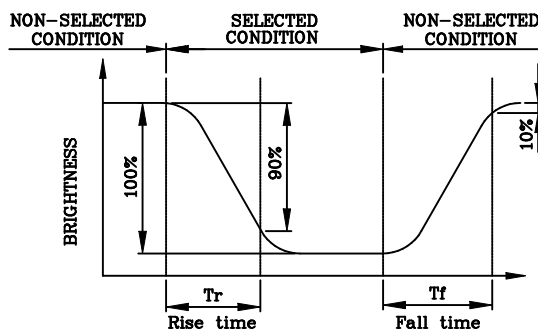

(positive type)

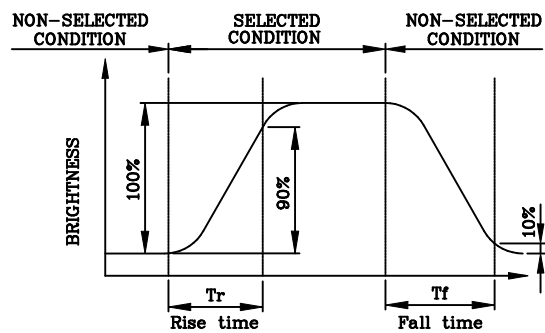



(negative type)

\*Conditions

Operating Voltage : Vop  
Viewing Angle (θ,φ) : (0,0)  
Frame Frequency : 70Hz  
Applying Waveform : 1/N duty 1/a bias

(NOTE 3)


Description of Measuring Equipment and Driving Waveforms

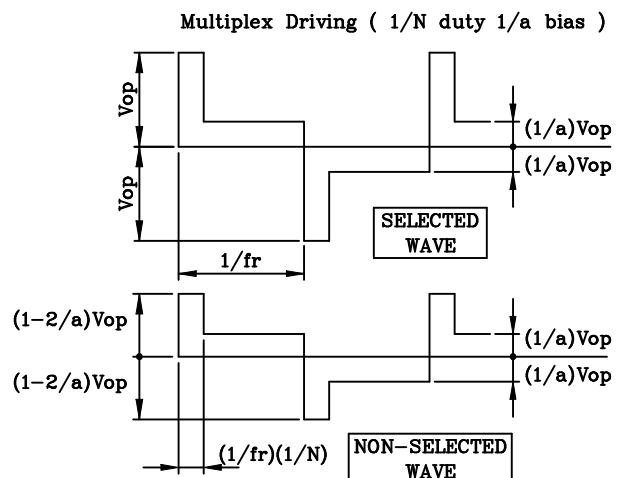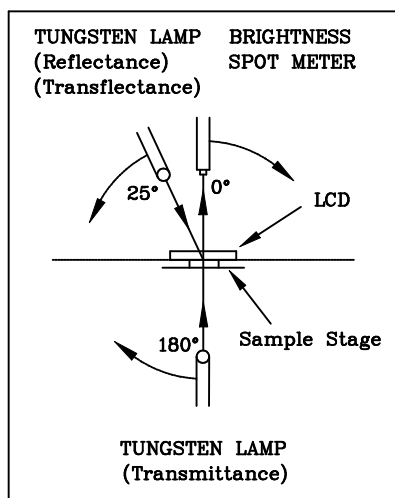




(NOTE 4)

Definition of Viewing Direction

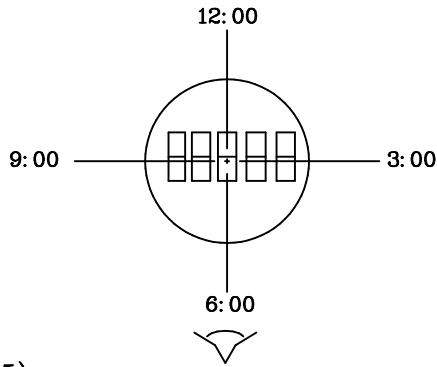

(NOTE 5)

Definition of Viewing Angle

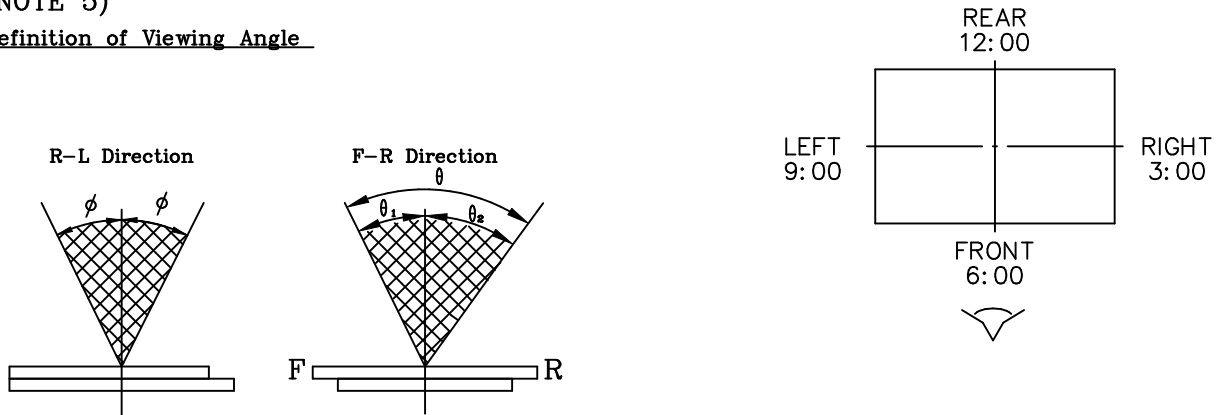


$$\theta = \theta_1 + \theta_2$$

**\*Conditions**


Operating Voltage :  $V_{op}$   
 Frame Frequency : 70Hz  
 Applying Waveform : 1/N duty 1/a bias  
 Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

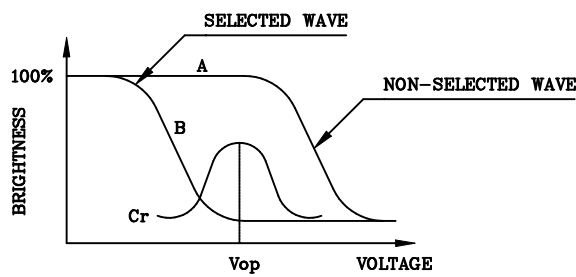

(positive type)

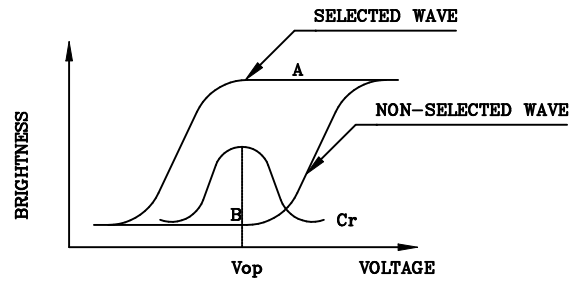


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

**\*Conditions**

Viewing Angle : 0  
 Frame Frequency : 70Hz  
 Applying Waveform : 1/N duty 1/a bias

## 5. BLOCK DIAGRAM

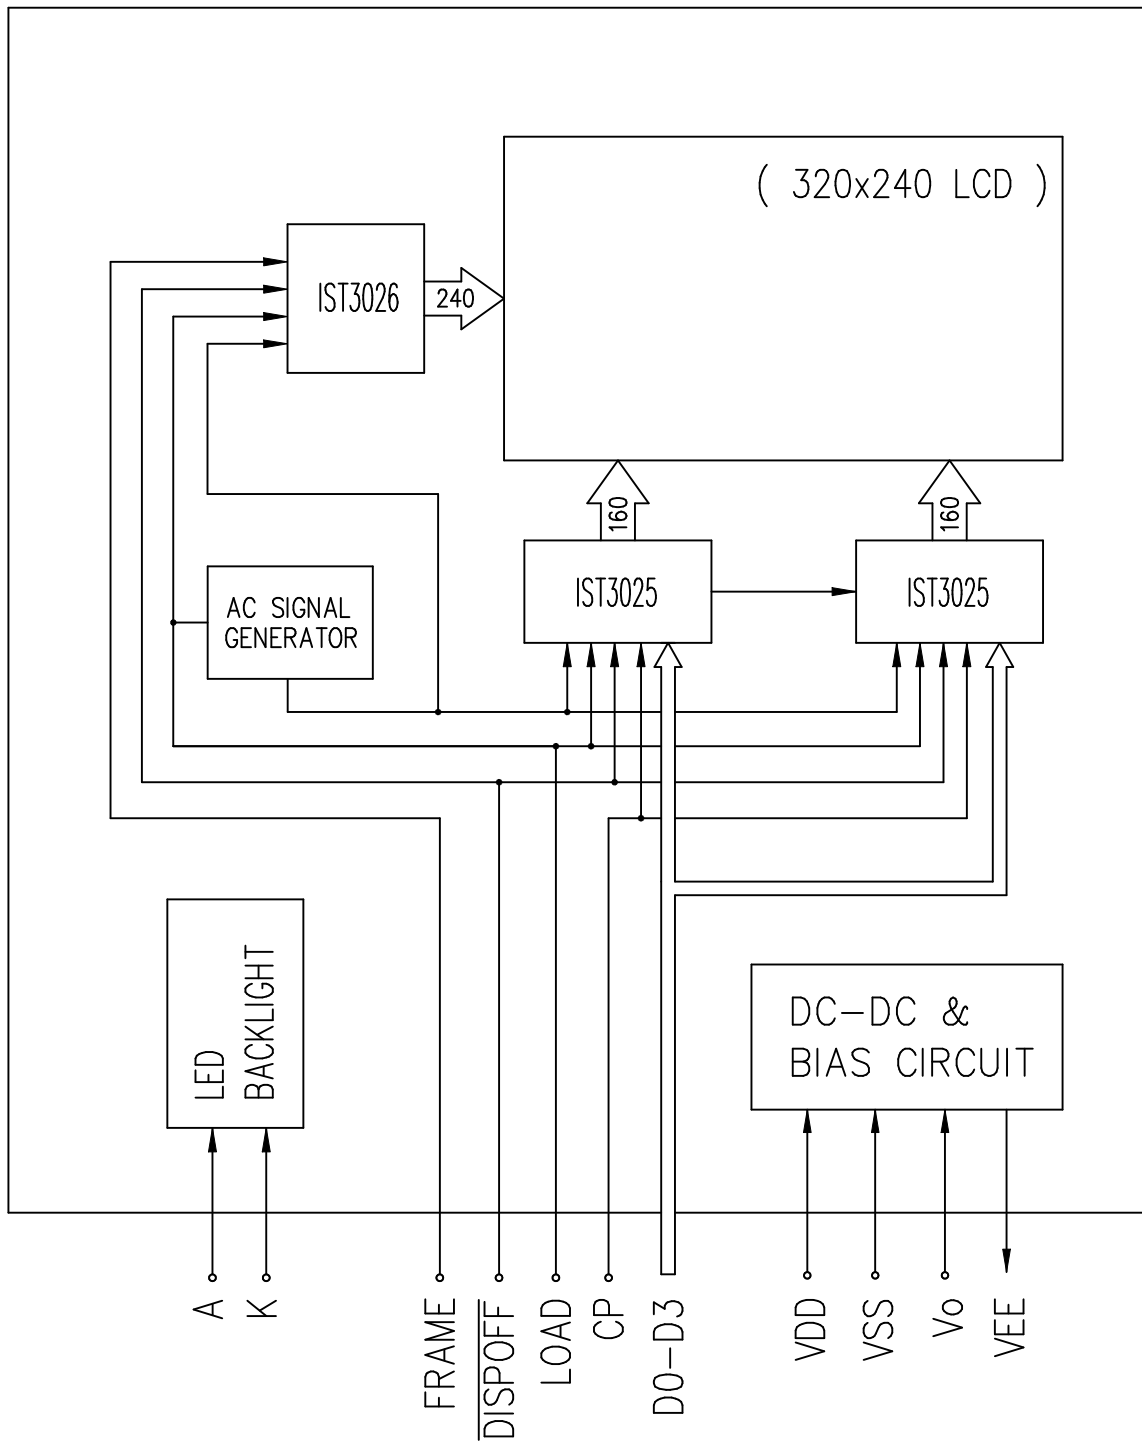

## 6. DEFINITION OF INTERFACE

CN1:PITCH 1.25mm WIDTH 18.75mm

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	D0	H/L	DISPLAY DATA SIGNAL
2	D1		
3	D2		
4	D3		
5	DISPOFF	H/L	H:ON/L:OFF
6	FRAME	H	SCAN START-UP SIGNAL
7	NC	-	NO CONNECTION
8	LOAD	H-L	INPUT DATA LATCH SIGNAL
9	CP	H-L	DATA INPUT CLOCK SIGNAL
10	VDD	-	POWER SUPPLY FOR LOGIC(+5V)
11	VSS	-	SIGNAL GROUND(0V)
12	VEE	-	POWER SUPPLY FOR LCD
13	VO	-	LCD CONTRAST ADJUST VOLTAGE
14	NC	-	NC

MATING CONNECTOR: ELCO 00-6207-341-914-000+


CN2:J.A.E./IL-G-4S-S3C2 ( or compatible )

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	A	-	POWER SUPPLY VOLTAGE FOR LED
2	NC	-	-
3	NC	-	-
4	K	-	GROUND

MATING CONNECTOR: J.A.E./IL-G-4P-S3T2-SA  
or J.A.E./IL-G-4P-S3L2-SA

# 7. POWER SUPPLY

LCD MODULE

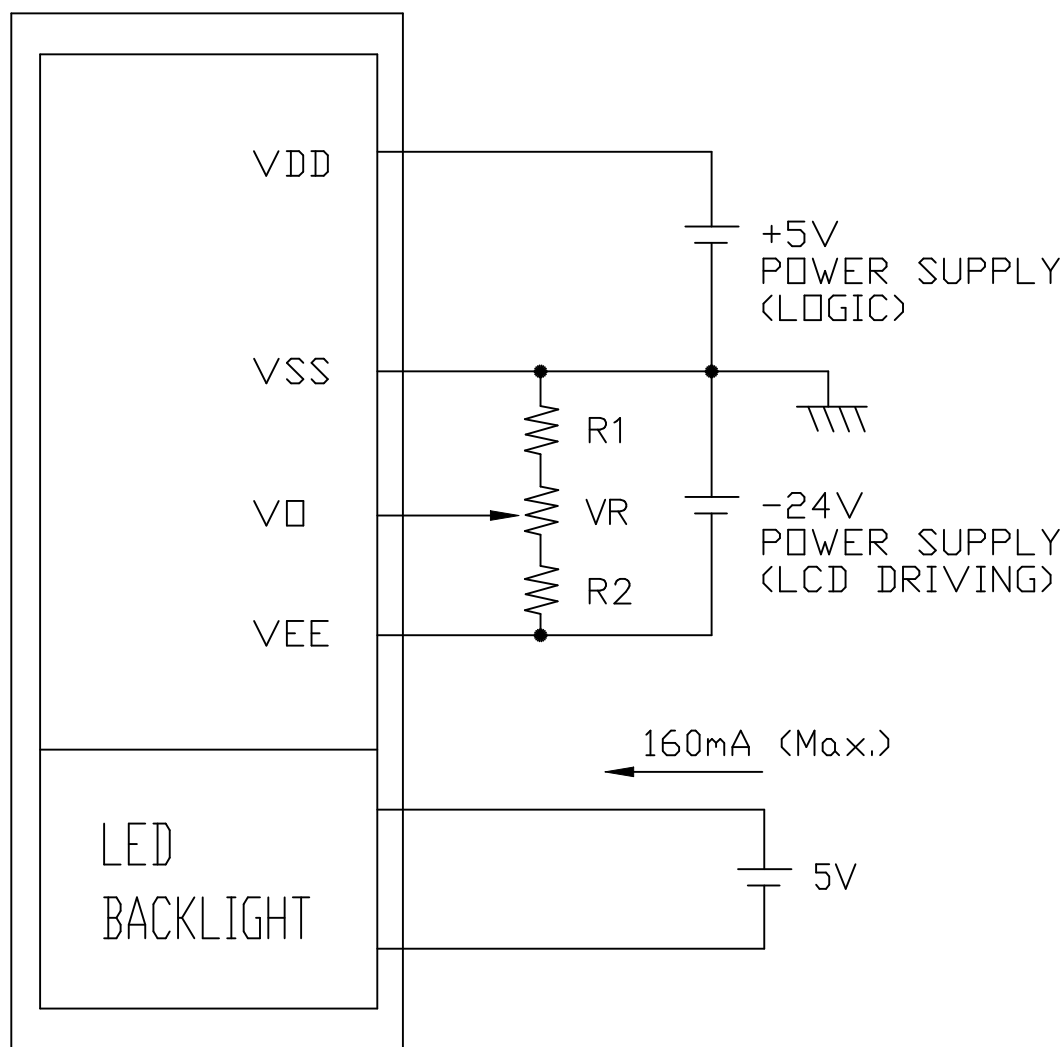


(NOTE)  $R1 + VR + R2 \approx 20K\Omega$

## 8. TIMING CHARACTERISTICS


### 8-1.CLOCK CHARACTERISTICS

VDD = 5V


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
CLOCK CYCLE TIME	$t_{CYC}$	250	-	-	ns
CLOCK HIGH LEVEL WIDTH	$t_{CWH}$	45	-	-	ns
CLOCK LOW LEVEL WIDTH	$t_{CWL}$	45	-	-	ns
CLOCK RISE TIME	$t_r$	-	-	50	ns
CLOCK FALL TIME	$t_f$	-	-	50	ns
DATA SETUP TIME	$t_{DS}$	30	-	-	ns
DATA HOLD TIME	$t_{DH}$	30	-	-	ns
CLOCK SETUP TIME	$t_{SCL}$	80	-	-	ns
CLOCK HOLD TIME	$t_{HCL}$	80	-	-	ns
FRAME SETUP TIME	$t_{SETUP}$	30	-	-	ns
FRAME HOLD TIME	$t_{HOLD}$	30	-	-	ns

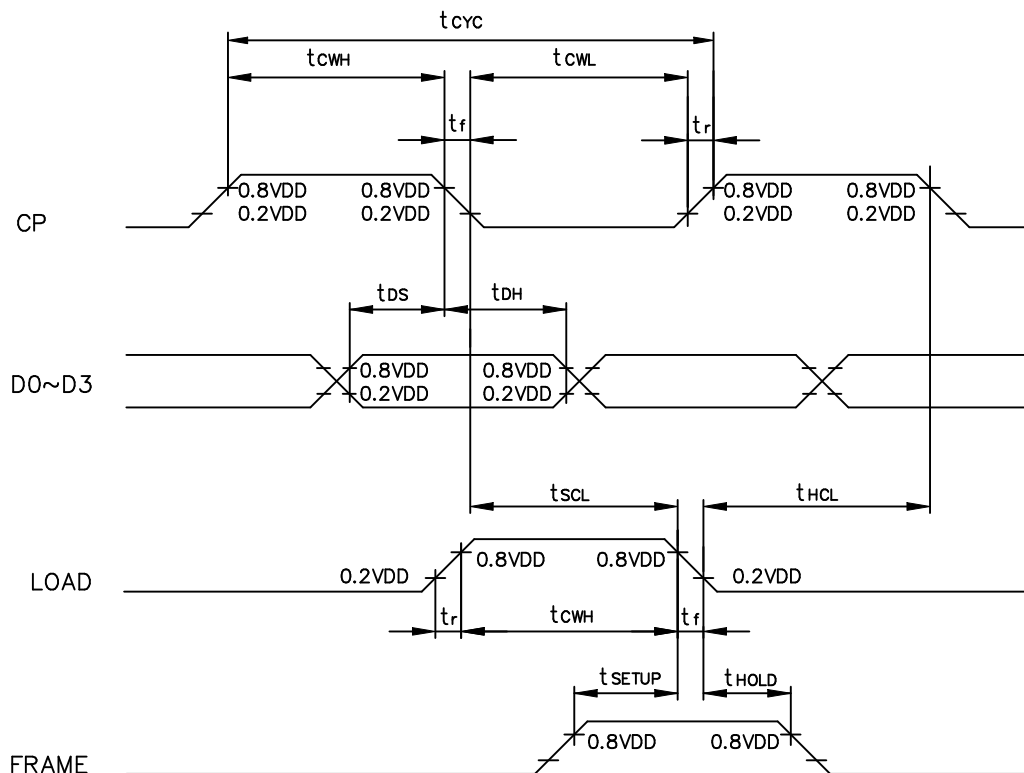

## 8.2 TIMING CHART OF INPUT SIGNALS

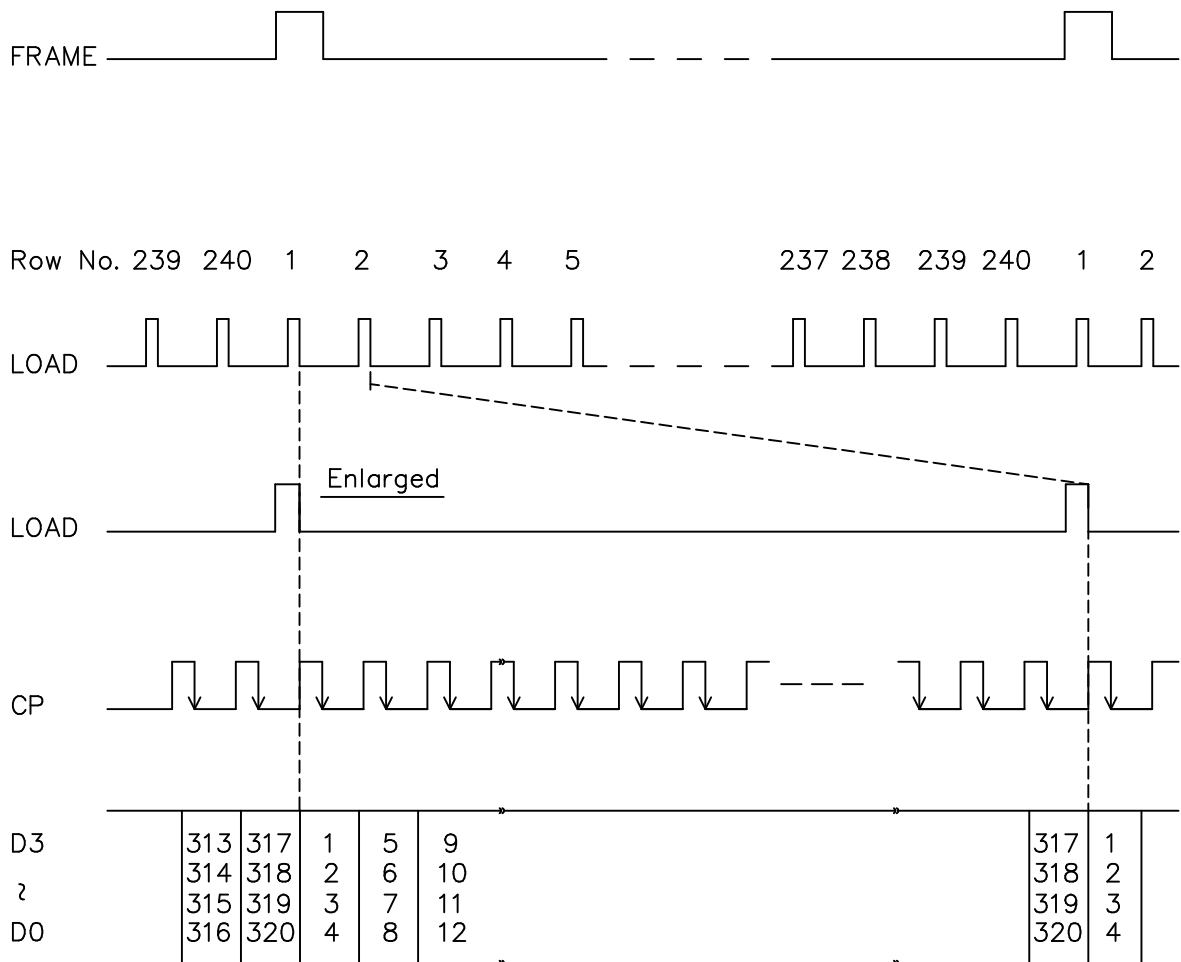

## 8.3 POWER ON/OFF TIMING

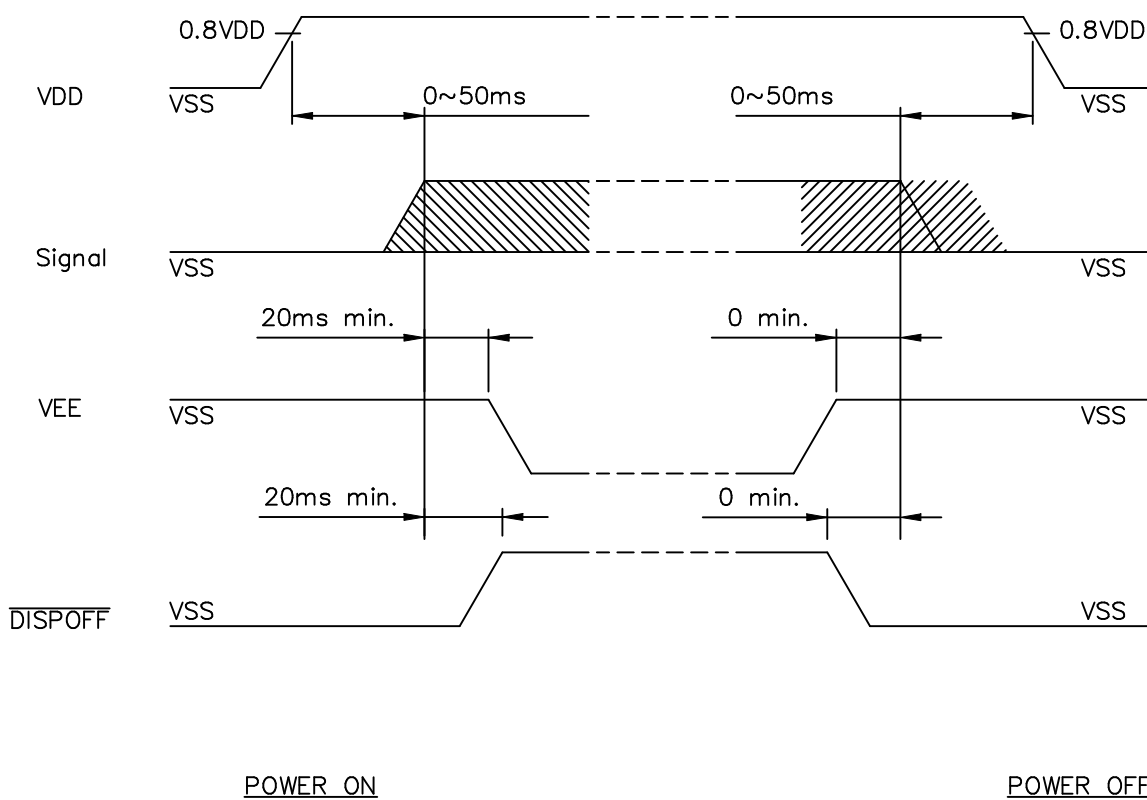

\*\* The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.


## 8-4 DISPLAY PATTERN

#001	D3	D2	D1	D0	D3		D0	D3	D2	D1	D0
#002	D3	D2	D1	D0	D3		D0	D3	D2	D1	D0
<p>Data Input:          Terminal : Dots (Row) on Display</p> <p>D0 : dot 4, dot 8 ..... dot 316, dot 320          D1 : dot 3, dot 7 ..... dot 315, dot 319          D2 : dot 2, dot 6 ..... dot 314, dot 318          D3 : dot 1, dot 5 ..... dot 313, dot 317</p>											
#239	D3	D2	D1	D0	D3		D0	D3	D2	D1	D0
#240	D3	D2	D1	D0	D3		D0	D3	D2	D1	D0
	d1	d2	d3	d4	d5		d316	d317	d318	d319	d320



## 9. RELIABILITY TEST

### WIDE TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	80°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-40°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	60°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	70°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	-20°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C, 30min → 70°C, 30min  (1cycle)			Appearance without defect	10 cycles

Inspection Provision

1. Purpose


The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2. Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3. Technical Terms

3-1 NAN YA Technical Terms

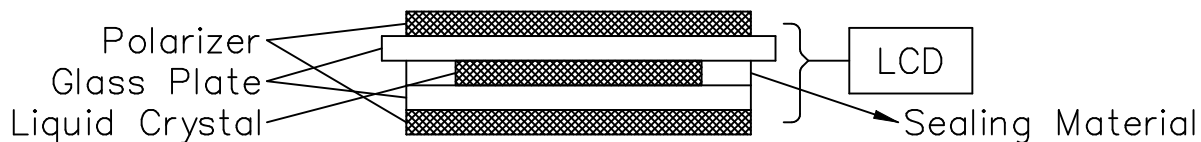

4. Outgoing Inspection

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection

4-2 Inspection Standard


	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions

\*Viewing Area Definition

Fig. 1

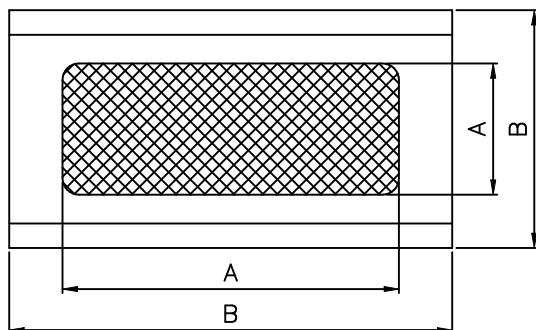

A : Zone Viewing Area  
B : Zone Glass Plate Outline

\*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.













The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and sample to be 30cm to 50cm.



5-2 External Appearance Defect




NO.	Item	Criterion																		
1	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<p>(1)-1-Spots</p> <table border="1" data-bbox="730 488 1391 784"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>D \leq 0.1</math></td> <td>Ignore</td> </tr> <tr> <td><math>0.1 &lt; D \leq 0.2</math></td> <td>5</td> </tr> <tr> <td><math>0.2 &lt; D \leq 0.3</math></td> <td>2</td> </tr> <tr> <td><math>0.3 &lt; D</math></td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <p>(1)-2-Blurred Spots(At lighting condition)</p> <table border="1" data-bbox="730 1216 1391 1462"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>D \leq 0.3</math></td> <td>Ignore</td> </tr> <tr> <td><math>0.3 &lt; D \leq 0.75</math></td> <td>5</td> </tr> <tr> <td><math>0.75 &lt; D</math></td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			

1	Line	<p>(1)-1 Lines</p> <table border="1" data-bbox="730 443 1492 734"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>W \leq 0.03</math></td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td><math>0.03 &lt; W \leq 0.08</math></td> <td><math>L \leq 4</math></td> <td>2</td> </tr> <tr> <td><math>0.08 &lt; W \leq 0.1</math></td> <td><math>L \leq 1</math></td> <td>1</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurred Lines(At lighting condition)</p> <table border="1" data-bbox="730 1048 1492 1339"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td><math>W \leq 0.03</math></td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td><math>0.03 &lt; W \leq 0.08</math></td> <td><math>L \leq 3</math></td> <td>6</td> </tr> <tr> <td><math>0.08 &lt; W</math></td> <td><math>3 &lt; L</math></td> <td>None</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3	Color irregular	Not remarkable color irregular.																								

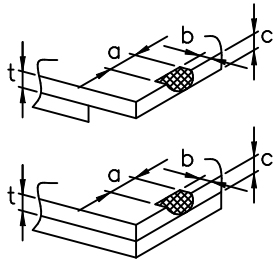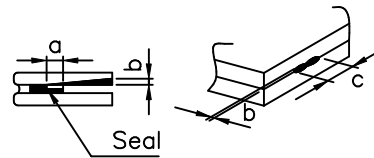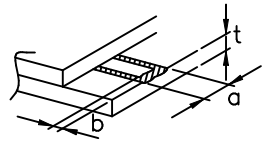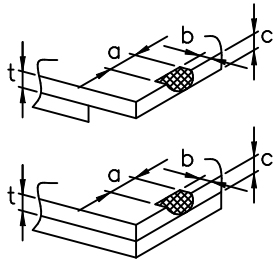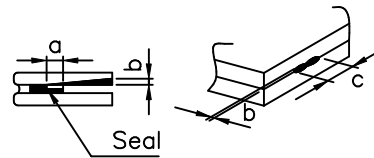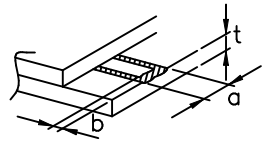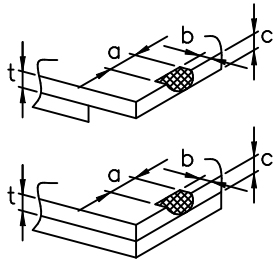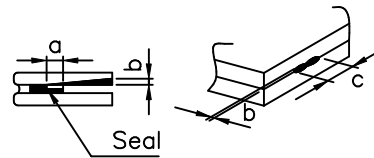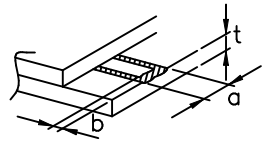4	Air bubbles polarizing plates, and reflection plates	<table border="1" data-bbox="730 387 1257 685"> <tr> <th data-bbox="730 387 995 537">Average Diameter (mm): D</th> <th data-bbox="995 387 1257 537">Number of pieces permitted</th> <td data-bbox="1257 387 1500 685" rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td> </tr> <tr> <td data-bbox="730 537 995 685">D ≤ 0.3 0.3 &lt; D</td> <td data-bbox="995 537 1257 685">Ignore 0</td> </tr> </table> <p data-bbox="730 701 1500 795">Note that when there are 4 pieces or more, they are not to be concentrated.</p>	Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	D ≤ 0.3 0.3 < D	Ignore 0					
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2										
D ≤ 0.3 0.3 < D	Ignore 0											
5	Cracks	<table border="1" data-bbox="678 795 1500 2016"> <tr> <td data-bbox="678 795 1093 1198"> <p data-bbox="678 795 1093 851">(1) General crack</p>  </td> <td data-bbox="1093 795 1500 1198"> <p data-bbox="1093 795 1500 851"><math>a \leq 5</math></p> <p data-bbox="1093 851 1500 896"><math>b \leq 2</math></p> <p data-bbox="1093 896 1500 940"><math>c \leq t</math></p> <p data-bbox="1093 940 1500 1198">Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="678 1198 1093 1400"> <p data-bbox="678 1198 1093 1254">(2) Corner crack</p>  </td> <td data-bbox="1093 1198 1500 1400"> <p data-bbox="1093 1198 1500 1243"><math>a \leq 2.5</math></p> <p data-bbox="1093 1243 1500 1288"><math>b \leq 2.5</math></p> <p data-bbox="1093 1288 1500 1332"><math>c \leq t</math></p> <p data-bbox="1093 1332 1500 1400"><math>a + b \leq 4</math></p> </td> </tr> <tr> <td data-bbox="678 1400 1093 1668"> <p data-bbox="678 1400 1093 1456">(3) Seal portion crack</p>  </td> <td data-bbox="1093 1400 1500 1668"> <p data-bbox="1093 1400 1500 1444"><math>a \leq \text{The seal width} \times 1/3</math></p> <p data-bbox="1093 1444 1500 1489"><math>b \leq t \times 2/3</math></p> <p data-bbox="1093 1489 1500 1534"><math>c \leq 5</math></p> <p data-bbox="1093 1534 1500 1668">The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="678 1668 1093 1915"> <p data-bbox="678 1668 1093 1724">(4) ITO Pin crack</p>  </td> <td data-bbox="1093 1668 1500 1915"> <p data-bbox="1093 1668 1500 1713"><math>a \leq 5</math></p> <p data-bbox="1093 1713 1500 1769"><math>b \leq 1/3 \text{ pin length}</math></p> <p data-bbox="1093 1769 1500 1814"><math>c \leq t</math></p> </td> </tr> <tr> <td data-bbox="678 1915 1093 2016"> <p data-bbox="678 1915 1093 1971">(5) Progressive cracks</p> </td> <td data-bbox="1093 1915 1500 2016"> <p data-bbox="1093 1915 1500 2016">All taken to be unacceptable.</p> </td> </tr> </table>	<p data-bbox="678 795 1093 851">(1) General crack</p> 	<p data-bbox="1093 795 1500 851"><math>a \leq 5</math></p> <p data-bbox="1093 851 1500 896"><math>b \leq 2</math></p> <p data-bbox="1093 896 1500 940"><math>c \leq t</math></p> <p data-bbox="1093 940 1500 1198">Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.</p>	<p data-bbox="678 1198 1093 1254">(2) Corner crack</p> 	<p data-bbox="1093 1198 1500 1243"><math>a \leq 2.5</math></p> <p data-bbox="1093 1243 1500 1288"><math>b \leq 2.5</math></p> <p data-bbox="1093 1288 1500 1332"><math>c \leq t</math></p> <p data-bbox="1093 1332 1500 1400"><math>a + b \leq 4</math></p>	<p data-bbox="678 1400 1093 1456">(3) Seal portion crack</p> 	<p data-bbox="1093 1400 1500 1444"><math>a \leq \text{The seal width} \times 1/3</math></p> <p data-bbox="1093 1444 1500 1489"><math>b \leq t \times 2/3</math></p> <p data-bbox="1093 1489 1500 1534"><math>c \leq 5</math></p> <p data-bbox="1093 1534 1500 1668">The numbers of pieces are set at up to 5 pieces.</p>	<p data-bbox="678 1668 1093 1724">(4) ITO Pin crack</p> 	<p data-bbox="1093 1668 1500 1713"><math>a \leq 5</math></p> <p data-bbox="1093 1713 1500 1769"><math>b \leq 1/3 \text{ pin length}</math></p> <p data-bbox="1093 1769 1500 1814"><math>c \leq t</math></p>	<p data-bbox="678 1915 1093 1971">(5) Progressive cracks</p>	<p data-bbox="1093 1915 1500 2016">All taken to be unacceptable.</p>
<p data-bbox="678 795 1093 851">(1) General crack</p> 	<p data-bbox="1093 795 1500 851"><math>a \leq 5</math></p> <p data-bbox="1093 851 1500 896"><math>b \leq 2</math></p> <p data-bbox="1093 896 1500 940"><math>c \leq t</math></p> <p data-bbox="1093 940 1500 1198">Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.</p>											
<p data-bbox="678 1198 1093 1254">(2) Corner crack</p> 	<p data-bbox="1093 1198 1500 1243"><math>a \leq 2.5</math></p> <p data-bbox="1093 1243 1500 1288"><math>b \leq 2.5</math></p> <p data-bbox="1093 1288 1500 1332"><math>c \leq t</math></p> <p data-bbox="1093 1332 1500 1400"><math>a + b \leq 4</math></p>											
<p data-bbox="678 1400 1093 1456">(3) Seal portion crack</p> 	<p data-bbox="1093 1400 1500 1444"><math>a \leq \text{The seal width} \times 1/3</math></p> <p data-bbox="1093 1444 1500 1489"><math>b \leq t \times 2/3</math></p> <p data-bbox="1093 1489 1500 1534"><math>c \leq 5</math></p> <p data-bbox="1093 1534 1500 1668">The numbers of pieces are set at up to 5 pieces.</p>											
<p data-bbox="678 1668 1093 1724">(4) ITO Pin crack</p> 	<p data-bbox="1093 1668 1500 1713"><math>a \leq 5</math></p> <p data-bbox="1093 1713 1500 1769"><math>b \leq 1/3 \text{ pin length}</math></p> <p data-bbox="1093 1769 1500 1814"><math>c \leq t</math></p>											
<p data-bbox="678 1915 1093 1971">(5) Progressive cracks</p>	<p data-bbox="1093 1915 1500 2016">All taken to be unacceptable.</p>											

6	Outer dimensions	Should be within the tolerance.
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.

5-3 Dot Appearance Defect

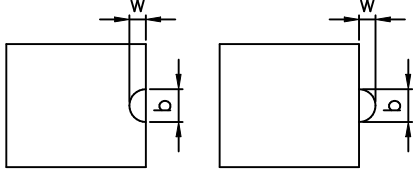NO.	Item	Criteria
1	Pinhole	 <p>Dot display a and b are each <math>\leq 0.2\text{mm}</math> The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2	Missing	 <p>Dot display a and b are each <math>\leq 0.2\text{mm}</math> The overall total is taken to be with in 10 units.</p>
3	Thick and thin display	 <p>Taken to be within <math>\pm 1.5\%</math> of display character width(a) and height(b).</p>



NOTICE:

- SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING



- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent. Use a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is  $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$  and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT




- 1.Acceptance inspection period  
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period  
The period is within twelve months since the date of shipping out under normal using and storage conditions.

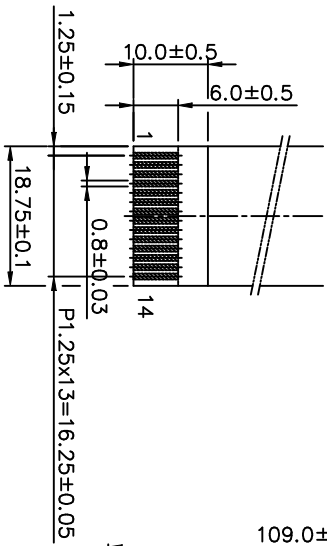

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	D0	H/L	DISPLAY DATA SIGNAL
2	D1	H/L	DISPLAY DATA SIGNAL
3	D2	H/L	DISPLAY DATA SIGNAL
4	D3	H/L	DISPLAY DATA SIGNAL
5	DISP OFF	H/L	H-ON/L-OFF
6	FRAME	H	SCAN START-UP SIGNAL
7	NC	-	NO CONNECTION
8	LOAD	H-L	INPUT DATA LATCH SIGNAL
9	CP	H-L	DATA INPUT CLOCK SIGNAL
10	VDD	-	POWER SUPPLY FOR LOGIC(+5V)
11	VSS	-	SIGNAL GROUND(OV)
12	VEE	-	POWER SUPPLY FOR LCD
13	V0	-	LCD CONTRAST ADJUST VOLTAGE
14	NC	△	NO CONNECTION

CN1: PITCH 1.25mm WIDTH 18.75mm

CN2: J.A.E./L-G-4S-S3C2

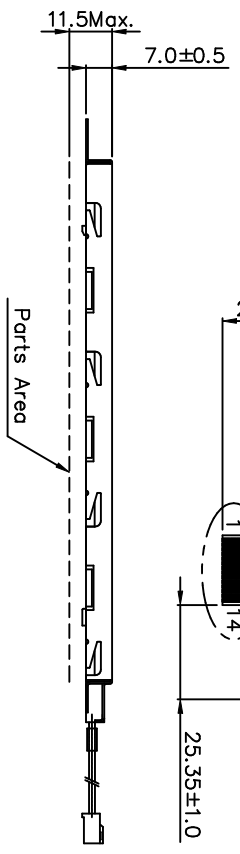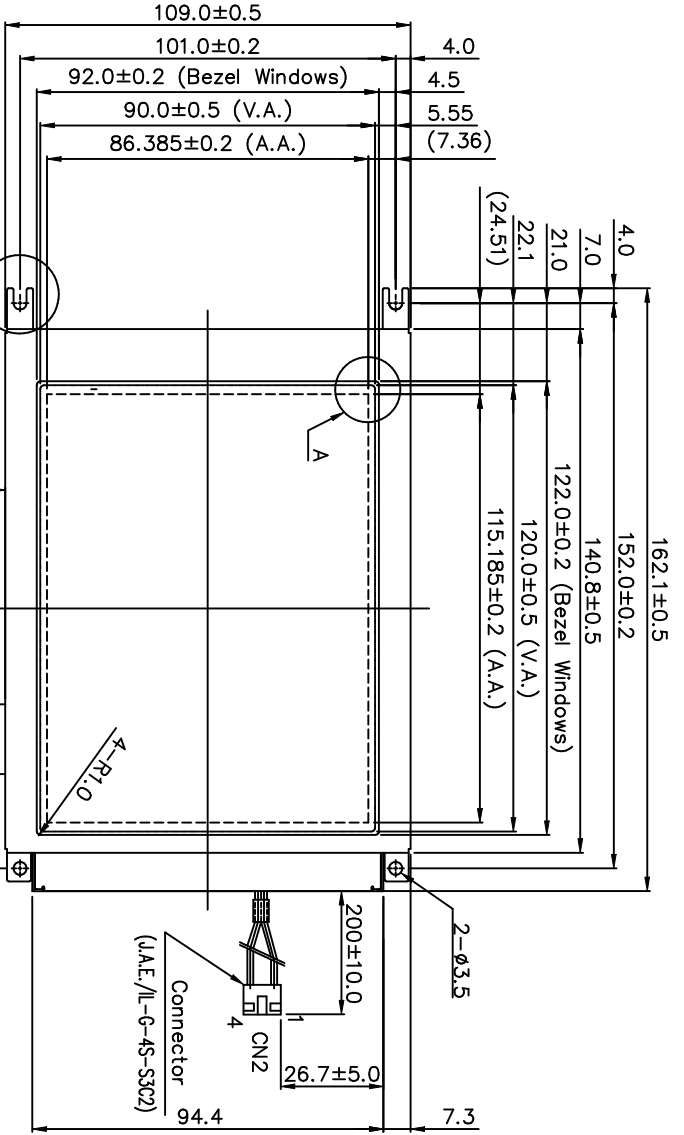

GENERAL TOLERANCE LIST

DIMENSION	TOLERANCE
L ≤ 6	±0.25 (mm)
6 < L ≤ 18	±0.3 (mm)
18 < L ≤ 50	±0.4 (mm)
50 < L ≤ 125	±0.5 (mm)
125 < L	±0.6 (mm)
ANGLE	±1° (DEG)

- NOTES :
1. RESOLUTION : 320 x 240 DOTS
  2. DRIVER IC: SEG IST3025CA1 or Compatible COM IST3026CA1 or Compatible
  3. BACKLIGHT: LED (WHITE)
  4. Frame Material : SECC (0.5 mmt)
  5. TOUCH PANEL: Without

REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE	DWG NO.
△	Modified Function of Pin No.14	95.06.19	CLOUDE			MY32-D27A
△						
△						
△						

NAME	DATE	THIRD ANGLE P.
APPROVE Tony Zhou	95.03.23	
CHECK Y.C. Liu	95.03.22	
DESIGN CLOUDE	95.03.22	SCALE UNIT
DRAWN CLOUDE	95.03.22	2/3 mm



南亞塑膠工業股份有限公司  
NAN YA PLASTICS CORPORATION  
製品圖  
LDCCGANY32S27CGK

# THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

## Correct handling

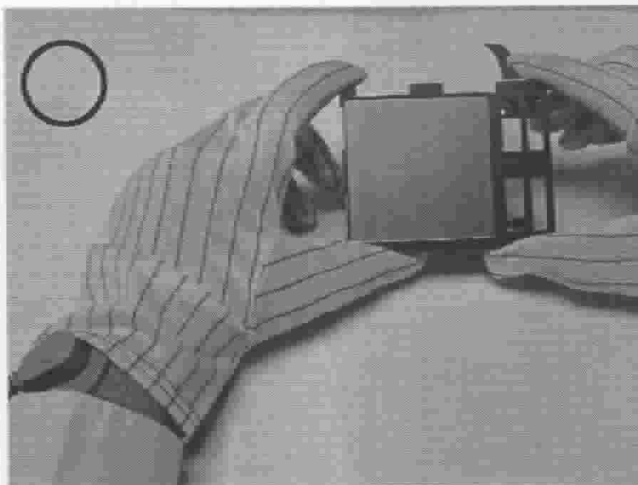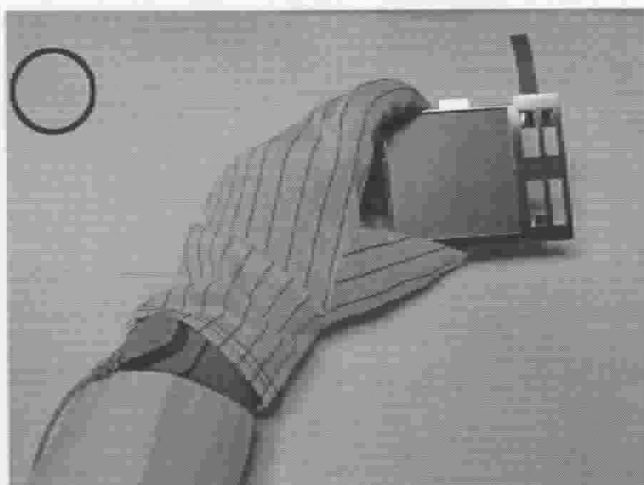


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


## Incorrect handling

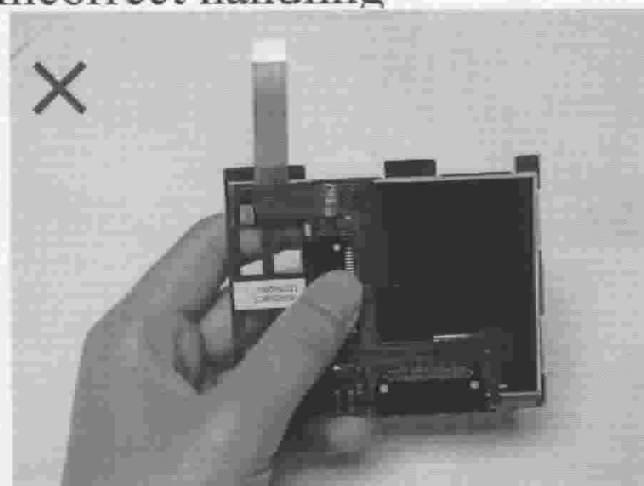


Please don't touch IC directly.

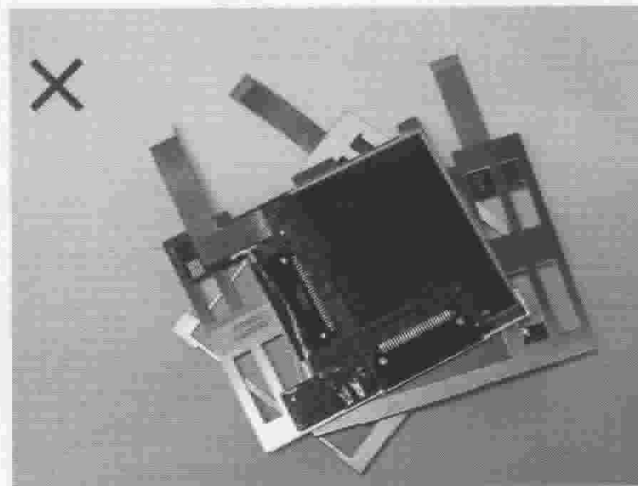

Please don't put one on another LCM.

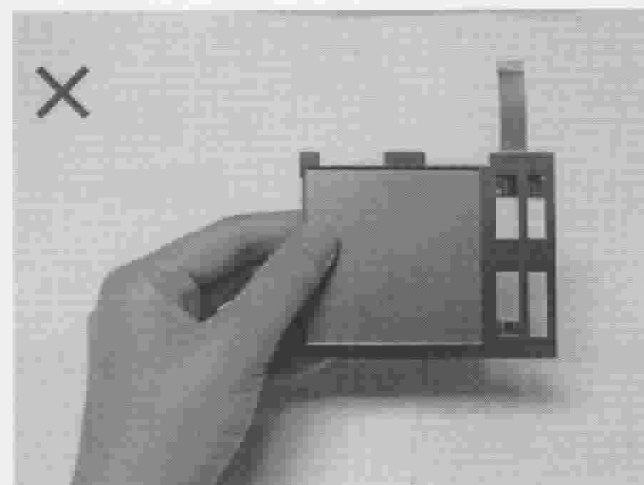

Please don't hold the surface of LCM.

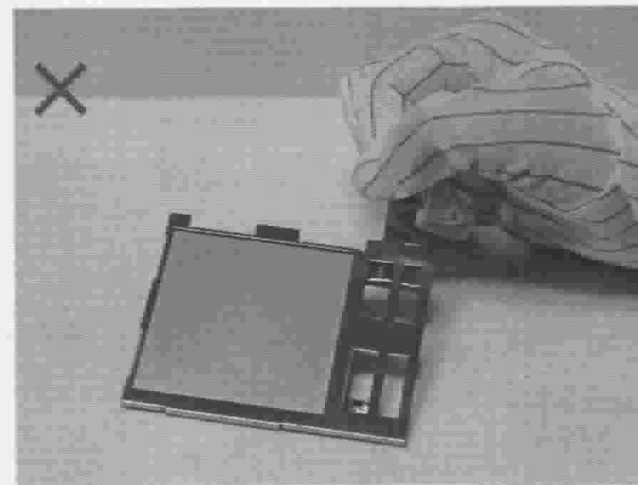



Please don't stretch interface of output.

# THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

## Correct handling

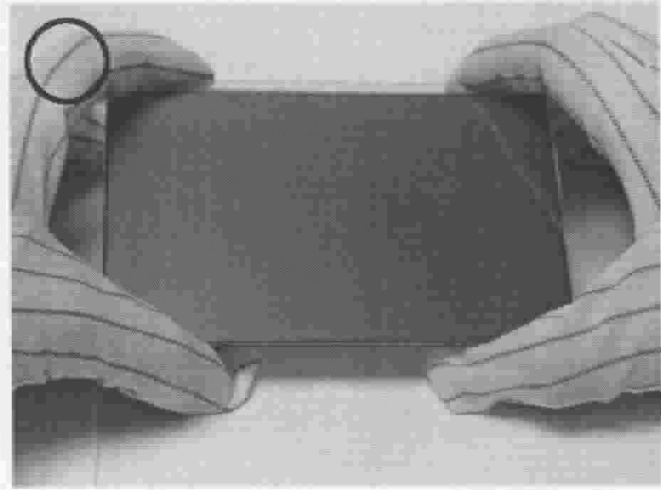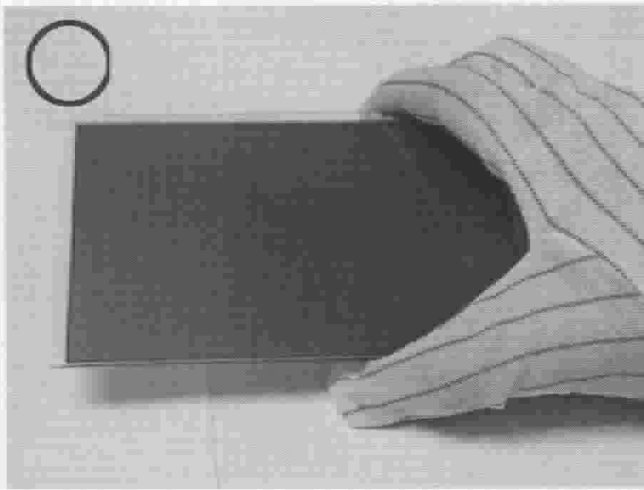


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


## Incorrect handling

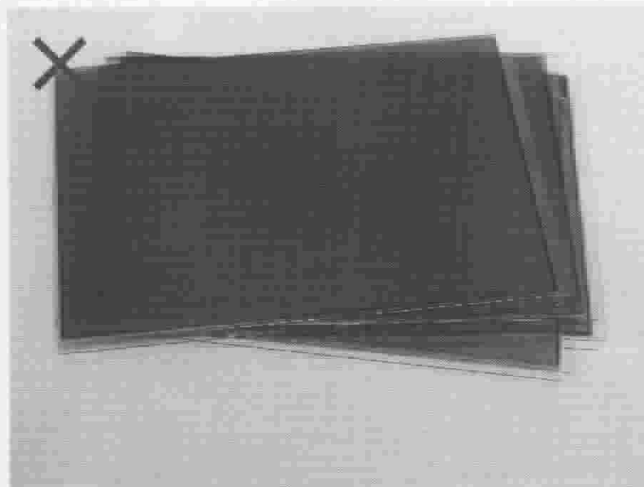


Please don't put one on another LCD.

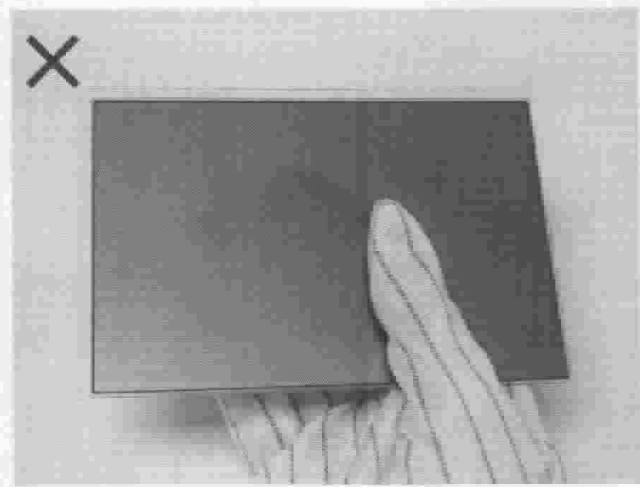

Please don't hold the surface of LCD.

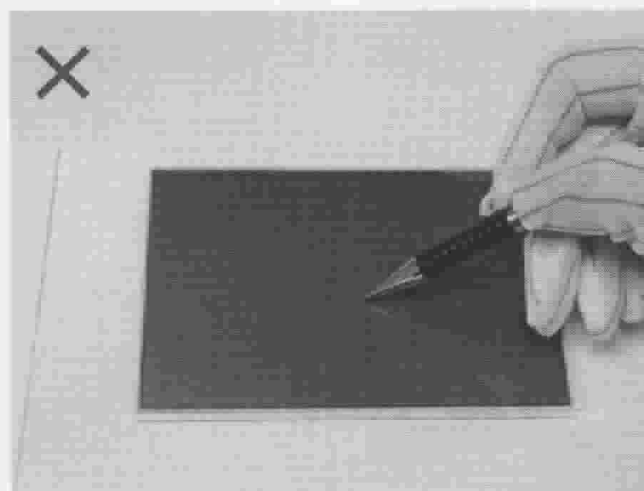

Please don't operate with sharp stick such as sharp pencil.

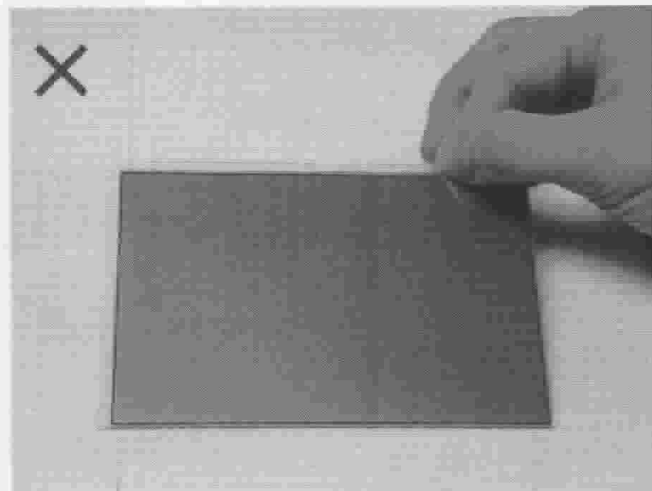

Please don't touch ITO glass without anti-static gloves.

