

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LDCGANY32Y72CGKS_

SPEC. NO.: LMY32-72A- \triangle

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

EDITED ON : JUNE.23.2006

Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN

1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LDCGANY32Y72CGKS_	-
2	Module Size	162.1 (W) x 109.0 (H) x 11.5Max. (D)	mm
3	Dot Size	0.33 (W) x 0.33 (H)	mm
4	Dot Pitch	0.36 (W) x 0.36 (H)	mm
5	Number of Dots	320 (W) x 240 (H)	Dot
6	Duty	1/240	-
7	LCD Display Mode	Blue Mode	-
8	Rear Polarizer	Transmission	-
9	Viewing Direction	12	O'clock
10	Backlight	LED	-
11	Controller	RA8835(With 32KB SRAM)	-
12	DC/DC Converter	Included	-
13	Touch Panel	Excluded	-
14	Weight	200 (Approx.)	g

NOTE :

LDCGANY32Y72CGKS

Back Light
C : LED Backlight

Reflective/Transmissive
N : Transmission

Option
72 : Version
C : Anti-glare
G : Special Color Backlight
K : High Contrast Ratio LC
S : RoHS Compliance
T : Sample for testing

Mode/View Angle
Y : Blue Mode, 12 O'clock

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Input Voltage	VI	-0.3	VDD+0.3	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	WIDE TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-20	70	-40	80
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 70^\circ\text{C}$: 75%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.

That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Power Supply for Logic	VDD-VSS	-	4.75	5.0	5.25	V	
Input Voltage	VIH	H level	0.8VDD	-	VDD	V	
	VIL	L level	0	-	0.2VDD	V	
Recommended LC Driving Voltage	(Vo-Vss) (Vop)	Duty=1/240	-20°C	25.1	25.6	26.1	V
			0°C	23.9	24.4	24.9	
			25°C	23.2	23.7	24.2	
			50°C	22.4	22.9	23.4	
			70°C	21.6	22.1	22.6	
Power Supply Current	IDD	OSCILLATOR=10MHz VDD = 5 V PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □	-	70	110	mA	
Surface Luminance of LCM	L	V _{AK} = 5V I _{AK} = 160mA(Max) PATTERN: (Dots All ON)	110	140	-	cd/m ²	
		V _{AK} = 5V I _{AK} = 160mA(Max) PATTERN: (Dots All Off)	-	20	40		

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used LED Rating (Constant Voltage Driving)

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Peak forward current	I_P	-	-	240	mA	-
Maximum reverse voltage	V_R	-	-	5	V	-
Applied forward voltage	V_{AK}	-	5	-	V	-
Applied forward current	I_{AK}	-	-	160	mA	-
LED power consumption	P_F	-	-	0.8	W	-
LED life time	L_L	-	10000	-	hrs	at $V_{AK}=5V$ (*1)

(*1) LED life time is defined as follows : The final brightness is at 50% of original brightness.

4. OPTICAL CHARACTERISTICS

AT Vop

ITEM		Cr(Contrast Ratio)										θ (Viewing Angle)		ϕ (Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
MODE		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
N	Y	3.0	4.0	3.5	5.0	3.5	5.0	3.0	4.5	2.0	3.0	-	(F)25 (R)30	-	(L)25 (R)25
NOTE		NOTE 6										NOTE 5			


NOTE : N : TRANSMISSION
Y : Special Polarizer, 12 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	3200	4000	6000	ms	NOTE 2
		0℃	400	500	750		
		25℃	200	250	375		
		50℃	80	100	150		
		70℃	65	80	120		
Response Time (fall)	Tf	-20℃	1600	2000	3000	ms	NOTE 2
		0℃	360	450	680		
		25℃	120	150	230		
		50℃	50	60	90		
		70℃	40	50	75		

(NOTE 1)

Definition of Operation Voltage(Vop)

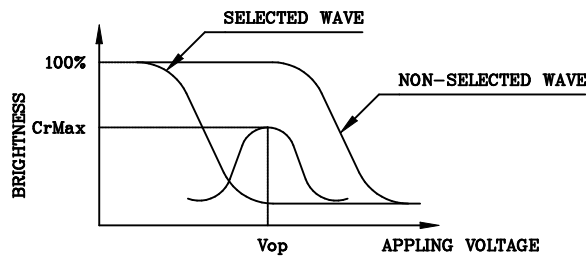

(positive type)

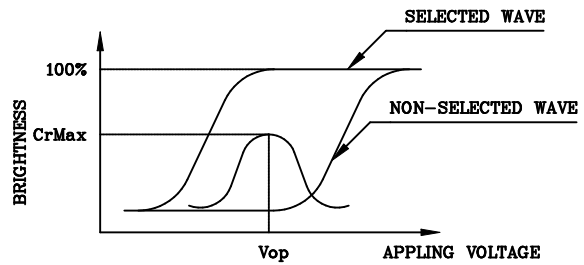


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

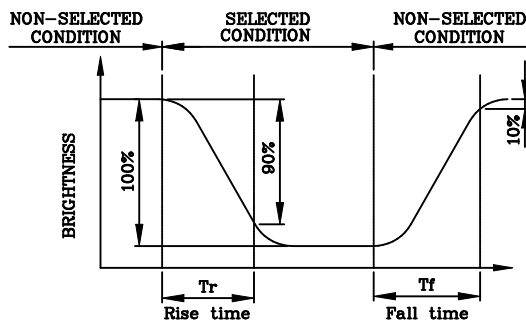

(positive type)

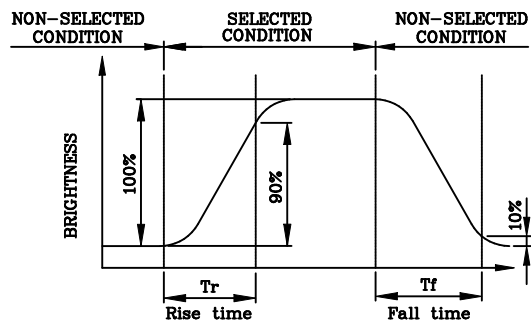


(negative type)

*Conditions


Operating Voltage : Vop
Viewing Angle (θ,φ) : (0,0)
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

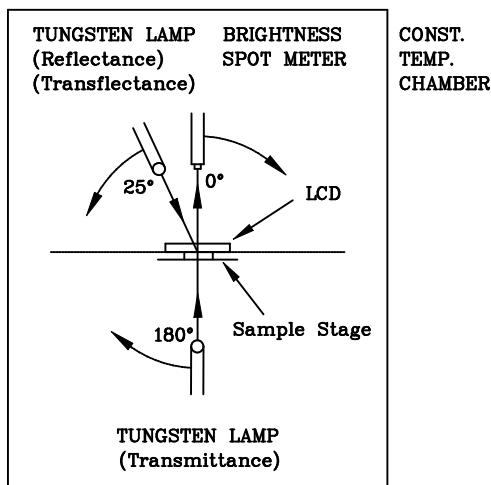


Multiplex Driving (1/N duty 1/a bias)

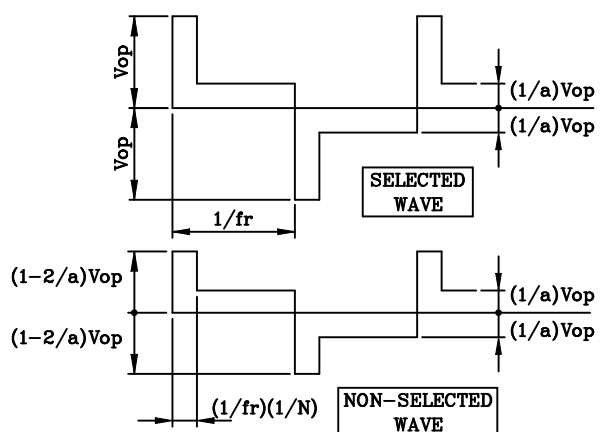


(NOTE 4)

Definition of Viewing Direction

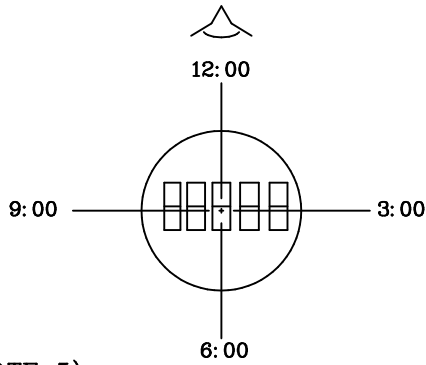

(NOTE 5)

Definition of Viewing Angle

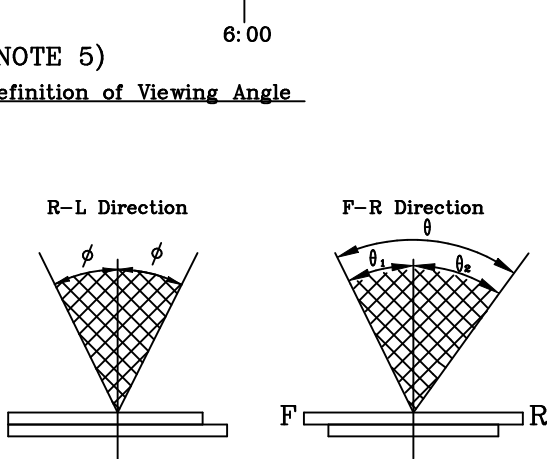


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

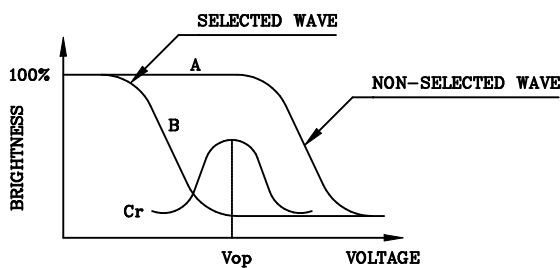

(positive type)

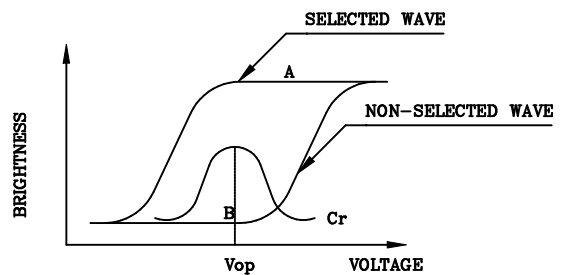


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

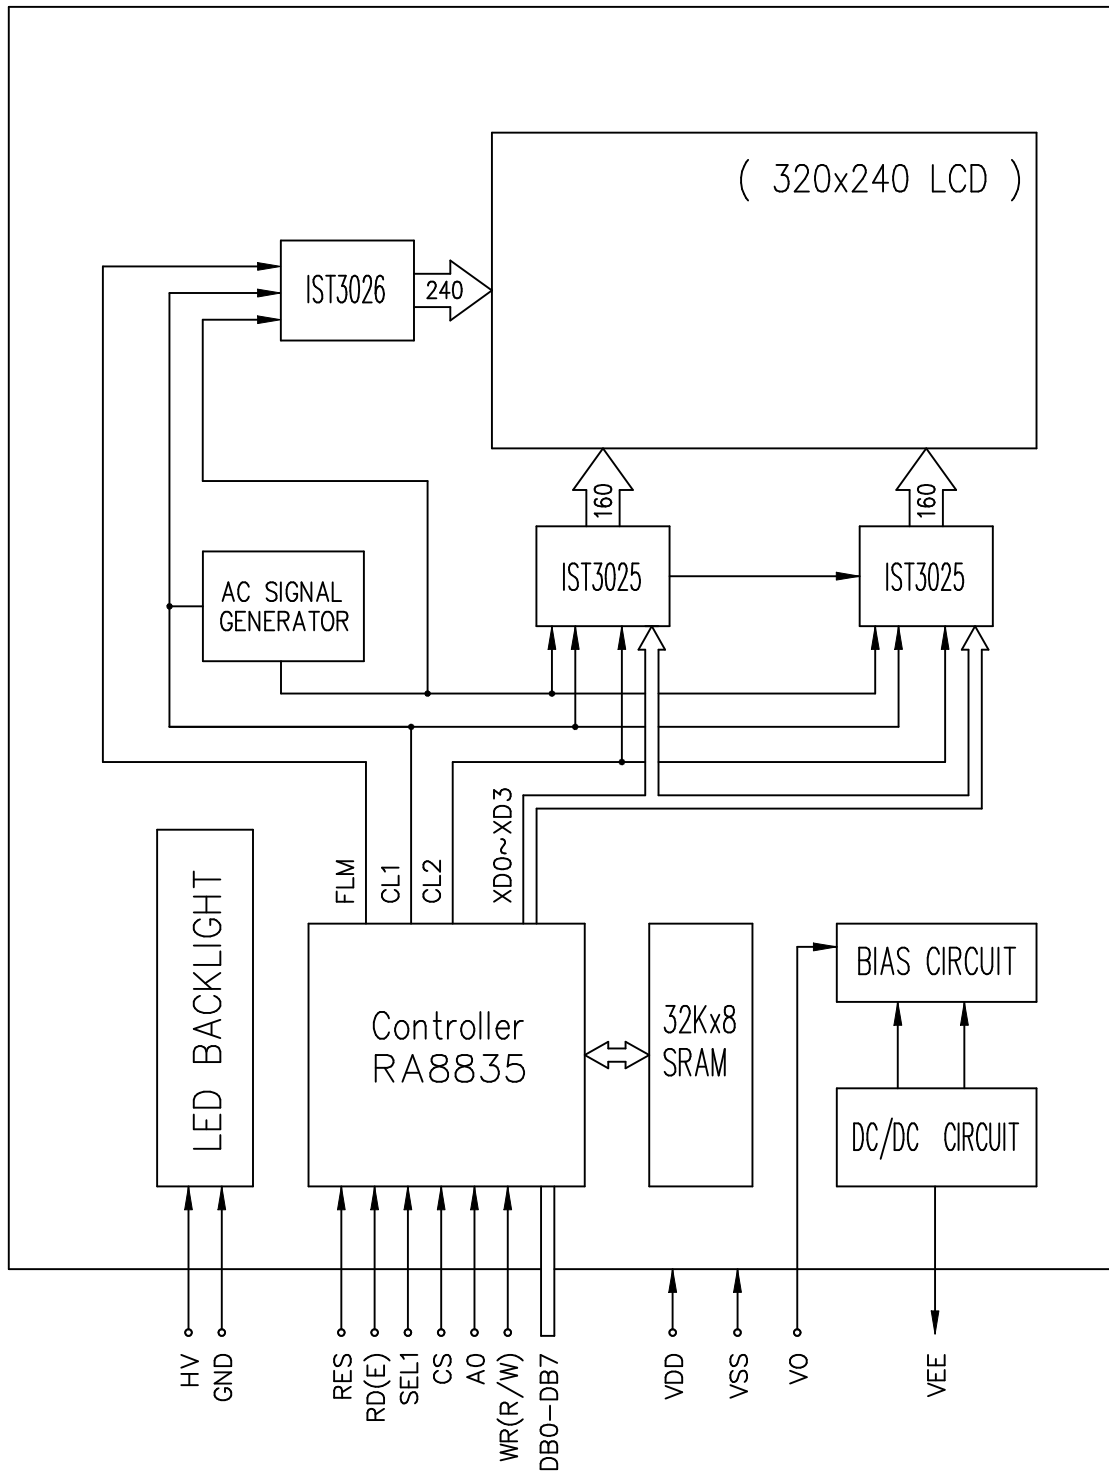

6. INTERNAL PIN CONNECTION

CN1:


PIN NO.	SYMBOL	FUNCTION
1	VSS	Ground
2	VDD	Power Supply for Logic
3	VO	Negative voltage power supply
4	AO	Data type select
5	WR(R/W)	8080 Family : Write signal 6800 Family : R/W signal
6	RD(E)	8080 Family : Read signal 6800 Family : Enable clock
7	DB0	3-State I/O data bus
8	DB1	
9	DB2	
10	DB3	
11	DB4	
12	DB5	
13	DB6	
14	DB7	
15	CS	Chip select
16	RES	This active Low input performs hardware reset on the RA8835
17	VEE	Supply voltage for LCD panel
18	SEL1	'0' FOR 8080 Family MPU , '1' for 6800 Family MPU
19	NC	No Connection
20	NC	No Connection
21	NC	No Connection
22	NC	No Connection

CN2 : J.A.E./ IL-G-4S-S3C2

PIN NO.	SYMBOL	FUNCTION
1	A	Power Supply for LED
2	NC	-
3	NC	-
4	K	Ground

7. POWER SUPPLY

LCD MODULE

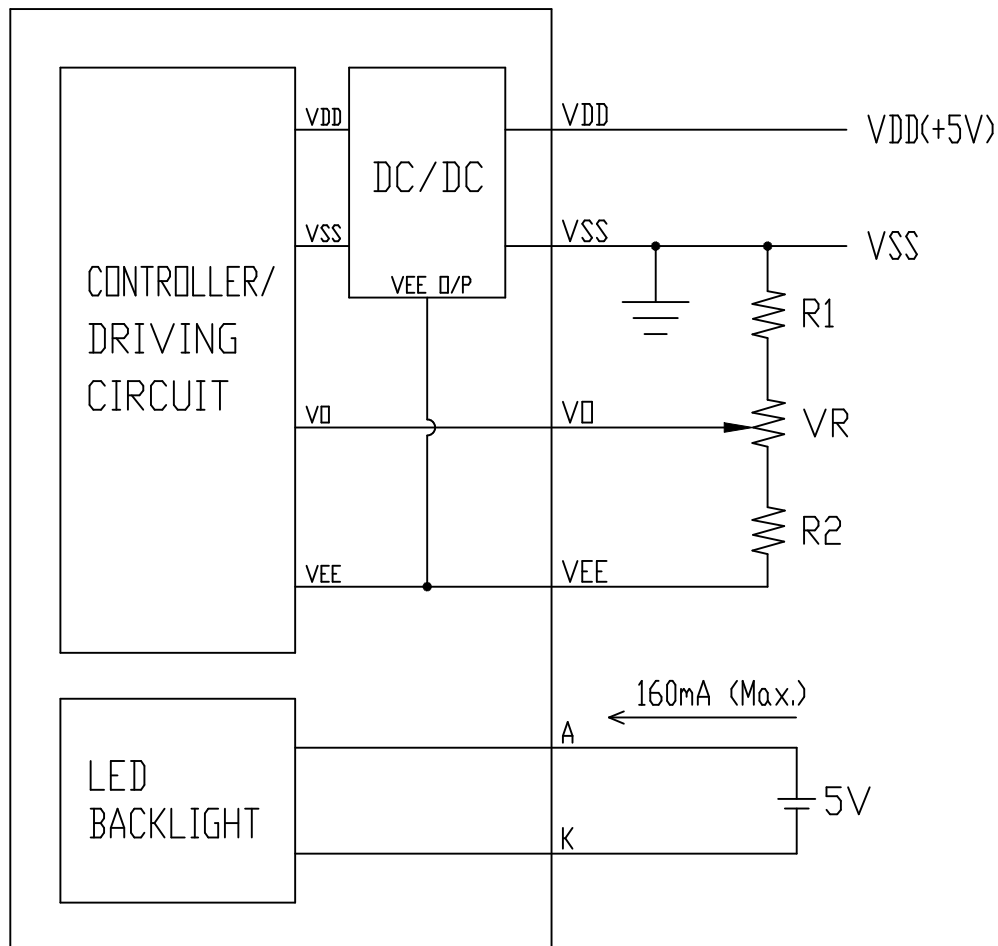

(NOTE)


$$R1 + VR + R2 \cong 20K\Omega$$

8. TIMING CHARACTERISTICS

8-1. READ/WRITE CHARACTERISTICS(8080 FAMILY MPU)

VDD=5.0V±5%


ITEM	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
A0, \overline{CS}	ADDRESS HOLD TIME	t_{AH8}	10	-	-	ns
	ADDRESS SETUP TIME	t_{AW8}	0	-	-	ns
$\overline{WR}, \overline{RD}$	SYSTEM CYCLE TIME	t_{CYC8}	1	-	-	ns
	STROBE PULSE WIDTH	t_{CC}	120	-	-	ns
D0 to D7	DATA HOLD TIME	t_{DH8}	5	-	-	ns
	DATA SETUP TIME	t_{DS8}	120	-	-	ns
	\overline{RD} ACCESS TIME	t_{ACC8}	-	-	50	ns
	OUTPUT DISABLE TIME	t_{OH8}	10	-	50	ns

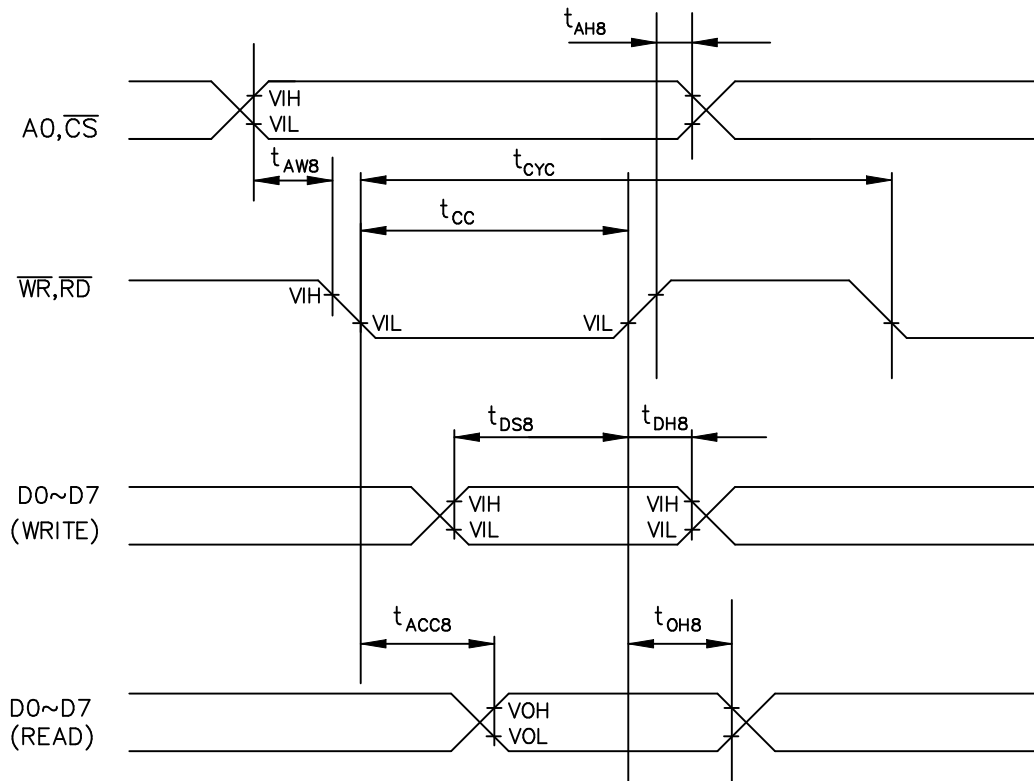


8-2.READ/WRITE CHARACTERISTICS(6800 FAMILY MPU)

VDD=5.0V±5%

ITEM	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
A0, \overline{CS} , \overline{WR}	ADDRESS HOLD TIME	t_{AH6}	0	-	-	ns
	ADDRESS SETUP TIME	t_{AW6}	0	-	-	ns
	SYSTEM CYCLE TIME	t_{CYC6}	1	-	-	ns
D0 to D7	DATA HOLD TIME	t_{DH6}	0	-	-	ns
	DATA SETUP TIME	t_{DS6}	100	-	-	ns
	ACCESS TIME	t_{ACC6}	-	-	85	ns
	OUTPUT DISABLE TIME	t_{OH6}	10	-	50	ns
\overline{RD}	ENABLE PULSE WIDTH	t_{RDW}	120	-	50	ns

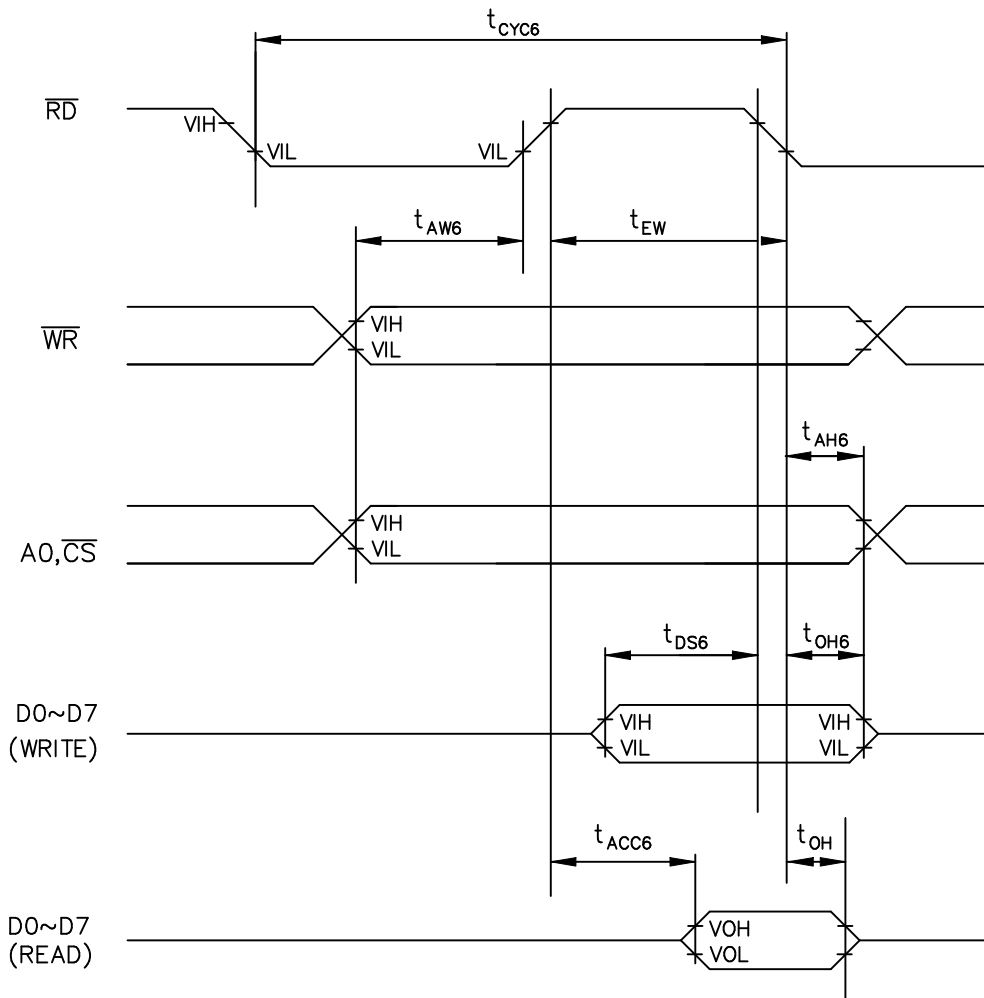


8-3.POWER ON/OFF TIMING

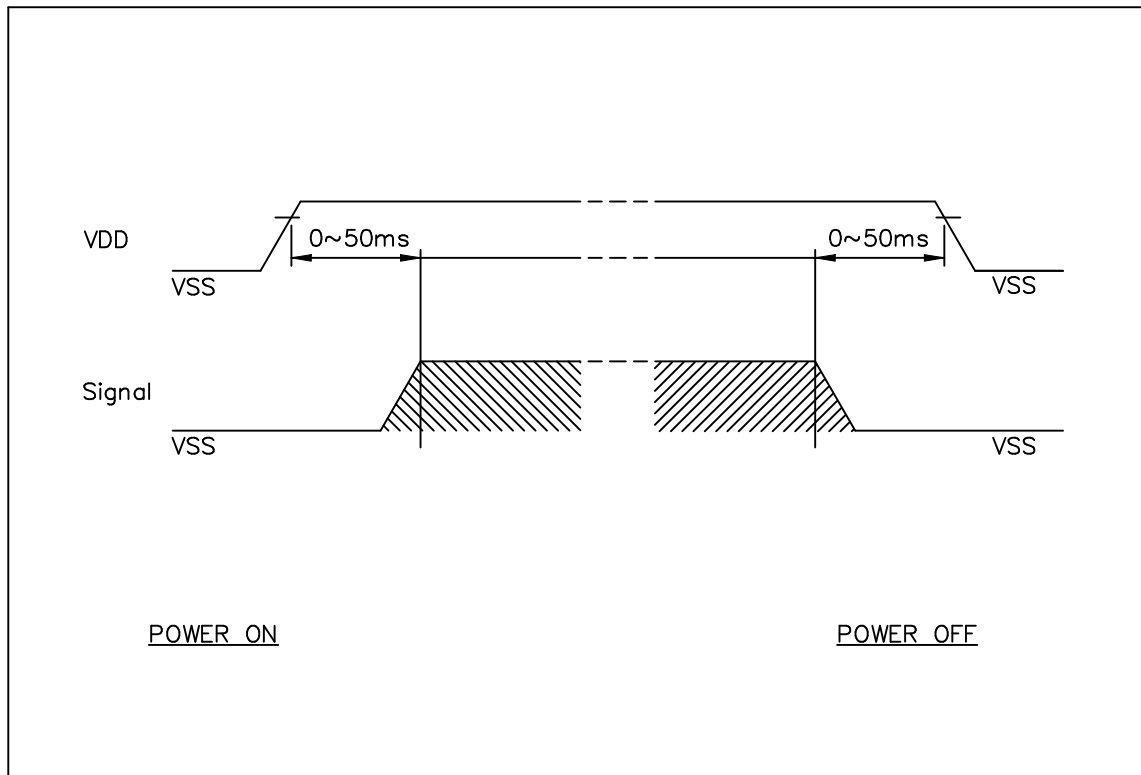

(Note)


The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

8-4.DISPLAY PATTERN

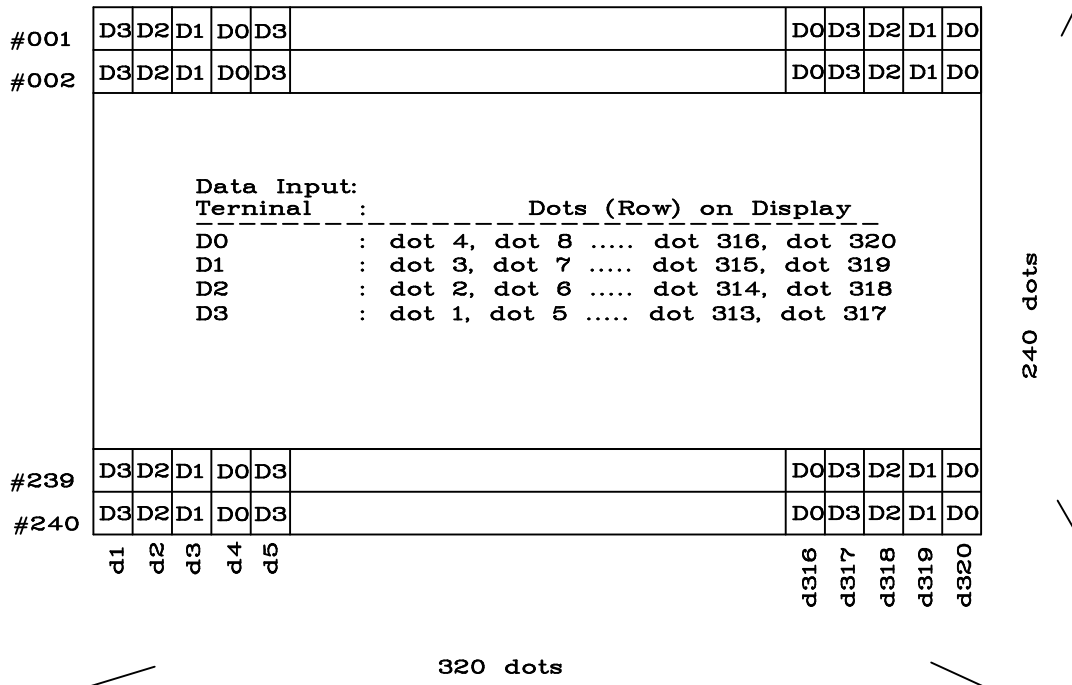

9. RELIABILITY TEST


WIDE TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	80°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-40°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	60°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	70°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	-20°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C, 30min → 70°C, 30min  (1 cycle)			Appearance without defect	10 cycles

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions
 *Viewing Area Definition

Fig. 1

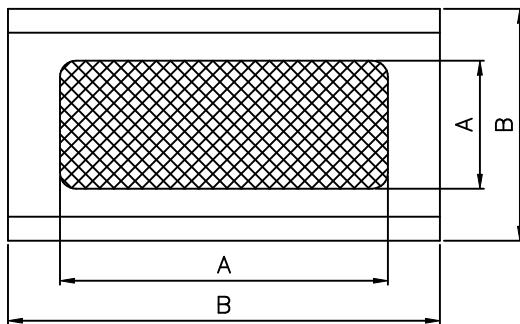













A : Zone Viewing Area
 B : Zone Glass Plate Outline

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
 The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and sample to be 30cm to 50cm.

5-2 External Appearance Defect




NO.	Item	Criterion																		
1	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<p>(1)-1-Spots</p> <table border="1" data-bbox="711 477 1356 763"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.1 < D \leq 0.2$</td> <td>5</td> </tr> <tr> <td>$0.2 < D \leq 0.3$</td> <td>2</td> </tr> <tr> <td>$0.3 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <p>(1)-2-Blurred Spots(At lighting condition)</p> <table border="1" data-bbox="711 1187 1356 1426"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.3$</td> <td>Ignore</td> </tr> <tr> <td>$0.3 < D \leq 0.75$</td> <td>5</td> </tr> <tr> <td>$0.75 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			

1	Line	<p>(1)-1 Lines</p> <table border="1" data-bbox="710 427 1452 712"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 4$</td> <td>2</td> </tr> <tr> <td>$0.08 < W \leq 0.1$</td> <td>$L \leq 1$</td> <td>1</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurred Lines(At lighting condition)</p> <table border="1" data-bbox="710 1019 1452 1303"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 3$</td> <td>6</td> </tr> <tr> <td>$0.08 < W$</td> <td>$3 < L$</td> <td>None</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3	Color irregular	Not remarkable color irregular.																								

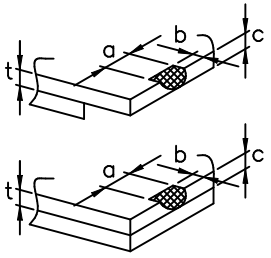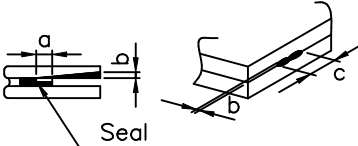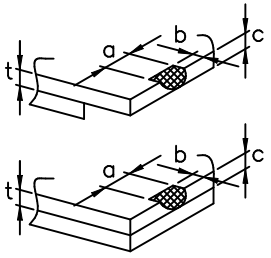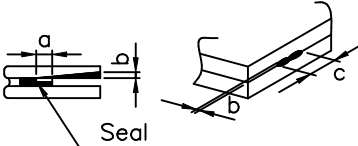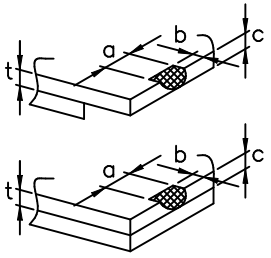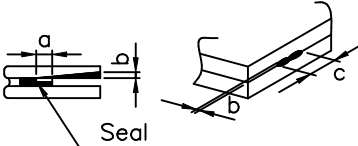4	Air bubbles polarizing plates, and reflection plates	<table border="1" data-bbox="710 380 1225 667"> <tr> <th data-bbox="710 380 970 526">Average Diameter (mm):D</th> <th data-bbox="970 380 1225 526">Number of pieces permitted</th> <th data-bbox="1225 380 1476 667" rowspan="2">Average diameter = (Long diameter + Short diameter)/2</th> </tr> <tr> <td data-bbox="710 526 970 667">D ≤ 0.3 0.3 < D</td> <td data-bbox="970 526 1225 667">Ignore 0</td> </tr> </table> <p data-bbox="710 683 1476 779">Note that when there are 4 pieces or more, they are not to be concentrated.</p>		Average Diameter (mm):D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	D ≤ 0.3 0.3 < D	Ignore 0					
Average Diameter (mm):D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2											
D ≤ 0.3 0.3 < D	Ignore 0												
5	Cracks	<table border="1" data-bbox="662 779 1476 1964"> <tr> <td data-bbox="662 779 1066 1169">(1)General crack </td> <td data-bbox="1066 779 1476 1169"> $a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces. </td> </tr> <tr> <td data-bbox="662 1169 1066 1361">(2)Corner crack </td> <td data-bbox="1066 1169 1476 1361"> $a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$ </td> </tr> <tr> <td data-bbox="662 1361 1066 1630">(3)Seal portion crack </td> <td data-bbox="1066 1361 1476 1630"> $a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces. </td> </tr> <tr> <td data-bbox="662 1630 1066 1870">(4)ITO Pin crack </td> <td data-bbox="1066 1630 1476 1870"> $a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$ </td> </tr> <tr> <td data-bbox="662 1870 1066 1964">(5)Progressive cracks</td> <td data-bbox="1066 1870 1476 1964">All taken to be unacceptable.</td> </tr> </table>		(1)General crack 	$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.	(2)Corner crack 	$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$	(3)Seal portion crack 	$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.	(4)ITO Pin crack 	$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$	(5)Progressive cracks	All taken to be unacceptable.
(1)General crack 	$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.												
(2)Corner crack 	$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$												
(3)Seal portion crack 	$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.												
(4)ITO Pin crack 	$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$												
(5)Progressive cracks	All taken to be unacceptable.												

6	Outer dimensions	Should be within the tolerance.
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.

5-3 Dot Appearance Defect

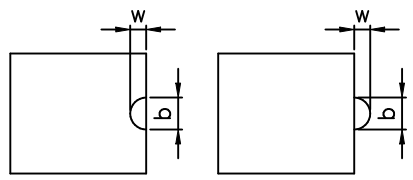NO.	Item	Criteria
1	Pinhole	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2	Missing	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.</p>
3	Thick and thin display	 <p>Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).</p>

NOTICE:

- SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING

- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent. Use a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT



- 1.Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

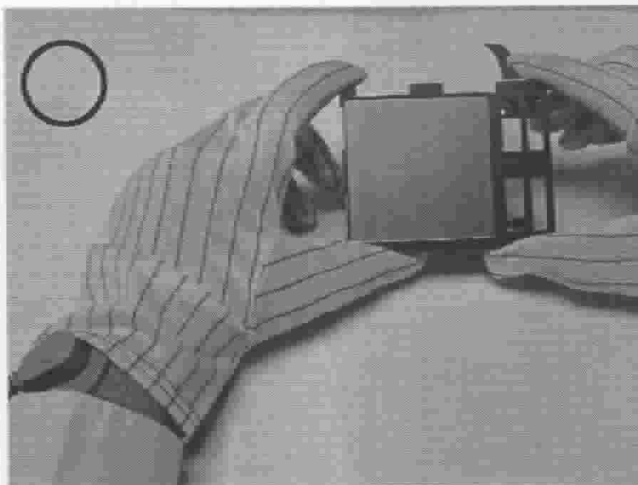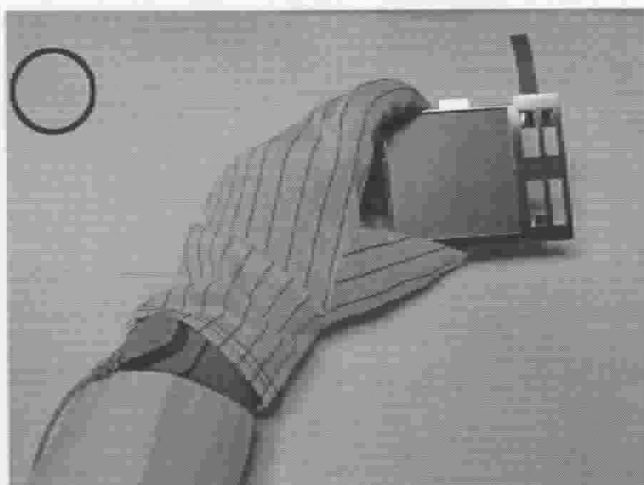


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

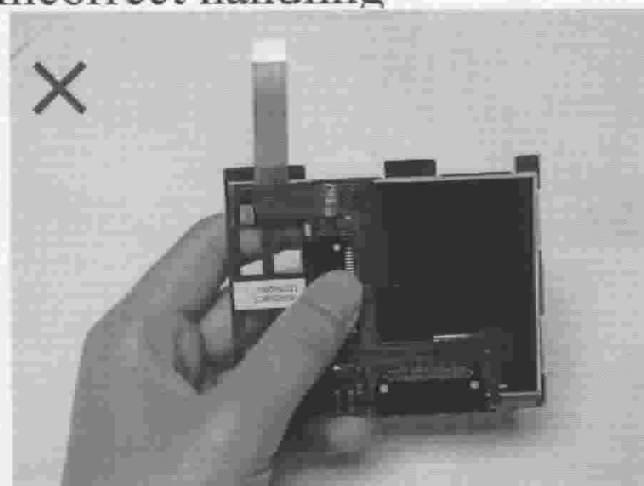


Please don't touch IC directly.

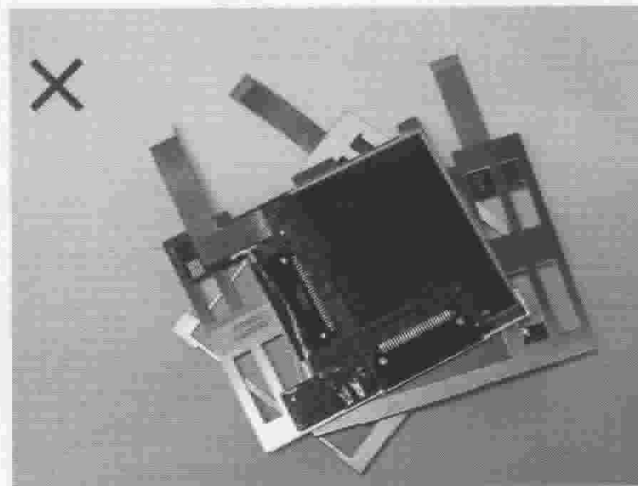

Please don't put one on another LCM.

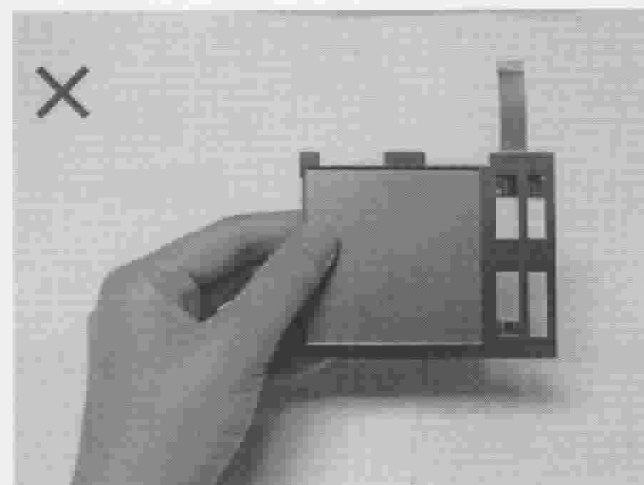

Please don't hold the surface of LCM.

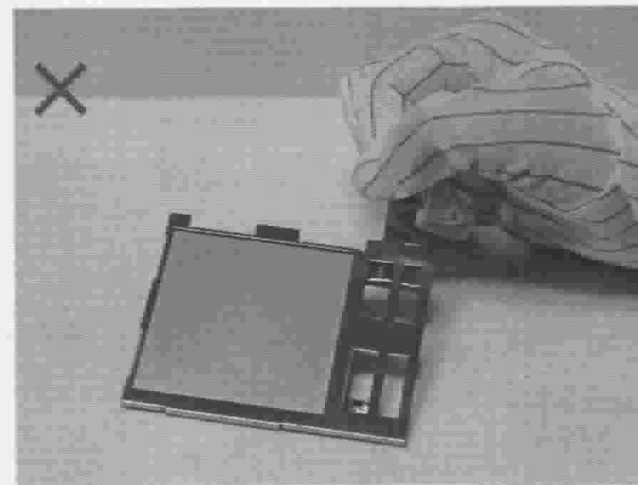



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

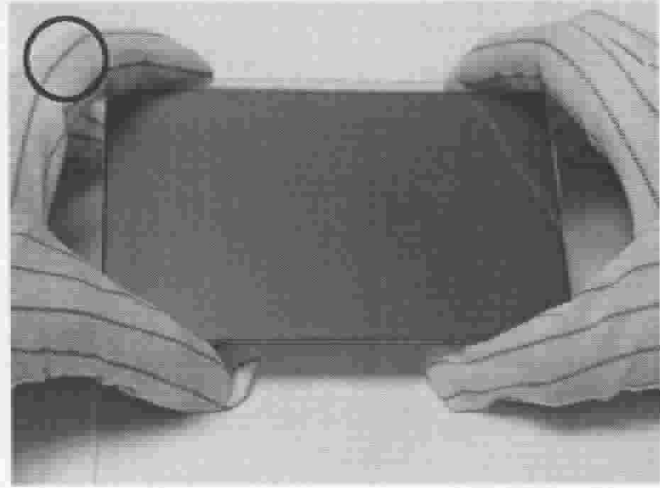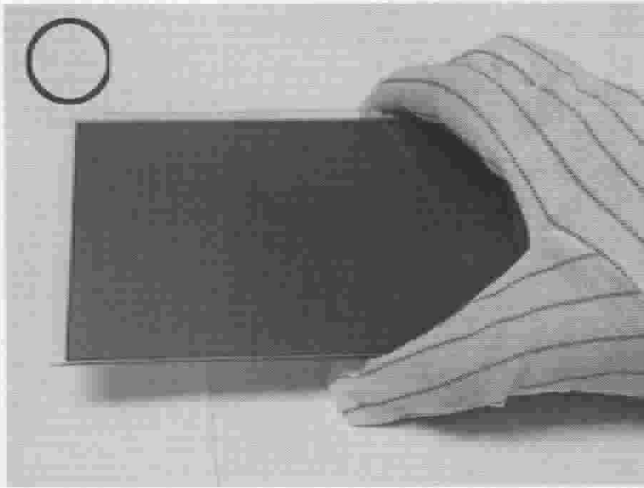


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

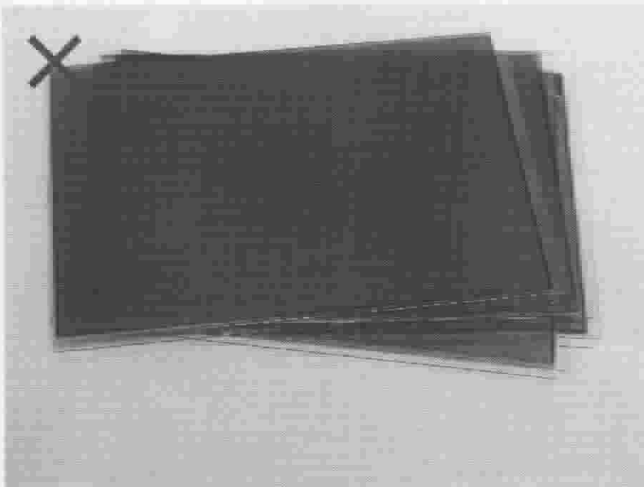


Please don't put one on another LCD.

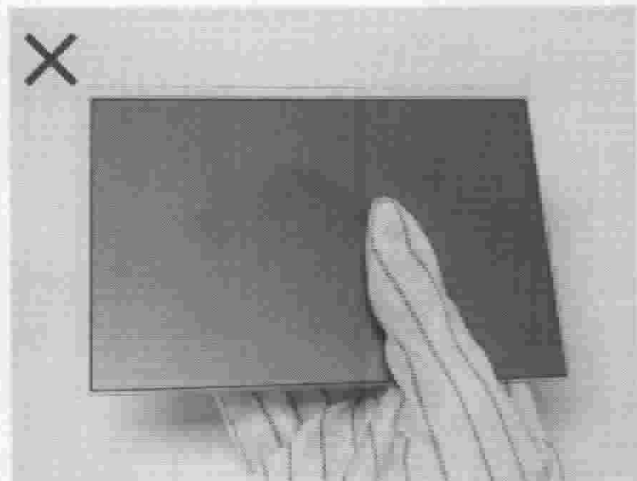

Please don't hold the surface of LCD.

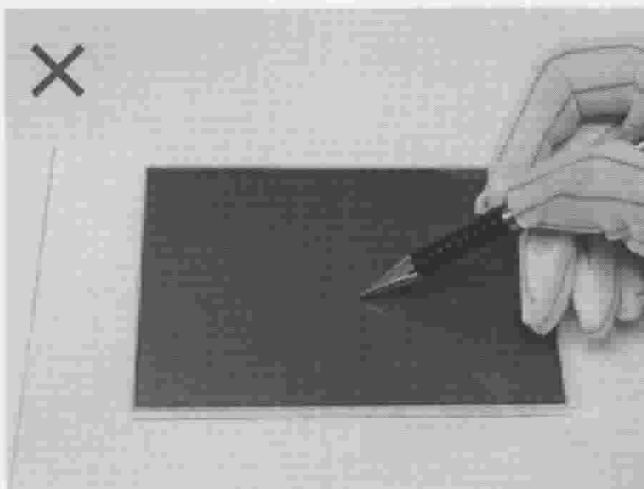

Please don't operate with sharp stick such as sharp pencil.

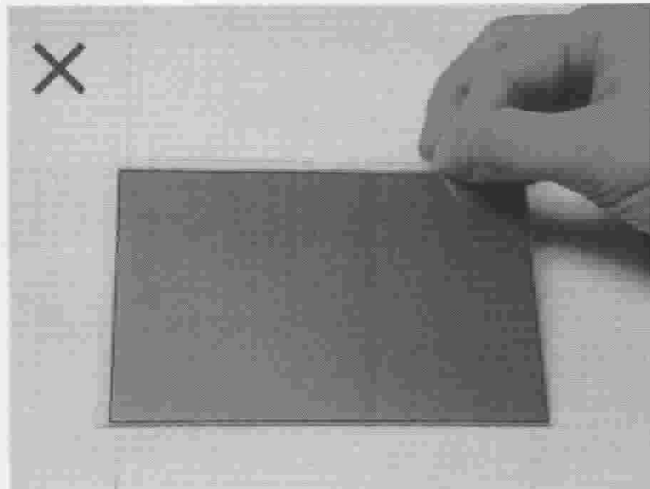

Please don't touch ITO glass without anti-static gloves.

