

## 8x8 Dot-Matrix 3mm dia. Bicolor LED Display

### User's Guide


**(1) Absolute Maximum Ratings at Ta=25°C**

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	IF	20	mA
Pulse Forward Current	IFP	100	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	-20~+80	mW
Operating Temperature	Topr	-25~+85	°C
Storage Temperature	Tstg	-25~+85	°C
Soldering Temperature	Tsld	Reflow Soldering : 260°C for 5 Seconds Hand Soldering : 350°C for 3 Seconds	

\* IFP Conditions : Pulse Width ≤ 10m sec. and Duty ≤ 1/10

**(2) Initial Electrical / Optical Characteristics at Ta=25°C**

Item	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage(Green)	VF	2.2	2.3	2.5	V	IF=20mA
Forward Voltage(Red)	VF	1.6	1.8	2.0	V	IF=20mA
Reverse Current	IR	---	---	10	uA	VR=5V

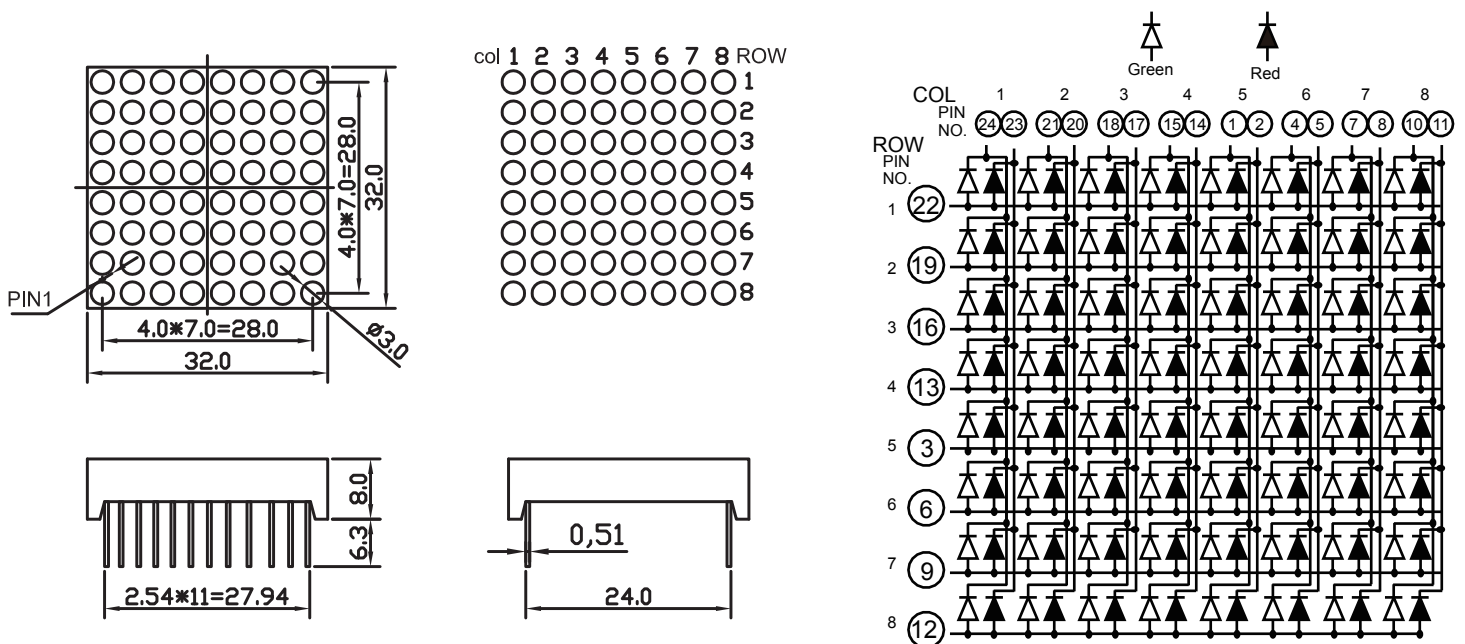

## Contact Us

**Sure Electronics Co., Ltd.**

Floor 5, A zone,  
Qinhuai Technology Innovation center,  
NO.105-2, DaMing Road,  
Nanjing,  
China

Tel: +8613601408832  
+86-25-66606340  
(English service, from GMT1-10AM, only for technical questions)

Email: [support@sure-electronics.net](mailto:support@sure-electronics.net)

Website: [www.sure-electronics.net](http://www.sure-electronics.net)  
[www.sure-electronics.com](http://www.sure-electronics.com)  
[www.sureelectronics.net](http://www.sureelectronics.net)