

## LESDA6V1W5T1G Quad Array for ESD Protection

### General Description

The LESDA6V1W5T1G is a monolithic suppressor designed to protect components connected to data and transmission lines against ESD. The device clamp the voltage just above the logic level supply for positive transients, and to a diode drop below ground for negative transients.

### Applications

- Computers
- Printers
- Communication systems
- Cellular phones handsets and accessories
- Wireline and wireless telephone sets
- Set top boxes

### Features

- 4 Unidirectional Transil functions
- Breakdown voltage:
- $V_{BR} = 6.1 \text{ V min. and } 25 \text{ V min.}$
- Low leakage current:  $< 1 \text{ mA}$
- Very small PCB area  $< 4.2 \text{ mm}^2$  typically
- High ESD protection level: up to 25 kV
- High integration

### Complies with the following standards

#### IEC61000-4-2

Level 4 16 kV (air discharge)  
9 kV(contact discharge)


#### MIL STD 883E - Method 3015-7 Class 3

25 kV HBM (Human Body Model)



**SOT353**

### Functional diagram




LESDA6V1W5T1G

### Absolute Ratings ( $T_{amb}=25^{\circ}\text{C}$ )

Symbol	Parameter	Value	Units
$P_{PP}$	Peak Pulse Power ( $t_p = 8/20\mu\text{s}$ )	LESDA6V1W5T1G 150	W
$T_L$	Maximum lead temperature for soldering during 10s	260	$^{\circ}\text{C}$
$T_{stg}$	Storage Temperature Range	-40 to +125	$^{\circ}\text{C}$
$T_{op}$	Operating Temperature Range	-40 to +125	$^{\circ}\text{C}$

### Electrical Parameter

Symbol	Parameter
$V_{RM}$	Stand-off voltage
$V_{BR}$	Breakdown voltage
$V_{CL}$	Clamping voltage
$I_{RM}$	Leakage current
$I_{PP}$	Peak pulse current
$I_R$	Reverse current
$I_F$	Forward current
$\alpha T$	Voltage temperature coefficient
$V_F$	Forward voltage drop
C	Capacitance
$R_d$	Dynamic

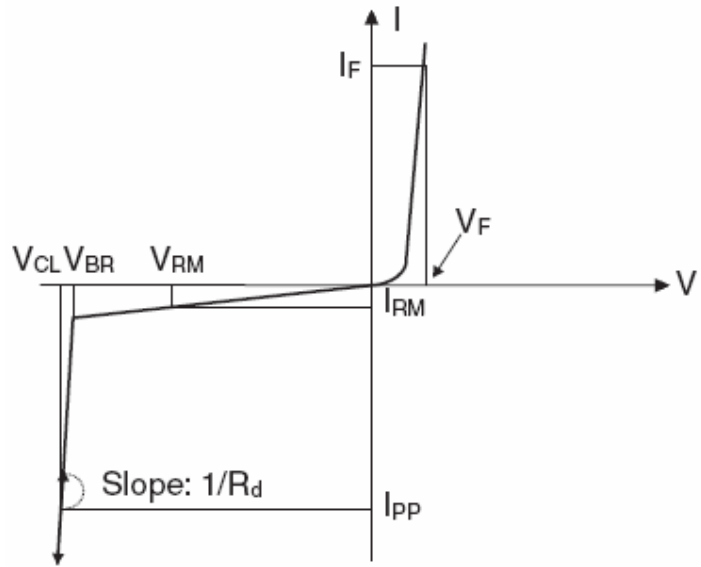

### Electrical Characteristics

Part Numbers	$V_{BR}$		$I_R$	$V_{RM}$	$I_{RM}$	$V_F$	$I_F$	$R_d$	$\alpha T$	C
	Min.	Max.				Max.		Typ. <sup>(1)</sup>	Max. <sup>(2)</sup>	Typ. 0v bias
	v	v				v		$\Omega$	$10^{-4}/^{\circ}C$	pF
LESDA6V1W5T1G	6.1	7.2	1	3	1	1.25	200	0.61	6	90

1. Square pulse  $I_{PP}=15A, t_p=2.5\mu s$  2.  $V_{BR}=\alpha T * (T_{amb}-25^{\circ}C) * V_{BR}(25^{\circ}C)$

### Typical Characteristics

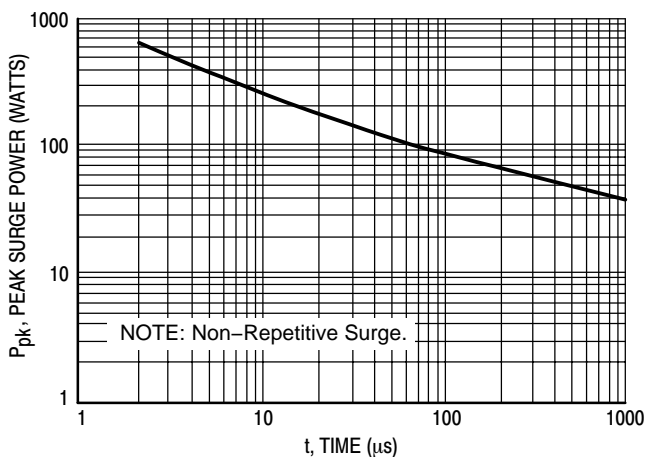


Figure 1. Pulse Width

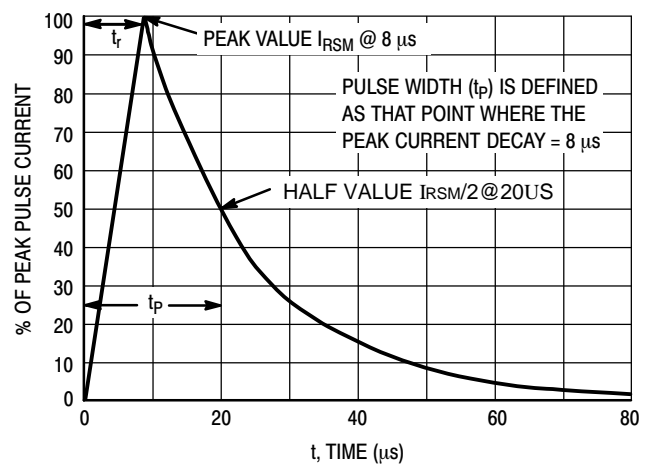


Figure 2. 8 x 20  $\mu s$  Pulse Waveform

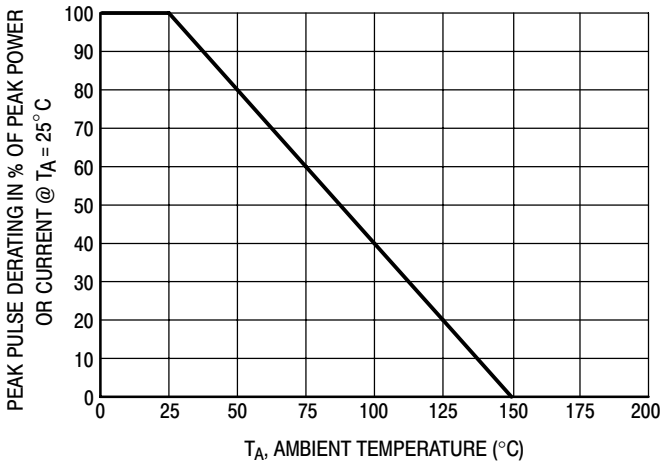


Figure 3. Pulse Derating Curve

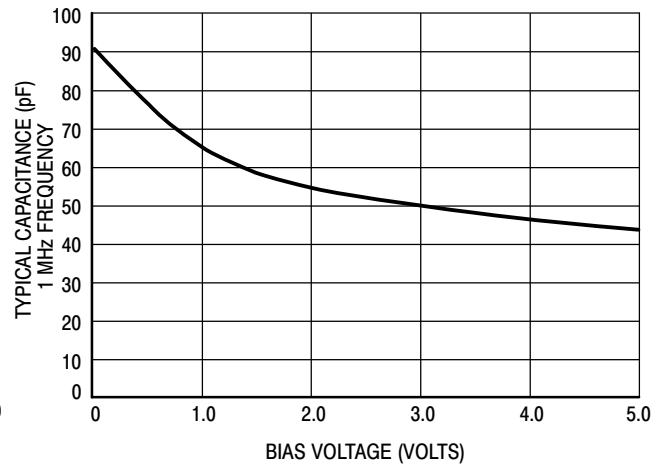


Figure 4. Capacitance

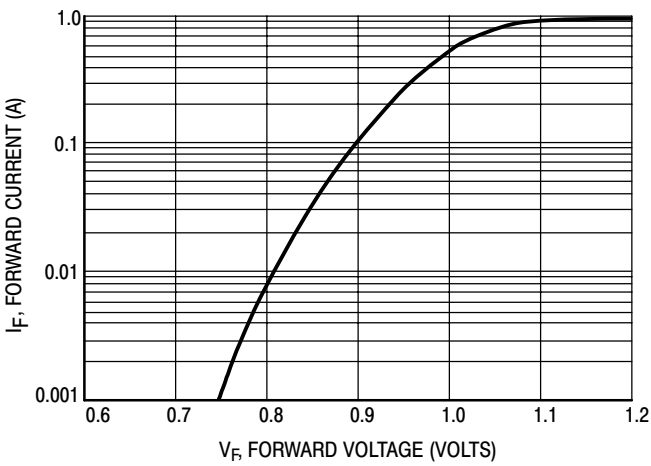


Figure 5. Forward Voltage

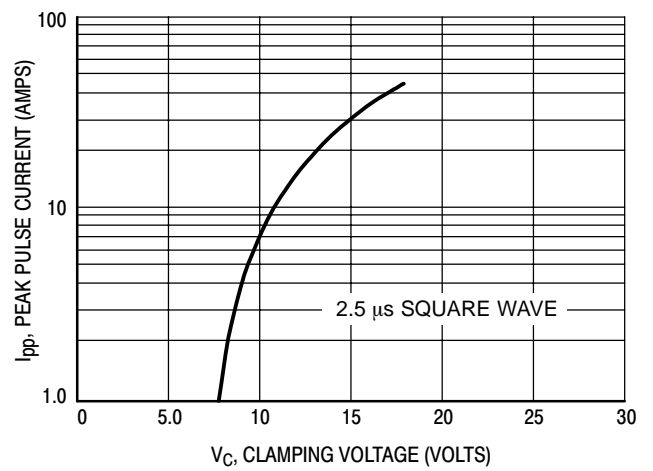
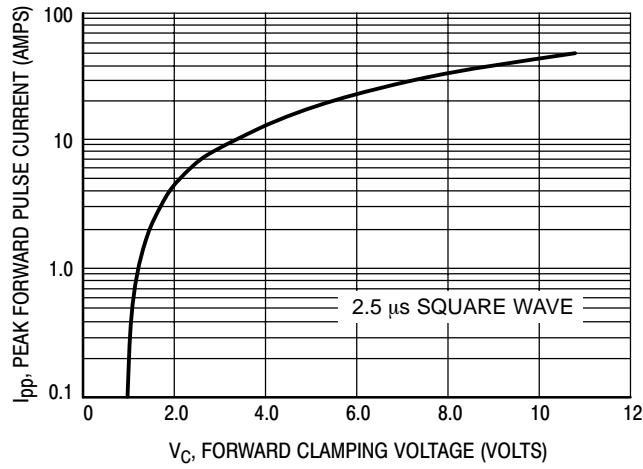


Figure 6. Clamping Voltage versus Peak Pulse Current (Reverse Direction)



**Figure 7. Clamping Voltage versus Peak Pulse Current (Forward Direction)**

**Package mechanical data**

**SOT-353 Package**

