



SAW Components

Preliminary Data Sheet LF73E





SAW Components

LF73E

Low-Loss Filter

140,0 MHz

Preliminary Data Sheet


Ceramic package DCC12A

Features

- IF low-loss filter
- 7,0 MHz usable bandwidth
- Ceramic SMD package

Terminals


- Gold plated

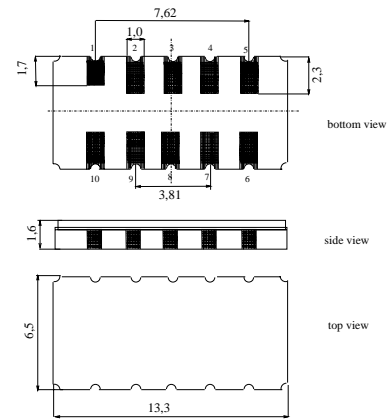

Dimensions in mm, approx. weight 0,4 g

Pin configuration

- | | |
|------------|-----------------|
| 1, 10 | Balanced Input |
| 5, 6 | Balanced Output |
| 2, 4, 7, 9 | Case ground |
| 3, 8 | To be grounded |

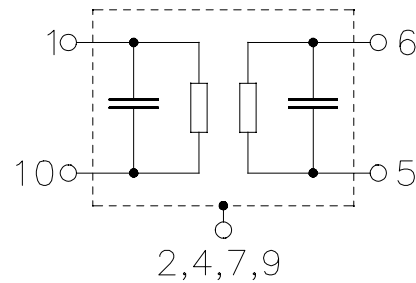

Type	Ordering code	Marking and Package according to	Packing according to
LF73E		C61157-A7-A94	F61074-V8131-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40 / +85	°C
Storage temperature range	T_{stg}	-55 / +125	°C
DC voltage	V_{DC}	0	V
Source power	P_s	10	dBm


SAW Components
LF73E
Low-Loss Filter
140,0 MHz
Preliminary Data Sheet
Characteristics

Operating temperature:

 $T = -40^{\circ}\text{C} \dots 85^{\circ}\text{C}$

Terminating source impedance:

 $Z_S = 50 \ \Omega$ bal. and external matching network

Terminating load impedance:

 $Z_L = 50 \ \Omega$ bal. and external matching network

		min.	typ.	max.	
Nominal frequency	f_N	—	140,0	—	MHz
Minimum insertion attenuation (including matching network)	α_{\min}	—	13,5	15,0	dB
Pass bandwidth					
	$\alpha_{\text{rel}} \leq 0,6 \text{ dB}$	$B_{0,6\text{dB}}$	—	8,1	— MHz
Amplitude ripple (p-p) TTE ¹⁾	$\Delta\alpha$				
	$f_N \pm 2,75 \text{ MHz}$	—	0,22	0,3	dB
	$f_N \pm 3,5 \text{ MHz}$	—	0,33	0,6	dB
Absolute group delay (@ f_N)	τ	—	1,0	—	μs
Phase ripple (p-p) TTE ¹⁾	$\Delta\varphi$				
	$f_N \pm 2,75 \text{ MHz}$	—	2,3	4,0	$^{\circ}$
	$f_N \pm 3,5 \text{ MHz}$	—	2,6	6,0	$^{\circ}$
Relative attenuation (relative to α_{\min})	α_{rel}				
	$f_N - 7,0 \text{ MHz} \dots f_N - 100,0 \text{ MHz}$	40	45	—	dB
	$f_N + 7,0 \text{ MHz} \dots f_N + 12,0 \text{ MHz}$	38	40	—	dB
	$f_N + 12,0 \text{ MHz} \dots f_N + 100,0 \text{ MHz}$	40	45	—	dB
Tripple transit suppression	TTS	40	43	—	dB
Return loss					
	$f_N \pm 3,5 \text{ MHz}$	—	17	—	dB
Pyroelectric pulse amplitude (p-p)	V_p	—	20	50	mV
Temperature coefficient of frequency	TC_f	—	- 18	—	ppm/K


¹⁾ TTE = Triple transit signal excluded (Gate from 0 μs to 2.6 μs)



Preliminary Data Sheet

Matching network

(Element values depend upon PCB layout)

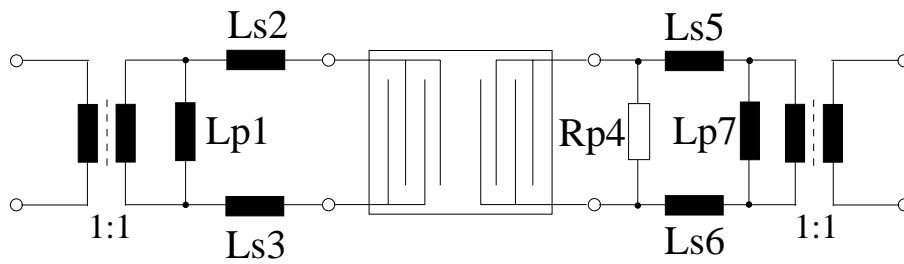

$L_{p1} = 39 \text{ nH}$

$L_{s2} = 22 \text{ nH}$

$L_{s3} = 27 \text{ nH}$

$R_{p4} = 680 \text{ } \Omega$

$L_{s5} = 33 \text{ nH}$

$L_{s6} = 27 \text{ nH}$

$L_{p7} = 82 \text{ nH}$



SAW Components


LF73E

Low-Loss Filter


140,0 MHz

Preliminary Data Sheet

Normalized frequency response: **Triple transit signal included**

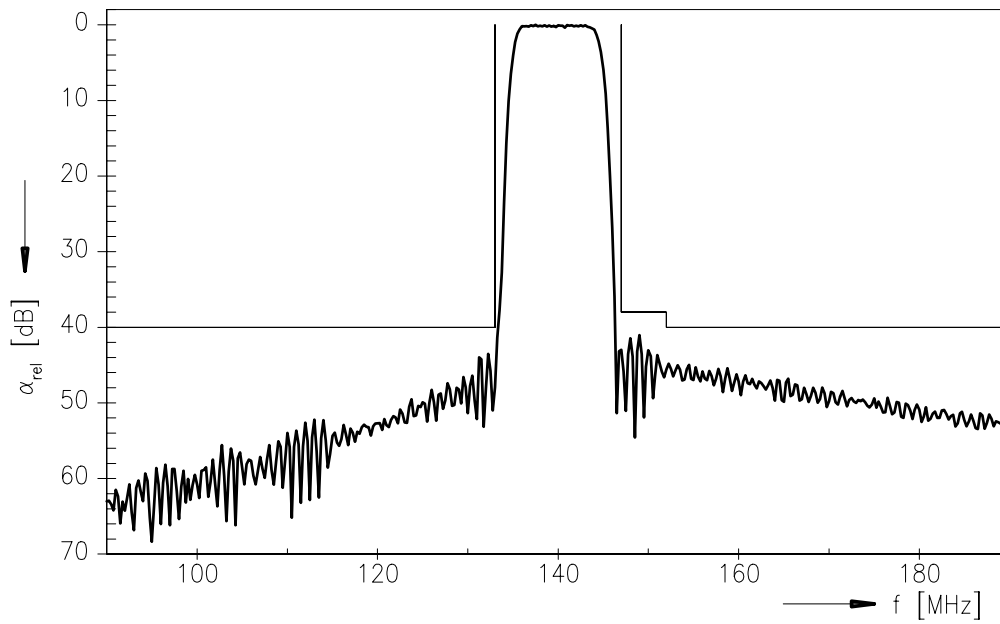

Normalized frequency response (pass band): **Triple transit signal excluded**

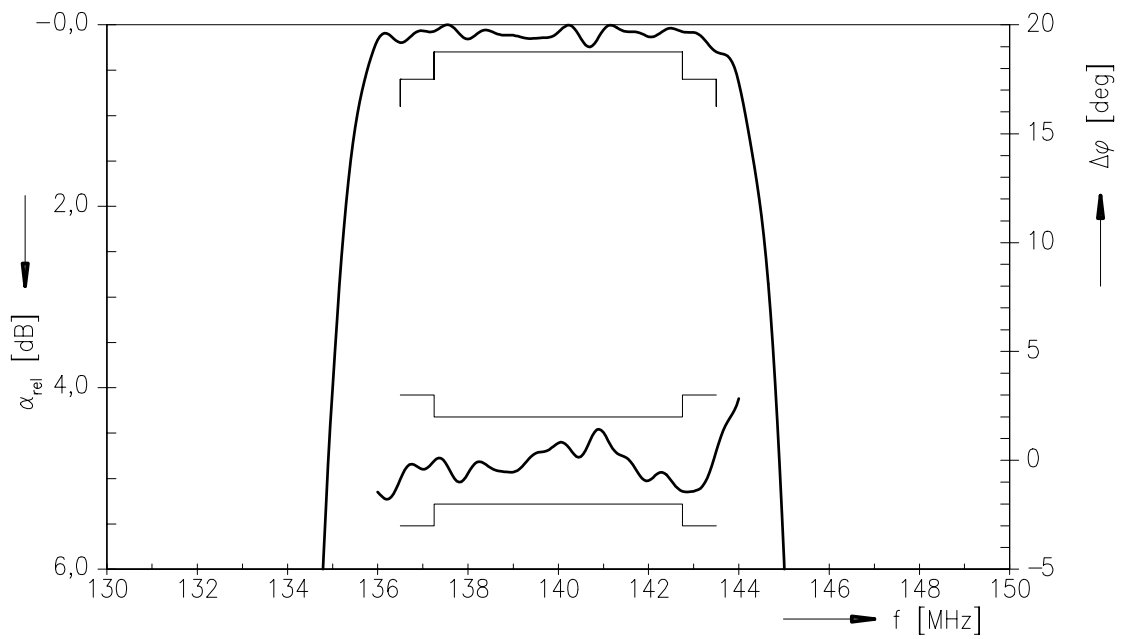



SAW Components

LF73E

Low-Loss Filter

140,0 MHz

Preliminary Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.