




LG30 / SMLG30

TO-8 THIN-FILM LINEARIZER FOR THE G30

- WIDE TEMPERATURE OPERATION
- YIELDS LINEAR ATTENUATION (dB) FOR LINEAR CONTROL VOLTAGE

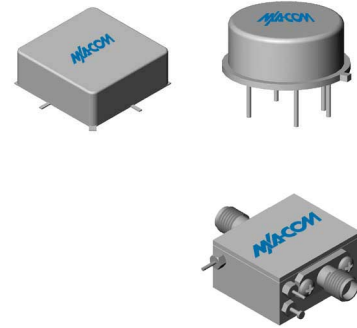

Linearity Specifications (Rev. Date: 3/02)*

Temperature	Typical	Guaranteed Max.
25°C	±1.0 dB	±1.5 dB
-54°C to +85°C	< ±1.5 dB	±2.0 dB

* Frequency: 100-2000 MHz; attenuation range: 3 to 25 dB

Typical Current Drain

	Control Voltage = 0 V (Max. Attenuation)	Control Voltage = 15 V (Min. Attenuation)
-V	3 mA	15 mA
+V	5 mA	14 mA
V _{con}	6 mA	12 mA
Combination of LG30 and G30		
-V	3 mA	15 mA
+V	12 mA	21 mA
V _{con}	6 mA	12 mA

Absolute Maximum Ratings

Storage Temperature	-62°C to +125°C
Max. Case Temperature	125°C
Max. DC Voltage	+17 Volts
“S” Series Burn-in Temperature (Case)	125°C


Outline Drawings

Package Figure Model	TO-8 BJ LG30	Surface Mount AD SMLG30	SMA Connectorized CG CLG30
----------------------	--------------	-------------------------	----------------------------

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

Typical Performance @ 25°C

V_{Out} vs. V_{Control}

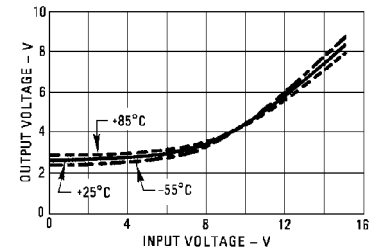

Attenuation vs. V_{Control}

