

| | |
|----------|------|
| Scanning | LIB. |
| | |



SPECIFICATION FOR APPROVAL

• **CUSTOMER** : LG Electronics inc.

• **ITEM** : Power Supply Unit.

• **P/NO**

| Model Name | Customer | Supplier |
|----------------|-------------|------------|
| LGP4247H-12LPB | EAY62512701 | PLDF-L101A |

• **DATE** : 2013. 11. 15

• **Revision** : 3.1

• **Remark** : MP (PCB REV 2.0)

Producing District : YANTAI, CHINA (중국 연태)

(생산지)

GWANGJU, KOREA (한국 광주)

BEKASI, INDONESIA (인도네시아 베카시)

WROCLAW, POLAND (폴란드 브루츠와프)

★ **Safety Standard Parts** [안전규격부품 List]

Power Cord, Power Plug, X/Y-Capacitor, Power Switch, Fuse, SMPS Trans, Stand-By Trans, Photo coupler, Insulation(절연) Resistor, Discharge(방전) Resistor, Fusing Resistor, FBT.CPT, CPT Socket, DY, D-Coil, Line Filter, PCB Material, Front / Back-cover Material Relay(1-2차간), Varistor, Adapter

★ **EMC Standard Parts** [전자규격 부품 List]

Power Plug, Line Filter, X-Capacitor, Y-Capacitor, SMPS Trans, Tuner, Saw-Filter, Shield Case, Oscillator, Pattern Change

★ **Green** [유해물질 확인사항]

This item must meet the standards of LG Electronics for six major substances as designated by RoHS for control.

(Cd: 10ppm under, Pb/Hg/Cr+6/PBB/PBDE: 100 ppm under)

| | |
|--|-------------------------------------|
| | LG Innotek Co., Ltd |
| | LG Twin Tower 33/34F, Yeouido-dong, |
| | Yeongdeungpo-gu, Seoul, Korea |
| | Tel. : +82-2-3777-1114 |
| | Fax. : +82-2-3777-0082 |

Documentation For Approval

| Model Name | Customer | Supplier |
|----------------|-------------|------------|
| LGP4247H-12LPB | EAY62512701 | PLDF-L101A |

| Written | Checked | | Approved |
|------------|------------|--|-------------|
| J.S Lee | J.Y Kim | | S.H JANG |

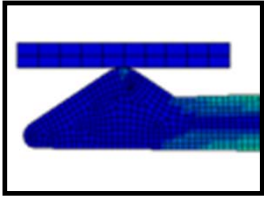
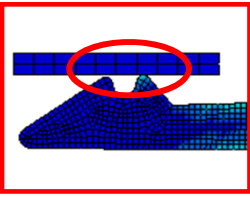
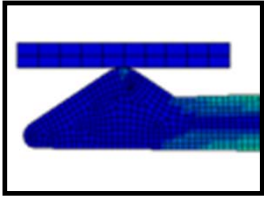
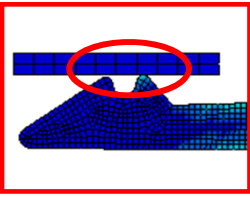
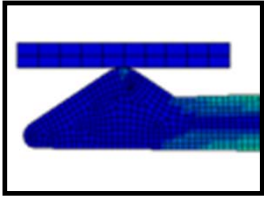
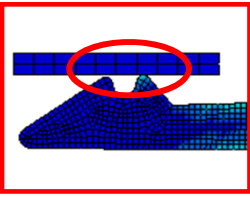
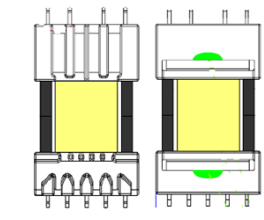
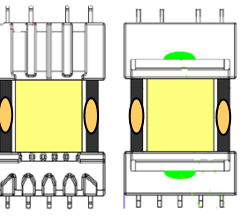
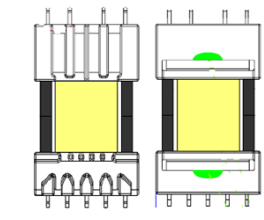
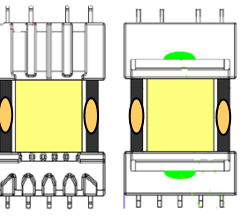
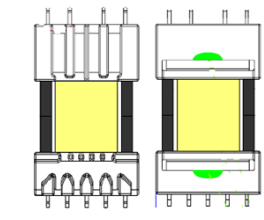
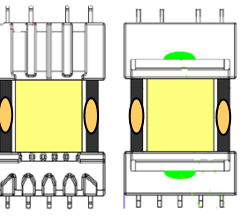
Contents







| NO. | A table of contents | Page |
|-----|--|-------|
| 1 | Documentation of Approval | 1~2 |
| 2 | Contents | 3 |
| 3 | Revision History & Software Revision History | 4~8 |
| 4 | CTQ Management & Model Marking | 9 |
| 5 | Specification 1. INTRODUCTION 2. SPECIFICATION 2.1 Input Requirements 2.2 Power Output Characteristics 2.3 Environment Requirement 2.4 Dielectric Strength Voltage and Insulation Resistance 2.5 Burn-in 2.6 Interface 2.7 Product Safety 2.8 Construction 2.9 Function of protection 2.10 Sound Noise Characteristics. 2.11 Connector Specification 2.12 PCB Dimension. 2.13 Apply to Eyelet point. 2.14 Electrical Characteristics 2.15 Mechanical Characteristics | 10~20 |
| 6 | Schematic Diagram | 21~22 |
| 7 | Block Diagram | 23~24 |
| 8 | Parts List | 25~31 |
| 9 | Process Marking | 32~33 |
| 10 | PCB Layout | 34~38 |
| 11 | Safety Parts | 39~42 |
| 12 | Mechanical Drawing | 43~45 |
| 13 | Packing Drawing | 46~51 |
| 14 | Bar-code Label Drawing | 52~53 |
| 15 | Labeling Point | 54~55 |
| 16 | Workmanship Point | 56~57 |
| 17 | Manufacturing Process (Flow-Chart) | 58~61 |
| 18 | * Appendix A1. Power Check list A2. Warranty letter | 62~73 |













Revision History

| Rev No. | Contents | Date of Approval | Checked | Remark | | | | | | | | | | | | | | | |
|---------|---|-------------------------|----------|-------------------------|-------|--------|--------------------|-----|------|------------------|-------|--------|--------------------|-----|--------|--------------------|----------|----------|--|
| 1.0 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4) Micom Ver : 1.00a (Checksum : 0x2214)</p> <p>1. ADD UL Marking.</p> | 11.12.14 | J.Y Kim | | | | | | | | | | | | | | | | |
| 1.1 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Add Producing District - Add Bekasi, Indonesia - Add WROCLAW, POLAND</p> <p>2. Add Indonesian localized box maker - Add Yumi</p> | 12.02.10 | K.T.Choi | | | | | | | | | | | | | | | | |
| 1.2 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Check VLED voltage on Aging to figure out MLCC crack - Check if VLED voltage is at least 3V higher than typical value.</p> <table border="1" style="margin-left: 40px;"> <thead> <tr> <th style="text-align: center;">Model</th> <th style="text-align: center;">Typical</th> <th style="text-align: center;">Condition for detecting</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">4247H</td> <td style="text-align: center;">58.5 V</td> <td style="text-align: center;">higher than 61.5 V</td> </tr> <tr> <td style="text-align: center;">55H</td> <td style="text-align: center;">78 V</td> <td style="text-align: center;">higher than 81 V</td> </tr> <tr> <td style="text-align: center;">4247L</td> <td style="text-align: center;">67.2 V</td> <td style="text-align: center;">higher than 70.2 V</td> </tr> <tr> <td style="text-align: center;">55L</td> <td style="text-align: center;">76.8 V</td> <td style="text-align: center;">higher than 79.8 V</td> </tr> </tbody> </table> | Model | Typical | Condition for detecting | 4247H | 58.5 V | higher than 61.5 V | 55H | 78 V | higher than 81 V | 4247L | 67.2 V | higher than 70.2 V | 55L | 76.8 V | higher than 79.8 V | 12.02.24 | K.T.Choi | |
| Model | Typical | Condition for detecting | | | | | | | | | | | | | | | | | |
| 4247H | 58.5 V | higher than 61.5 V | | | | | | | | | | | | | | | | | |
| 55H | 78 V | higher than 81 V | | | | | | | | | | | | | | | | | |
| 4247L | 67.2 V | higher than 70.2 V | | | | | | | | | | | | | | | | | |
| 55L | 76.8 V | higher than 79.8 V | | | | | | | | | | | | | | | | | |
| 1.3 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Reduce the size of Air vinyl - Before : 750L * 270W - After : 585L * 270W</p> | 12.04.23 | K.T.Choi | | | | | | | | | | | | | | | | |

Revision History

| Rev No. | Contents | Date of Approval | Checked | Remark | | | | |
|---|--|------------------|----------|---|---|-----------|----------|--|
| 1.4 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Change FFC Connector contact point for improving contact N.G. ISSUE.</p> <div style="text-align: center;"> <table border="1" style="width: 100%;"> <thead> <tr> <th style="width: 50%;">Before</th> <th style="width: 50%;">After</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> </tbody> </table> </div> | Before | After |  |  | 12.05.11 | K.T.Choi | |
| Before | After | | | | | | | |
|  |  | | | | | | | |
| 1.5 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Add ST product site. (STF13NM60-Q601,Q602) - Longgang / China : Assy Plant Code – G4 - Change application : PB Free → Halogen Free</p> | 12.06.11 | K.T.Choi | | | | | |
| 1.6 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Change 1uF, 2.2uF MLCC VENDOR. - ONLY USE TDK, MURATA. - APPLY TO 2012. 07. 01.</p> | 12. 06.20 | K.T.Choi | | | | | |
| 1.7 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Apply STBY Trans (12S-LS01) which has additional bonding points to improve noise. - Maker : FEELUX - Location : T501 - Bonding points : Top side of core junction Bottom side of core junction</p> <div style="text-align: center;"> <table border="1" style="width: 100%;"> <thead> <tr> <th style="width: 50%;">Before</th> <th style="width: 50%;">After</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> </tbody> </table> </div> | Before | After |  |  | 12. 06.29 | K.T.Choi | |
| Before | After | | | | | | | |
|  |  | | | | | | | |
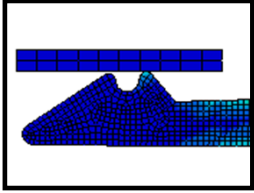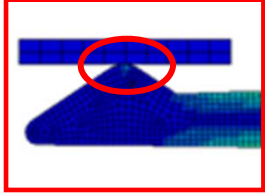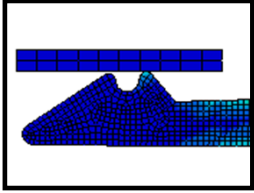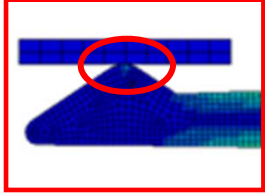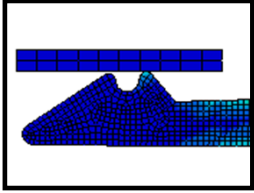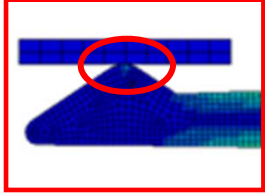
| Rev No. | Contents | Date of Approval | Checked | Remark | | | | |
|---|--|------------------|----------|---|---|----------|----------|--|
| 1.8 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Change FFC Connector contact point for improving contact N.G. ISSUE.</p> <div data-bbox="296 461 979 743" style="border: 1px solid black; padding: 5px; text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Before</th> <th style="width: 50%;">After</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;"></td> <td style="text-align: center;"></td> </tr> </tbody> </table> </div> | Before | After |  |  | 12.07.10 | K.T.Choi | |
| Before | After | | | | | | | |
|  |  | | | | | | | |
| 1.9 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Delete FDT86106LZ from Parts list</p> <ul style="list-style-type: none"> - Name : FDT86106LZ - Maker : FAIRCHILD - Location : Q801, Q802, Q803, Q804, Q805, Q806 Q807, Q808, Q809, Q810, Q811, Q812 | 12.08.17 | K.T.Choi | | | | | |
| 2.0 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Box Change</p> <ul style="list-style-type: none"> - Add : Box Silk (Bar Code and Tape Line) | 12.08.24 | K.T.Choi | | | | | |
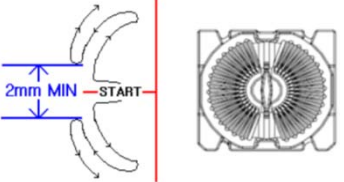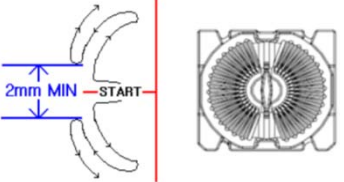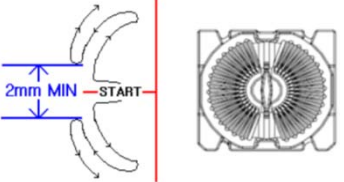
| Rev No. | Contents | Date of Approval | Checked | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|------------------|---------|---|---|---|---|--|---------|---------|------|------|-------|-------|-----------------|------|------|---|---|----|----|----------------|------|------|-----|-----|-----|------|--|---------|---------|------|------|-------|-------|-----------------|------|------|---|---|----|----|----------------|------|------|-----|-----|-----|-----|----------|----------|--|
| 2.1 | <p>Apply to MP (PCB REV 1.0) PCB P/No.EAX64310401(1.4)</p> <p>1. Reinforce Line Filter Spec. - Item : LLF-121, 25mH</p> <p>1) Secure a split winding distance</p> <table border="1" data-bbox="236 577 976 891"> <thead> <tr> <th>Before</th> <th>After</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">2mm Min</td> </tr> <tr> <td style="text-align: center;">  </td> <td style="text-align: center;">  </td> </tr> </tbody> </table> <p>2) Change Impedance - Before</p> <table border="1" data-bbox="236 1025 992 1115"> <thead> <tr> <th></th> <th>0.15MHz</th> <th>0.45MHz</th> <th>1MHz</th> <th>5MHz</th> <th>10MHz</th> <th>30MHz</th> </tr> </thead> <tbody> <tr> <td>FREQUENCY (MHz)</td> <td>0.15</td> <td>0.45</td> <td>1</td> <td>5</td> <td>10</td> <td>30</td> </tr> <tr> <td>IMPEDANCE (KΩ)</td> <td>20.0</td> <td>20.0</td> <td>8.0</td> <td>0.5</td> <td>0.1</td> <td>0.01</td> </tr> </tbody> </table> <p>- After</p> <table border="1" data-bbox="236 1205 992 1294"> <thead> <tr> <th></th> <th>0.15MHz</th> <th>0.45MHz</th> <th>1MHz</th> <th>5MHz</th> <th>10MHz</th> <th>30MHz</th> </tr> </thead> <tbody> <tr> <td>FREQUENCY (MHz)</td> <td>0.15</td> <td>0.45</td> <td>1</td> <td>5</td> <td>10</td> <td>30</td> </tr> <tr> <td>IMPEDANCE (KΩ)</td> <td>22.0</td> <td>29.0</td> <td>8.0</td> <td>0.5</td> <td>0.1</td> <td>0.1</td> </tr> </tbody> </table> | Before | After | X | 2mm Min |  |  | | 0.15MHz | 0.45MHz | 1MHz | 5MHz | 10MHz | 30MHz | FREQUENCY (MHz) | 0.15 | 0.45 | 1 | 5 | 10 | 30 | IMPEDANCE (KΩ) | 20.0 | 20.0 | 8.0 | 0.5 | 0.1 | 0.01 | | 0.15MHz | 0.45MHz | 1MHz | 5MHz | 10MHz | 30MHz | FREQUENCY (MHz) | 0.15 | 0.45 | 1 | 5 | 10 | 30 | IMPEDANCE (KΩ) | 22.0 | 29.0 | 8.0 | 0.5 | 0.1 | 0.1 | 12.09.20 | K.T.Choi | |
| Before | After | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| X | 2mm Min | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.15MHz | 0.45MHz | 1MHz | 5MHz | 10MHz | 30MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FREQUENCY (MHz) | 0.15 | 0.45 | 1 | 5 | 10 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IMPEDANCE (KΩ) | 20.0 | 20.0 | 8.0 | 0.5 | 0.1 | 0.01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 0.15MHz | 0.45MHz | 1MHz | 5MHz | 10MHz | 30MHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| FREQUENCY (MHz) | 0.15 | 0.45 | 1 | 5 | 10 | 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IMPEDANCE (KΩ) | 22.0 | 29.0 | 8.0 | 0.5 | 0.1 | 0.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3.0 | <p>Apply to MP (PCB REV 2.0) PCB P/No. EAX64310401(1.6)</p> <p>1. Change the type of PFC Output Diode - Location : D607 - Axial type → TO-220 type</p> <table border="1" data-bbox="236 1608 976 1886"> <thead> <tr> <th>Before</th> <th>After</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">  </td> <td style="text-align: center;">  </td> </tr> </tbody> </table> | Before | After |  |  | 12.10.18 | K.T.Choi | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Before | After | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Rev No. | Contents | Date of Approval | Checked | Remark |
|---------|---|------------------|----------|--------|
| 3.1 | <p>Apply to MP (PCB REV 2.0) PCB P/No. EAX64310401(1.6)</p> <p>1. L6599AD change assembly site and material</p> <p>As is ; Before Change</p> <ul style="list-style-type: none"> I. Old Assembly site : Amkor in Philippines → "B" marking II. Labels : Assembled in Philippines III. Old Wire : Au <p>To be ; After Change</p> <ul style="list-style-type: none"> I. New Assembly site Shenzhen in China → "K" marking II. Labels : Assembled in China III. New Wire : Copper(Cu) <p>2. 4M Change Process</p> <ul style="list-style-type: none"> 1)Responsibility of 4M Change ; LGE 2)Running Change ; Yes 3)Goods of Stock ; no rework | 13.11.15 | K.T.Choi | |

Software Revision History

| No. | Firmware Revision Contents | Date of Approval | Checked | Remark |
|-----|---|------------------|---------|--------|
| 1 | - Firmware Version 1.00a Checksum 0x2214 | 11.12.14 | J.Y Kim | |
| | | | | |

CTQ Management

| No. | Contents | Page |
|-----|-----------------------------------|------|
| 1 | 2.1.1 Power Factor | 11 |
| 2 | 2.2 Power Output Characteristics | 12 |
| 3 | 2.2.1. Stand by Power Consumption | 12 |

Specification

1. INTRODUCTION

1.1 Scope

This approval is the description related to every electrical and structural specifications and reliability For Power Supply Unit used on 42 inch, 47 inch LGE LED TV.

1.2 Customers product related items

Product : Power Supply Unit

Part code : EAY62512701

1.3 Product name

Product name : PLDF-L101A

Revision code : 3.1

2. SPECIFICATION

2.1 Input Requirements

| | |
|---------------------------|--|
| Nominal Input Voltage | AC 100V to AC 240V |
| Input Voltage Variation | AC 90V to AC 264V |
| Input Current | Under 2.5Arms . (at 100Vac & Nominal Load) Under 1.3Arms . (at 240Vac & Nominal Load) |
| Nominal Frequency | 50 / 60 Hz |
| Frequency Variation Range | 47 Hz to 63 Hz |
| Phase | Single |
| Leakage Current | 0.7mA_peak. (100Vac ~ 240Vac) |
| Surge Immunity | $\pm 4\text{kV} / 1000\text{ns} / 0^\circ$ to 360° |
| Hold-up Time | More than 20ms at 100Vac and maximum output load |
| Lightning Surge | 2kA Normal, Common Mode |
| Inrush Current | 80A zero-peak max at cold start and any specified line, load, temperature conditions. |

2.1.1 Power Factor

over than 0.9 at 90 – 264Vac & max load condition

2.2 Power Output Characteristics

| Output | Voltage Variable range [V] | Rated Current (Min, Max) [Amean] | Voltage Regulation [V] | Ripple Voltage [mVp_p] |
|-------------|----------------------------|-----------------------------------|------------------------|------------------------|
| 3.5V (STBY) | 3.3V ~ 3.7V | 0.3W Under(15mA) | - | - |
| | | 1.8A(0~1.8A) (ON condition) | ± 5% | 250 mVp_p |
| | 12V | 11.4V ~ 12.6V | 2.0A (0.1~2.0A) | ± 5% |
| 24 | 21.6V ~ 26.4V | 1.2A (0.1~1.2A) | ± 10% | 500 mVp_p |
| LED B+ | 45.9V ~ 63.7V | 0.105A(0.10185~0.10815A) ×12Ch | - | - |

* On Condition : In a moment of Power_ON Signal activated, the current of 3.5V output should be limited within 40mA(Max) at LCD TV condition for stability.

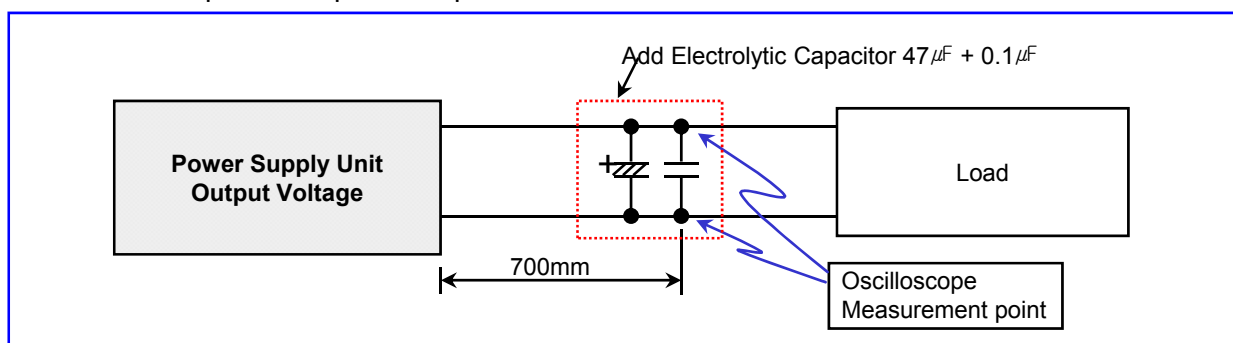
Do not turn "Power_ON" Signal on at the load condition of 3.5V output, more than 40mA.

* Total regulation for each output circuit includes the results of input voltage variation, load variation, warm-up drift and temperature change.

* The following instruments shall be used for measuring ripple noise.

1. Probe having impedance ratio of 1:1.
2. Oscilloscope having frequency characteristic of 100MHz or more.

Test Point : power output each pin



※ Ripple and noise are measured at the end of output cable which are added a 0.1uF ceramic capacitor and 47uF electrolytic capacitor. (connected parallel)

2.2.1 Stand By Power Consumption

| Output Voltage | 3.5V (STBY) | 12V | 24V |
|----------------|--------------------------------------|------------------------|-----|
| Load [A] | 0.015 | Don't Care (Power-Off) | |
| Wattage [W] | Less than 0.3W Under (230Vac / 50Hz) | | |

2.3 Environment Requirement

| | |
|-------------------------------------|--|
| Operating Temperature Range | -10 °C to 40 °C (60 °C :No Hardware Failure, TV SET Condition) |
| Operating Humidity Range | 30 to 85 % |
| Storage Temperature Range | -25 to 85 deg. |
| Storage humidity Range | 5 to 90 % |
| MTBF (Mean Time Between Failure) | 50,000 hour |
| Cooling Condition | Natural Air |
| Shock | 98 m/s ² Shock test consists of pivoting the power supply, from one edge of it's bottom side, on a flat surface (such as wood having thickness of 10mm or more) and allowing the opposite edge to fall from a height of 50mm to this surface. The test is performed three times on each edge of the bottom side of the power supply |

2.4 Dielectric Strength Voltage and Insulation Resistance



| | |
|-----------------------------|--|
| Dielectric Strength Voltage | AC 3KV or DC 4240V 1Min 10mA (Test SPEC) AC 3.6KV 1 SEC 10 mA.(PSU Mass Production) Between Primary and All Secondary Circuits. |
| Insulation Resistance | Insulation resistance shall be more than 8M ohm (at DC 500V) Between Primary Live, Neutral line and Secondary. |

* Above tests are performed at room temperature in non-condensing atmospheric conditions

* Frame grounds are connected to secondary circuits.

2.5 Burn-in

More than 2 hours at 40 °C (±5 °C), Normal input voltage.

AC on/off must be test 1 time after burn-in.

80% Load (except LED String current : 105mA) of specification.

2.6 Interface

| Appellation | Explanation | Signal Direction | Action |
|-------------|--------------------|------------------|--------------------------------|
| POWER ON | Vcc Circuit ON/OFF | Input | High : Vcc ON Low : Vcc OFF |

2.7 Product Safety



| | |
|---------------------------------|--|
| Safety Standards to be applied | Design to meet the requirements as follows UL60950, IEC60950, IEC60065 and 60950 |
| EMI/RFI Standards to be applied | Design to meet the requirements as follows FCC and EN55020, EN55013 Class B with 4dB minimum margin. |

2.8 Construction

| | |
|------------------|---------------------------|
| Weight | Less than 900g |
| Unit Size (typ.) | 243(W) X 245(D) X 18.9(H) |

2.9 Function of protection

| Protection | Output Circuit | Trip point | | Notes |
|---------------|----------------|------------|-------|---------------|
| | | Min | Max | |
| Over Current | STBY 3.5V | 2.5A | 8.0A | Auto Re-start |
| | 12V | 5.0A | 22.0A | Latch |
| | 24V | 2.5A | 15.0A | Latch |
| Short Circuit | STBY 3.5V | - | - | Auto Re-start |
| | 12V | - | - | Latch |
| | 24V | - | - | Latch |

- * This Power Supply has above-mentioned protections.
- * Short circuit protection between different output terminals is not considered.
- * Trip point for over voltage indicates the operating point when the output voltage slowly increases.
- * The conditions of Over Current measurement
Multi output(3.5V,12V,24V) is nominal load state except an over current measurement.

2.10 Sound Noise Characteristics.

PSU Noise Specification

22.5 dB(a) / 20. μ Pa 2.0E-5 Pa

(1/1 octave, A-weighting, to 1kHz ~ 16kHz Total overall)

Measure Location : Anechoic Room

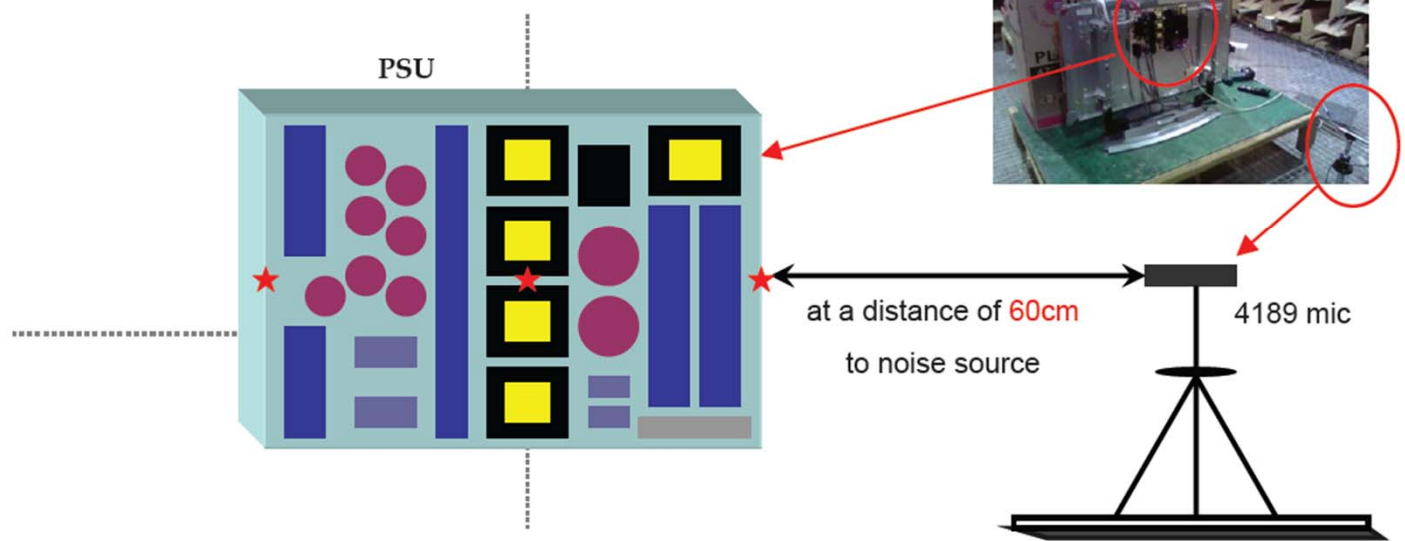
Measure Condition : At a distance of 60cm mic

Full white pattern, at AC 110V/220V

The max specification

(measure 3 points, at PSU center and left & right on the side)

PSU NOISE MEASURE POINT



2.11 Connector Specification

2.11.1 Connectors Usage

SK100 (DAC-18D3A) (Black angle type)

| No | Name |
|----|---------|
| 1 | LIVE |
| 2 | NEUTRAL |

P701 (SMAW200A-H08A2)

| No | Name |
|----|----------|
| 1 | VSYNC_IN |
| 2 | I2C_SDA |
| 3 | I2C_SCL |
| 4 | SIN |
| 5 | GND |
| 6 | SCLK |
| 7 | N.C |
| 8 | REVERSE |

P702 (20010WR-06A03)

| No | Name |
|----|-----------|
| 1 | MICOM_VDD |
| 2 | RXD |
| 3 | TXD |
| 4 | TOOL 0 |
| 5 | RESET |
| 6 | GND |

P201 (SMAW200-H24S2)

| P201 | | | |
|------|-----------|----|-----------|
| 1 | Power on | 2 | 24V |
| 3 | 24V | 4 | 24V |
| 5 | GND | 6 | GND |
| 7 | GND | 8 | GND |
| 9 | 3.5V | 10 | 3.5V |
| 11 | 3.5V | 12 | 3.5V |
| 13 | GND | 14 | GND |
| 15 | GND | 16 | V-SYNC |
| 17 | 12V | 18 | DRV_ON |
| 19 | 12V | 20 | N.C |
| 21 | 12V | 22 | PWM Dim#1 |
| 23 | PWM Dim#2 | 24 | Error_out |


P202 (IS100-L08T-C46) (BLACK)

| No | Name |
|----|-------|
| 1 | VC_6 |
| 2 | VC_5 |
| 3 | VC_4 |
| 4 | VC_3 |
| 5 | VC_2 |
| 6 | VC_1 |
| 7 | N.C |
| 8 | LED + |

P203 (IS100-L08T-C46-A) (WHITE)

| No | Name |
|----|-------|
| 1 | LED + |
| 2 | N.C |
| 3 | VC_12 |
| 4 | VC_11 |
| 5 | VC_10 |
| 6 | VC_9 |
| 7 | VC_8 |
| 8 | VC_7 |

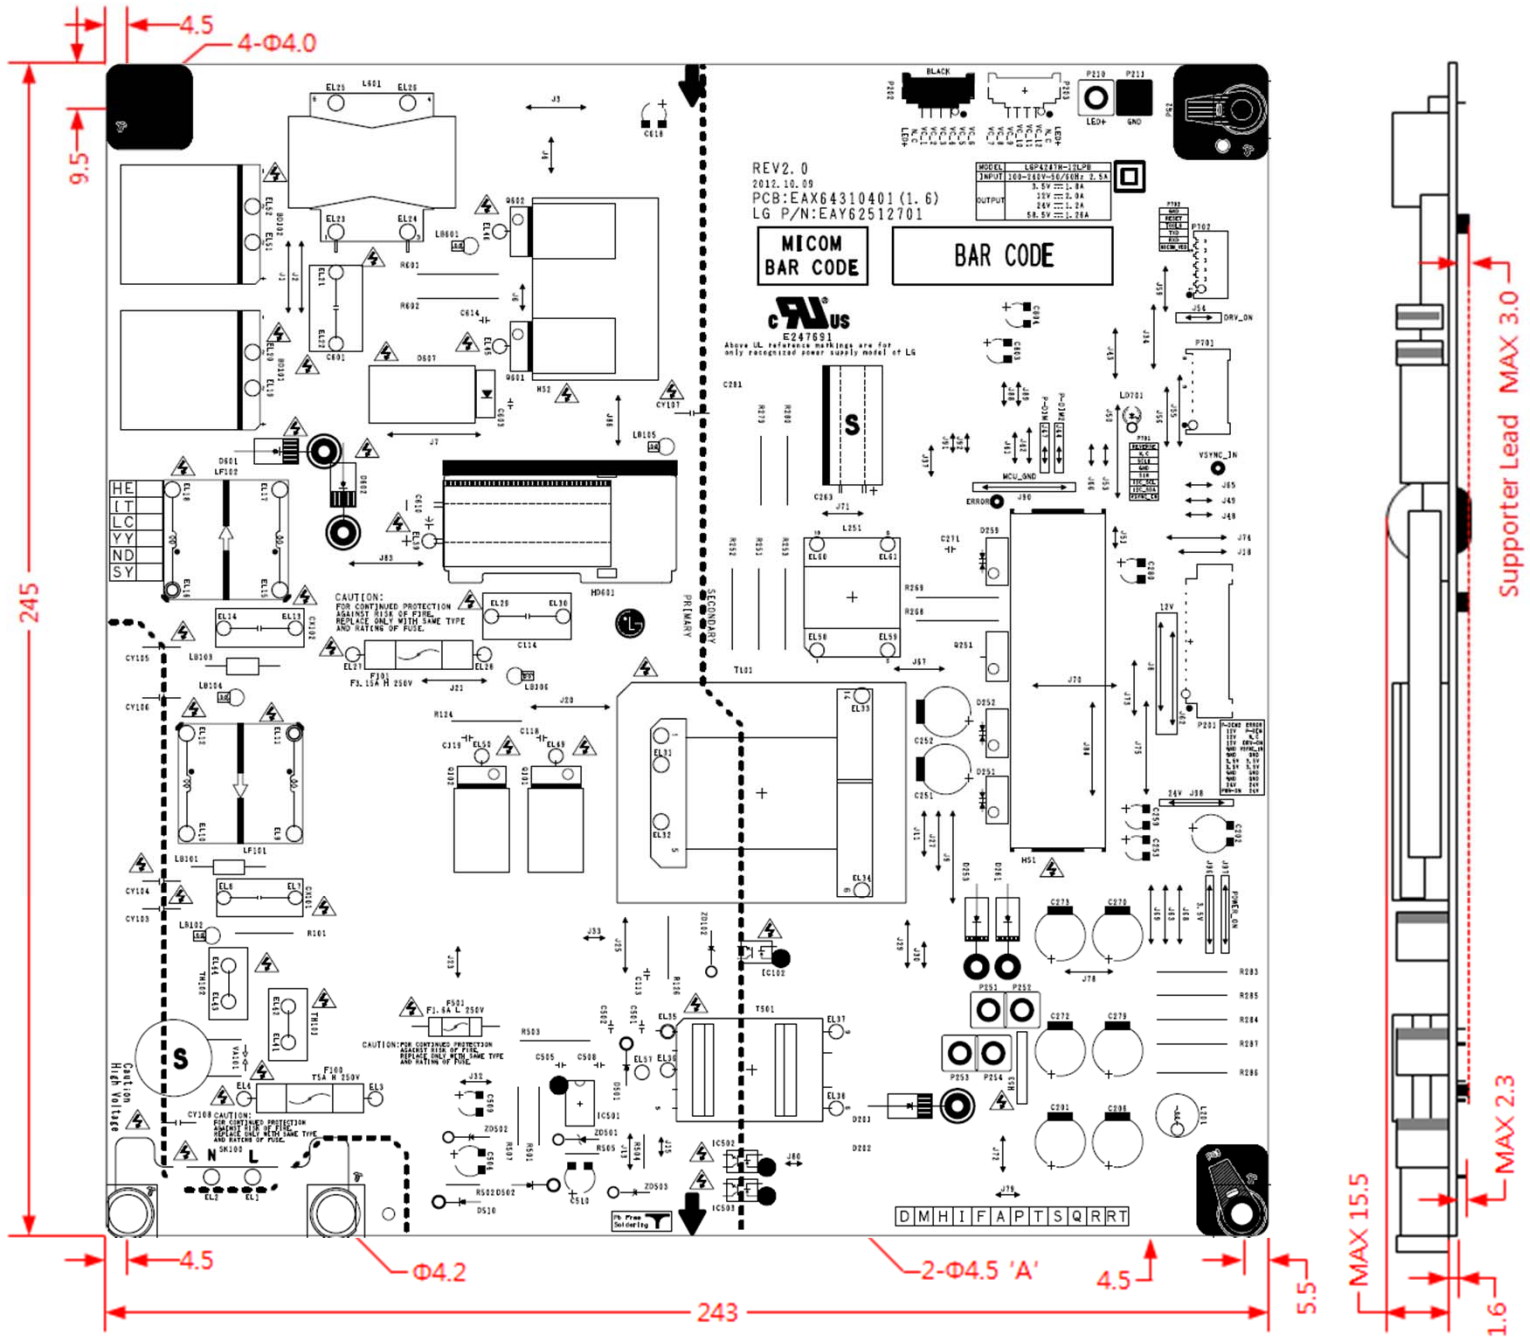2.12 PCB Dimension.
(CTI - 600)




- 1) Power board PCB : 243mm X 245mm X 1.6(T)mm
- 2) Component height ; Max 15.5mm
- 3) Lead Cutting : Max 2.3mm (except HD Max 3.5mm)
- 4) PCB Material : FR-1,KB,DS,L,R-8700 CTI-600

2.13 Apply to the Eyelet point.(LGP4247H-12LPB)

Apply to the Eyelet point 2.0Φ : EL1,EL2,EL9,EL10,EL11,EL12,EL15,EL16,EL17,EL18,EL19,EL20,EL23,EL24,EL25, EL26,EL31,EL32,EL33,EL34,EL51,EL52 (22EA)

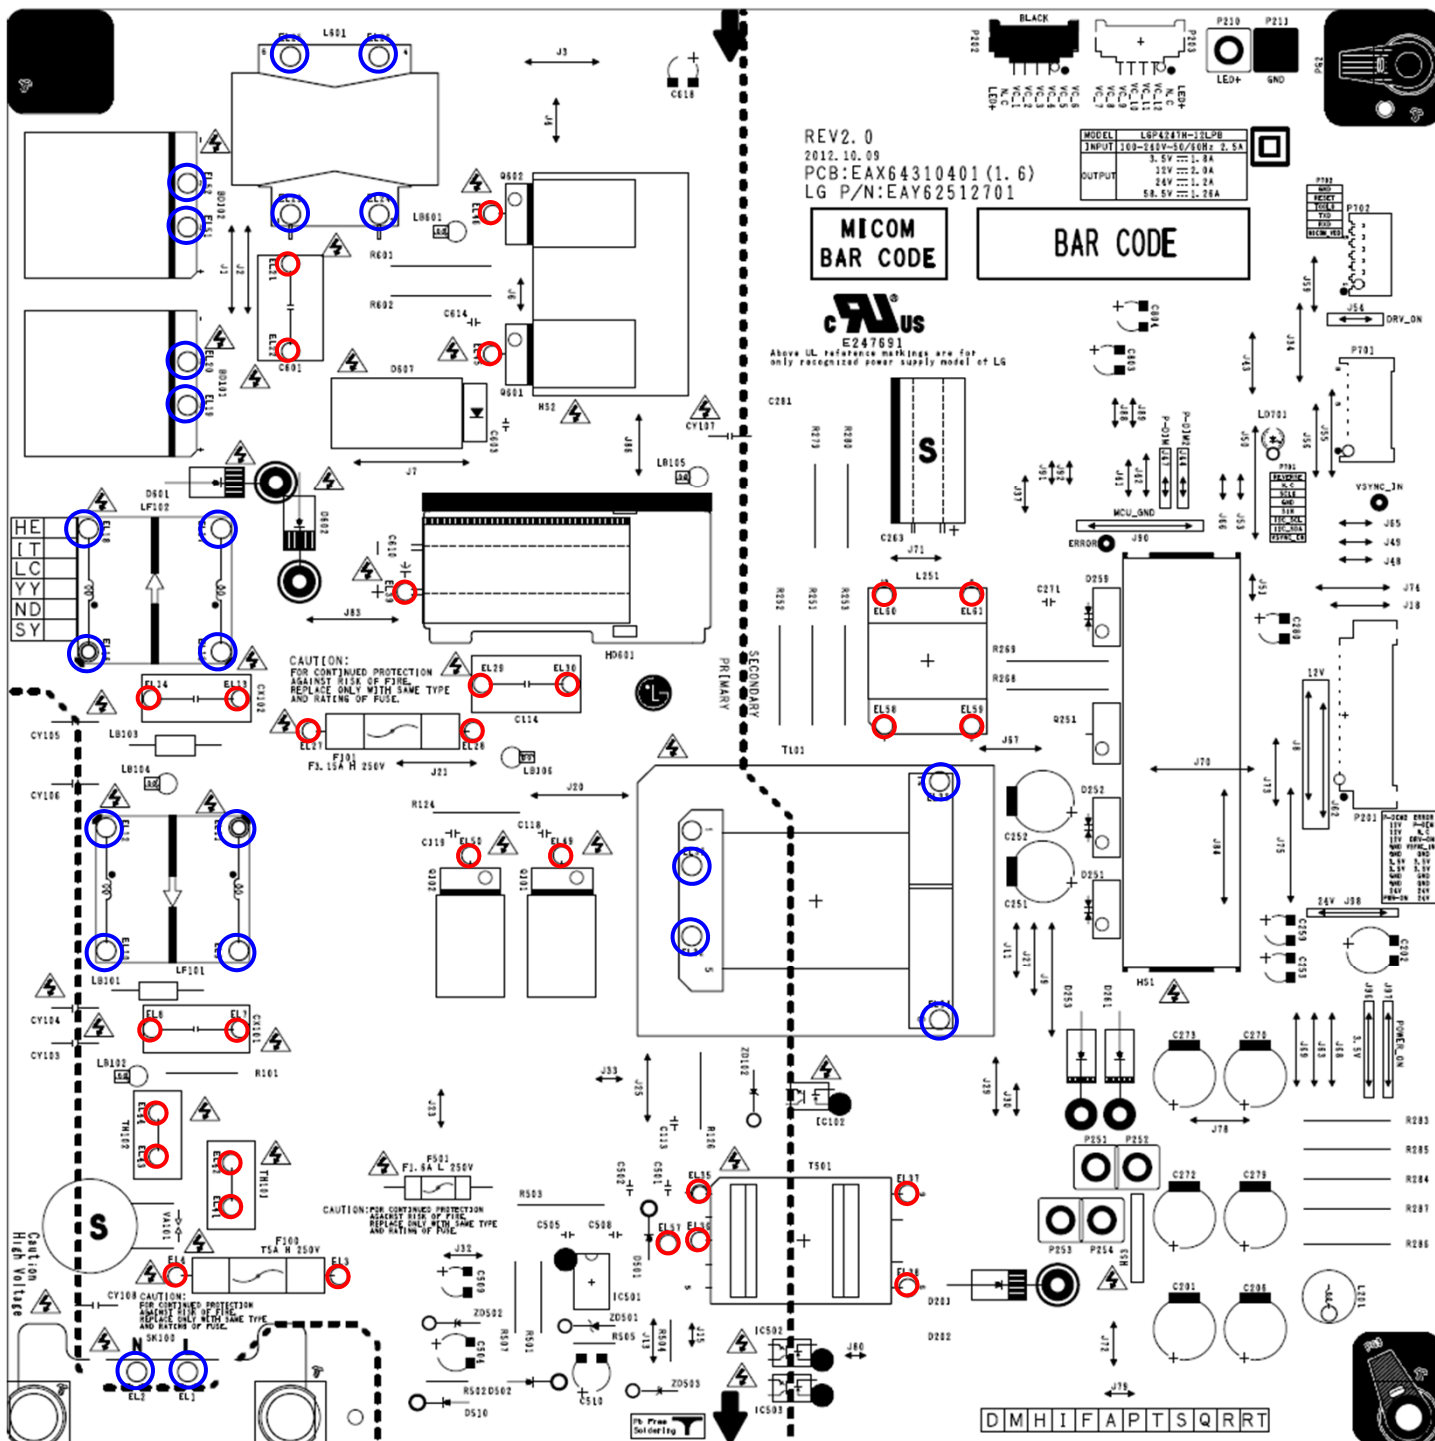Apply to the small Eyelet point 1.6Φ : EL3,EL4,EL7,EL8,EL13,EL14,EL21,EL22,EL27,EL28,EL29,EL30,EL35,EL36, EL37,EL38, EL39,EL41,EL42,EL43,EL44,EL45,EL46,EL49,EL50,EL57,EL58, EL59,EL60,EL61 (30EA)




2.14 Electrical Characteristics

| No. | Test Item | Test method | | | | | | | | | | | | | | | | | | |
|------------|---|---|------|-------------|------------|-----|------------|-------------|------------|------------------------------------|------------|-------------|------------|-----|------------|------------|------------|-----------------------------------|------------|------------|
| 1 | Intermittent Operation stability Test | The switching regulator shall ON/OFF for 20,000 time at an Interval of 10 sec at maximum load, after that electrical Characteristics shall be satisfied. | | | | | | | | | | | | | | | | | | |
| 2 | Low temperature operation | The switching regulator is left at the operating guarantee Minimum temperature for 2 hours without applying electricity. After that power shall be turned on, and then the electrical Characteristics shall be satisfied. | | | | | | | | | | | | | | | | | | |
| 3 | Low temperature Storage test Leave At low temperature | The switching regulator is left at minimum storage Temperature for 96 hours or more. Then the switching regulator is left at a room temperature and humidity for 1 hour or more, after that electrical characteristics shall be satisfied. | | | | | | | | | | | | | | | | | | |
| 4 | Heat cycle storage test | <p>The switching regulator is 10 consecutive temperature cycle that shown below is performed and then leave them at room temperature and humidity for 1 hour or more. After that, electrical characteristics shall be satisfied.</p> <table border="1"> <thead> <tr> <th>Time</th> <th>Temperature</th> </tr> </thead> <tbody> <tr> <td>30 minutes</td> <td>25℃</td> </tr> <tr> <td>30 minutes</td> <td>25℃ -> -20℃</td> </tr> <tr> <td>60 minutes</td> <td>Minimum storage temperature (-20℃)</td> </tr> <tr> <td>30 minutes</td> <td>-20℃ -> 25℃</td> </tr> <tr> <td>30 minutes</td> <td>25℃</td> </tr> <tr> <td>30 minutes</td> <td>25℃ -> 70℃</td> </tr> <tr> <td>60 minutes</td> <td>Maximum storage temperature (70℃)</td> </tr> <tr> <td>30 minutes</td> <td>70℃ -> 25℃</td> </tr> </tbody> </table> | Time | Temperature | 30 minutes | 25℃ | 30 minutes | 25℃ -> -20℃ | 60 minutes | Minimum storage temperature (-20℃) | 30 minutes | -20℃ -> 25℃ | 30 minutes | 25℃ | 30 minutes | 25℃ -> 70℃ | 60 minutes | Maximum storage temperature (70℃) | 30 minutes | 70℃ -> 25℃ |
| Time | Temperature | | | | | | | | | | | | | | | | | | | |
| 30 minutes | 25℃ | | | | | | | | | | | | | | | | | | | |
| 30 minutes | 25℃ -> -20℃ | | | | | | | | | | | | | | | | | | | |
| 60 minutes | Minimum storage temperature (-20℃) | | | | | | | | | | | | | | | | | | | |
| 30 minutes | -20℃ -> 25℃ | | | | | | | | | | | | | | | | | | | |
| 30 minutes | 25℃ | | | | | | | | | | | | | | | | | | | |
| 30 minutes | 25℃ -> 70℃ | | | | | | | | | | | | | | | | | | | |
| 60 minutes | Maximum storage temperature (70℃) | | | | | | | | | | | | | | | | | | | |
| 30 minutes | 70℃ -> 25℃ | | | | | | | | | | | | | | | | | | | |
| 5 | Heat shock test | <p>Heat shock test performed under following conditions without applying electricity and then leave them at room temperature and humidity for 1 hour or more. After that, electrical characteristics shall be satisfied.</p> <p>Condition : -45℃(30minutes), 120℃(30minutes), Switching time : Less than 5 minutes, 200 cycles.</p> | | | | | | | | | | | | | | | | | | |

2.15 Mechanical Characteristics

| No. | Test Item | Test method |
|-----|------------|---|
| 1 | Appearance | <p>There shall be no contaminant or dirt on the switching regulator which has adverse effect on electrical characteristics.</p> <p>There shall be no excessive unevenness or scratches on the plated or painted surface.</p> |
| 2 | Vibration | <p>While applying electricity :</p> <p>Vibration frequency : 5 ~ 100Hz</p> <p>Acceleration : 4.9 m/s ²</p> <p>Vibration in X,Y,Z direction for 30 minutes</p> <p>While applying electricity :</p> <p>Vibration frequency : 5 ~ 100Hz</p> <p>Acceleration : 14.7 m/s ²</p> <p>Vibration in X,Y,Z direction for 30 minutes</p> <p>After that electrical characteristics shall be satisfied.</p> <p>There shall be no damage to appearance and construction.</p> |
| 3 | Shock | <p>Shock : 98 m/s ²</p> <p>On the oak more than 10mm thickness with the flat face, raise the one side for 50mm, and it carries out each side free fall for three sides.</p> <p>There shall be no damage to appearance and construction.</p> |

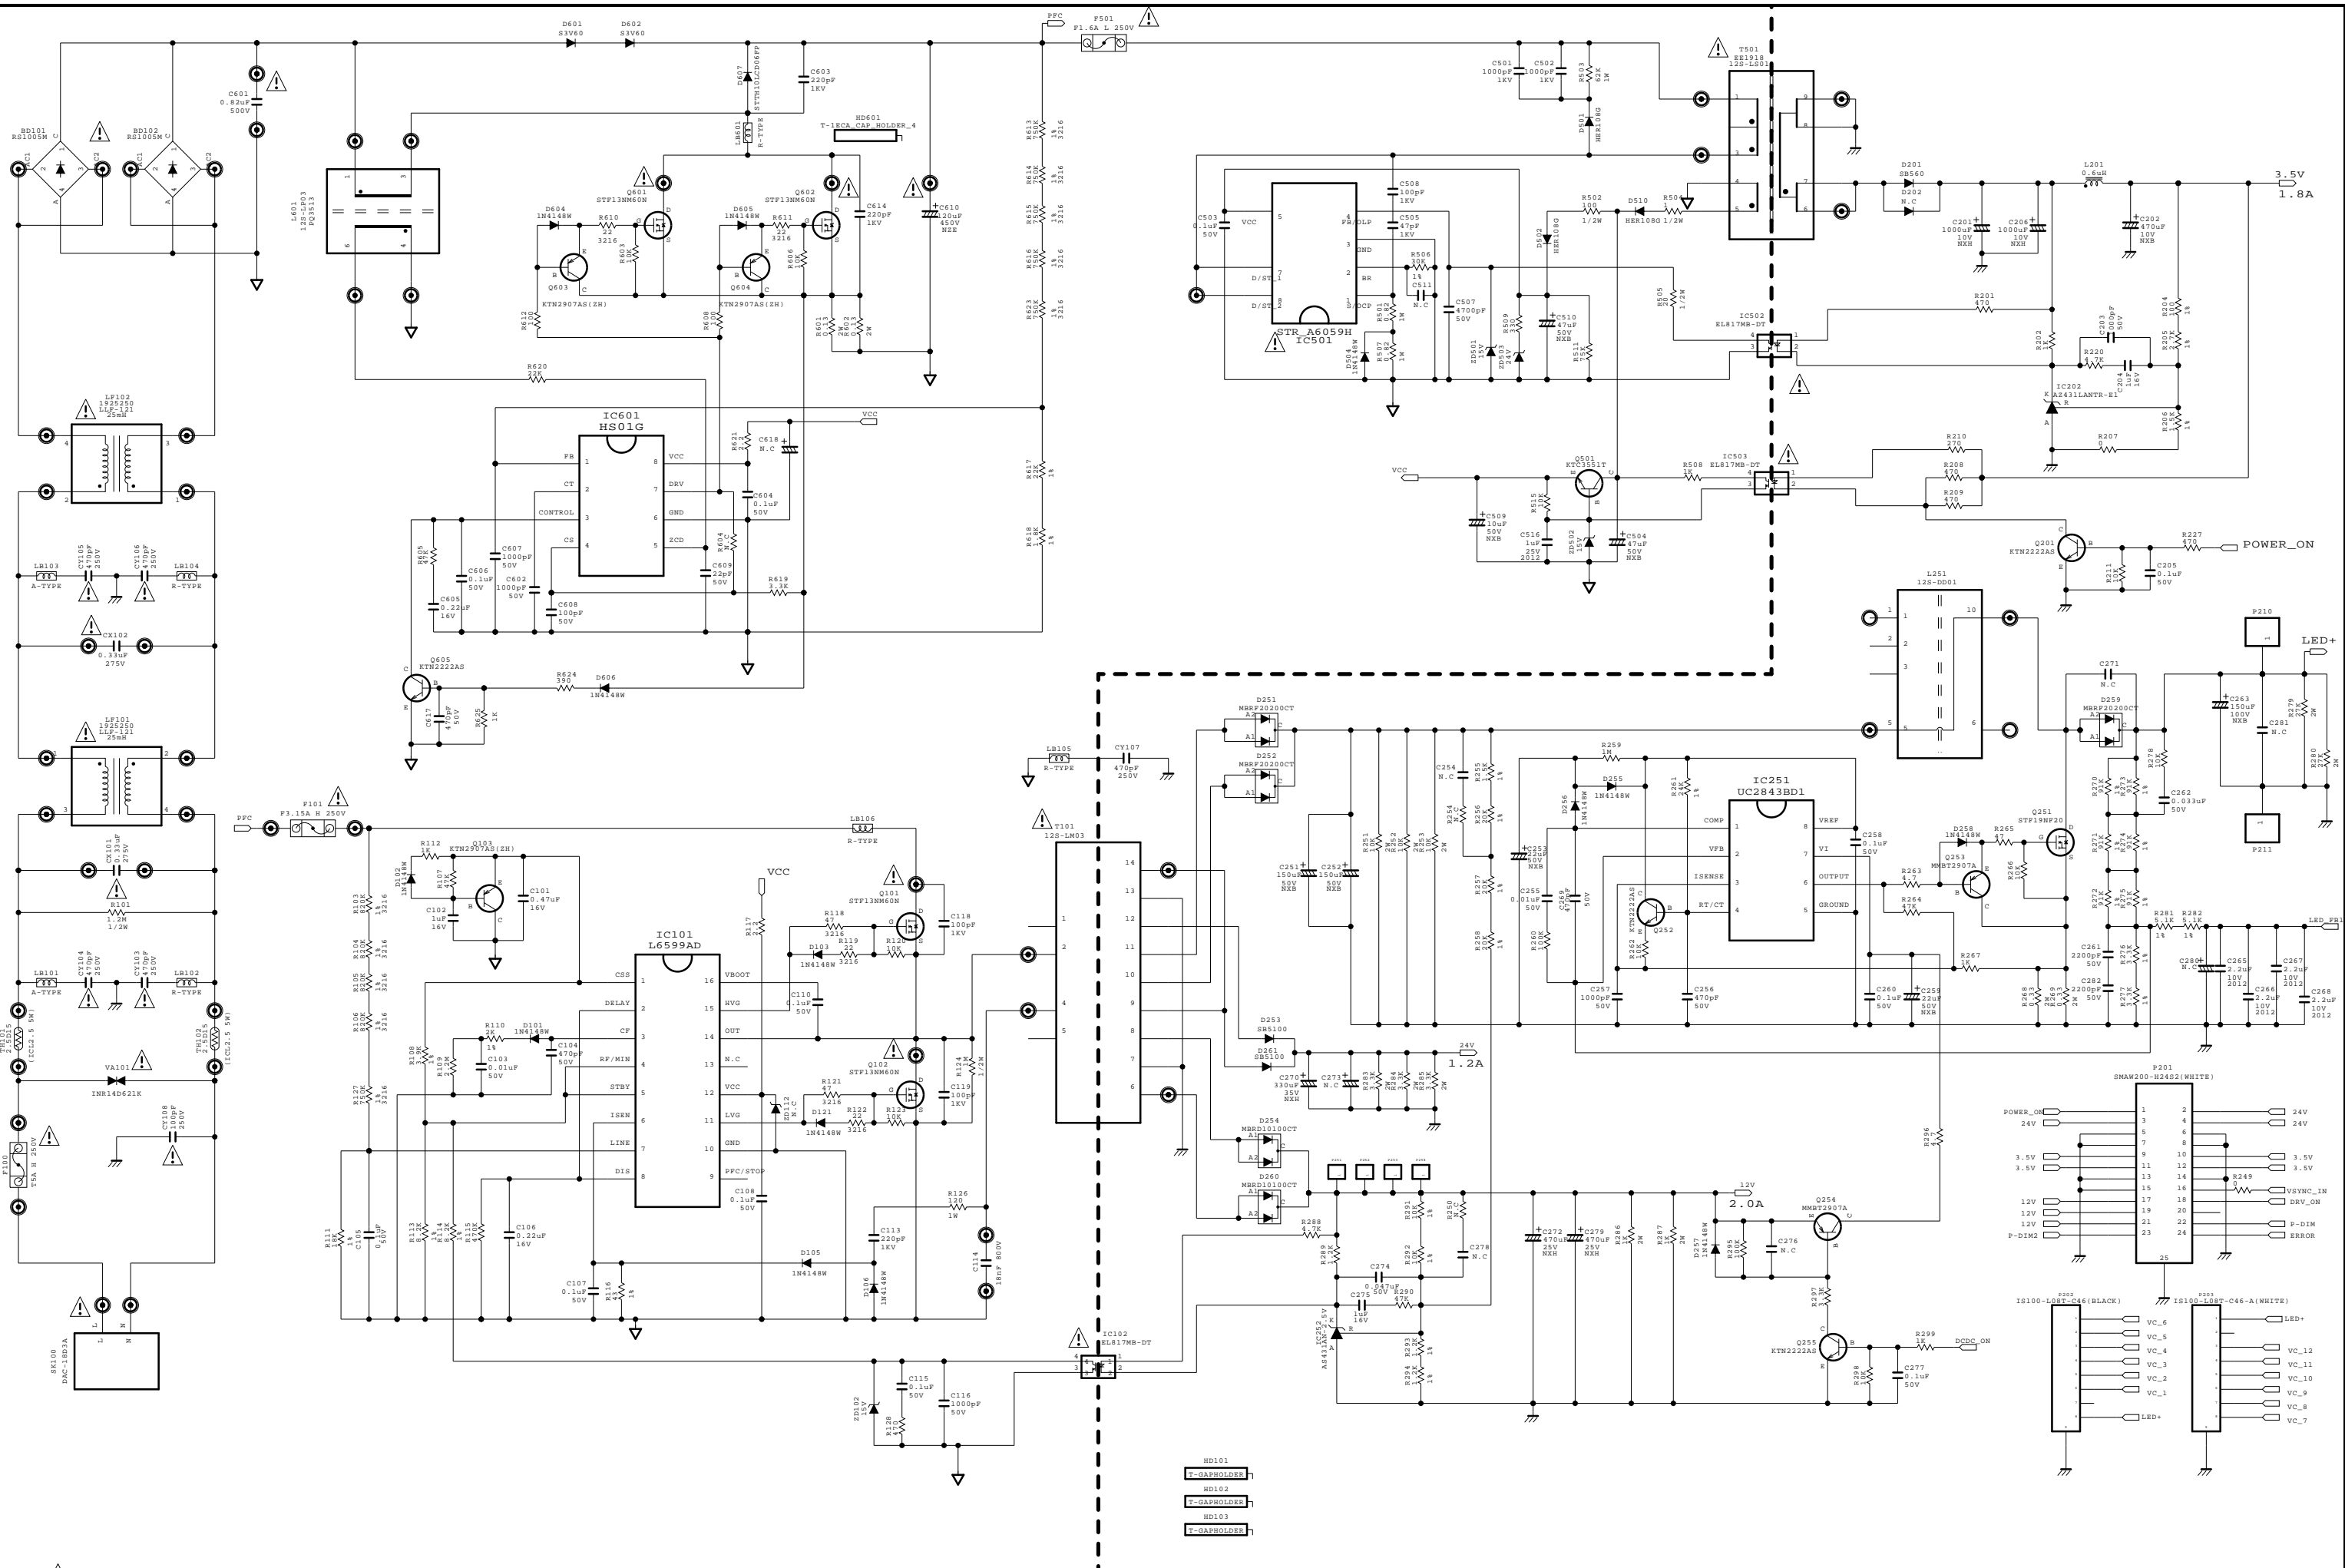Schematic Diagram








THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



| | | | |
|-------|----------------|-------|-----------|
| MODEL | LGP4247H-12LPB | DATE | '12.10.09 |
| BLOCK | PFC\STBY\MULTI | SHEET | 1 / 2 |

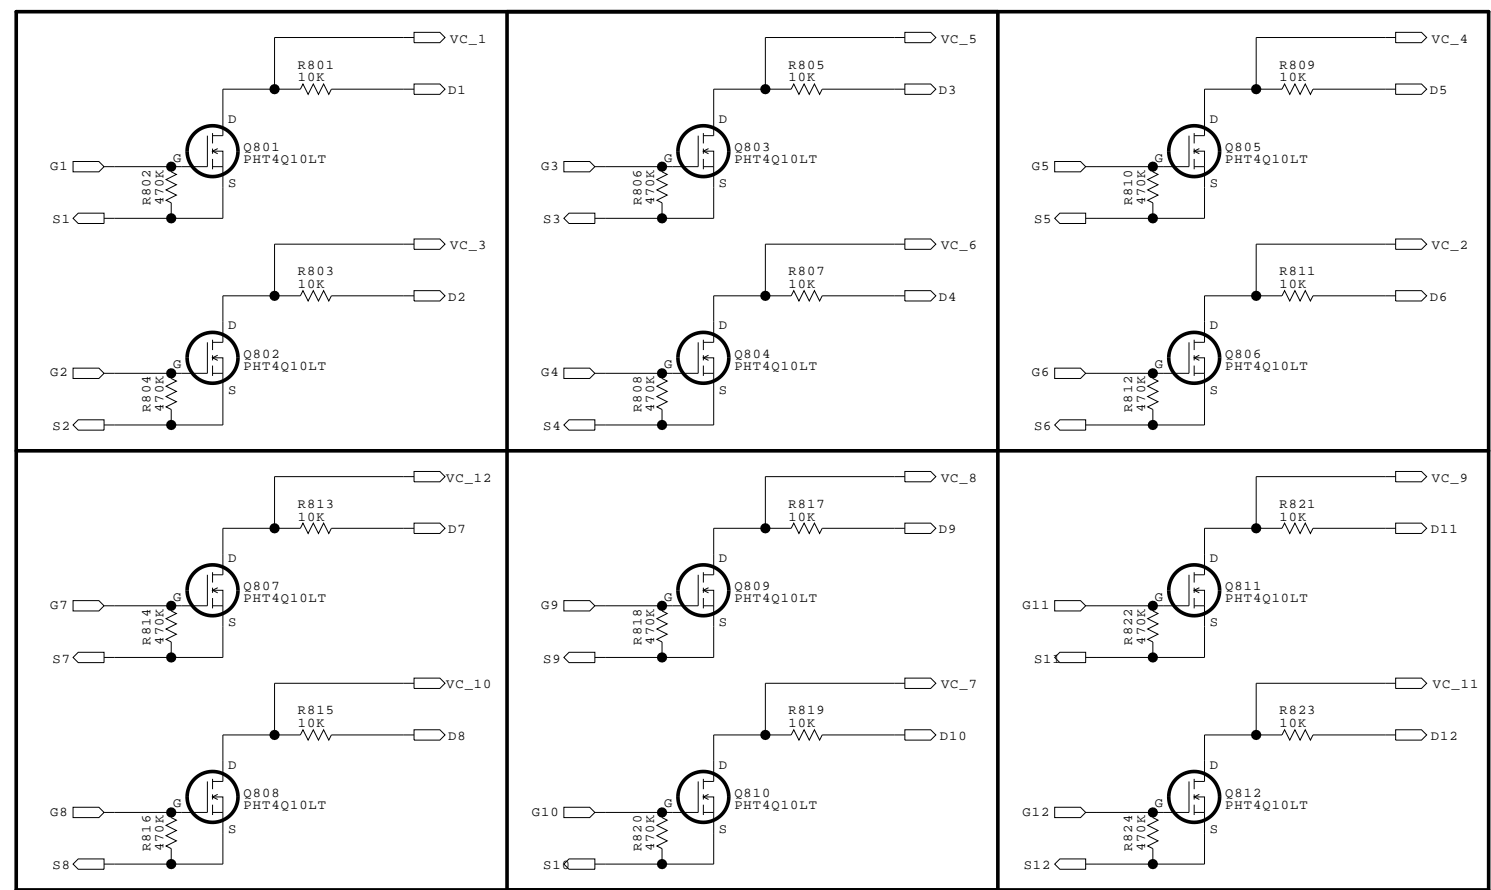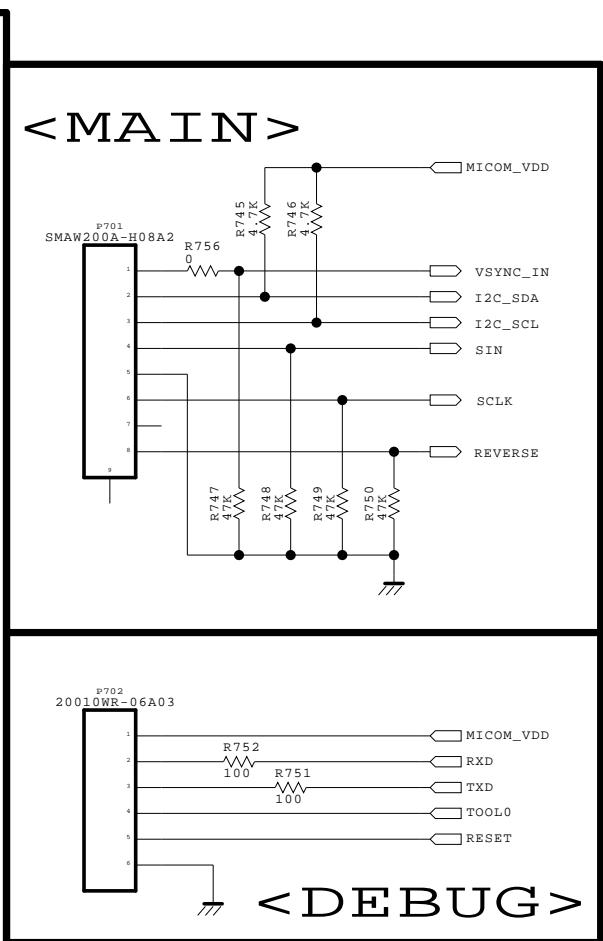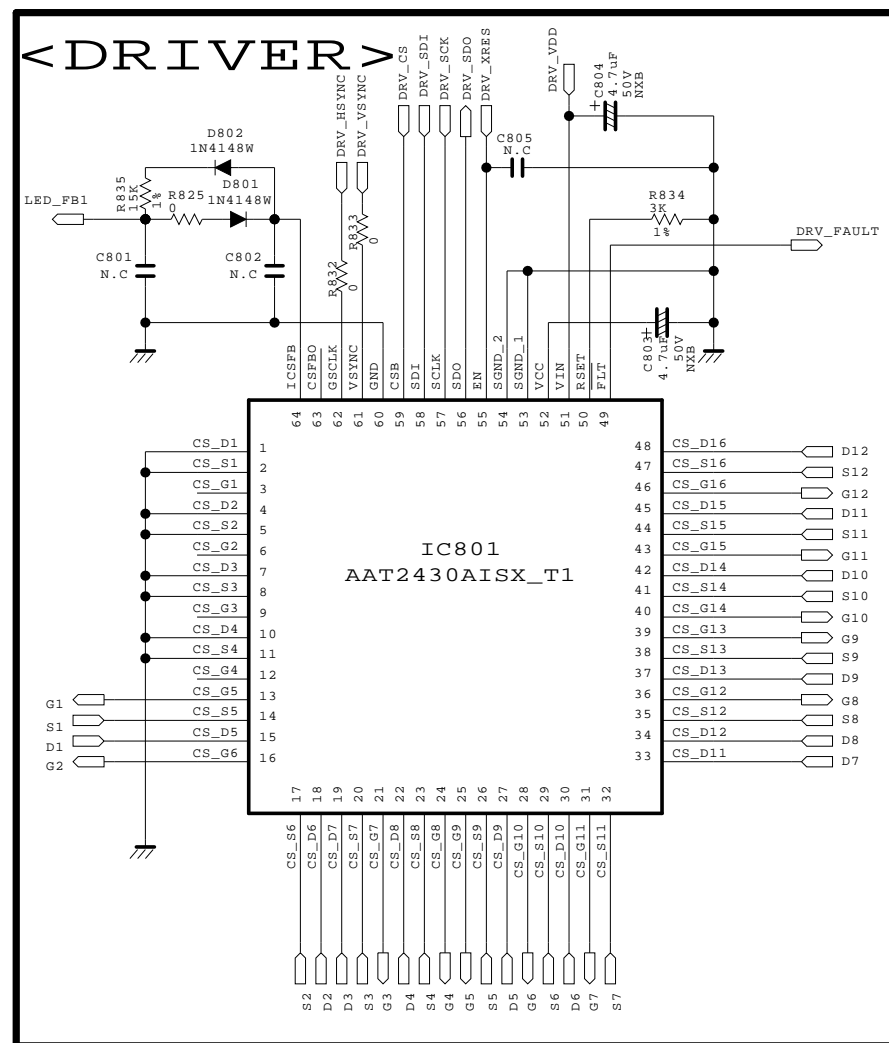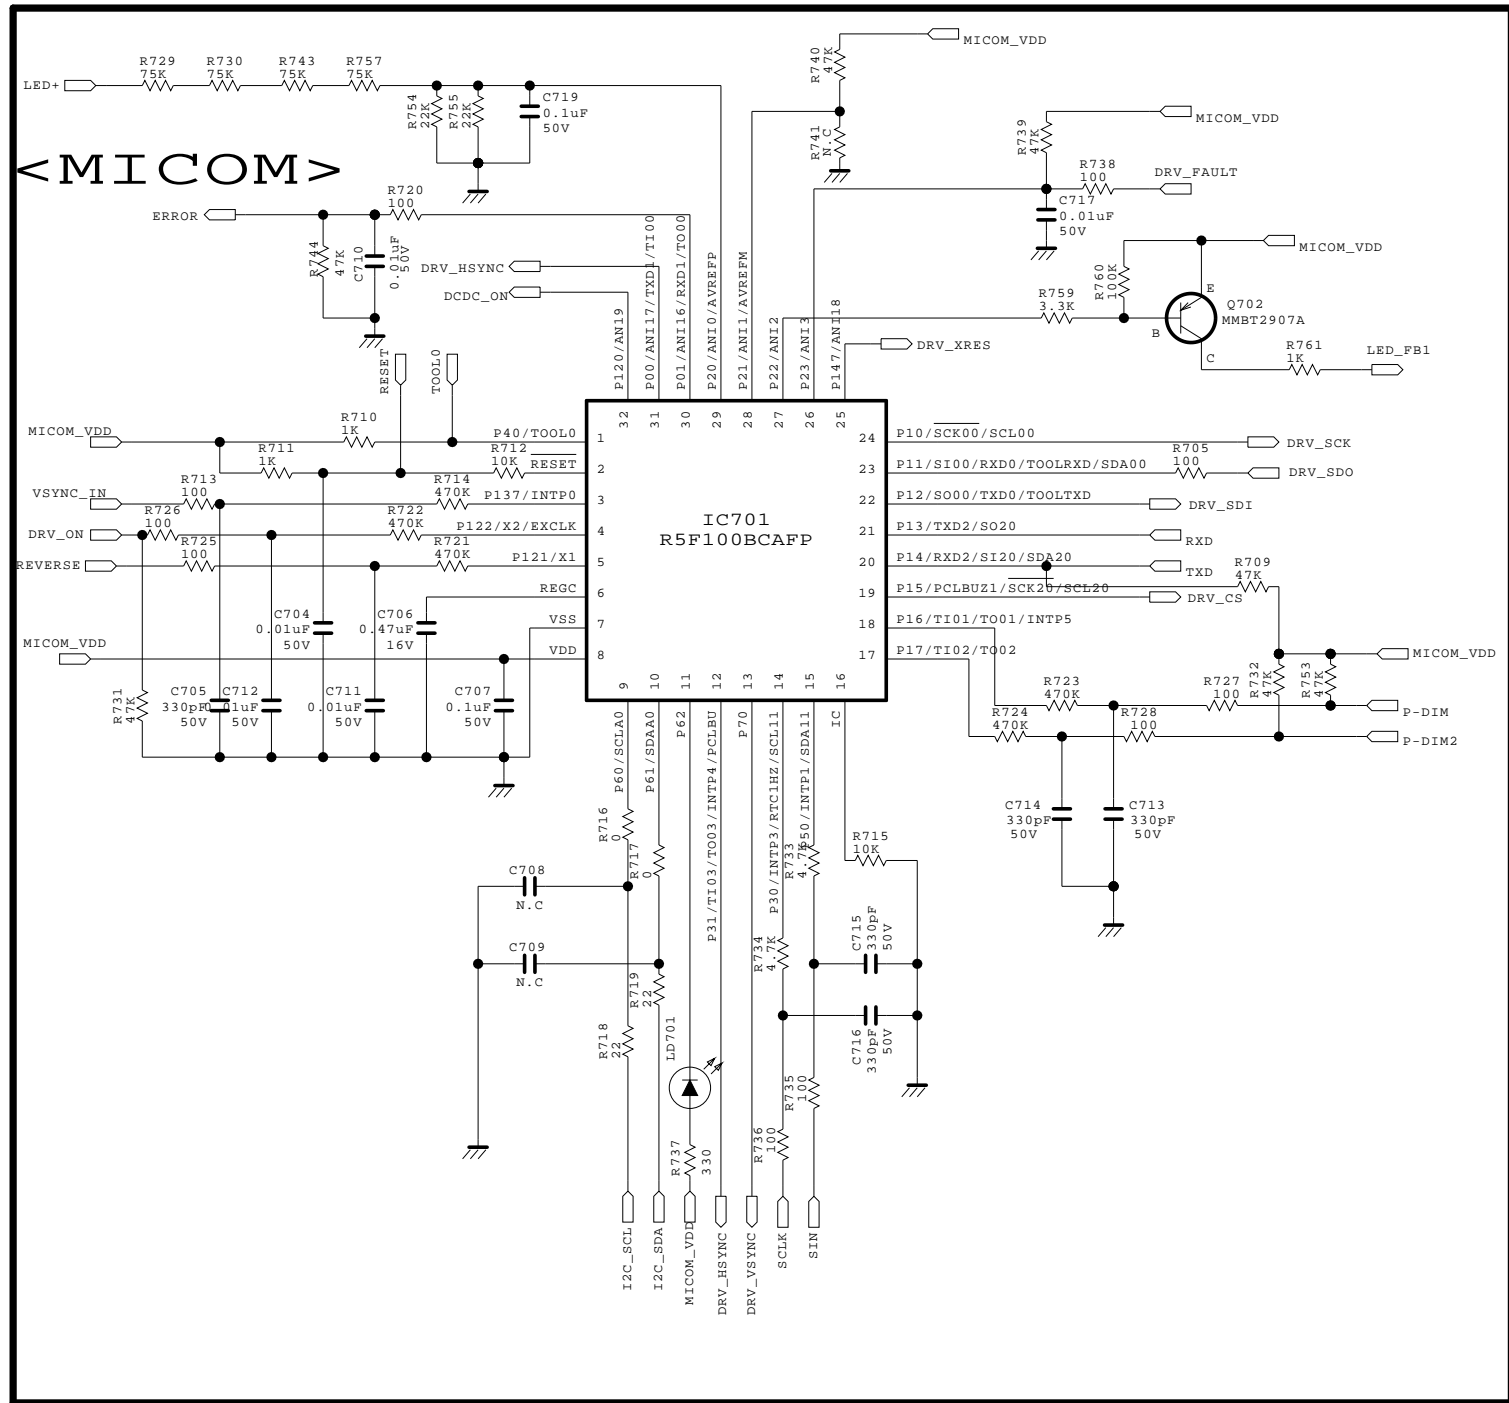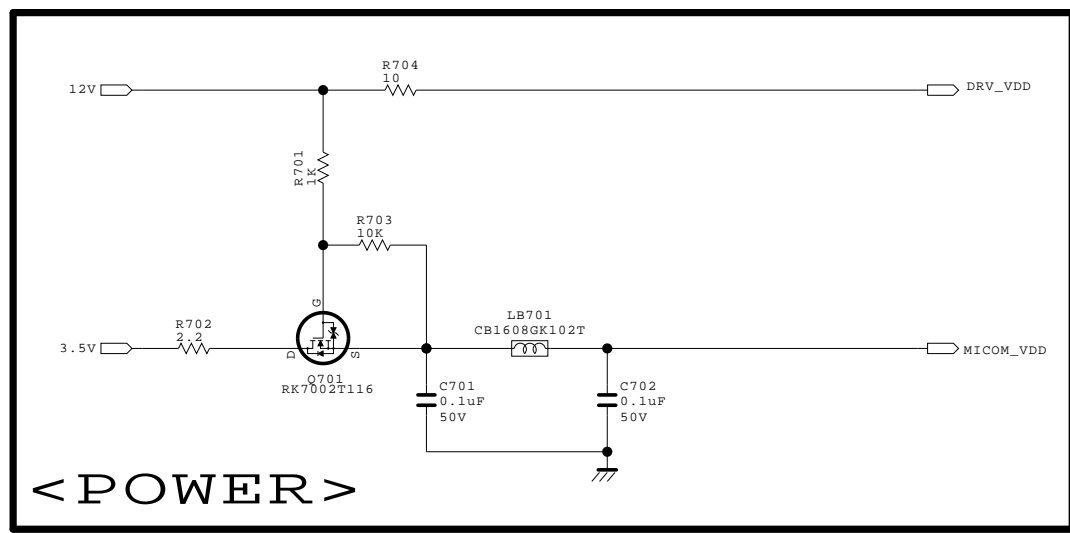REV 2.0



THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics



| | | | |
|-------|----------------|-------|-----------|
| MODEL | LGP4247H-12LPB | DATE | '12.10.09 |
| BLOCK | DRV | SHEET | 2 / 2 |

REV 2.0

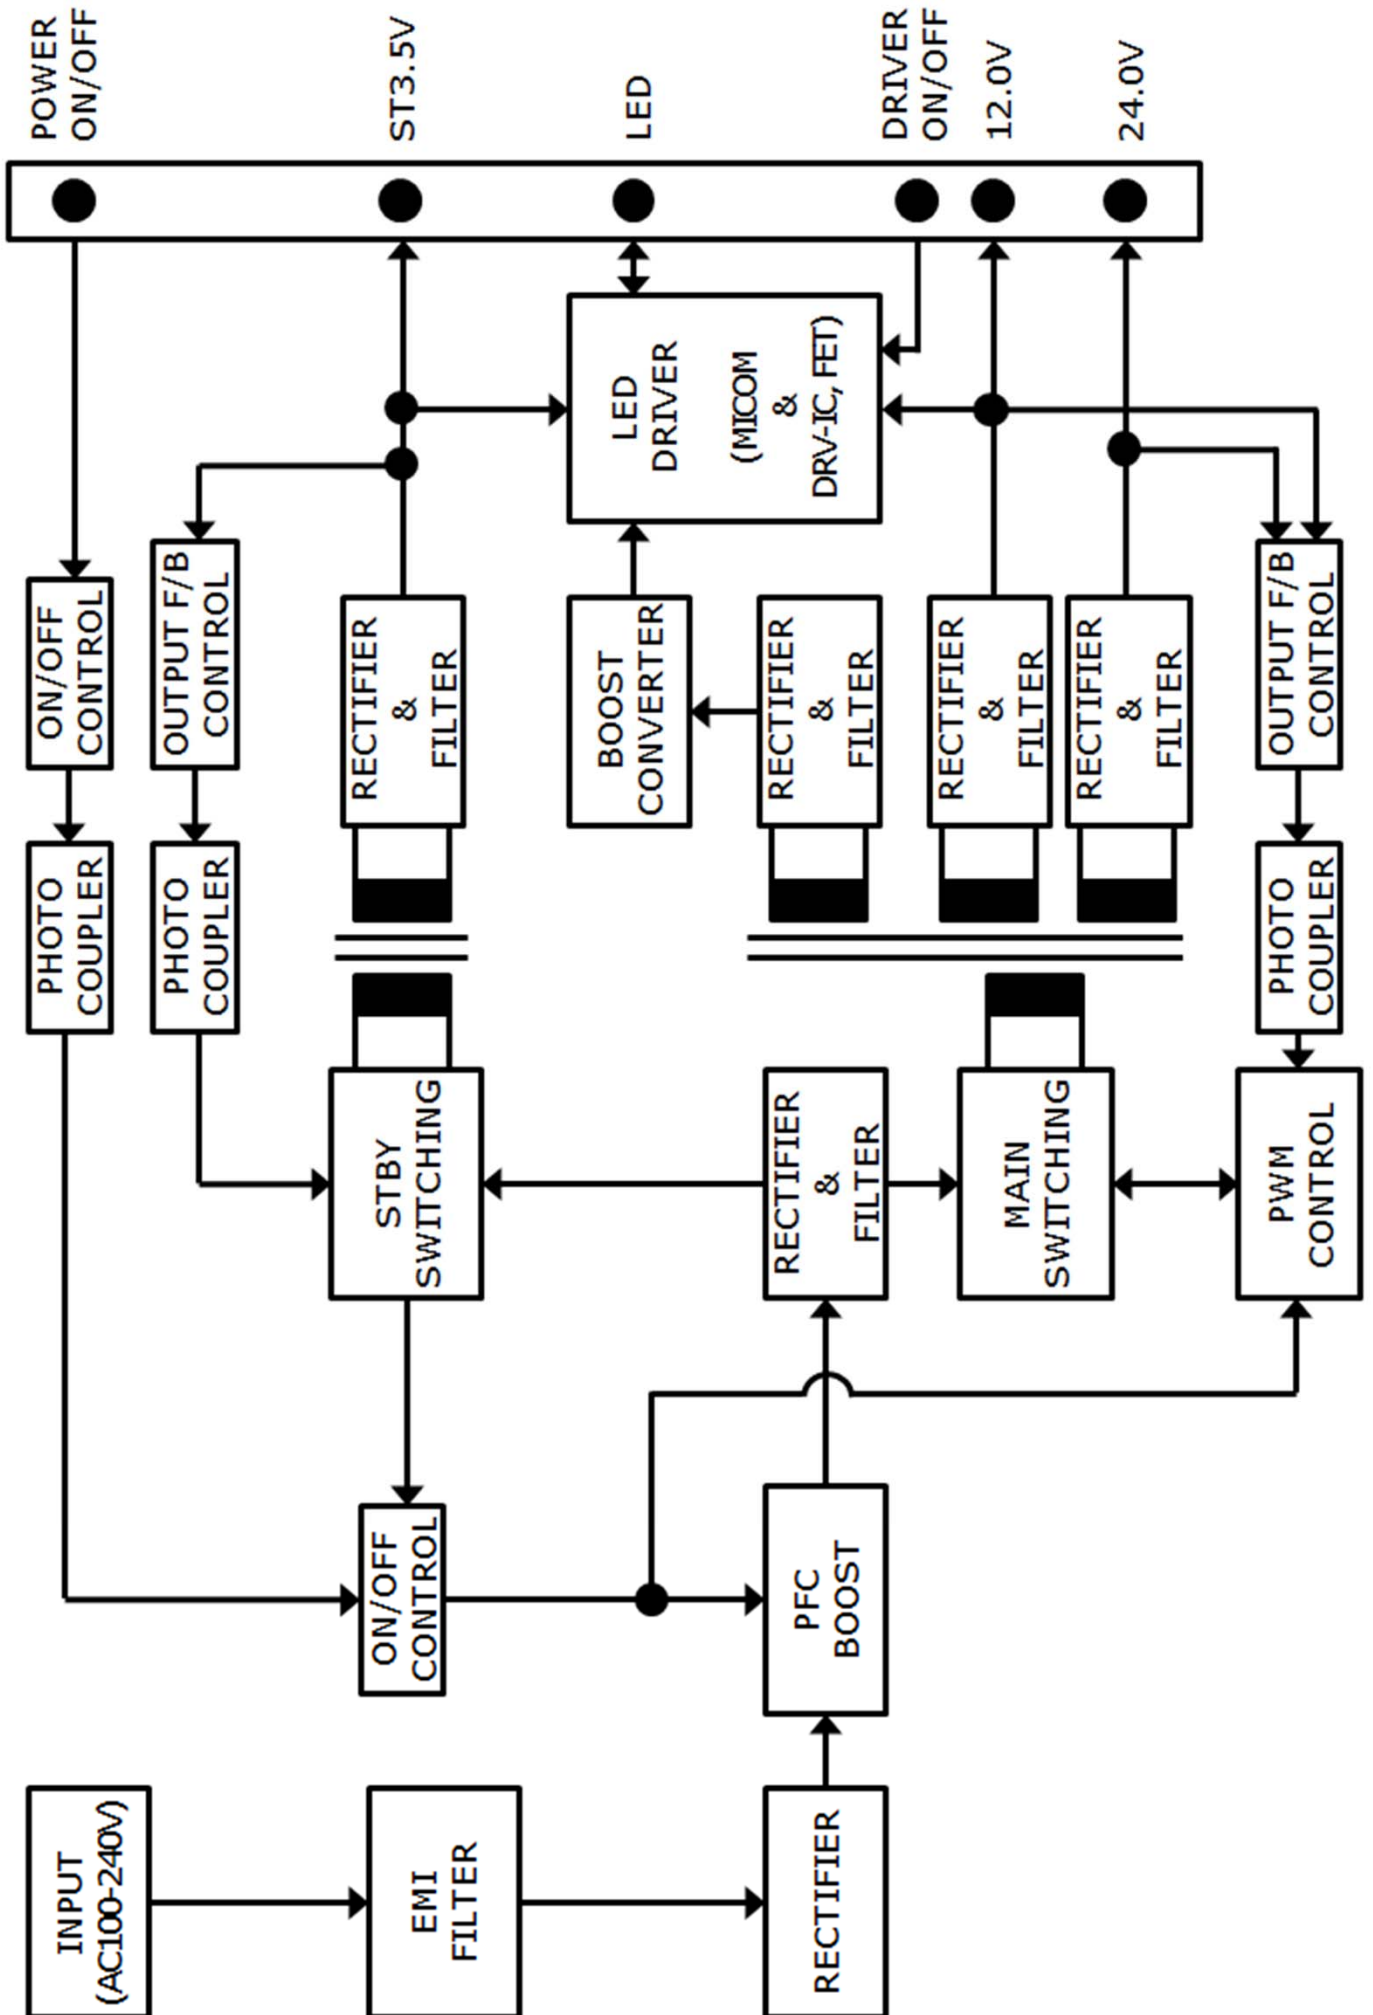Block Diagram



Parts List

| No | Level | Qty | Unit | Location | Specification | Description | Maker |
|----|-------|-----|------|-------------------------|---|---------------------|--|
| 1 | MI | 1 | EA | HS1 | MULTI DIODE ASS'Y | HEAT SINK ASS'Y | |
| 2 | MI | 1 | EA | HS1 | LPB4247_55 HS1 (20 X 70 X 8mm) | HEAT SINK | CHENG CHIA MINGXUE Y AOFENG BAOCHENG INNO D&C YUWON NRT HUA GUANG HUA PENG GUOTAI Onsung Pampas |
| 3 | MI | 3 | EA | D251,D252,D259 | MBRF20200CT 20A 200V TO-220FP MBRF20U200CT 20A 200V TO-220FP | DIODE | SENSITRON KEC |
| 4 | MI | 1 | EA | Q251 | STF19NF20 200V 15A TO-220FP TK15A20D 200V 15A TO-220FP | FET | STM TOSHIBA |
| 5 | MI | 4 | EA | FOR D251,D252,D259,Q251 | M/S S/W + Φ3.0 7L SILVER PLATE HEAD | SCREW | JUNGWOO SEOUL METAL ASIA BOLT SUNG HO METAL KUOFBI HUIYU MACHINERY DELIKANG DONG HAIKANG RUI YOU TANJIN METAL |
| 6 | MI | 1 | GR | FOR D251,D252,D259,Q251 | HC300 OKC-5500 G746 YG6111 DS-323 AK100 AK100 KD-3 | SILICON GREASE | CHANG AMLS OKONG SHINETSU MOMENTIVE DONGYANG SILICON SUNNICO TAIZBOND SHIN WEI |
| 7 | MI | 1 | EA | HS2 | PFC FET ASS'Y | HEAT SINK ASS'Y | |
| 8 | MI | 1 | EA | HS2 | LPB4247_55 HS2 (25 X 38 X 5.5mm) | HEAT SINK | CHENG CHIA MINGXUE Y AOFENG BAOCHENG INNO D&C YUWON NRT HUA GUANG HUA PENG GUOTAI Onsung Pampas |
| 9 | MI | 2 | EA | Q601,Q602 | IPA60R280E6 650V 13.8A TO-220FP STF13NM60N 650V 11A TO-220FP | FET | INFINEON STM |
| 10 | MI | 2 | EA | FOR Q601,Q602 | M/S S/W + Φ3.0 7L SILVER PLATE HEAD | SCREW | JUNGWOO SEOUL METAL ASIA BOLT SUNG HO METAL KUOFBI HUIYU MACHINERY DELIKANG DONG HAIKANG RUI YOU TANJIN METAL |
| 11 | MI | 0.5 | GR | FOR Q601,Q602 | HC300 OKC-5500 G746 YG6111 DS-323 AK100 AK100 KD-3 | SILICON GREASE | CHANG AMLS OKONG SHINETSU MOMENTIVE DONGYANG SILICON SUNNICO TAIZBOND SHIN WEI |
| 12 | MI | 1 | EA | | LGP4247H-12LPB MI & AI COMPONENTS | MI & AI ASS'Y | |
| 13 | MI | 2 | EA | BD101,BD102 | RS1005M 600V 10A L-FORMING KBJ1006G 600V 10A L-FORMING D10XB60 600V 10A L-FORMING | BRIDGE-DIODE | RECTRON LITE-ON DACHANG |
| 14 | MI | 1 | EA | C263 | NXB 150uF 100V MRB P5 Φ12.5x25 MF 150uF 100V MRB P5 Φ13x25 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 15 | MI | 1 | EA | C610 | NZE 120uF 450V MP7.5 Φ18x40 SK120uF 450V MP7.5 Φ18x40 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 16 | MI | 1 | EA | C601 | MPHB 0.82uF 500V J P15 MP 0.82uF 500V J P15 PCMP 372/472 0.82uF 500V J P15 | CAPACITOR,FILM | EUROPTRONIC LUMEN PILKOR |
| 17 | MI | 1 | EA | C114 | MPLB 0.018uF 1000V J P15 NP 0.018uF 800V J P15 PCMP 384 0.018uF 800V J P15 | CAPACITOR,FILM | EUROPTRONIC LUMEN PILKOR |
| 18 | MI | 2 | EA | CX101,CX102 | PCX2 337 0.33uF 275V K P15 MPX 0.33uF 275V K P15 CTX 0.33uF 275V K P15 | CAPACITOR,FILM | PILKOR EUROPTRONIC CHENG TUNG |
| 19 | MI | 2 | EA | D601,D602 | 1N5408G 1KV 3A P20 S3V60 600V 3.5A P20 30PDA60 600V 3A P20 | DIODE | TSC SHINDENGEN NI |
| 20 | MI | 1 | EA | D607 | STTH10LCD06 600V 10A TO-220FP BYV29FX-600 600V 9A TO-220FP | DIODE | STM NXP |
| 21 | MI | 2 | EA | D253,D261 | SB5100 100V 5A P20 SR510-24 100V 5A P20 SB5100 100V 5A P20 | DIODE | SENSITRON TSC LITE-ON |

| | | | | | | | |
|----|-----|----|----|---|--|---|--|
| 22 | MI | 1 | EA | D201 | SB560 60V 5A P20 SR560 60V 5A P20 SB560 60V 5A P20 | DIODE | SENSITRON DACHANG LITE-ON |
| 23 | MI | 2 | EA | Q101,Q102 | TK12A60D 600V 12A TO-220FP STF13NM60N 650V 11A TO-220FP | FET | TOSHIBA STM |
| 24 | MI | 1 | EA | F101 | F3.15A H 250V 50CF VIOLET (2 LINE) F3.15A H 250V 216 VIOLET (2 LINE) | FUSE, FAST ACTING | DAIN LITTEL FUSE |
| 25 | MI | 1 | EA | F100 | T5A H 250V 215 RED(1-LINE) T5A H 250V 50CT RED(1-LINE) T5A H 250V TSC RED(1-LINE) | FUSE, TIME LAG | LITTEL FUSE DAIN WALTER |
| 26 | MI | 2 | EA | PG2,PG3 | JS-12-75-04 SPCC 0.4T GND PIN | GND REINFORCE | SAMSUNG JS ST TELECOM PINGOOD DIHUA HUAKANG KANG YA LUNG |
| 27 | MI | 3 | EA | IC102,IC502,IC503 | EL817M(DT) B LTV817M-BN | IC | EVERLIGHT LITE-ON |
| 28 | MI | 1 | EA | IC501 | STR-A6059H DIP-8 | IC | SANKEN |
| 29 | MI | 2 | EA | TH101,TH102 | ICL-5W 2R50MSMT DSC2.5D15 2.5Ω 8A Φ15 MF72-2.5D15 2.5Ω 7A Φ15 WTR15D2R5 2.5Ω 8A Φ15 | ICL THERMISTOR THERMISTOR THERMISTOR | SMART DSC NSE WMEC |
| 30 | MI | 1 | EA | L201 | 0.6uH Φ3X10L BAR | INDUCTOR, COIL | DONGYANG TELECOM SOOJUNG CLOVER FEELUX LIENCHANG |
| 31 | MI | 1 | EA | L251 | 12S-DD01 | INDUCTOR, COIL | SOOJUNG JIANGSU CHANNELON ELECTRONIC GROUP FEELUX DONGYANG TELECOM BUJEON LIENCHANG |
| 32 | MI | 2 | EA | LF101,LF102 | CS920250S 25mH LH9B020250 25mH LLF-121 25mH LLF-121 25mH | LINE FILTER | TNC DONG IL DONGYANG TELECOM FEELUX |
| 33 | MI | 1 | EA | HD601 | EC40.0CAP-F-12 | MAIN CAP HOLDER | TBI |
| 34 | MI | 1 | EA | T101 | 12S-LM03 | TRANSFORMER | TDK SOCJUNG JIANGSU CHANNELON ELECTRONIC GROUP DONGYANG TELECOM BUJEON LIENCHANG FEELUX LGIT |
| 35 | MI | 1 | EA | L601 | 12S-LP03 | TRANSFORMER | TDK SOCJUNG JIANGSU CHANNELON ELECTRONIC GROUP DONGYANG TELECOM BUJEON LIENCHANG FEELUX LGIT |
| 36 | MI | 1 | EA | T501 | 12S-LS01 | TRANSFORMER | TDK SOCJUNG JIANGSU CHANNELON ELECTRONIC GROUP DONGYANG TELECOM BUJEON LIENCHANG FEELUX CLOVER |
| 37 | MI | 1 | EA | VA101 | INR14D621K-CAP 620V Φ14 L-FORMING TUBE SVC621D-14A TM7 620V Φ14 L-FORMING TUBE WMR14D621 620V Φ14 L-FORMING TUBE | VARIATOR | AMOTECH SAMWHA WMEC |
| 38 | MI | 1 | EA | P702 | 20010WR-06A03 6PIN WHITE | WAFER | YEONHO |
| 39 | MI | 1 | EA | SK100 | DAC-18D3A BLACK | WAFER | DONG IL |
| 40 | MI | 1 | EA | P202 | IS100-L08T-C46 8PIN BLACK | WAFER | UJU ELE |
| 41 | MI | 1 | EA | P203 | IS100-L08T-C46-A 8PIN WHITE | WAFER | UJU ELE |
| 42 | MI | 1 | EA | P701 | SMAW200A-H08A2 8PIN WHITE | WAFER | YEONHO |
| 43 | MI | 1 | EA | P201 | SMAW200-H24S2 24PIN WHITE | WAFER | YEONHO |
| 44 | SMT | 1 | EA | | LGP4247H-12LPB SMT COMPONENTS | | |
| 45 | SMT | 1 | EA | LB701 | CB1608GK102T JCBH160808A102 | BEAD | SAMWHA JOINSET |
| 46 | SMT | 1 | EA | C609 | 22pF 50V J 1608 COG | CAPACITOR, CHIP | MURATA PILKOR SAMWHA TAY OY UDEN TDK YAGEO HEC |
| 47 | SMT | 1 | EA | C608 | 100pF 50V J 1608 COG | CAPACITOR, CHIP | |
| 48 | SMT | 5 | EA | C705,C713,C714,C715,C716 | 330pF 50V J 1608 COG | CAPACITOR, CHIP | |
| 49 | SMT | 4 | EA | C104,C256,C269,C617 | 470pF 50V J 1608 COG | CAPACITOR, CHIP | |
| 50 | SMT | 5 | EA | C116,C203,C257,C602,C607 | 0.001uF 50V K 1608 X7R | CAPACITOR, CHIP | |
| 51 | SMT | 2 | EA | C261,C282 | 0.0022uF 50V K 1608 X7R | CAPACITOR, CHIP | |
| 52 | SMT | 1 | EA | C507 | 0.0047uF 50V K 1608 X7R | CAPACITOR, CHIP | |
| 53 | SMT | 7 | EA | C103,C255,C704,C710,C711,C712,C717 | 0.01uF 50V K 1608 X7R | CAPACITOR, CHIP | |
| 54 | SMT | 1 | EA | C262 | 0.033uF 50V K 1608 X7R | CAPACITOR, CHIP | |
| 55 | SMT | 1 | EA | C274 | 0.047uF 50V K 1608 X7R | CAPACITOR, CHIP | |
| 56 | SMT | 16 | EA | C105,C107,C108,C110,C115,C205, C258,C260,C277,C503,C604,C606, C701,C702,C707,C719 | 0.1uF 50V K 1608 X7R | CAPACITOR, CHIP | |

| | | | | | | | |
|-----|-----|----|----|--|--|-----------------|---|
| 57 | SMT | 2 | EA | C106,C605 | 0.22uF 16V K 1608 X7R | CAPACITOR, CHIP | MURATA PLKOR SAMWHA TAYOYUDEN TDK YAGEO HEC |
| 58 | SMT | 2 | EA | C101,C706 | 0.47uF 16V K 1608 X7R | CAPACITOR, CHIP | |
| 59 | SMT | 3 | EA | C102,C204,C275 | 1uF 16V K 1608 X7R | CAPACITOR, CHIP | |
| 60 | SMT | 1 | EA | C516 | 1uF 25V K 2012 X7R or 1uF 50V K 2012 X7R(PLKOR 삭제) | CAPACITOR, CHIP | |
| 61 | SMT | 4 | EA | C265,C266,C267,C268 | 2.2uF 10V K 2012 X7R or 2.2uF 16V K 2012 X7R | CAPACITOR, CHIP | |
| 62 | SMT | 16 | EA | D101,D102,D103,D105,D106,D121, D255,D256,D257,D258,D504,D604, D605,D606,D801,D802 | 1N4148W 100V 150mA SOD-123 1N4148W 100V 150mA SOD-123 MMSD4148T1 100V 200mA SOD-123 SDS4148G 100V 150mA SOD-123 | DIODE | RECTRON DIODES ONSEMI AUK |
| 63 | SMT | 2 | EA | D254,D260 | MBRD10100CT 10A 100V D-PACK MBRD10U100CT 10A 100V D-PACK SPEN-210A 10A 100V D-PACK | DIODE | SENSITRON KEC SANKEN |
| 64 | SMT | 12 | EA | Q801,Q802,Q803,Q804,Q805, Q806,Q807,Q808,Q809,Q810, Q811,Q812 | PHT4NQ10LT 100V 3.5A SOT-223 MDHT4N20Y 200V 0.85A SOT-223 | FET | NXP MAGNACHIP |
| 65 | SMT | 1 | EA | IC101 | L6599AD SO-16N | IC | STM |
| 66 | SMT | 1 | EA | IC202 | SJ432BS 1.24V ±0.5% SOT-23 TLV431BSN1T1G, 1.24V±0.5%, SOT-23 AZ431LANTR-E1, 1.24V±0.5%, SOT-23 | IC | AUK ON SEMI BCD |
| 67 | SMT | 1 | EA | IC251 | UC2843B SO-8 AP3843CM SO-8 UC2843B SO-8 | IC | ONSEMI BCD STM |
| 68 | SMT | 1 | EA | IC252 | SNF431BS 2.5V ±0.5% SOT-23 AS431AN, 2.5V±0.5%, SOT-23 KA431SLMF2, 2.5V±0.5%, SOT-23 | IC | AUK BCD FAIRCHILD |
| 69 | SMT | 1 | EA | IC601 | SCY99102-HS01G SOIC-8 | IC | ONSEMI |
| 70 | SMT | 1 | EA | IC701 | R5F100BCAFP | IC | Renesas |
| 71 | SMT | 1 | EA | IC801 | AAT2430AISX_T1 | IC | AATI |
| 72 | SMT | 10 | EA | J26,J36,J40,J46,J52, J77,J81,J82,J93,J95 | 0Ω J 3216 | RESISTOR, CHIP | KAMAYA PLKOR ROHM SAMSUNG YAGEO TZAIYUAN |
| 73 | SMT | 4 | EA | R119,R122,R610,R611 | 22Ω J 3216 | RESISTOR, CHIP | |
| 74 | SMT | 2 | EA | R118,R121 | 47Ω J 3216 | RESISTOR, CHIP | |
| 75 | SMT | 6 | EA | R127,R613,R614,R615,R616,R623 | 750KΩ F 3216 | RESISTOR, CHIP | |
| 76 | SMT | 4 | EA | R103,R104,R105,R106 | 820KΩ F 3216 | RESISTOR, CHIP | |
| 77 | SMT | 8 | EA | R207,R249,R716,R717,R756, R825,R832,R833 | 0Ω J 1608 | RESISTOR, CHIP | |
| 78 | SMT | 1 | EA | R289 | 1.2KΩ J 1608 | RESISTOR, CHIP | |
| 79 | SMT | 3 | EA | R260,R295,R760 | 100KΩ J 1608 | RESISTOR, CHIP | |
| 80 | SMT | 14 | EA | R608,R612,R705,R713,R720,R725, R726,R727,R728,R735,R736,R738, R751,R752 | 100Ω J 1608 | RESISTOR, CHIP | |
| 81 | SMT | 25 | EA | R120,R123,R211,R262,R266, R278,R298,R515,R603,R606, R703,R712,R715,R801,R803, R805,R807,R809,R811,R813, R815,R817,R819,R821,R823 | 10KΩ J 1608 | RESISTOR, CHIP | |
| 82 | SMT | 1 | EA | R704 | 10Ω J 1608 | RESISTOR, CHIP | |
| 83 | SMT | 10 | EA | R112,R202,R267,R299,R508, R625,R701,R710,R711,R761 | 1KΩ J 1608 | RESISTOR, CHIP | |
| 84 | SMT | 1 | EA | R259 | 1MΩ J 1608 | RESISTOR, CHIP | |
| 85 | SMT | 1 | EA | R109 | 2.2MΩ J 1608 | RESISTOR, CHIP | |
| 86 | SMT | 3 | EA | R117,R621,R702 | 2.2Ω J 1608 | RESISTOR, CHIP | |
| 87 | SMT | 2 | EA | R718,R719 | 22Ω J 1608 | RESISTOR, CHIP | |
| 88 | SMT | 3 | EA | R620,R754,R755 | 22KΩ J 1608 | RESISTOR, CHIP | |
| 89 | SMT | 1 | EA | R210 | 270Ω J 1608 | RESISTOR, CHIP | |
| 90 | SMT | 3 | EA | R297,R619,R759 | 3.3KΩ J 1608 | RESISTOR, CHIP | |
| 91 | SMT | 1 | EA | R108 | 3.9KΩ F 1608 | RESISTOR, CHIP | |
| 92 | SMT | 2 | EA | R509,R737 | 330Ω J 1608 | RESISTOR, CHIP | |
| 93 | SMT | 1 | EA | R624 | 390Ω J 1608 | RESISTOR, CHIP | |
| 94 | SMT | 6 | EA | R220,R288,R733,R734,R745,R746 | 4.7KΩ J 1608 | RESISTOR, CHIP | |
| 95 | SMT | 2 | EA | R263,R296 | 4.7Ω J 1608 | RESISTOR, CHIP | |
| 96 | SMT | 18 | EA | R115,R714,R721,R722,R723,R724, R802,R804,R806,R808,R810,R812, R814,R816,R818,R820,R822,R824 | 470KΩ J 1608 | RESISTOR, CHIP | |
| 97 | SMT | 5 | EA | R128,R201,R208,R209,R227 | 470Ω J 1608 | RESISTOR, CHIP | |
| 98 | SMT | 15 | EA | R107,R264,R290,R605,R709, R731,R732,R739,R740,R744, R747,R748,R749,R750,R753 | 47KΩ J 1608 | RESISTOR, CHIP | |
| 99 | SMT | 1 | EA | R265 | 47Ω J 1608 | RESISTOR, CHIP | |
| 100 | SMT | 5 | EA | R511,R729,R730,R743,R757 | 75KΩ J 1608 | RESISTOR, CHIP | |
| 101 | SMT | 2 | EA | R293,R294 | 1.2KΩ F 1608 | RESISTOR, CHIP | |
| 102 | SMT | 2 | EA | R206,R255 | 1.5KΩ F 1608 | RESISTOR, CHIP | |
| 103 | SMT | 1 | EA | R618 | 1.8KΩ F 1608 | RESISTOR, CHIP | |
| 104 | SMT | 1 | EA | R204 | 100Ω F 1608 | RESISTOR, CHIP | |
| 105 | SMT | 2 | EA | R291,R292 | 10KΩ F 1608 | RESISTOR, CHIP | |
| 106 | SMT | 1 | EA | R835 | 15KΩ F 1608 | RESISTOR, CHIP | |
| 107 | SMT | 1 | EA | R111 | 18KΩ F 1608 | RESISTOR, CHIP | |
| 108 | SMT | 1 | EA | R205 | 2.7KΩ F 1608 | RESISTOR, CHIP | |
| 109 | SMT | 3 | EA | R256,R257,R258 | 20KΩ F 1608 | RESISTOR, CHIP | |
| 110 | SMT | 1 | EA | R617 | 22KΩ F 1608 | RESISTOR, CHIP | |
| 111 | SMT | 1 | EA | R261 | 24KΩ F 1608 | RESISTOR, CHIP | |
| 112 | SMT | 1 | EA | R110 | 2KΩ F 1608 | RESISTOR, CHIP | |
| 113 | SMT | 2 | EA | R276,R277 | 3.3KΩ F 1608 | RESISTOR, CHIP | |
| 114 | SMT | 1 | EA | R506 | 30KΩ F 1608 | RESISTOR, CHIP | |
| 115 | SMT | 1 | EA | R834 | 3KΩ F 1608 | RESISTOR, CHIP | |
| 116 | SMT | 1 | EA | R116 | 43Ω F 1608 | RESISTOR, CHIP | |
| 117 | SMT | 2 | EA | R281,R282 | 5.1KΩ F 1608 | RESISTOR, CHIP | |
| 118 | SMT | 2 | EA | R113,R114 | 8.2KΩ F 1608 | RESISTOR, CHIP | |
| 119 | SMT | 6 | EA | R270,R271,R272,R273,R274,R275 | 91KΩ F 1608 | RESISTOR, CHIP | |
| 120 | SMT | 3 | EA | HD101,HD102,HD103 | 3X2.45X2.5H | SUPPORTER | POWER VALLEY |


| | | | | | | | |
|-----|-----|-----|----|--|--|---------------------|---|
| 121 | SMT | 1 | EA | Q701 | 2N7002K 60V 300mA SOT-23 2N7002K 60V 380mA SOT-23 RK7002 60V 115mA SOT-23 SSM3K7002F 60V 200mA SOT-23 | TRANSISTOR | DIODES ONSEMI ROHM TOSHIBA |
| 122 | SMT | 1 | EA | Q501 | KTC3551T 80V 1A TSM NPN BCW66GLT1 45V 800mA SOT-23 NPN 2SC5865 SOT-23 NPN | TRANSISTOR | KEC ONSEMI ROHM |
| 123 | SMT | 4 | EA | Q201,Q252,Q255,Q605 | MMBT2222A 40V 600mA SOT-23 NPN KTN2222AS 40V 600mA SOT-23 NPN PMBT2222A 40V 600mA SOT-23 NPN SBT2222A 40V 600mA SOT-23 NPN | TRANSISTOR | ONSEMI KEC NXP AUK |
| 124 | SMT | 6 | EA | Q103,Q253,Q254,Q603,Q604,Q702 | MMBT2907A -60V -600mA SOT-23 PNP KTN2907AS -60V -600mA SOT-23 PNP PMBT2907 -60V -600mA SOT-23 PNP SBT2907A -60V -600mA SOT-23 PNP | TRANSISTOR | ONSEMI KEC NXP AUK |
| 125 | SMT | 0.5 | GR | | HT-130A-106 HT-130D-7 LOCTITE 3609 NE8800T | BOND (SMD) | HITECH KOREA HITECH KOREA LOCTITE FUJI |
| 126 | AI | 1 | EA | | LGP4247H-12LPB AI COMPONENTS | | |
| 127 | AI | 1 | EA | C509 | NXB 10uF 50V M P5 Φ5X11 SG 10uF 50V M P5 Φ5X11 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 128 | AI | 2 | EA | C251,C252 | NXB 150uF 50V M P5 Φ10X12.5 SG 150uF 50V M P5 Φ10X13 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 129 | AI | 2 | EA | C253,C259 | NXB 22uF 50V M P5 Φ5X11 SG 22uF 50V M P5 Φ5X11 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 130 | AI | 2 | EA | C803,C804 | NXB 4.7uF 50V M P5 Φ5X11 SG 4.7uF 50V M P5 Φ5X11 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 131 | AI | 1 | EA | C202 | NXB 470uF 10V M P5 Φ8X11.5 SG 470uF 10V M P5 Φ8X12 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 132 | AI | 2 | EA | C504,C510 | NXB 47uF 50V M P5 Φ6.3X11 SG 47uF 50V M P5 Φ6.3X11 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 133 | AI | 2 | EA | C201,C206 | NXH 1000uF 10V M P5 Φ10X12.5 MG 1000uF 10V M P5 Φ10X13 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 134 | AI | 1 | EA | C270 | NXH 330uF 35V M P5 Φ10X12.5 MG 330uF 35V M P5 Φ10X13 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 135 | AI | 2 | EA | C272,C279 | NXH 470uF 25V M P5 Φ10X12.5 MG 470uF 25V M P5 Φ10X13 | CAPACITOR, ALUMINUM | SAMYOUNG SUSCON |
| 136 | AI | 3 | EA | C113,C603,C614 | DG 220pF 1KV K P5 125℃ CK 220pF 1KV K P5 125℃ CT81 220pF 1KV K P5 125℃ CK45 220pF 1KV K P5 125℃ | CAPACITOR, CERAMIC | APEX INTEC DONGIL ELEC. YINANDON TDK |
| 137 | AI | 3 | EA | C118,C119,C508 | DG 100pF 1KV K P5 125℃ CK 100pF 1KV K P5 125℃ CT81 100pF 1KV K P5 125℃ CK45 100pF 1KV K P5 125℃ | CAPACITOR, CERAMIC | APEX INTEC DONGIL ELEC. YINANDON TDK |
| 138 | AI | 1 | EA | C505 | DG 47pF 1KV K P5 125℃ CC 47pF 1KV K P5 125℃ CC81 47pF 1KV K P5 125℃ CC45 47pF 1KV K P5 125℃ | CAPACITOR, CERAMIC | APEX INTEC DONGIL ELEC. YINANDON TDK |
| 139 | AI | 2 | EA | C501,C502 | DG 1000pF 1KV K P5 125℃ CK 1000pF 1KV K P5 125℃ CT81 1000pF 1KV K P5 125℃ CK45 1000pF 1KV K P5 125℃ | CAPACITOR, CERAMIC | APEX INTEC DONGIL ELEC. YINANDON TDK |
| 140 | AI | 5 | EA | CY103,CY104,CY105,CY106,CY107 | DA 470pF 400V K P10 105℃ DA 470pF 400V K P10 105℃ CT81 470pF 400V K P10 105℃ CD 470pF 400V K P10 105℃ | CAPACITOR, CERAMIC | APEX INTEC DONGIL ELEC. YINANDON TDK |
| 141 | AI | 1 | EA | CY108 | DA 100pF 400V K P10 105℃ DA 100pF 400V K P10 105℃ CT81 100pF 400V K P10 105℃ CD 100pF 400V K P10 105℃ | CAPACITOR, CERAMIC | APEX INTEC DONGIL ELEC. YINANDON TDK |
| 142 | AI | 3 | EA | D501,D502,D510 | UF1007 1KV 1A DO-41 UF4007 1KV 1A DO-41 HER108G 1KV 1A DO-41 UF4007 1KV 1A DO-41 | DIODE | DIODES DACHANG RECTRON TSC |
| 143 | AI | 3 | EA | ZD102,ZD501,ZD502 | 1N5245B 15V DO-35 1N5245B 15V DO-35 MTZJ15B 15V DO-34 | DIODE, ZENER | VISHAY RECTRON ROHM |
| 144 | AI | 1 | EA | ZD503 | 1N5252B 24V DO-35 1N5252B 24V DO-35 MTZJ24B 24V DO-34 | DIODE, ZENER | VISHAY RECTRON ROHM |
| 145 | AI | 30 | EA | EL3,EL4,EL7,EL8,EL13,EL14,EL21, EL22,EL27,EL28,EL29,EL30,EL35, EL36,EL37,EL38,EL39,EL41,EL42, EL43,EL44,EL45,EL46,EL49,EL50 EL57,EL58,EL59,EL60,EL61 | 1.6X3.0 | EYELET | SAMSUNG JS DOSUNG DAERIN HUAKANG DELKANG SEJIN LEZHI Avico |
| 146 | AI | 22 | EA | EL1,EL2,EL9,EL10,EL11, EL12,EL15,EL16,EL17,EL18, EL19,EL20,EL23,EL24,EL25, EL26,EL31,EL32,EL33,EL34, EL51,EL52 | 2.0X3.0 | EYELET | SAMSUNG JS DOSUNG DAERIN HUAKANG DELKANG SEJIN LEZHI Avico |
| 147 | AI | 1 | EA | F501 | F1.6A L 250V 876 | FUSE, FAST ACTING | LITTELFUSE |

| | | | | | | | |
|-----|-----|----|----|--|--|---------------------------------------|--|
| 148 | AI | 6 | EA | P210,P211,P251,P252,P253,P254 | SSJS236-6-3 (6mm Under) | GT PIN | SAMSUNG JS DOSUNG DAERIN HUA KANG DEL KANG SEJIN LEZHI Avico |
| 149 | AI | 2 | EA | LB101, LB103 | BFS3550A0L SINGLE AXIAL SEB3550050BA SINGLE AXIAL | INDUCTOR, BEAD FILTER LEAD | SAMWHA SCC |
| 150 | AI | 5 | EA | LB102, LB104, LB105, LB106, LB601 | BFS3550R2F SINGLE RADIAL SER3550050BA SINGLE RADIAL | INDUCTOR, BEAD FILTER LEAD | SAMWHA SCC |
| 151 | AI | 64 | EA | J1, J2, J3, J4, J6, J7, J8, J9, J11, J13, J15, J18, J20, J21, J23, J25, J27, J29, J30, J32, J33, J34, J37, J41, J42, J43, J44, J47, J48, J49, J50, J51, J53, J54, J55, J56, J59, J62, J63, J65, J66, J67, J68, J69, J70, J71, J72, J73, J74, J75, J78, J79, J80, J83, J84, J86, J88, J89, J90, J91, J92, J96, J97, J98 | Φ0.6 | JUMPER WIRE | DIELEC DAPcsLPcsD TPI TZAI YUAN UNI-OHM ILKWANG DM Seungw on RLC |
| 152 | AI | 1 | EA | LD701 | LTL-1CHY-001A, 5mm Pitch Type (Yellow) 204-10UYC-S530, 5mm Pitch Type (Yellow) | LED | LITE-ON EVERLIGHT |
| 153 | AI | 1 | EA | R502 | CRS 100Ω 1/2W J SMALL RDM92 100Ω 1/2W J SMALL SFR25H 100Ω 1/2W J SMALL CF 100Ω 1/2W J SMALL | RESISTOR, CARBON FILM | ABCO SMART PLKOR TZAI YUAN |
| 154 | AI | 1 | EA | R504 | CRS 1Ω 1/2W J SMALL RDM92 1Ω 1/2W J SMALL SFR25H 1Ω 1/2W J SMALL CF 1Ω 1/2W J SMALL | RESISTOR, CARBON FILM | ABCO SMART PLKOR TZAI YUAN |
| 155 | AI | 1 | EA | R505 | CRS 20Ω 1/2W J SMALL RDM92 20Ω 1/2W J SMALL SFR25H 20Ω 1/2W J SMALL CF 20Ω 1/2W J SMALL | RESISTOR, CARBON FILM | ABCO SMART PLKOR TZAI YUAN |
| 156 | AI | 1 | EA | R101 | PRC 1.2MΩ 1/2W J SURGE MSR37 1.2MΩ 1/2W J SURGE | RESISTOR, FIXED CARBON COMPOSITION | SMART PLKOR |
| 157 | AI | 1 | EA | R124 | PRC 1MΩ 1/2W J SURGE MSR37 1MΩ 1/2W J SURGE | RESISTOR, FIXED CARBON COMPOSITION | SMART PLKOR |
| 158 | AI | 3 | EA | R251, R252, R253 | MORS 10KΩ 2W J SMALL RSD02 10KΩ 2W J SMALL PR02 10KΩ 2W J SMALL MOF 10KΩ 2W J SMALL | RESISTOR, METAL OXIDE FILM | ABCO SMART PLKOR TZAI YUAN |
| 159 | AI | 1 | EA | R126 | MORS 120Ω 1W J SMALL RSD01 120Ω 1W J SMALL PR01 120Ω 1W J SMALL MOF 120Ω 1W J SMALL | RESISTOR, METAL OXIDE FILM | ABCO SMART PLKOR TZAI YUAN |
| 160 | AI | 2 | EA | R286, R287 | MORS 1KΩ 2W J SMALL RSD02 1KΩ 2W J SMALL PR02 1KΩ 2W J SMALL MOF 1KΩ 2W J SMALL | RESISTOR, METAL OXIDE FILM | ABCO SMART PLKOR TZAI YUAN |
| 161 | AI | 2 | EA | R279, R280 | MORS 27KΩ 2W J SMALL RSD02 27KΩ 2W J SMALL PR02 27KΩ 2W J SMALL MOF 27KΩ 2W J SMALL | RESISTOR, METAL OXIDE FILM | ABCO SMART PLKOR TZAI YUAN |
| 162 | AI | 3 | EA | R283, R284, R285 | MORS 3.3KΩ 2W J SMALL RSD02 3.3KΩ 2W J SMALL PR02 3.3KΩ 2W J SMALL MOF 3.3KΩ 2W J SMALL | RESISTOR, METAL OXIDE FILM | ABCO SMART PLKOR TZAI YUAN |
| 163 | AI | 1 | EA | R503 | MORS 62KΩ 1W J SMALL RSD01 62KΩ 1W J SMALL PR01 62KΩ 1W J SMALL MOF 62KΩ 1W J SMALL | RESISTOR, METAL OXIDE FILM | ABCO SMART PLKOR TZAI YUAN |
| 164 | AI | 2 | EA | R501, R507 | WNPS 0.82Ω 1W J SMALL PRN 0.82Ω 1W J SMALL | RESISTOR, WIRE WOUND | ABCO SMART |
| 165 | AI | 2 | EA | R601, R602 | WNPS 0.13Ω 2W J SMALL PRN 0.13Ω 2W J SMALL | RESISTOR, WIRE WOUND | ABCO SMART |
| 166 | AI | 2 | EA | R268, R269 | WNPS 0.33Ω 2W J SMALL PRN 0.33Ω 2W J SMALL | RESISTOR, WIRE WOUND | ABCO SMART |
| 167 | AI | 1 | EA | | EAX64310401 LGP4247H-12LPB 243 x 245 1.6T FR1 KB, DS, L, R-8700 CTI-600 | PCB | DUCK SUNG HT CIRCUIT(QINGDAO) DONGMYUNG CIR SHANGHAI WANZHENG SHENG KHUANG NEW TRIUNION TIANJIN DEA DUCK HUIHO HSIANG KUO TIAN FENG TIS KOREA Wellbest Cosmotech Kyosha |
| 168 | ETC | | | | | | SUBSIDIARY MATERIALS |

| | | | | | | | |
|-----|-----|--------|----|--|--|---------------|--|
| 169 | ETC | 0.0769 | EA | | 509 * 344 * 280 * 8T | BOX CARTON | NEWEA IND DAESAN. HANYOUNG JAEL QXBW TAILI PACKING HUAXING PACK SOONGSAN WUJIANG ZHENLONG SUZHOU JIADELONG KUNSHAN KUNHONG Dongju Yumi |
| 170 | ETC | 1.0769 | EA | | 341 * 256 * 8T (Cross board A) | BOX PARTITION | NEWEA IND DAESAN. HANYOUNG JAEL QXBW TAILI PACKING HUAXING PACK SOONGSAN WUJIANG ZHENLONG SUZHOU JIADELONG KUNSHAN KUNHONG Dongju Yumi |
| 171 | ETC | 0.3077 | EA | | 506 * 256 * 8T (Cross board B) | BOX PARTITION | NEWEA IND DAESAN. HANYOUNG JAEL QXBW TAILI PACKING HUAXING PACK SOONGSAN WUJIANG ZHENLONG SUZHOU JIADELONG KUNSHAN KUNHONG Dongju Yumi |
| 172 | ETC | 0.2307 | EA | | 506 * 341 * 8T | PAD | NEWEA IND DAESAN. HANYOUNG JAEL QXBW TAILI PACKING HUAXING PACK SOONGSAN WUJIANG ZHENLONG SUZHOU JIADELONG KUNSHAN KUNHONG Dongju Yumi |
| 173 | ETC | 1 | EA | | Min 600 * 200 | BUBBLE SHEET | DUCKJIN S&P JAEL QXBW CHUMDAN A-TEK KUNSHANKUNHONG LYUANG SERVEONE |
| 174 | ETC | 1 | EA | | 42 X 8 NY WHITE 93CODE 19DIGIT | BAR CODE | SHUN JIN HANA. AIT SERVEONE WUJIANG SUNGLING GUNGGAOQI ZHI XIN |
| 175 | ETC | 1 | EA | | 19 X 9 NY WHITE MICOM CHECKSUM | LABEL | SHUN JIN HANA. AIT SERVEONE WUJIANG SUNGLING GUNGGAOQI ZHI XIN |
| 176 | ETC | 15.0 | GR | | EF-9301(g) ILF-714(kg) TF328-2-2(Kg) EC-19S-8 CS-9111LF | FLUX | ALPHA ION ELEC TONGFANG 동화 다 무라 철술 |
| 177 | ETC | 23.0 | GR | | HSE-11 B20 BAR (SN:99%,AG:0.3%,CU:0.7%) SN:99%, AG:0.3%, CU:0.7% SAC0307 A+ SN:99%, AG:0.3%, CU:0.7% YW9-0307 SN:99%, AG:0.3%, CU:0.7% M35E-BAR SN:99%, AG:0.3%, CU:0.7% | SOLDER BAR | HEESUNG METAL SEOUL ALLOYMETAL DYFENCO YUNNAN TIN SOLNET |
| 178 | ETC | 5.0 | GR | | HSE-11 B20 BAR (SN:99%,AG:0.3%,CU:0.7%) SN:99%, AG:0.3%, CU:0.7% SAC0307 A+ SN:99%, AG:0.3%, CU:0.7% YW9-0307 SN:99%, AG:0.3%, CU:0.7% M35E-BAR SN:99%, AG:0.3%, CU:0.7% | SOLDER WIRE | HEESUNG METAL SEOUL ALLOYMETAL DYFENCO YUNNAN TIN SOLNET |
| 179 | ETC | 10.0 | GR | | H-828W OKE-410 QS9112 RTV SS7945W TSE3854DS-W BN707 RTV KE402RTV ES 2044H & 2S2482W UB-5601 EA-4100 DS-818 | BOND (RTV) | OKONG OKONG KCC KCC MOMENTIVE BONIC SHINETSU CANADA U-BOND DOW CORNING DONGYANG |

Process Marking

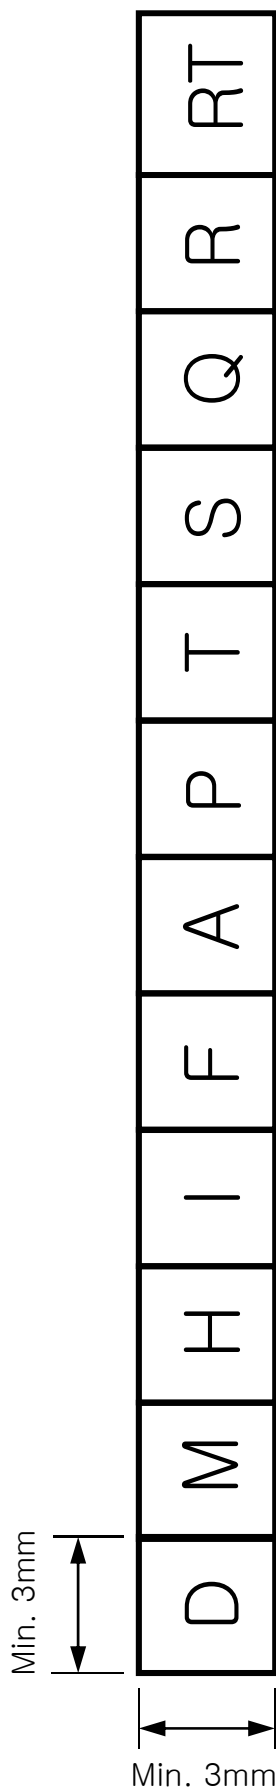
공정표시 MARK (PCB SILK)




- D : 자삽
- M : SMD
- H : 수삽 최종
- I : ICT
- F : 1차 성능
- A : AGING
- P : HI-POT
- T : 최종 검사 (ATE)
- S : SET 검사
- Q : QC 검사
- R : 불량 수리
- RT : 양산 보증 시험

PCB Layout

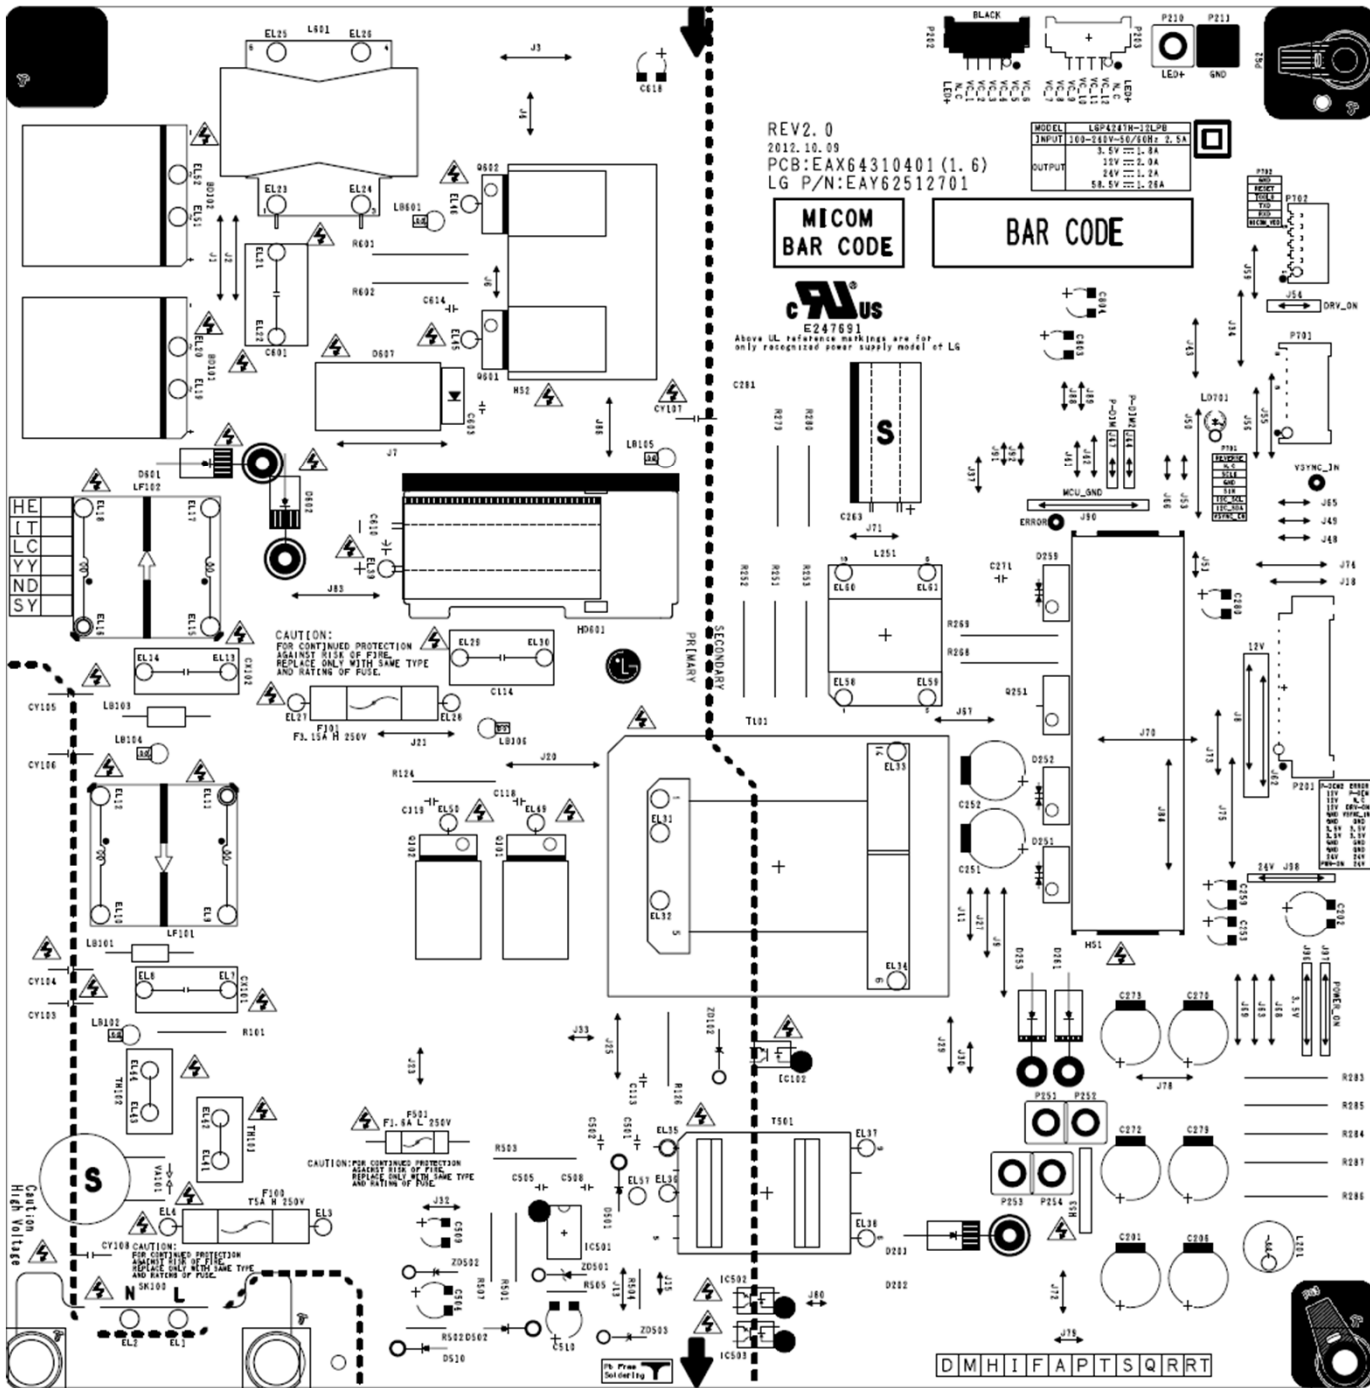
Top Silk




Bottom Silk

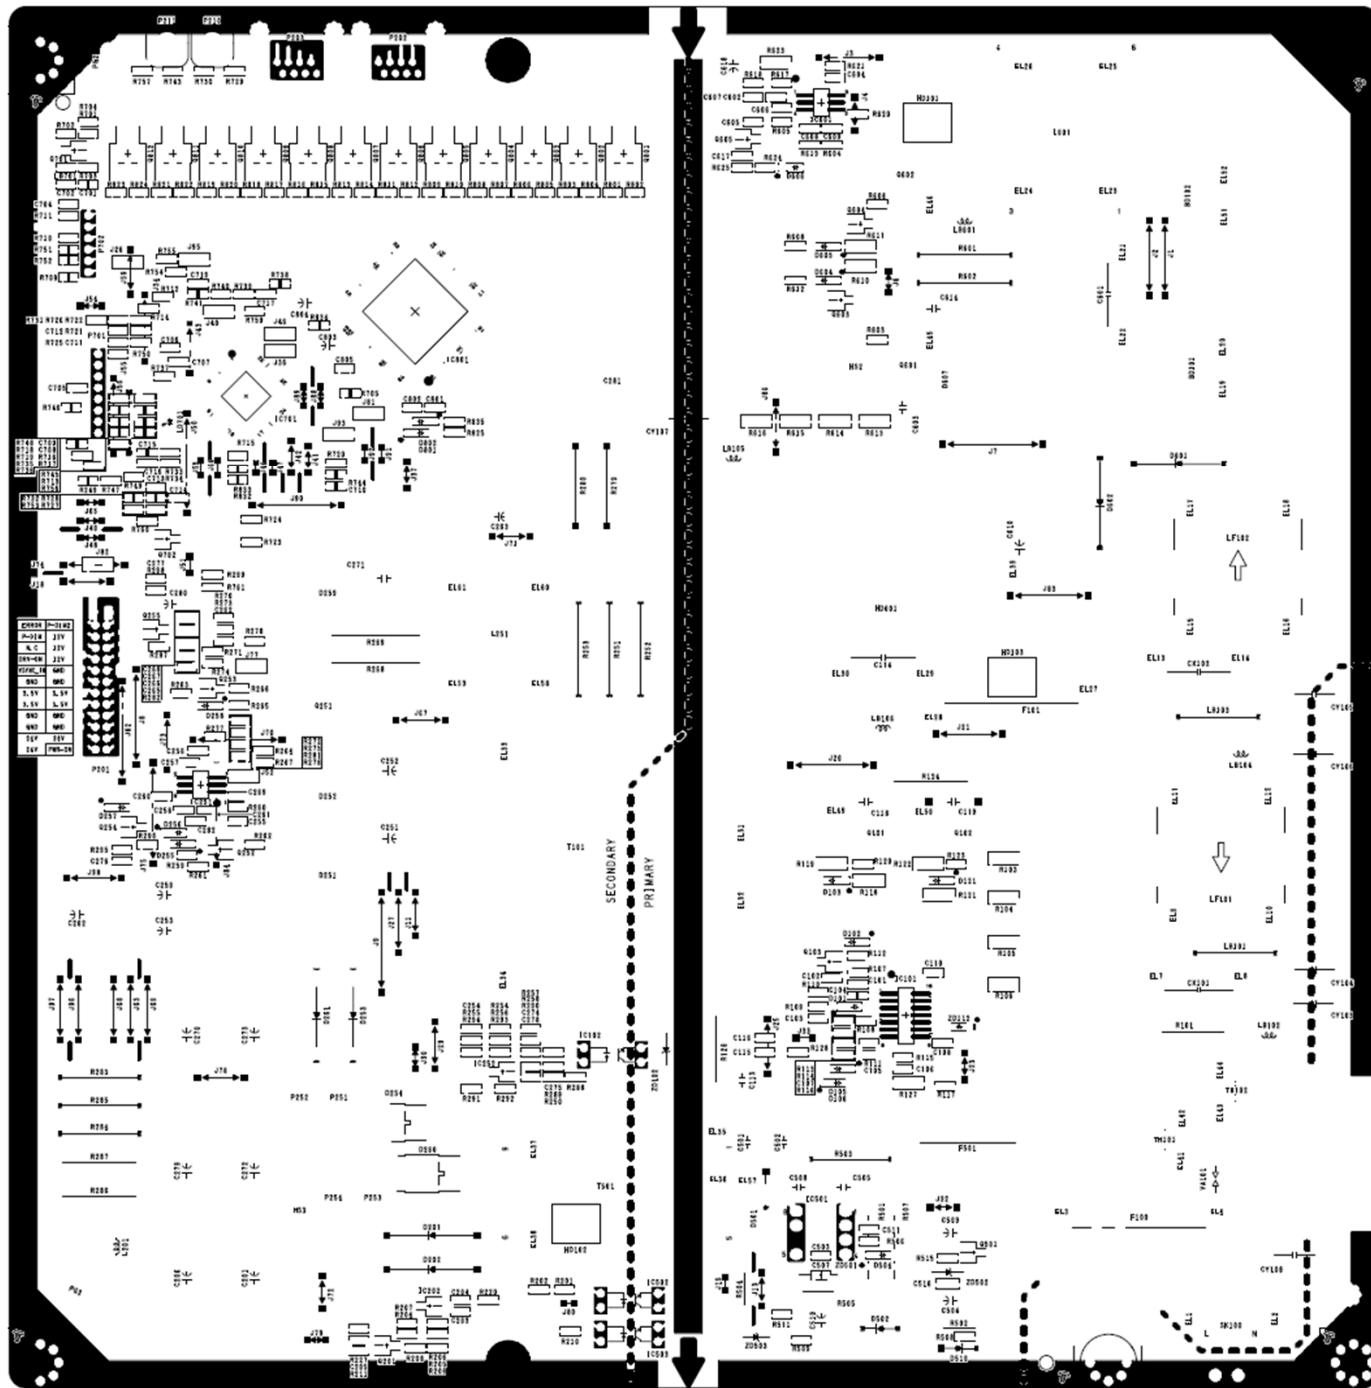

Bottom Pattern

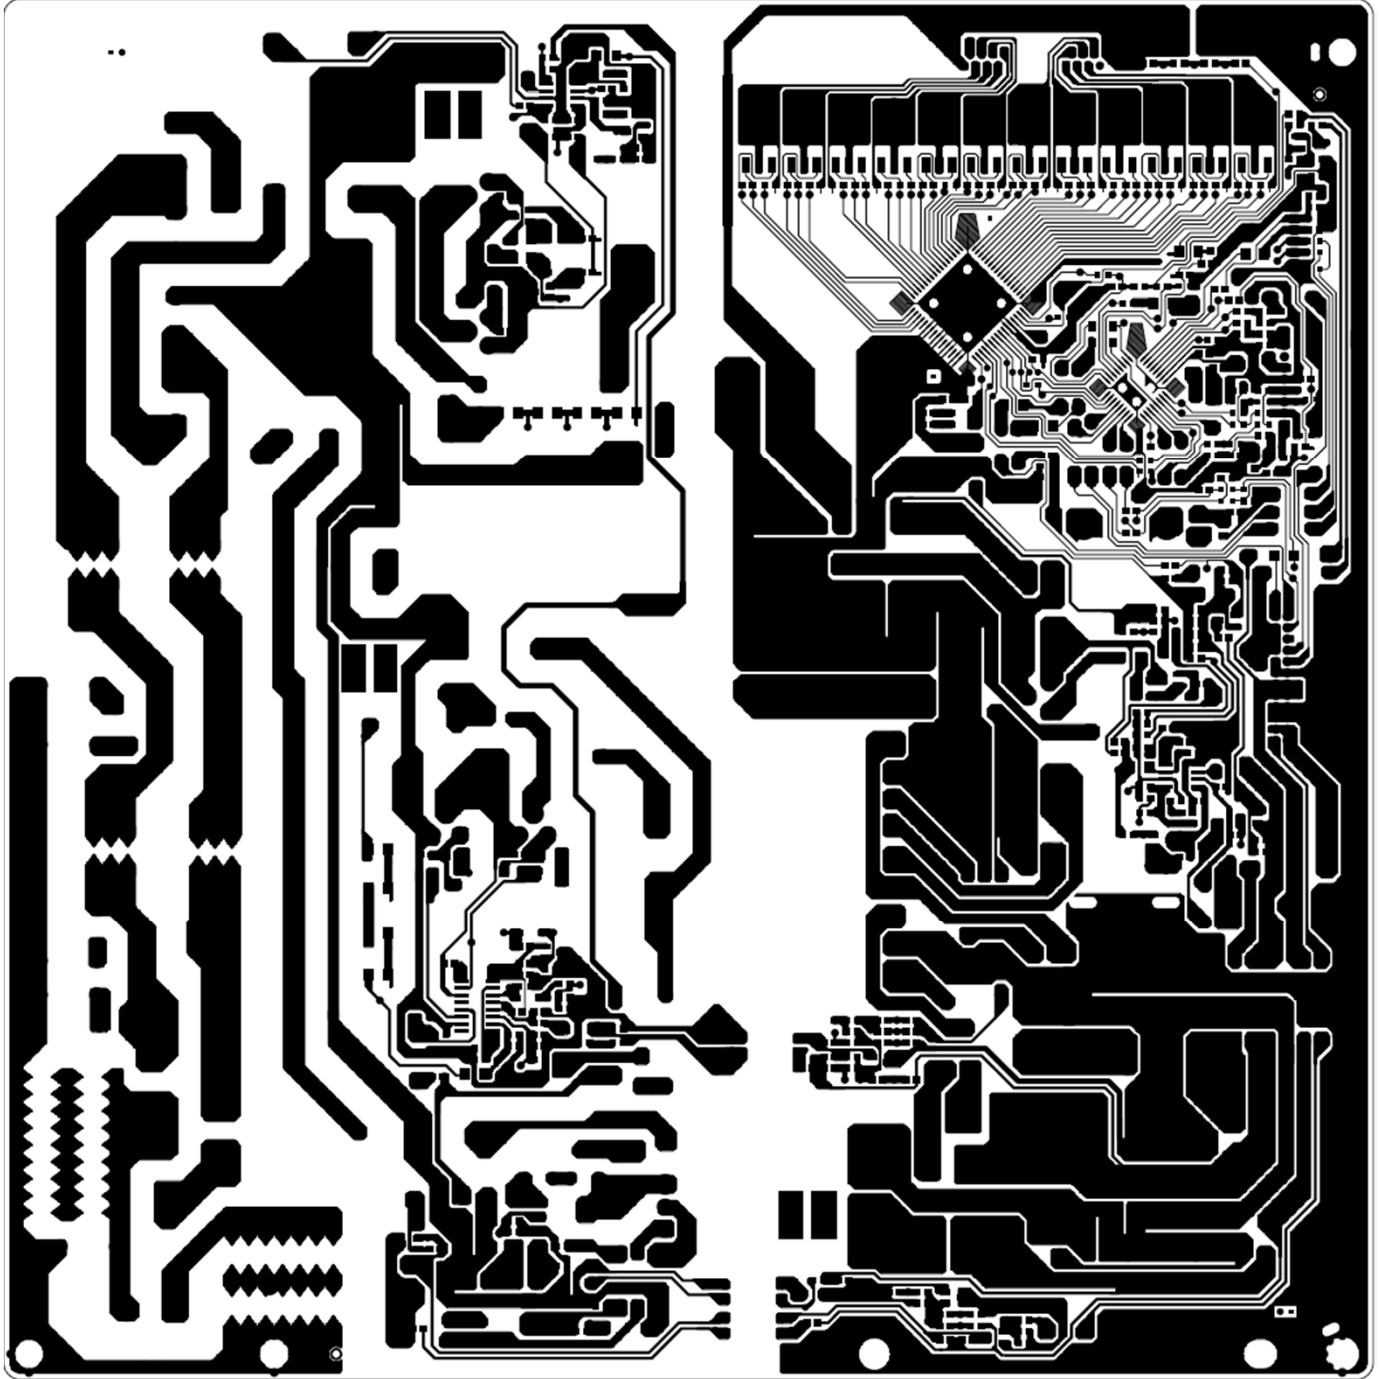

Bottom Solder mask

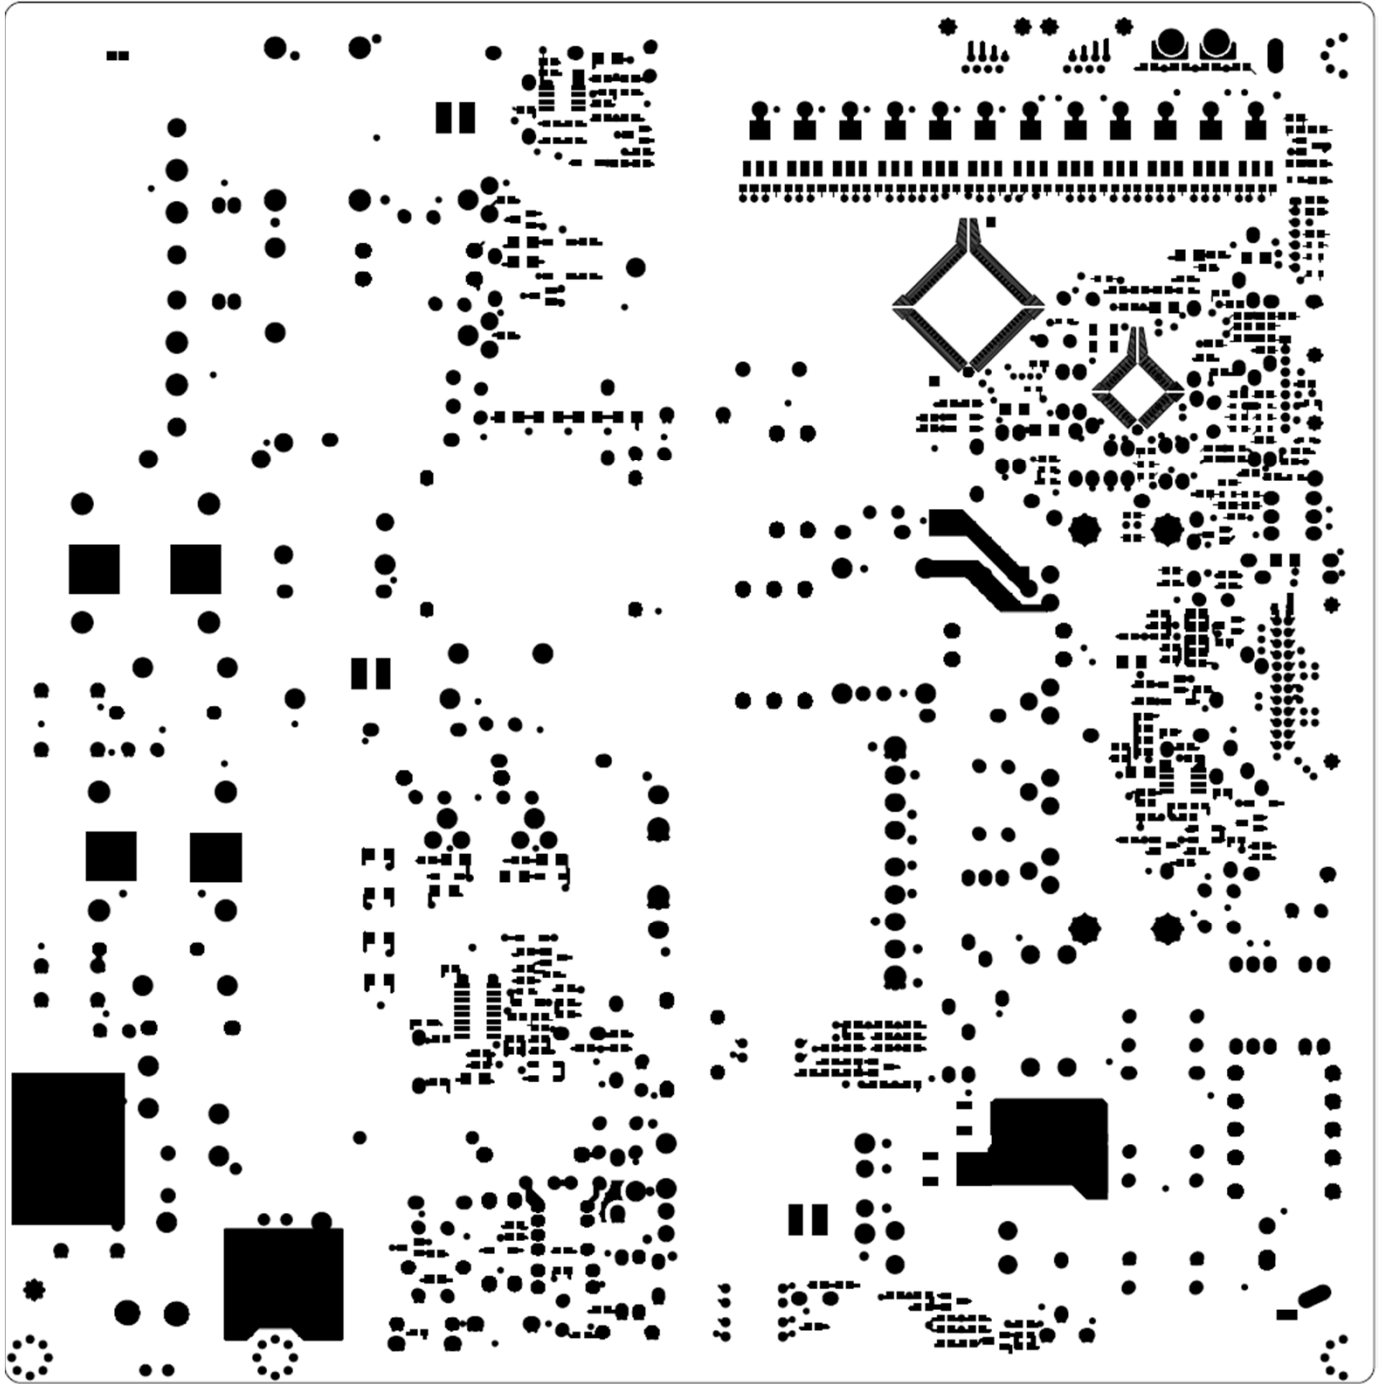

Safety Parts


| Object/part No. | Manufacturer / Trademark | Type / Model | Value / Rating | Parts Marking (貨物) | standard | mark(s) of conformity1) |
|---------------------------------------|---------------------------------------|--------------|---|--------------------|--|-------------------------|
| AC input connector, (SK100) | Dongil Tech | DAC-18D3A | 250V 2.5A / 5A | 2.5A/250V-5A/250V- | IEC 60320-1 | |
| Fuse, (F100) | Littelfuse Inc. | 215 Series | T5A H / 250V | LF.T5AH250VP | IEC 60127-1 | |
| | WALTER FUSE | TSC | | TSC5A250V(P) | IEC 60127 | |
| | Dainfuse | 50CT | | T5AH250V | IEC 60127 | |
| | BUSSMANN | S505 | | T5AH250V | IEC 60127 | |
| | CONQUIRE | UDA / UDA-A | | UDA T5A H 250V | IEC 60127-3-5 | |
| Fuse, (F101) | Littelfuse Inc. | 216 Series | F3.15A H / 250V | LF.F3.15AH250VP | IEC 60127-1 | |
| | Dainfuse | 50CF | | F3.15AH250V | IEC 60127 | |
| | BUSSMANN | S501 | | T3.15AH250V | IEC 60127 | |
| | CONQUIRE | UBM-A | | UBM-A 3.15A 250V | IEC 60127-2-1 | |
| Fuse, (F501) | Littelfuse Inc. | 876 Series | F1.6A L / 250V | LF1.6A F250V | IEC 60127-1 | |
| | Dainfuse | 30CF | | F1.6A 250V | IEC 60127 | |
| Line Filter, (LF101,LF102) | TNC | CS920250S | Rated 130°C | 920250S | IEC 60065 | Test in appliance |
| | Dongil Tech | LH9B020250 | | 020250 | IEC 60065 | Test in appliance |
| | DONGYANG TELECOM | LLF-121 | | LLF-121 | | |
| | JIANGSU CHANNELON ELECTRONIC GROUP | | | | | |
| | FEELUX | | | | | |
| | SOOJUNG | | | | | |
| JIANGSU TAICHANG ELECTRONICS Co.,LTD. | | | | | | |
| Varistor, (VA101) | Samwha | SVC621D-14 | 620V,Min. | SVC621-14 | IEC61051-2 | |
| | Amotech Co., Ltd. | INR 14D621 | | INR 14D621 | | |
| | Xiamen Wanming Electronics Co.,Ltd | WMR14D621K | | WMR 14D621K | | |
| Bridge Diode, (BD101,BD102) | Rectron | RS1005M | Min. 600V / 10A | RS1005M | E94233 | |
| | TSC | TS10B05G | | TS10B05G | E96005 | Test in appliance |
| | Lite-on | KBJ1006G | | KBJ1006G | | |
| | SHINDENGEN | D10XB60 | | D10XB60 | E142422 | |
| | GULF | G10XB60 | | G10XB60 | | |
| | DACHANG | D10XB60 | | D10XB60 | | |
| X-cap. (CX101,CX102) | Pilkor | PCX2 337 | 275V Max 0.33uF (CX101= 0.33uF, CX102= 0.33uF) | PCX2 337 | IEC 60384-14 UL1414 | |
| | | PCX2 335M | | PCX2 335M | IEC 60384-14 UL1414 | |
| | SUNGHO | CMPP | | CMPP | IEC 60384-14 UL1414/UL1283 | |
| | Okaya | LE | | LE | IEC 60384-14 UL1414 | |
| | EUROPTRONIC | MPX | | MPX | E199061/ E311052 IEC 60384-14-2'nd edition | |
| | CHENGTUNG | CTX | | CTX | IEC 60384-14 UL1414 | |
| Thermistor. (TH101,TH102) | DSC | DSC 2.5D-15 | 2.5ohm at 25 ° C | DSC 2.5D-15 | IEC 60065 | |
| | Xiamen Wanming Electronics Co.,Ltd | WTR 15D2R5 | | WTR 15D2R5 | | |
| | JIANGSU XINGSHUN ELECTRONICS CO., LTD | 2.5D2-15 | | 2.5D2-15 | | |
| | NANJING SHIHENG ELECTRONICS CO., LTD | MF72 2.5D15 | | MF72 2.5D15 | | |
| | SMART ELECTRONICS INC | ICL-5W | 2.5ohm at 25 ° C | ICL-052R50MSMT | | |

| | | | | | | |
|--|---------------------------------------|-------------|-----------------------------|--------------|-------------|-------------------|
| Elec. Cap., (C610) | SAMYOUNG | NZE | 450V / Max 120uF / 105°C | NZE450V120uF | IEC 60950-1 | Test in appliance |
| | SUSCON | SK | | SK450V120uF | | |
| | SAMWHA | LT | | LT450V8120uF | | |
| | RUBYCON | BXC | | BXC450V120uF | | |
| Switching TR, (Q601,Q602) | INFINEON | IPA60R280E6 | Min. 600V / Min 10A | 6R280E6 | IEC 60950-1 | Test in appliance |
| | TOSHIBA | TK13A60D | | K13A60D | | |
| | STM | STF13NM60N | | I3NM60N | | |
| | SILIKRON | SSF11NS60F | | SSF11NS60F | | |
| Switching TR, (Q101,Q102) | KEC | KF12N60F | Min. 600V / Min 10A | KF12N60 | IEC 60950-1 | Test in appliance |
| | TOSHIBA | TK12A60D | | K12A60D | | |
| | STM | STF13NM60N | | I3NM60N | | |
| | MAGNACHIP | MDF11N60 | | MDF11N60 | | |
| INFINEON | SD10N60 | SD10N60 | | | | |
| Flyback IC, (IC501) | SANKEN | STR-A6059H | Min. 650 V / Min 1.8A | A6059H | IEC 60950-1 | Test in appliance |
| Y Cap., (CY103,CY104, CY105,CY106) | Kunshan Wansheng | Y1 / CT7 | | CT7 471K | | |
| | Apex intec | Y1 / NK | | NK471K | | |
| | DONG IL | Y1 / DA | | DA471K | | |
| | YINANDON | Y1 / CT81 | | CT81 471K | | |
| | SAMWHA | Y1 / SD | | SD471K | | |
| | JYA-NAY | Y1 / JN | | JN471K | | |
| | GUANGDONG SOUTH HONGMING | Y1 / F | | F471K | | |
| | TDK | Y1 / CD | | CD471K | | |
| Y Cap., (CY108) | Kunshan Wansheng | Y1 / CT7 | | CT7 101K | | |
| | Apex intec | Y1 / NK | | NK101K | | |
| | DONG IL | Y1 / DA | | DA101K | | |
| | YINANDON | Y1 / CT81 | | CT81 101K | | |
| | SAMWHA | Y1 / SD | | SD101K | | |
| | JYA-NAY | Y1 / JN | | JN101K | | |
| | GUANGDONG SOUTH HONGMING | Y1 / F | | F101K | | |
| | TDK | Y1 / CD | | CD101K | | |
| Bridging Cap., (CY107) | Kunshan Wansheng | Y1 / CT7 | | CT7 471K | | |
| | Apex intec | Y1 / NK | | NK471K | | |
| | DONG IL | Y1 / DA | | DA471K | | |
| | YINANDON | Y1 / CT81 | | CT81 471K | | |
| | SAMWHA | Y1 / SD | | SD471K | | |
| | JYA-NAY | Y1 / JN | | JN471K | | |
| | GUANGDONG SOUTH HONGMING | Y1 / F | | F471K | | |
| | TDK | Y1 / CD | | CD471K | | |
| PFC Coil,(L601) | SOOJUNG | 12S-LP03 | Rated 130°C | 12S-LP03 | IEC 60950-1 | Test in appliance |
| | BUJEON | | | | | |
| | DONG YANG TELECOM CO., LTD | | | | | |
| | LG Innotek | | | | | |
| | JIANGSU CHANNELON ELECTRONIC GROUP | | | | | |
| | TDK | | | | | |
| | FEELUX | | | | | |
| | JIANGSU TAICHANG ELECTRONICS Co.,LTD. | | | | | |
| LIENCHANG | | | | | | |
| Switching Transformer, (T101) | SOOJUNG | 12S-LM03 | Class B | 12S-LM03 | IEC 60950-1 | Test in appliance |
| | BUJEON | | | | | |
| | DONG YANG TELECOM CO., LTD | | | | | |
| | LG Innotek | | | | | |
| | JIANGSU TAICHANG ELECTRONICS Co.,LTD. | | | | | |
| | JIANGSU CHANNELON ELECTRONIC GROUP. | | | | | |
| | TDK | | | | | |
| | FEELUX | | | | | |
| LIENCHANG | | | | | | |

| | | | | | | |
|-------------------------------------|--|-------------------------------------|---------------------------|---|----------------------|-------------------|
| Switching Transformer, (T501) | SOOJUNG | 12S-LS01 | Class B | 12S-LS01 | IEC 60065 | Test in appliance |
| | BUJEON | | | | | |
| | DONG YANG TELECOM CO., LTD | | | | | |
| | JIANGSU CHANNELON ELECTRONIC GROUP. | | | | | |
| | TDK | | | | | |
| | FEELUX | | | | | |
| | JIANGSU TAICHANG ELECTRONICS Co.,LTD. | | | | | |
| Clover hi-tech Co., Ltd. | | | | | | |
| LIENCHANG | | | | | | |
| Opto-coupler, (IC102, IC502, IC503) | Everlight | EL817 | >0,4mm / Rated 6000Vac | EL817 | IEC 60065 UL 1577 | |
| | Lite-on | LTV817... | | S17BN | | |
| Discharge Resistor, (R101) | Smart | PRC | 1/2W, 1.2Mohm, 5% | | IEC 60065 | |
| | UNIROYAL ELECTRONICS INDUSTRY CO., LTD | MGR0W2J****A10 | | | IEC 60065 | |
| | Pilkor | SR37,MSR37 | | | IEC 60065 | |
| Capacitor (C601) | Pilkor | FCMP 372 (box) FCMP 472 (Film) | 0,82uF / 500V | 820n J 500V 372 MKP 824 J 500 P472 MPP | IEC60384-1 | UL |
| | LUMEN | MP | 0,82uF / 500V | M 824J MP 500V | | |
| | EUROPTRONIC | MPHB | 0,82uF / 500V | MPHB 824 J 500 | | |
| | Sung-Ho | MPP BMPP | 0,82uF / 500V | 824J 500V S MPP 824J 500V BMPP SH | | |
| CHENG TUNG | CTH | 0,82uF / 500V | CTH 824 J 500V | | | |
| Capacitor (C114) | Pilkor | FCMP 384 | 0,018uF / 800V | 18n J 800V 384 MMKP | IEC60384-1 | UL |
| | LUMEN | NP | 0,018uF / 800V | M 183J NP 800V | | |
| | EUROPTRONIC | MPLB | 0,018uF / 1000V | MPLB 183 J 1000 | | |
| | Sung-Ho | NPPS | 0,018uF / 800V | 183J S 800V NPPS | | |
| CHENG TUNG | PPN | 0,018uF / 800V | PPN 183 J 800V | | | |
| PCB | DONGMYUNG CIR. | DM5-V-0 | 04V-0 | | | |
| | SHANGHAI WANZHENG | SWZ-2 | 04V-0 | | | |
| | SHENG KHUANG(WEI JUN) | 03V0-C 03V0 | 04V-0 | | | |
| | SHANGHAI AREX | 02V0 | 04V-0 | | | |
| | NEW TRIUNION | TU-3 | 04V-0 | | | |
| | CHIN POON | E5 | 04V-0 | | | |
| | TIANJIN DAEDUCK | DC-1 DC-2 | 04V-0 | | | |
| | HUIHO | 4B-5 | 04V-0 | | | |
| | HSIANG KUO | 07V0 | 04V-0 | | | |
| | SAMHAN | SH7 | 04V-0 | | | |
| | HT CIRCUIT(QINGDAO) | 1994V0 | 04V-0 | | | |
| | WONKYUNG | WK-1 | 04V-0 | | | |
| | TIAN FENG | TU-1 | 04V-0 | | | |
| | Duck sung | DSS-V-0 | 04V-0 | | | |
| | TIS KOREA | TIS-3 | 04V-0 | | | |
| | kyosha | 2204V-0 | 04V-0 | | | |
| | kyosha | S4504V-0 | 04V-0 | | | |
| | Wellbest | MTV0-01 | 04V-0 | | | |
| | Cosmotech | GS2-V-0-1 CJ2-V-0-1 CJ2-V-0-2 | 04V-0 | | | |
| | CHANGZHOU HAIHONG | CCE-V0 | 04V-0 | | | |

1) an asterisk indicates a mark which assures the agreed level of surveillance
Remarks: *) Large volume capacitors exceeding volume 1750mm³

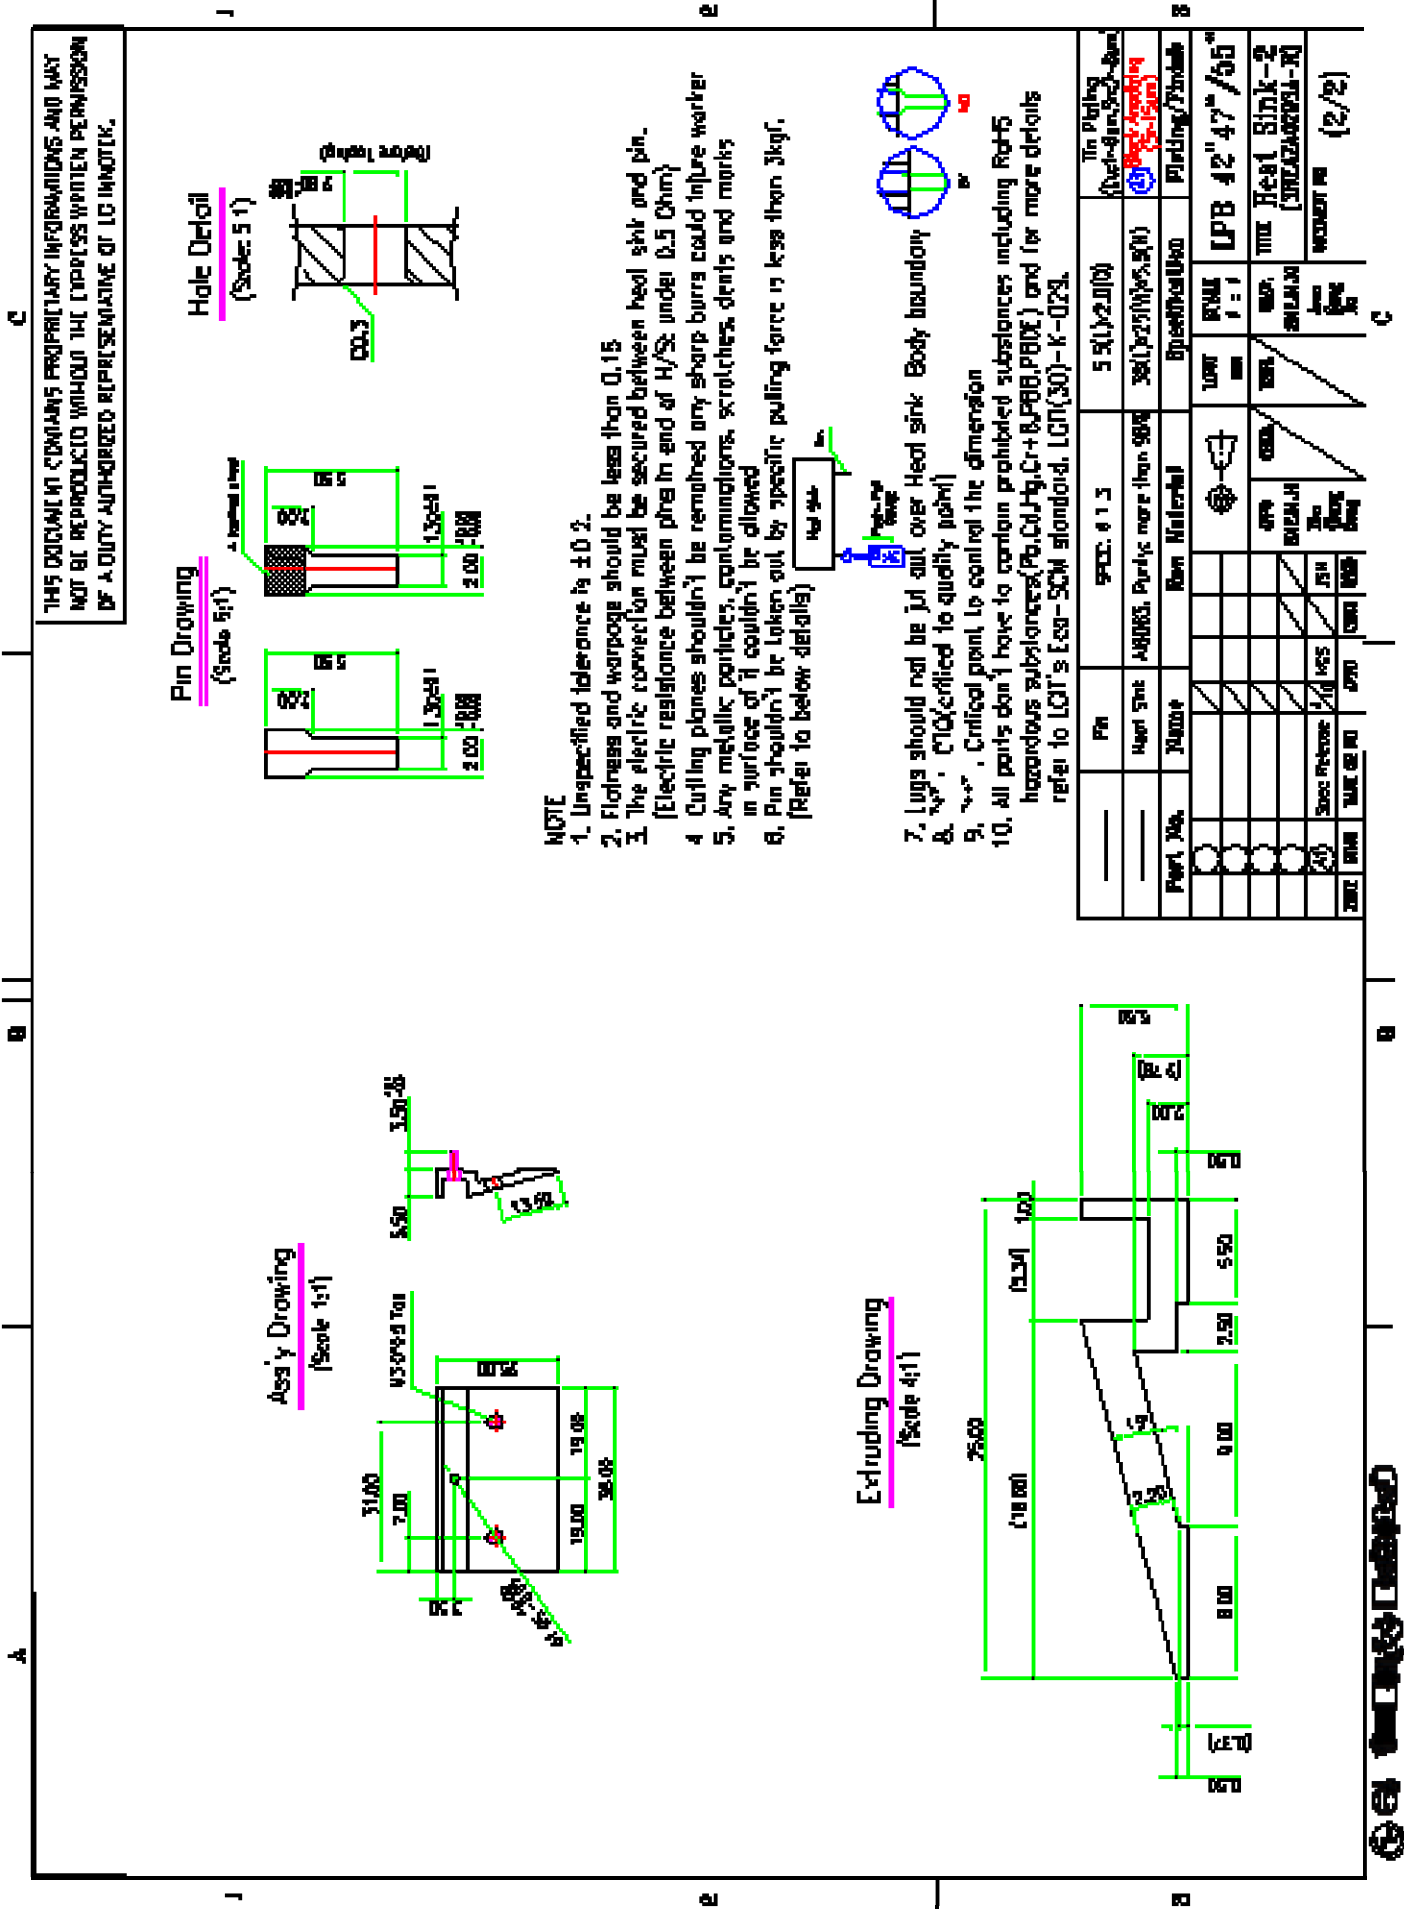Mechanical Drawing



Ass'y Drawing (Scale 1:1)

Dimensions: 7.00 (pin width), 19.00 (pin length), 26.00 (total length), 31.00 (total width), 7.00 (inner width), 19.00 (inner width), 19.00 (inner width). Hole diameter: 3.00. Pitch: 2.54.

Extruding Drawing (Scale 4:1)

Dimensions: 25.00 (total height), 12.50 (height to top of pin), 100 (width of top flange), 5.50 (height of top flange), 5.50 (height to bottom of pin), 0.50 (height of bottom flange), 2.00 (height of bottom flange), 8.00 (width of bottom flange).

NOTE

1. Unspecified tolerance is ± 0.2 .
2. Flatness and warpage should be less than 0.15.
3. The electric connection must be secured between heat sink and pin. (Electric resistance between them and of H/Sz under 0.5 Ohm)
4. Curling planes shouldn't be remained any sharp burrs could injure worker.
5. Any metallic particles, contaminations, scratches, dents and marks in surface of it couldn't be allowed.
6. Pin shouldn't be taken out by specific pulling force is less than 3kgf. (Refer to below details)

Requirements: $> 3\text{kgf}$

7. Lugs should not be cut out over Heat sink Body boundary.

8. $> 100\%$ CIP (certified to quality point)

9. $> 100\%$ Critical point to control the dimension


10. All parts don't have to contain prohibited substances including RoHS hazardous substances (Pb, Cd, Hg, Cr+6, PBB, PBDE) and for more details refer to LGI's Eco-Sch standard. LGI(30)-K-029.


| | | | | | |
|----------|-----------|----------------|----------------------|----------------|---------------------------------|
| Part No. | Part | QTY | Spec: 613 | 5.5(1200) | Tin Plating (Elect-Game-32-3um) |
| | Heat Sink | ASSEMBLY | Partic more than 300 | 38(270)X5.5(N) | RoHS (30-1508) |
| | Material | Specified/Used | | Plating/Finish | |
| | | | | ENV | |
| | | | | RF | |
| | | | | IN | |
| | | | | REWORK | |
| | | | | 2017.05.03 | |
| | | | | 2017.05.03 | |
| | | | | 2017.05.03 | |
| | | | | 2017.05.03 | |


| | | |
|------|------------|-------------------|
| FORM | 1:1 | LPB 42" 47" / 66" |
| REV | 001 | Heat Sink-2 |
| DATE | 2017.05.03 | (SPECIAL-REV) |
| DR | DR | WORKER |
| CHK | CHK | WORKER |
| APP | APP | (2/2) |



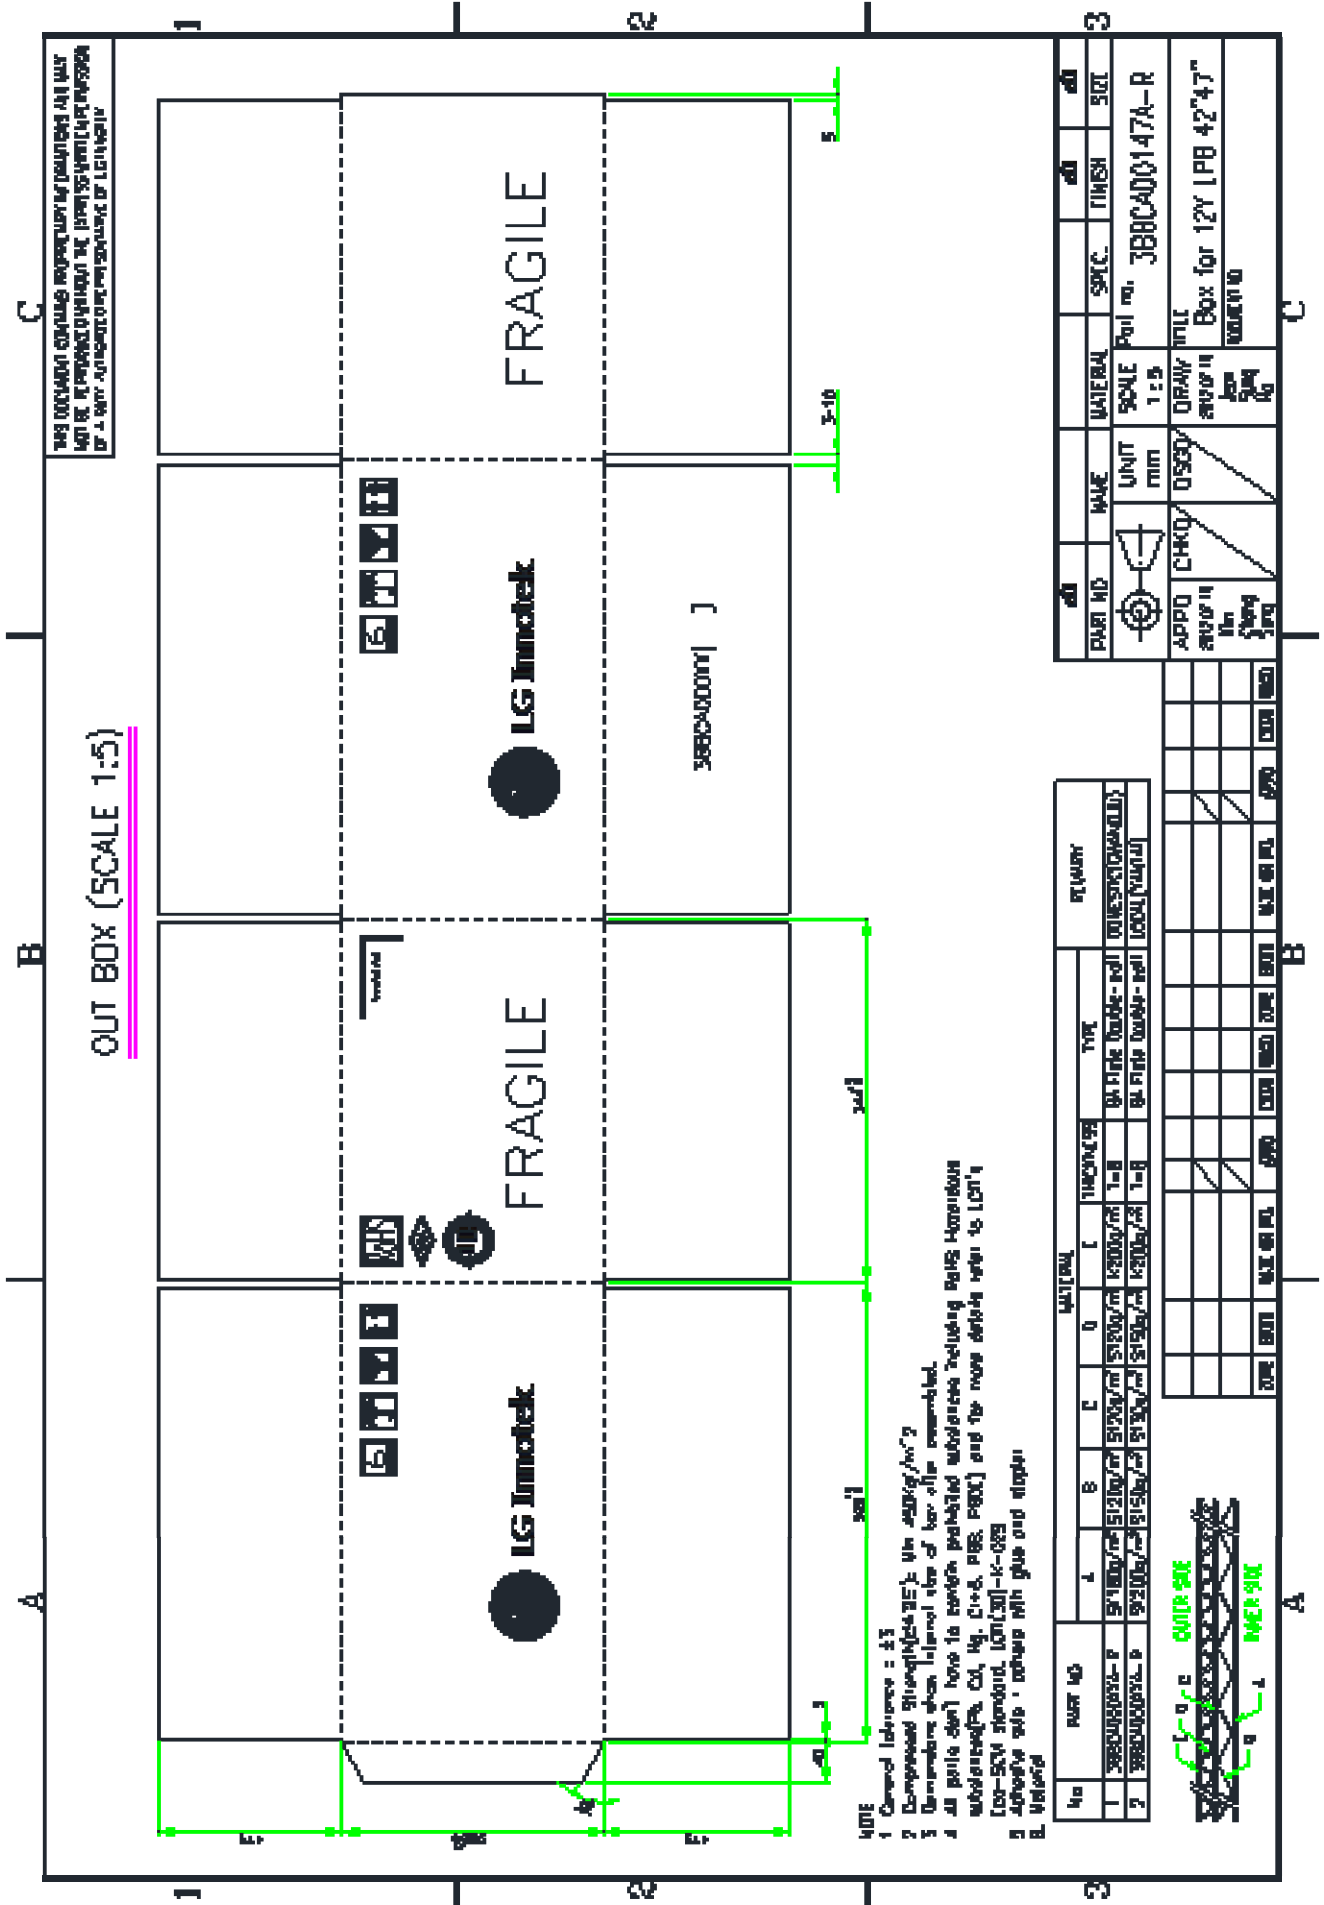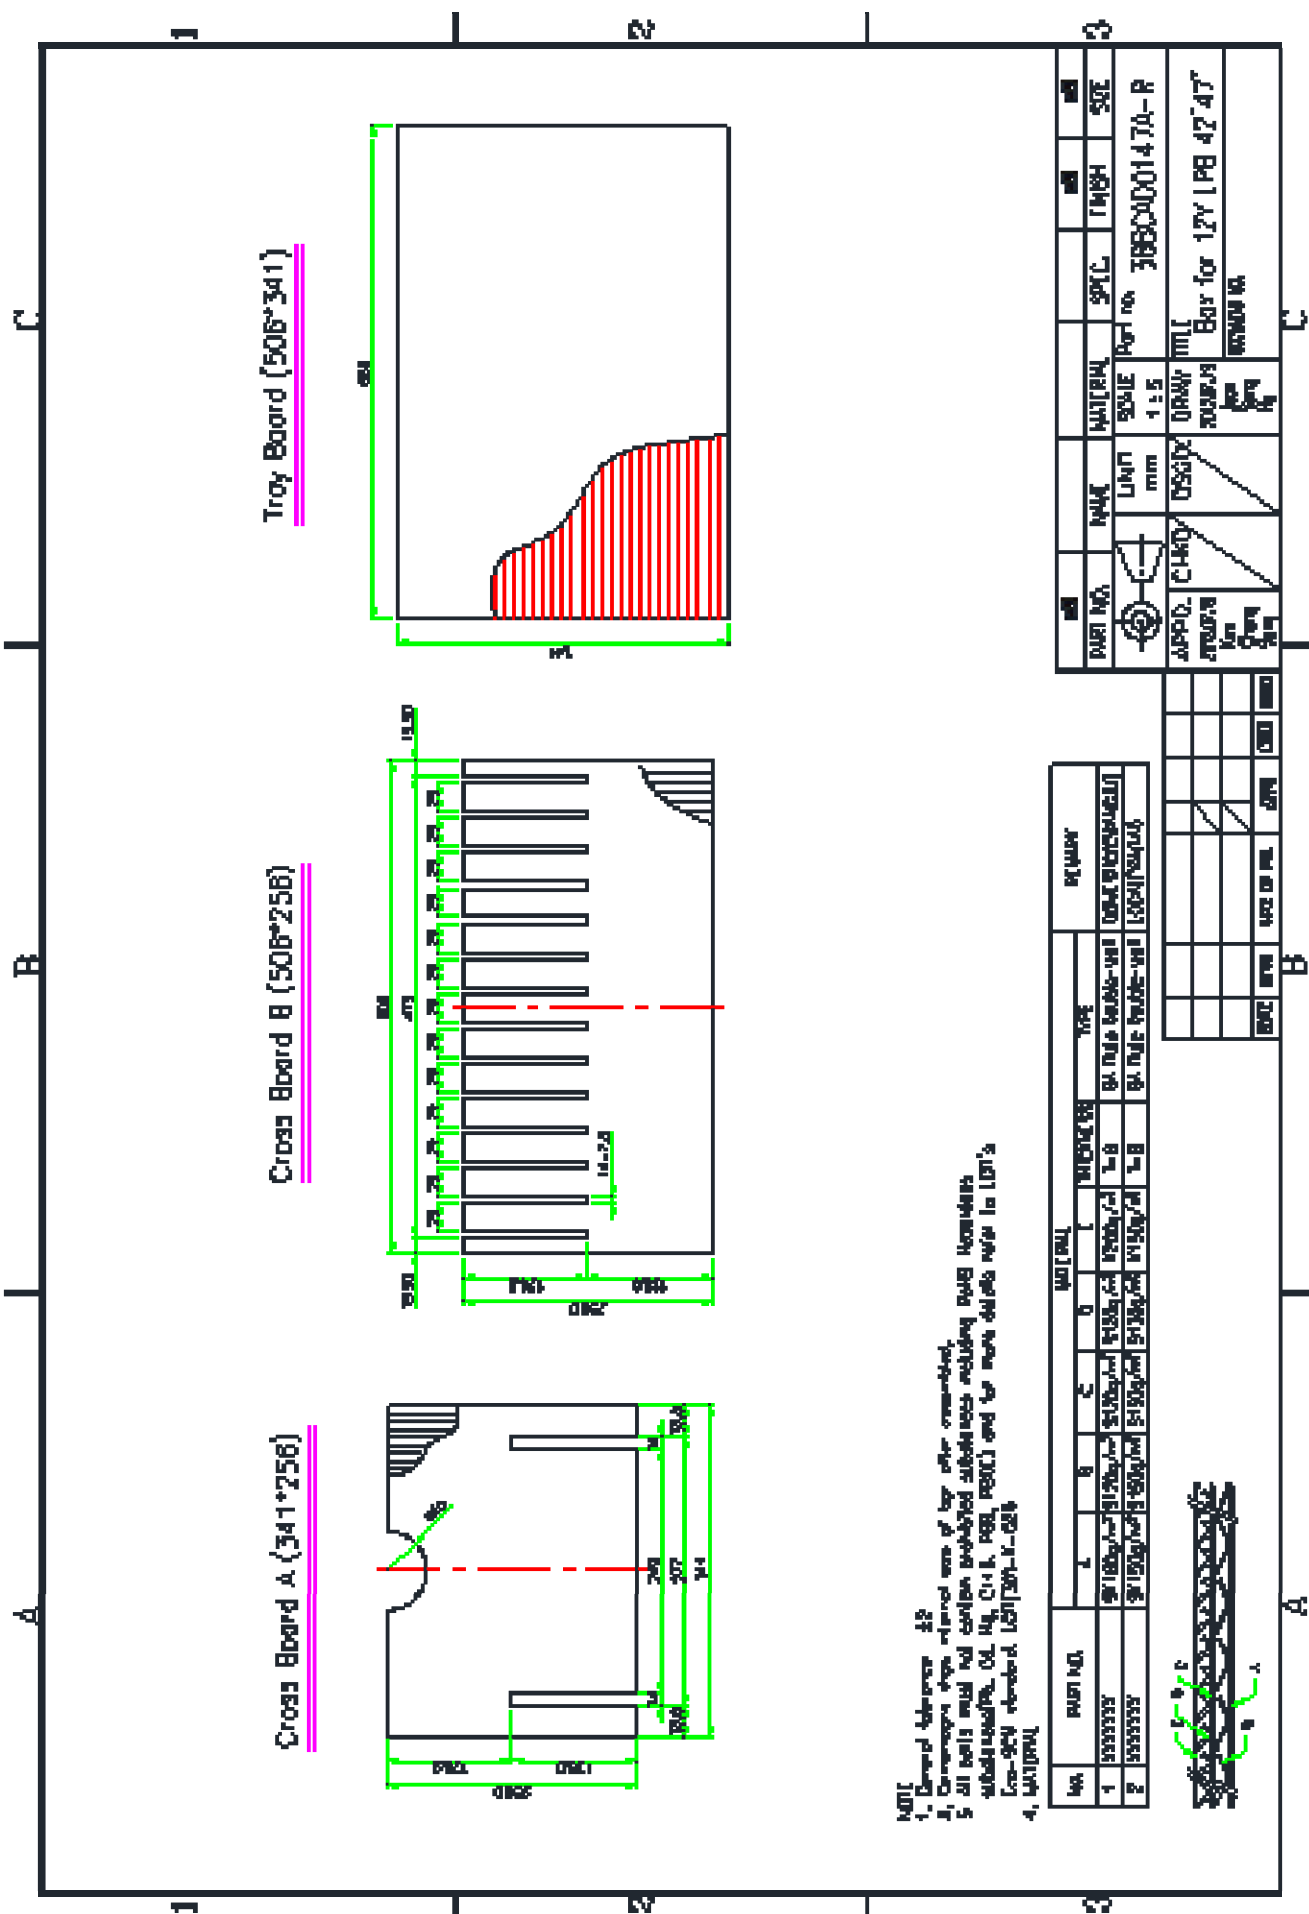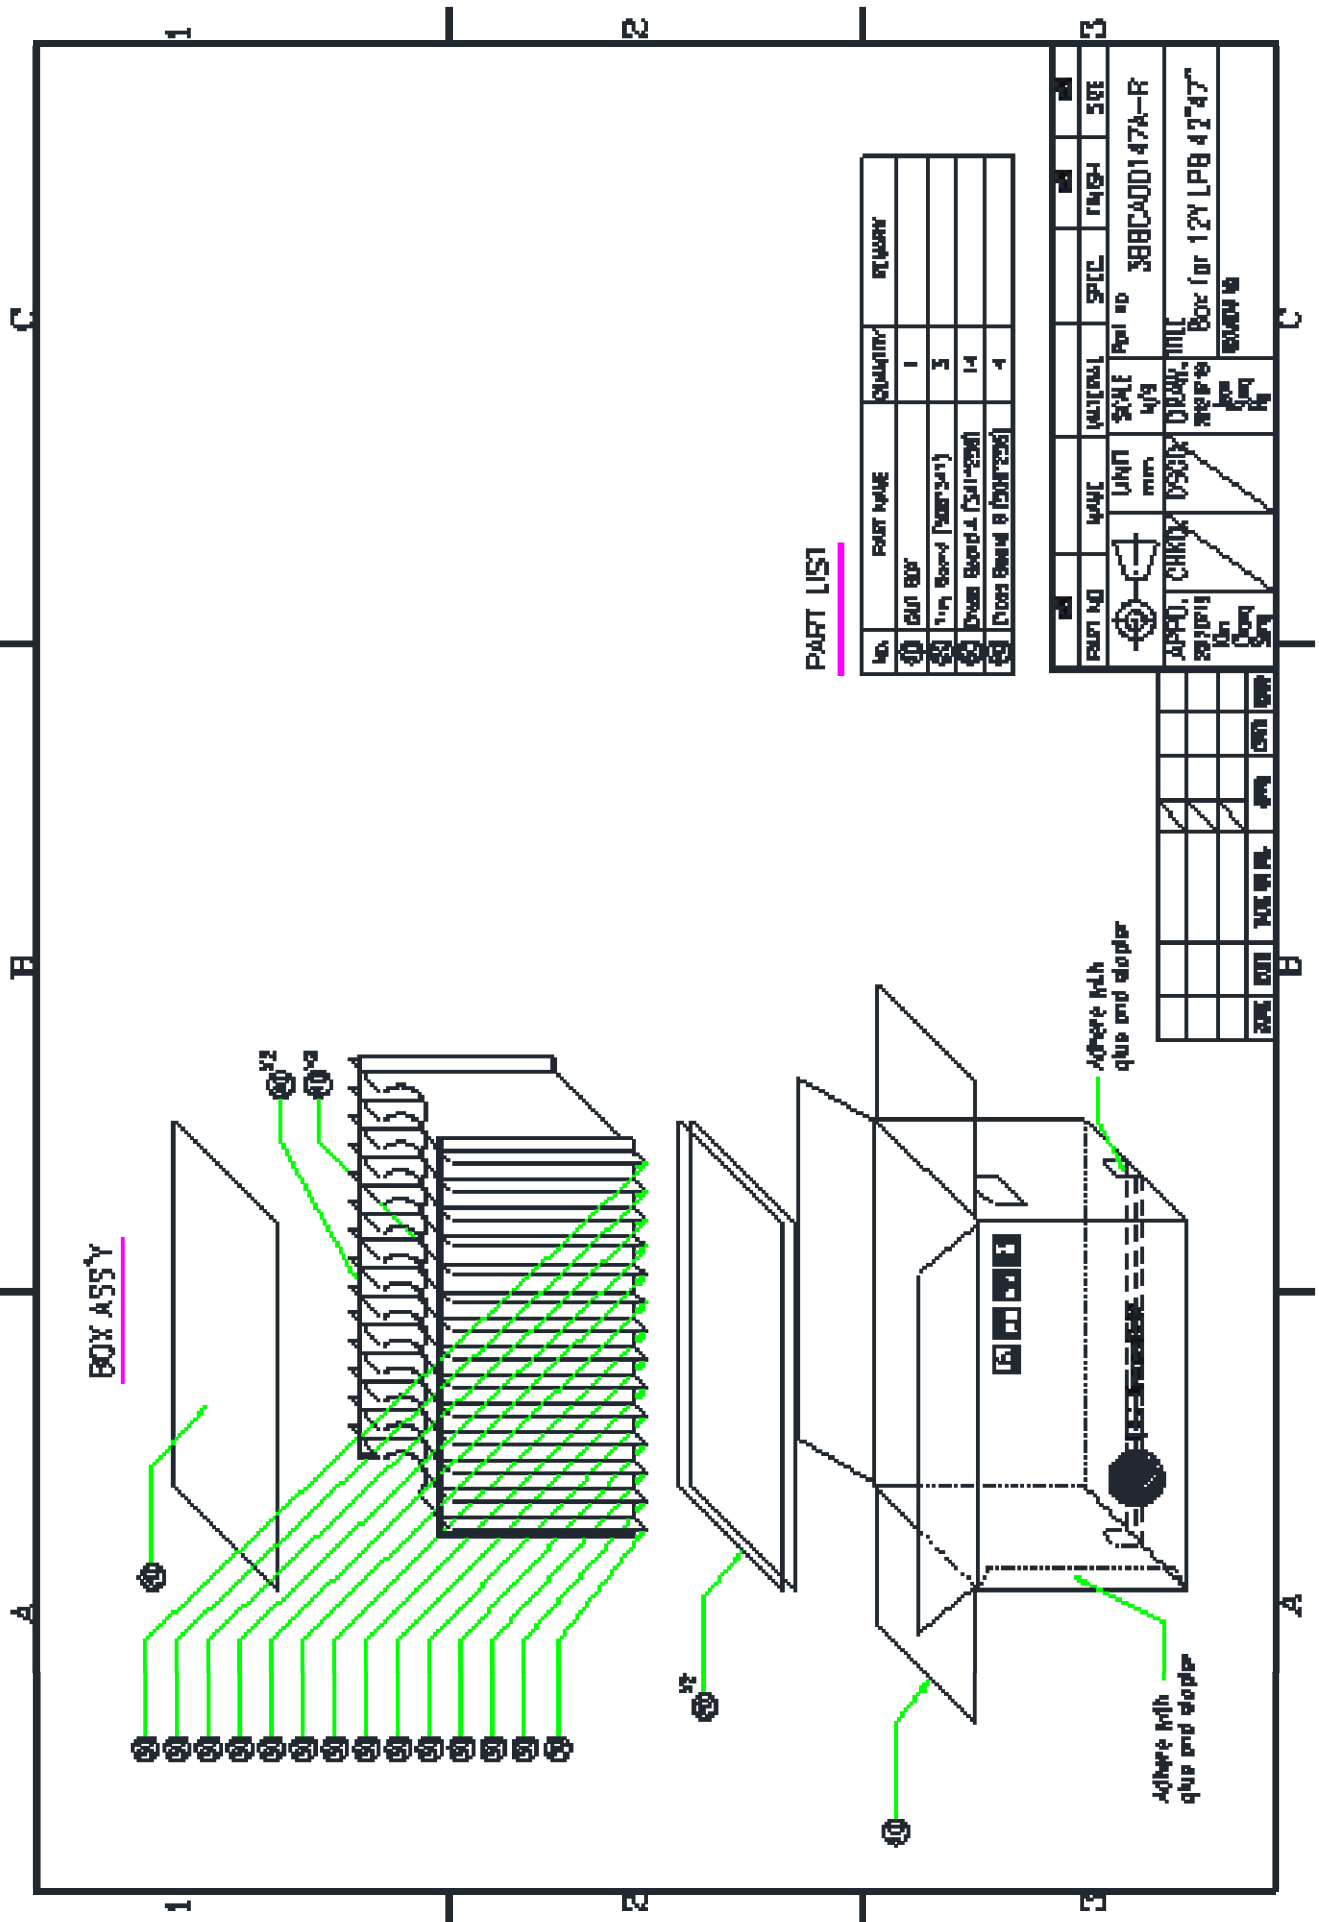Packing Drawing








PART LIST

| No. | PART NAME | QUANTITY | REMARK |
|-----|------------------------|----------|--------|
| 10 | BOX | 1 | |
| 11 | Top Board (P/N:241) | 3 | |
| 12 | Down Board A (P/N:220) | 14 | |
| 13 | Down Board B (P/N:225) | 4 | |

| PART NO | NAME | UNIT | MATERIAL | SPEC | TRNGH | SIZE |
|---------|------------------------|------|----------|---------------|-------|------|
| 10 | BOX | mm | SPALC | 388CA00147A-R | | |
| 11 | Top Board (P/N:241) | mm | FR-4 | | | |
| 12 | Down Board A (P/N:220) | mm | FR-4 | | | |
| 13 | Down Board B (P/N:225) | mm | FR-4 | | | |

| REV | DATE | NAME | APP | CHK | ENG | DATE |
|-----|------|------|-----|-----|-----|------|
| | | | | | | |
| | | | | | | |

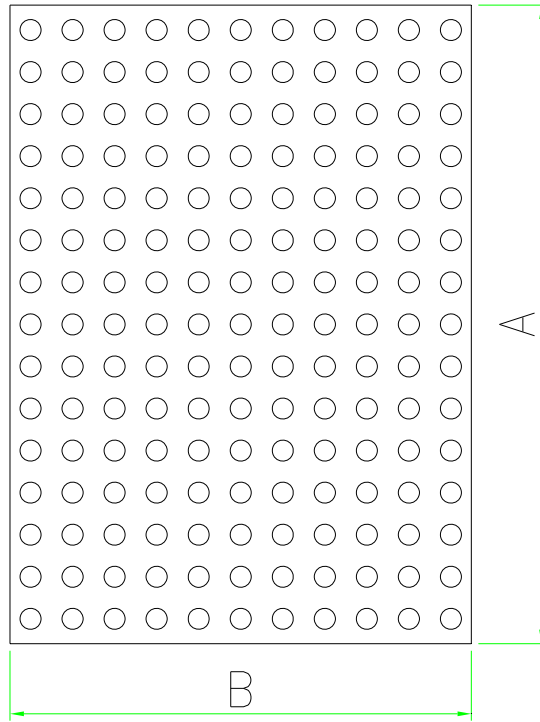

NOTE

1. Material : LDPE
2. General tolerance :
3. COLOR : PINK
4. Antistatic finishing $\begin{matrix} +5 \\ -5 \end{matrix}$
5. Surface Resistance : $10^6 \sim 10^{11}$ Ohm/SQ
All parts must not contain prohibited substances including RoHS azardous substances (Pb, Cd, Hg,Cr+6, PBB, PBDE) and for more details refer to LGIT's Eco-SCM standard,
6. LGIT (30)-K-029.

| Part NO. | Thickness | "A" | "B" | Application Model | LGIT PCB Part Number |
|----------|-----------|-----|-----|--------------------------|----------------------|
| A | 4 ±1.5 | 400 | 225 | EPSU 32/37(162L*195W) | 3EBDDB0001A-R |
| B | 4 ±1.5 | 585 | 220 | EPSU 42/47(245L*159W) | 3EBDDB0002A-R |
| C | 4 ±1.5 | 620 | 200 | EPSU 55(270L*159W) | 3EBDHA0001A-R |
| D | 4 ±1.5 | 585 | 270 | LPB 42/47(245L*243W) | 3EBDDB0003A-R |
| E | 4 ±1.5 | 585 | 220 | LPB 42/47 Low(245L*174W) | 3EBDDB0002A-R |
| F | 4 ±1.5 | 620 | 270 | LPB 55(270L*242W) | 3EBDDB0003A-R |
| G | 4 ±1.5 | 620 | 200 | LPB 55 Low(270L*176W) | 3EBDHA0001A-R |


| PART NO. | | NAME | | MATERIAL | | SPEC. | | FINISH | SIZE |
|----------|------|-------------|------|----------|---|------------|-------------|---|----------------------------|
| | | | | | | UNIT mm | SCALE NS | | |
| | | | | | APPD. 12.04.02 Kim Chang Sung | CHKD. | DSGD. | DRAW. 12.04.02 Jeon Sung Ho | TITLE Air Vinyl for 12Y |
| ZONE | SYMB | DATE OR NO. | APPD | CHKD | DSGD | | | | DOCUMENT NO. _____ |

LG Innotek Co., Ltd.

Bar-Code Label Drawing

1. BARCODE Specification

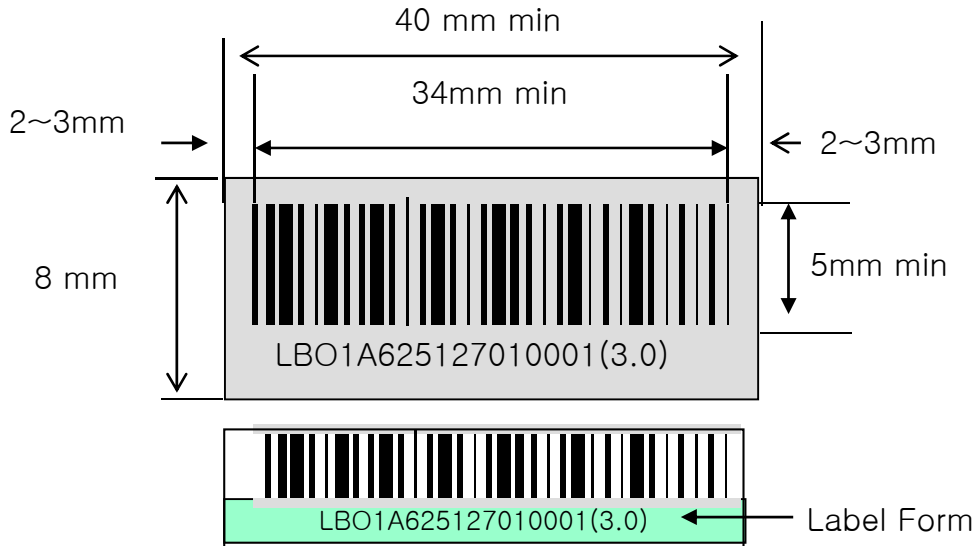1.1 Power Board Barcode specification




※ Bar Code Size는 그림의 size가 최소size이며, 업체 기준 및 PCB공간에 따라 변경 할 수 있으나, 그림의 size보다 줄일 수 는 없음.

| Code | Barcode Specification | Remark |
|--|--|--------|
| Manufacturing code | L (L : LGIT) | |
| Manufacturing Year | B (B : 2011) | |
| Manufacturing Month | O (1,2,3,... 10:O, 11:N, 12:D) | |
| Manufacturing Date | 1 (1~9,... A:10, B:11, C:12, ...X) * Don't USE : "I" ,"O" Character | |
| Manufacturing Line | A~D : Gwangju , E~N / 0~9 : Yantai , O~V : Indonesia , X~Z : Poland | |
| LG Part No. | 62512701 (EAY62512701) | |
| Serial. No. | 0001 (10Digit, 0001~9999) | |
| Rev. No | Approval Sheet Revision Number | |
| Barcode type : 93 code Barcode length : 17 digit Label size : 8 X 36 mm (minimize) | | |

※ BARCODE PRINTING : DO NOT ERASE, WHEN RUB BY HAND.
 ※ Label P/N : 3320KE0008B
 Ribbon Black R300 P/N : 5250KR0011A


Labeling Point

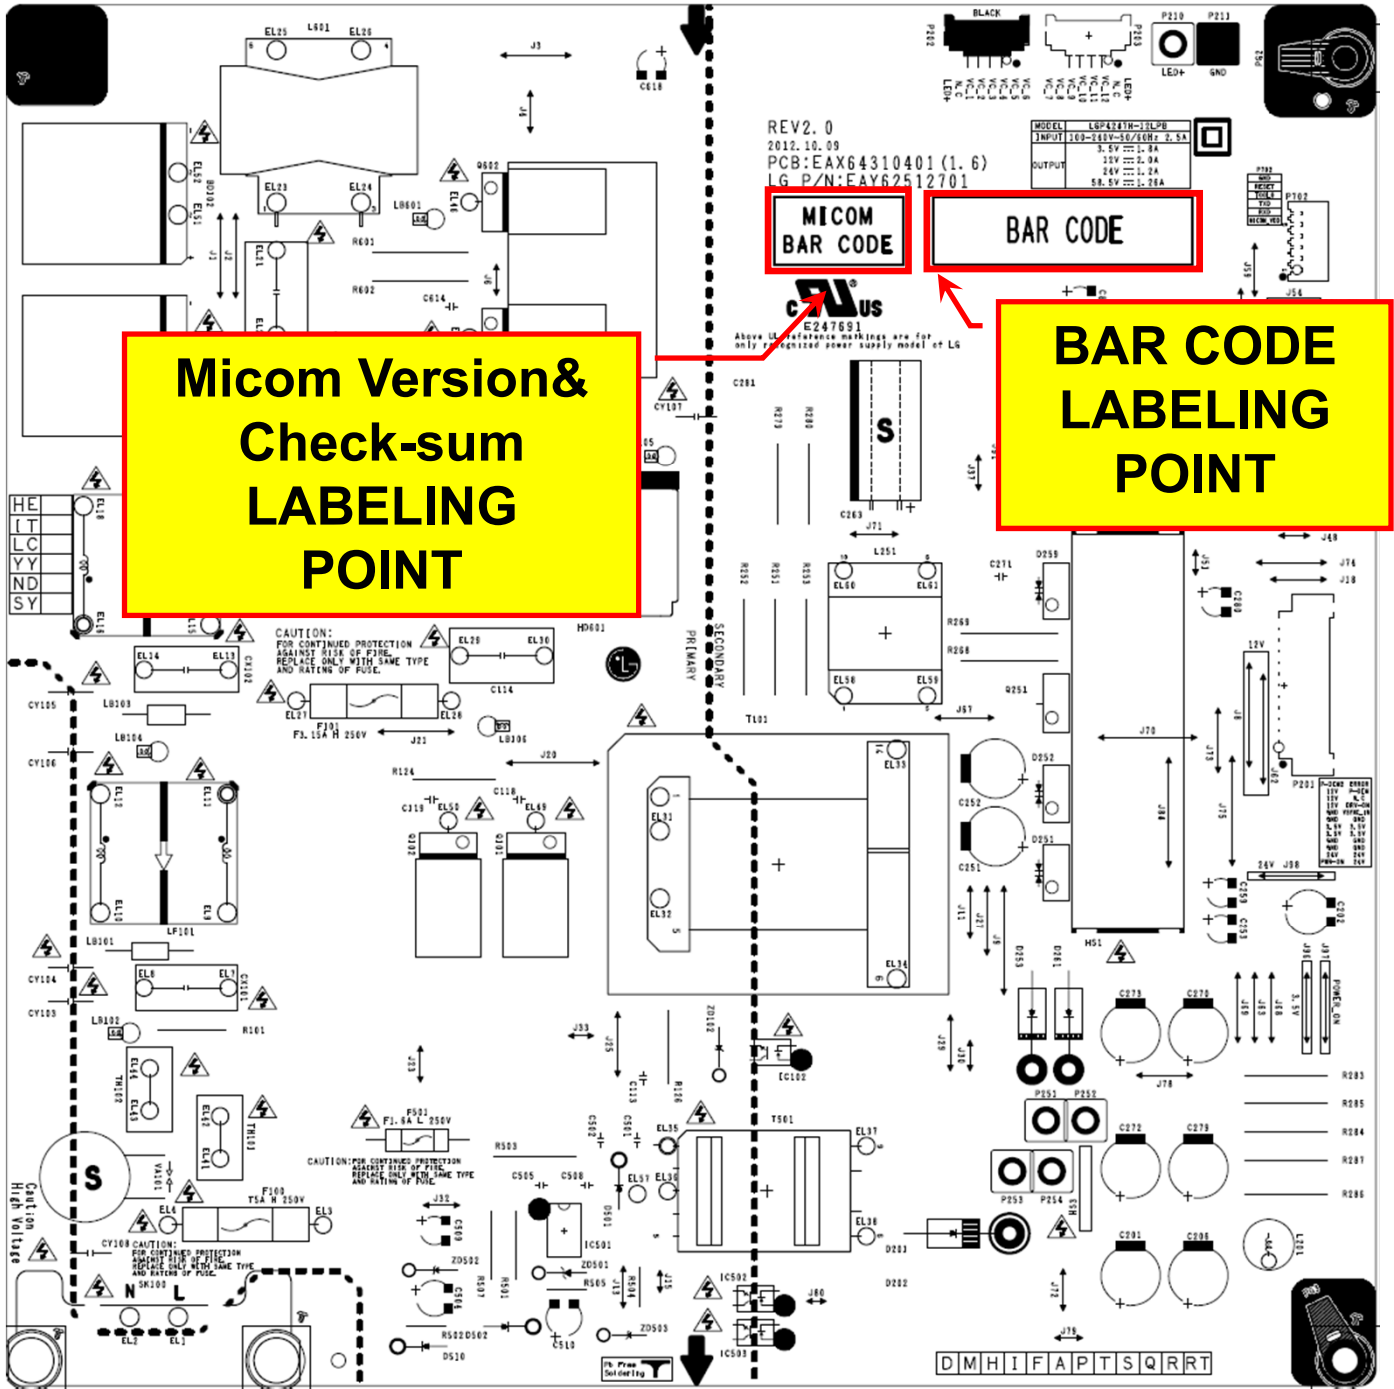LABELING POINT



Workmanship Point

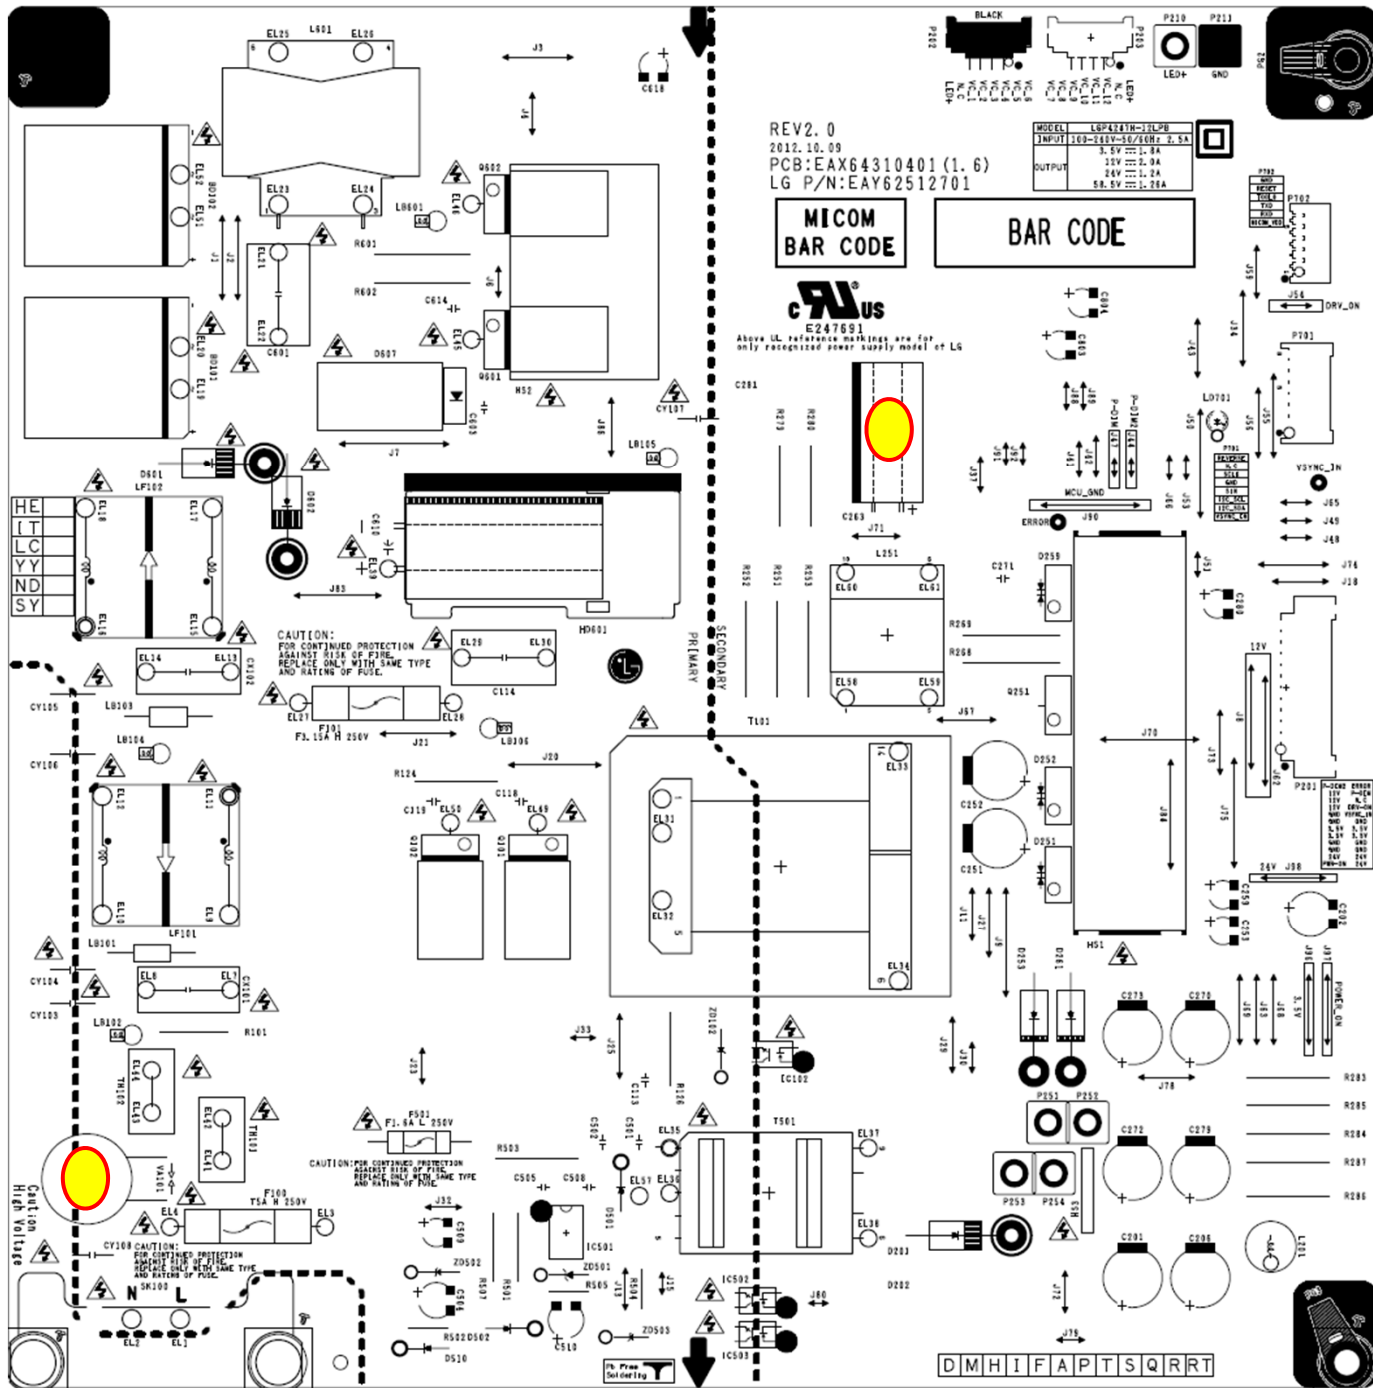Silicone Bonding Point ()



Manufacturing Process

Manufacturing Process

| 제 / 개 / 장 | | 개칭사유 | | 개칭No. | | 작성 | | 승인 | |
|---|-------------------|---|----------|---|---------------|---|--|-----|--|
| 11.08.24 | | 최초제칭 | | 0 | | / / | | / / | |
| 관리 No. : P.LDF-L101A / P.LDK-L102A/P.LDF-L103A/P.LDK-L104A 모델명 : P.LDF-L101A / P.LDK-L102A/P.LDF-L103A/P.LDK-L104A 품목 : LGIT 제조사 : LGIT 작성자 : | | | | | | | | | |
| 4M CC 공정도 | | | | | | | | | |
| 공정번호 | 공정명 | 작업내용 | MAN (시달) | Machine (장비) | Material (재료) | 4M | Method (방법) | | |
| 1 | Incoming material | 배당 모뎀의 부품 부분과 수량을 확인하고 Box 해체 후 Tray에 적어 [자재 준비] | | 적인대, 이동대차, 라벨프린터, 스케너 | 부품 | 수량, 포장상태, 부분, Lot 상태, 일자 | 제조 확인 양해 리스트 별명 입증고 관리 리스트 | | |
| 2 | [Eyelet] | PCB에 Eyelet, GT Pin을 삽입 | | Eyelet M/C | Eyelet | Programing, 모뎀의 확인, 삽입 좌표 조정 에어입력: 6.0kgf/cm ² 이상 | 일상점검표 기중진행 Sheet 표준검사일지 수리일보 | | |
| 3 | [Jump Wire] | PCB에 Jump Wire를 삽입 후 클린팅 | | Jump Wire M/C 비전 검사(AOI) 바니어 캘리퍼스 각도 측정 지그 | Jump Wire | Clinching 길이: 64.0-9mm Cinching 각도: 15-35° 중복 삽입, 미삽 회용 것 | 일상점검표 기중진행 Sheet 표준검사일지 수리일보 | | |
| 4 | [Sequence] | Axial 자재를 주사의 극성에 맞게 Tape로 연결 | | Sequence M/C 바니어캘리퍼스 | Axial 부품 | 테이핑 시수 : 64.6-65mm 부품 치수정 : 0.3mm 이하 부품 간격: 5mm | 일상점검표 기중진행 Sheet 표준검사일지 수리일보 | | |
| 5 | [Axial] | PCB에 Axial 부품을 삽입 후 클린팅 | | Axial M/C 비전 검사(AOI) 각도 측정 지그 바니어캘리퍼스 | 부품 Sequence | Cinching 길이: 2-1.5mm Cinching 각도: 15-35° 삽입, 미삽 발생하지 않을 것 | 일상점검표 기중진행 Sheet 표준검사일지 수리일보 | | |
| 6 | [이형 거상] | PCB에 이형 부품을 삽입 후 클린팅 | | M10 M/C 바니어캘리퍼스 | 이형 부품 | Cinching 길이: 2-1.5mm 부품 치수 : 6-6.5mm 삽입, 미삽 발생하지 않을 것 | 일상점검표 기중진행 Sheet 표준검사일지 수리일보 | | |
| 7 | [Radial] | PCB에 Radial 부품을 삽입 후 클린팅 | | Radial M/C 비전 검사(AOI) 비전 검사일지 | Radial 부품 | 부품 부품, 방향, 위치 확인 Cinching 길이: 2-1.5mm 삽입, 미삽 발생하지 않을 것 PCSB의 극성 일치 | BOM 일상점검표 기중진행 Sheet 표준검사일지 수리일보 | | |

* Process Symbols : ▽(Incoming), ○ (Working Flow Chart), ◇ (Inspection), □ (Packing), ▷ (Delivery)

Manufacturing Process

| 제 / 개 / 정 | | 개칭사유 | | 개칭No. | | 작성 / 검토 / 승인 | |
|---|----------------|--|----------|--|---|---|---|
| 관리 No. : 11.08.24 | | 최초제정 | | 0 | | / / / | |
| 도면명 : PLDF-L107A / PLDK-L102A/PLDF-L103A/PLDK-L104A | | 종류 : 4M | | 제조사 : LGIT | | 작성일 : 11.08.24 | |
| 공정번호 | 공정명 | 작업내용 | MAN (사양) | Machos (장비) | Material (재료) | Method (방법) | |
| 1 | [자재준비] | 해당 모델의 부품 부합과 수량을 확인하고 Box 복제 후 Tray에 적지 | | 인도공장 부품보관대/이동대차 바코드 스캔 | 부품 BOM/MSD Level | 수령 포장상태, 부품 Lot 상태, 일자 LGIT PIN Label 확인 BOM/MSD Level | 제조 장구 오픈 리스트 형별 입고서 관리 리스트 |
| 2 | [Solder Cream] | Solder Cream 보관 및 사용 | | 냉장고 Thermometer | Almit (LFM-48W TM+HF(L)) -Sn-Ag3.0-Cu0.5 | 용도 관리 환경 : 1~10°C -(이계통사) 생산일시 6개월까지 사용가능 상온방치 2시간이상 포장시간 60초 ~120초 | 냉장 온도 관리 Sheet 관리라벨 사용 이력 관리 |
| 3 | [Chip Bond] | Chip bond 보관 및 사용 | | 냉장고 Thermometer | Chip Bond | 용도 관리 환경 : 1~10°C 상온방치 2시간이상 | 형상정밀표 수리일보 |
| 4 | [본드 인쇄] | Stencil Mask를 Printer에 장착하고 그위에 Bond를 투입한 후 PCB를 Loader로부터 공급 받아 Squeegee로 접착제를 장부 치에 인쇄 | | Mask Bond 인쇄기 Squeegee | Chip Bond | 마스크 번호 Mask 2016 후 사이즈 : 0.8mm 3216 후 사이즈 : 1.2mm 접착제 : 보탈명 : HF-100UL 포도 생산시 투입량 : 300g 2H01다 양 제크 후 보충 : 100g~250g | 마스크 입고서 확인 부입 Check Sheet |
| 5 | [Chip Mount] | 합본된 PCB 위에 Chip 장착 | | Chip Mounter | 부품 | 스루홀의 입자와 속도 조정 (조건표) 인쇄 상태 확인 Squeegee No. (조건표) 마스크 세척 | 고정밀 조건표 고대(가용)인쇄물 Check Sheet Manual 세척 이력 관리 Sheet |
| 6 | [이형 Mount] | 셀 본딩된 PCB 위에 이형 부품 장착 PCB에 정착된 부품 삽입 상태 검사(AOI) | | Multi Mounter AOI | 부품 | BOM, 도면 확인 자체 고관 Check Mounting 상태 확인 Pick-up 상태 확인 | 포출검사일지 MES PDA 고대(가용)인쇄물 Check Sheet 부품 Less용 기록표 형상정밀표 |
| 6 | [Reflow] | PCB에 부착된 부품용 고정하기 위해 접착제를 경화 | | Reflow/M/C Profile/Jig Push/Pull Gauge | 부품 | BOM, 도면 확인 자체 고관 Check Mounting 상태 확인 Pick-up 상태 확인 OK,NG Sample로 장비 검증 | 포출검사일지 MES PDA 고대(가용)인쇄물 Check Sheet 부품 Less용 기록표 AOI 검사 불량 관리 Sheet 형상정밀표 |
| | | | | | | 생산 모델과 프로파일용 일치 할 것, 프로파일 용도 조건표와 프로파일용 확인한다. 회고 온도 : 140도 이하 / 120OverTime:70~100초 | 저장지로서 용도 프로파일 형상정밀표 고대(가용)인쇄물 Check Sheet |
| | | | | | | Chip 결합 온도 1608 : 1.0g/ 이상 2012 : 1.3g/ 이상 3216 : 1.5g/ 이상 | 결합 온도 측정 Sheet |

* Process Symbols : <V (Incoming), <O (Working Flow Chart), <◇ (Inspection), <□ (Packing), <▷ (Delivery)

Manufacturing Process

| AM QC 공정도 | | AM | | | | |
|--|--------------------|---|----------|--|-------------------|---|
| 작성 | 검토 | 작성 | 승인 | | | |
| 4M QC 공정도 제목 : LGT 제작사 : LGT 품목 : 제조사 : LGT 작업자 : 작성일 : 11.08.24 | | | | | | |
| 공정번호 | 공정명 | 작업내용 | MAN (시안) | Machine (장비) | Material (재료) | Method (방법) |
| 1 | [지재준비] | 해당 모델의 부품 부피와 수량을 확인하고 Box 하체 후 Tray 에 적치 | | 계측장 부품포장대 이동대차 | 부품 | 수량 조정상태, 부분 Lot 상태, 일자 LGT P/N Label 확인 |
| 2 | [Manual Insertion] | 바코드 라벨 발행 | | PC Barcode 라벨 프린터 스캐너 | 라벨 | 라벨 검증 MES 작업지도서 |
| 3 | [수상공정] | PCBA 부품삽입 | | 수상 장비이더 납땀자 부품적치대/부품대차 매거진 PC/스캐너 | 부품 실리콘 | 납땀 지그 특성표와 PCB 진행 특성표 일치 납땀 확인 부품삽입 상태 확인 라벨 실크 Box 내 삽입 실리콘 규격 도포 실시 |
| 4 | [Flux공정] | PCB 하단에 Flux 분사 | | Flux M/C 비중계 | Flux | Flux 비중: 0.823±0.005 Flux 분포 및 노출 상태 확인 |
| 5 | [WaveSoldering 공정] | Soldering | | Wave Soldering M/C Solder 자동공급기 Wave Checker | Solder | Reheat 온도: 110±10°C Pot 1식: 257±3°C Pot 2식: 257±3°C 납조 성분 Check -Cu: 12,000 ppm -Pb: 800ppm 이내 DPU 관리 |
| 5 | [납땀 검사 및 수형 공정] | Soldering 된 제품 납땀 상태 검사 및 수형 | | 인두기 인두 온도측정기 수형 견대이더 | 제품 | 외관검사 기준을 참고 하여 전면 검사 실시 인두 온도: 320°C 인두기 누출전압: 10mV 이하 |
| 6 | [ICT 공정] | PCBA 장착된 부품 상태 검사 | | ICT M/C (AT-01) Fixture PC | 제품 | 모델명, 프로그램 확인 부품 규격 확인 |
| 7 | [동작검사] | 제품 동작 검사 | | Fixture 케이블 Inline 섀시, PC Barcode Scanner | 제품 | 모델명, 공장 확인 Program Version 확인 Check Sum값 확인 (Check sum: 0x8E85C) 제품 전기의 특성 측정 표준 샘플로 OK/NG 확인 |
| 8 | [내입력사] | 제품 내입 검사 | | Fixture 내입기 Inline 섀시 | 제품 | 표준 샘플로 OK/NG 확인 내입 검사 실시 |
| 9 | [실리콘도포] | 실리콘 도포 | | Dispenser | 실리콘 | 제품별 도포위치 |
| 10 | [Aging공정] | 제품 Aging 검사 | | Aging M/C Select Card 유사부하 Cable | 제품 | 온도, 시간 확인 항목 기준 확인 |
| 11 | [최종외관검사] | 제품 외관검사 | | | 제품 | 외관검사 기준을 참고 하여 검사 |
| 12 | [특성검사] | 제품 특성 검사 | | Fixture 계측기 Inline 섀시, PC Barcode Scanner | 제품 | 모델명, 공장 확인 Program Version 확인 제품 전기의 특성 측정 표준 샘플로 OK/NG 확인 |
| 13 | [포장] | 제품 포장 | | Barcode Scanner PC | 제품 Box 에어비닐 | 모델명, Barcode 확인 MES 작업지도서 |

* Process Symbols : ▽(Incoming), ○ (Working Flow Chart), ◇ (Inspection), □ (Packing), ▷ (Delivery)

※ APPENDIX LIST

| No. | Contents |
|-----|------------------------|
| 1 | Power Check List |
| 2 | WARRENTY LETTER (RoHS) |



POWER CHECK LIST

WARRANTY LETTER

| |
|---------|
| 비사용 증명서 |
|---------|

| | | | |
|----|--|------|----------------|
| 구분 | <input checked="" type="checkbox"/> 승인용 <input type="checkbox"/> 양산용 | 제출일자 | 2011 . 12 . 07 |
|----|--|------|----------------|

| | | | | |
|------|--|--|--|--|
| 협력회사 | | | | |
|------|--|--|--|--|

| | | | | |
|--------|--------------------|----|---|---|
| 회사명 | LG 이노텍 | 결재 | 담당자 | 부서장 |
| 연락처 | Tel 062-950-0232 | 성명 | 김 인 재 | 김 형 성 |
| e-mail | ijkim@ginnotek.com | 서명 |  |  |

| | | | |
|------|--|--|--|
| 부품정보 | | | |
|------|--|--|--|

| | | | |
|-------------|----------------|--------|----------------------|
| LG전자 P/No. | EAY62512701 | 부품제조일자 | |
| Maker P/No. | PLDF-L101A | 생산 공장 | LGIT Yantai, Gwangju |
| 부품명(품명) | LGP4247H-12LPB | | |

당사가 납품하는 납입품 및 당사 제조 공정상 사용되는 물질이 아래 Check 항목에 대해 만족함을 증명합니다.

————— 아 래 —————

ROHS 규제 6대 물질(Pb, Cd, Cr⁶⁺, Hg, PBBs, PBDEs)이 LG전자 Display 사업부 기준을 만족함

※ 아래 항목은 PCB(Printed Circuit Board)에 장착되는 부품일 경우 기록 요망

Soldering Type : Flow Reflow

최대 내열성 온도 : 260 °C 최대 내열성 시간 : 10 sec.

Pb-Free Soldering (Solder Cream, Bar, Wire 모두 포함) 적용이 가능함

Note.

1. 본 자료 상의 모든 기재 내용은 사실에 근거하여 작성하여야 하며, LG전자가 근거 자료를 요구 시, 관련 Data를 제출하여야 한다.
2. 본 자료가 승인용으로 사용될 경우 Sample과 함께 제출하고, 양산용으로 사용될 경우 초품 입고시 제출하여야 한다.
3. LG 전자 Display 사업부에 공급되는 PCB 장착 부품의 내열 기준은 다음과 같음.
Flow 부품 : 260°C/10 sec , Reflow 부품 : 250°C/10 sec