

LH1085AT/AAB High-Voltage, Solid-State Relay

www.DataSheet4U.com

Description

The LH1085AT/AAB High-Voltage, Solid-State Relay is a single-pole, normally open switch (1 Form A) that can replace electromechanical relays in many applications. The relay features logic-level input control of isolated high-voltage switch outputs. The output is rated at 350 V and can handle loads up to 135 mA. The relay can switch both ac and dc loads and is ideal for audio frequency or dc applications. Typical ON-resistance at 25 mA is 30 Ω .

The LH1085AT/AAB Relay consists of a GaAlAs LED that optically couples control signals to a monolithic integrated circuit. Optical coupling provides 1500 Vrms of input/output isolation. The integrated circuit is a dielectrically isolated, high-voltage die comprised of photodiode arrays, switch control circuitry, and high-voltage DMOS transistor switches.

In operation, the device is exceptionally linear up to 45 mA. Beyond 45 mA, the incremental resistance decreases, thereby minimizing internal power dissipation. Overload currents are clamped at 300 mA by internal current limiting. An extended clamp condition, which increases relay temperature, results in a reduction in clamp current, thereby further reducing internal power dissipation and preserving the relay's integrity. This relay is packaged in a 6-pin, plastic DIP (LH1085AT) or in a 6-pin, surface-mount, gull-wing configuration (LH1085AAB).



Features

- 1500 Vrms input/output isolation
- Low ON-resistance
- Clean, bounce-free switching
- dv/dt typically better than 500 V/ μ s
- Low power consumption
- Monolithic IC reliability

Applications


- High-voltage testers
- Industrial controls
- Telecom switching
- Triac predriver
- Isolation switching

Functional Diagram



EQUIVALENT RELAY DIAGRAM

Pin Diagram



LH1085AT/AAB High-Voltage, Solid-State Relay

Absolute Maximum Ratings

At 25 °C

Stresses exceeding the values listed under Absolute Maximum Ratings can cause permanent damage to the device. This is an absolute stress rating only. Functional operation of the device at these or any other conditions in excess of those indicated in the operational sections of this data sheet is not implied. Exposure to maximum-rating conditions for extended periods of time can adversely affect the device reliability.

Rating	Symbol	Value	Unit
Ambient Operating Temperature Range	TA	-40 to +85	°C
Storage Temperature Range	Tstg	-40 to +100	°C
Pin Soldering Temperature (t = 7 s max.)	TS	270	°C
Input/Output Isolation Voltage (t = 60 s min.)	VISO	1500	Vrms
LED Input Ratings:			
Continuous forward current	IF	20	mA
Reverse voltage	VR	10	V
Output Operation:			
dc or peak ac load voltage (IL ≤ 50 μA)	VL	350	V
Continuous dc load current	IL	135	mA
Peak load current (t = 10 ms)	IP	400	mA
Power Dissipation	PDISS	500	mW

Recommended Operating Conditions

TA = 25 °C unless otherwise specified

Parameter	Symbol	Min	Typ	Max	Unit
LED Forward Current for Switch Turn-on (TA = -40 °C to +85 °C)	IFON	8	10	20	mA
Continuous dc Load Current	IL	—	45	135	mA
ac rms Load Current	—	—	30	135	mA

Pin Descriptions

Pin	Symbol	Name/Function
1 2	Control + Control -	These pins are the positive and negative inputs to the control LED. An appropriate amount of current through the LED closes the circuit path between S and S'.
6 4	S S'	These pins are the switch outputs. The pin designated as S represents one side of a relay pole. The pin designated as S' is the complementary side of a relay pole. This relay pole is normally open unless sufficient control current is flowing.
3	Blank	This pin can be used as a tie-point for external components. Voltage on this pin should not exceed 300 V.
5	NC	This pin is connected to internal circuitry. It should not be used as a tie-point for external circuitry.

Characteristics

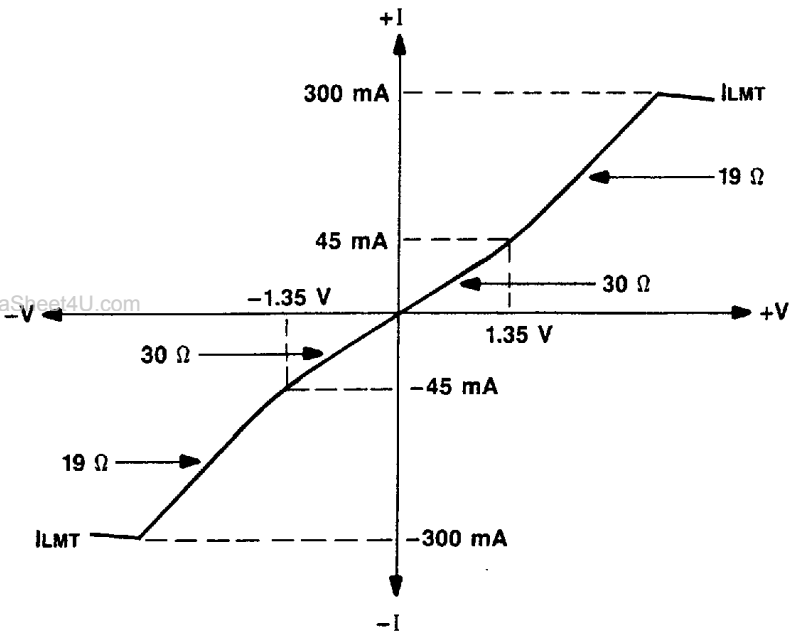


Figure 1. Typical ON Characteristics

Electrical Characteristics


TA = 25 °C

Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information purposes only and are not part of the testing requirements.

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
LED Forward Current for Switch Turn-on	IFon	IL (min) = 150 mA, VL = ±9 V, t = 10 ms (See Figure 2.)	—	1.3	2.5	mA
LED Forward Current for Switch Turn-off	IFoff	IF = 0.2 mA, VL = ±300 V (See Figure 2.)	0.2	1.2	—	mA
LED Forward Voltage	VF	IF = 10 mA	1.15	1.22	1.45	V
ON-resistance	RON	IF = 5 mA, IL = ±25 mA (See Figure 3.)	20	30	37	Ω
Current Limit	ILMT	IF = 5 mA, VL = ±9 V, t = 10 ms (See Figure 4.)	225	300	400	mA
Output Off-state Leakage Current	—	IF = 0, VL = ±100 V (See Figure 4.)	—	0.03	200	nA
Turn-on Time	ton	IF = 5 mA, VL = +150 V, RL = 4 kΩ (See Figure 5.)	—	1.4	2.0	ms
Turn-off Time	toff	IF = 5 mA, VL = +150 V, RL = 4 kΩ (See Figure 5.)	—	0.9	2.0	ms
Feedthrough Capacitance Pin 4 to 6	—	IF = 0, VL = 4 Vp-p, 1 kHz	—	24	—	pF

LH1085AT/AAB High-Voltage, Solid-State Relay


Test Circuits

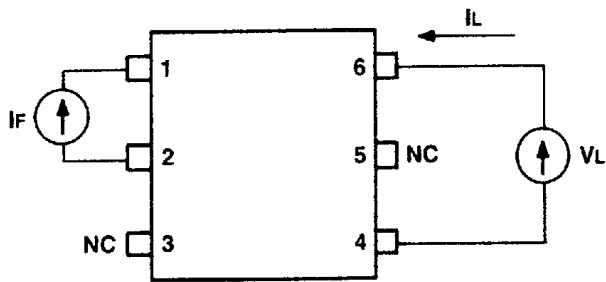

www.DataSheet4U.com


IF	VL	Measure	Parameter
2.5 mA	±9 V	IL	If $ IL \geq I_L(\text{min})$, then I_{on} is good.
0.2 mA	±300 V	IL	If $ IL < 5 \mu\text{A}$, then I_{off} is good.

Figure 2. Test Circuit for LED Forward Current for Switch Turn-On/Turn-Off

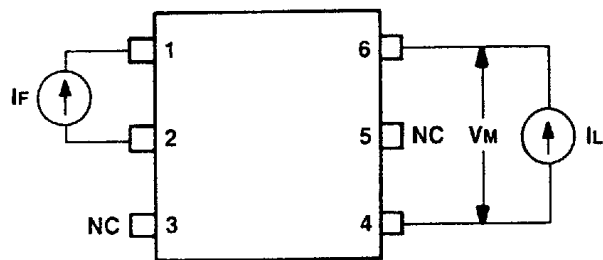

IF	IL	Measure	Parameter
5.0 mA	±25 mA	±VM	ON-resistance = $\frac{ VM }{25 \text{ mA}}$


Figure 3. Test Circuit for ON-Resistance

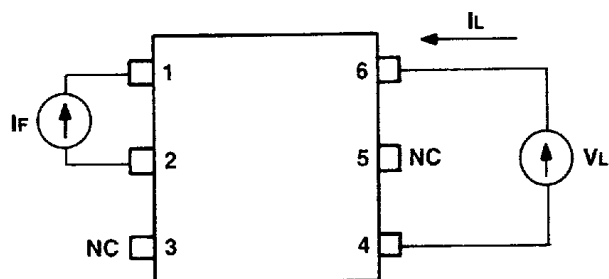

IF	VL	Measure	Parameter
0	±100 V	IL	Leakage = $ IL $
5.0 mA	±9 V	IL	Current Limit = $ IL $, $t = 10 \text{ ms}$

Figure 4. Test Circuit for Leakage and Current Limit

Test Circuits (continued)

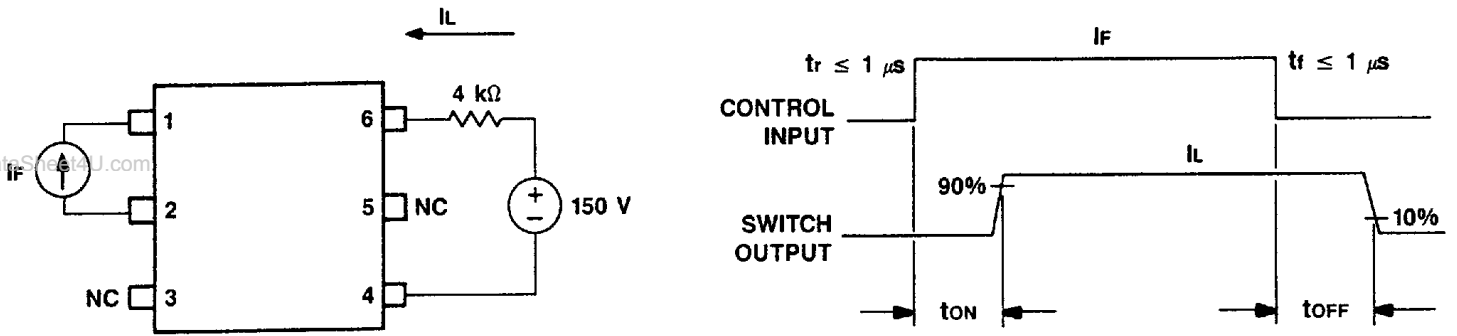

IF	VL	Measure	Parameter
5.0 mA	+150 V	IL	$t_{on}/t_{off} = \Delta t \text{ IF to IL}$

Figure 5. t_{on}/t_{off} Test Circuits and Waveforms

Applications

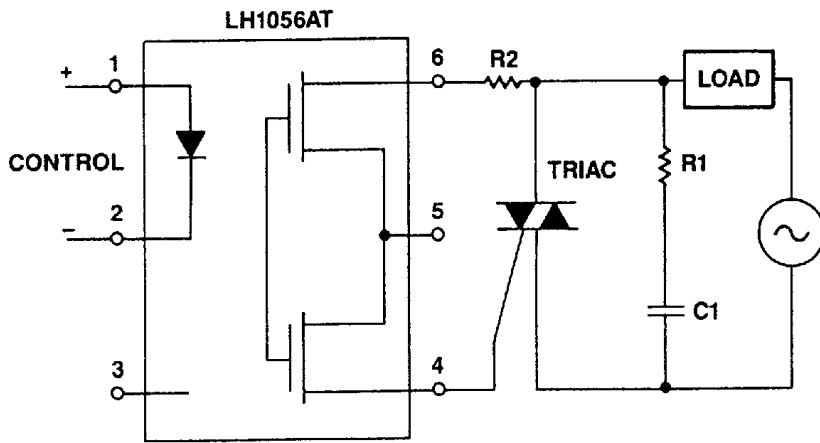





Figure 6. Triac Predriver

LH1085AT/AAB High-Voltage, Solid-State Relay

Outline Drawings

6-Pin, Plastic DIP (LH1085AT)

Dimensions are in inches and (millimeters).

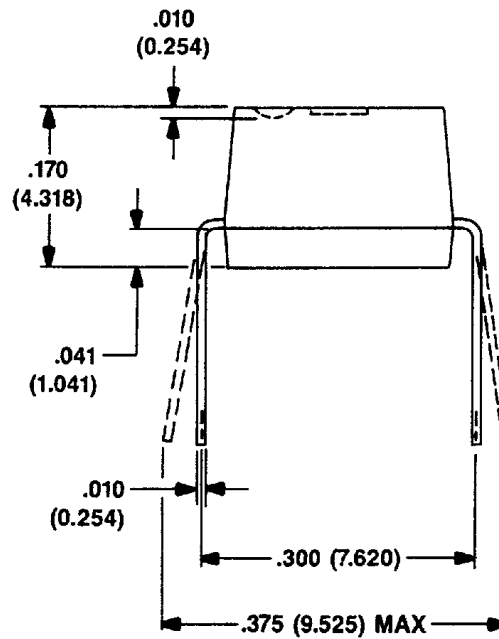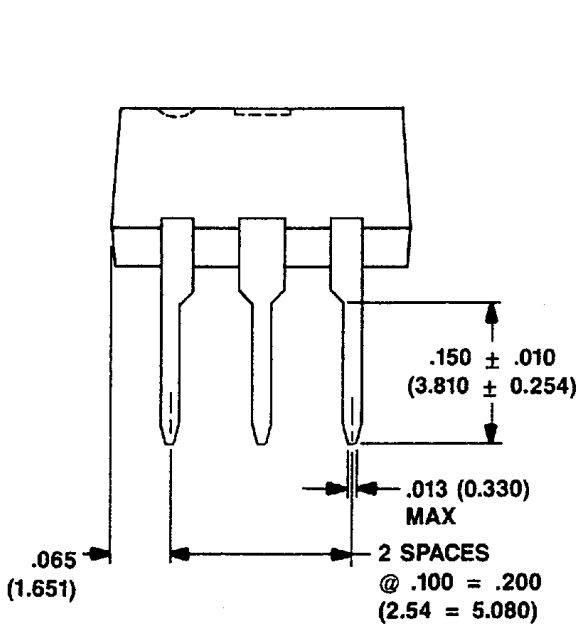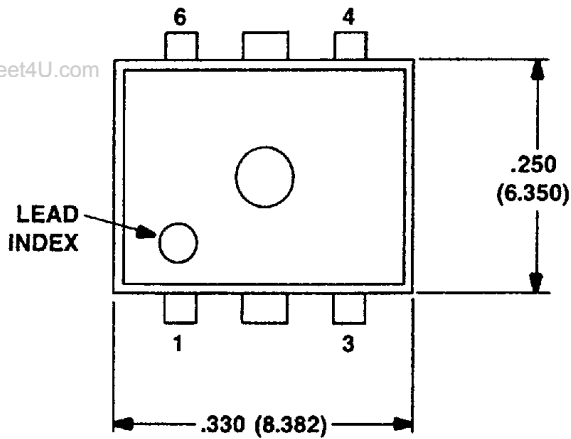




LH1085AT/AAB High-Voltage, Solid-State Relay

Outline Drawings (continued)

6-Pin, Plastic Gull-Wing (LH1085AAB)

Dimensions are in inches and (millimeters).

www.DataSheet4U.com

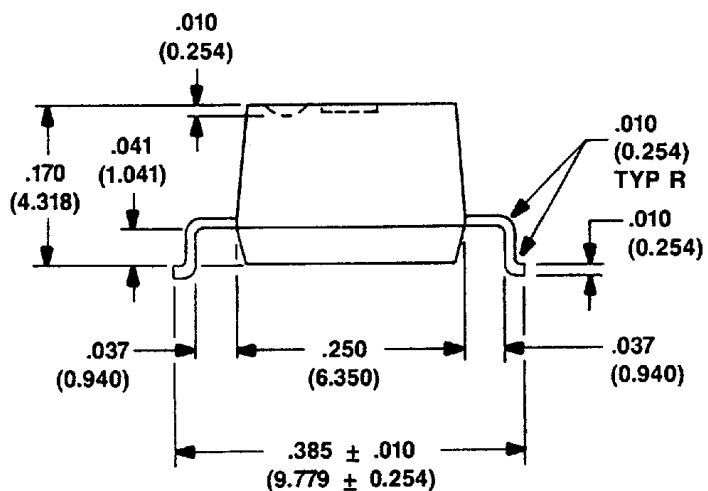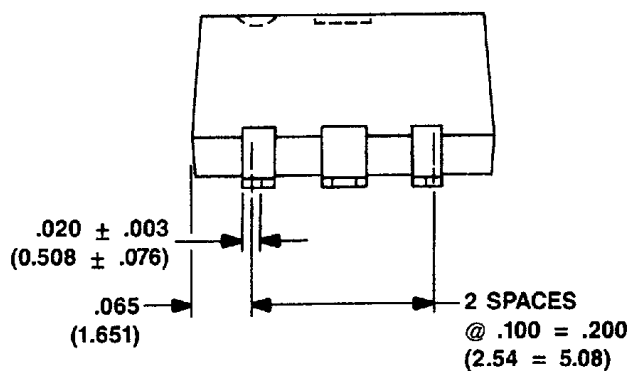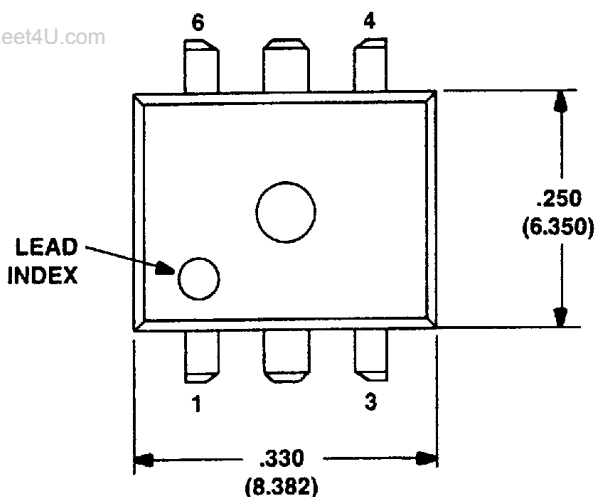

LH1085AT/AAB High-Voltage, Solid-State Relay

Ordering Information

Device	Package	Comcode
LH1085AT	6-Pin, Plastic DIP	104395520
LH1085AAB	6-Pin, Plastic Gull-Wing	104395512

For additional information, contact your AT&T Account Manager, or call:

- AT&T Microelectronics
Dept. 52AL330240
555 Union Boulevard
Allentown, PA 18103
1-800-372-2447

Siemens North American Sales Offices

Serving the Northern U.S.

Westford, Massachusetts
(508) 692-0550
Livonia, Michigan
(313) 462-1195
Kokomo, Indiana
(317) 456-1928

Serving the Southern U.S.

Iselin, New Jersey
(908) 603-0600
Mt. Laurel, New Jersey
(609) 273-6677
Norcross, Georgia
(404) 449-3981
Dallas, Texas
(214) 733-4511

Serving the Western U.S.

Southern California
(714) 971-1274
North Central
(708) 884-7009
Northwest
(408) 777-4968
Rocky Mountains
(303) 451-5513

Serving Canada

Eastern Canada
(905) 819-8000
Western Canada
(514) 426-6103

- AT&T Microelectronica de España
Albacete, 5 - 2^a
28027 Madrid
Spain
Tel. (34) 1-404 6012
FAX (34) 1-404 3469
Telex 41494 AMESP

AT&T reserves the right to make changes to the product(s), software, or circuit(s) described herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product or circuit.

Copyright © 1990 AT&T
All Rights Reserved
Printed in U.S.A.

March 1990
DS90-028HVIC
This document replaces DS88-091LBC.



www.DataSheet4U.com

AT&T
The right choice.