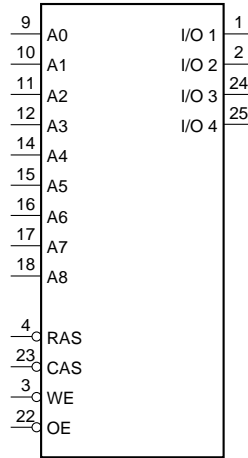
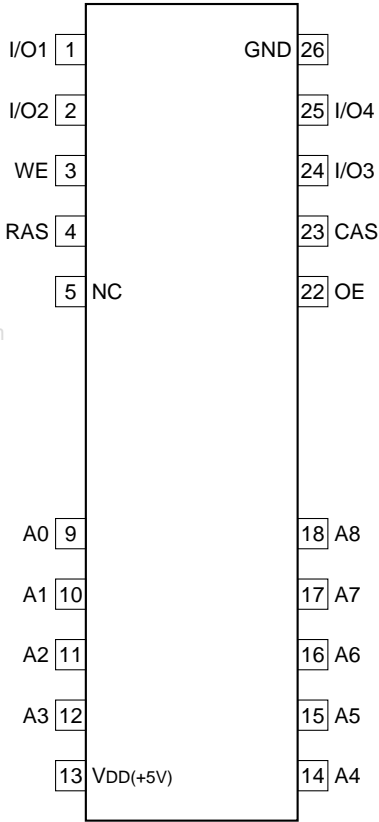

C-MOS 256 4 BITS DYNAMIC RAM
- TOP VIEW -



INPUT

- A0 - A8 ; ADDRESS
- RAS ; ROW ADDRESS STROBE
- CAS ; COLUMN ADDRESS STROBE
- WE ; WRITE ENABLE (H : READ, L : WRITE)
- OE ; DATA OUTPUT ENABLE

INPUT/OUTPUT

- I/O 1 - I/O 4 ; DATA

