

LH740A/LH740AC FET Input Operational Amplifier

General Description

The LH740A/LH740AC is a FET input, general purpose operational amplifier with high input impedance, closely matched input characteristics, and good slew rates. Input offset voltage is typically 10.0 mV at 25°C, while input bias current is less than 100 pA at 25°C. Offset current is typically less than 40 pA at 25°C. Other important design features include:


- Internal 6 dB/octave frequency compensation
- Unity gain slew rate in excess of 6 V/μs
- Unity gain bandwidth of 1 MHz
- Input offset is adjustable with a single 10k pot
- Pin compatible with LM741, LM709, LM101A.
- Excellent offset current match over temperature, typically 100 pA

- Output is continuously short-circuit proof
- Excellent open loop gain, typically in excess of 100 dB
- Guaranteed over the full military temperature range

The LH740A/LH740AC is intended to fulfill a wide variety of applications requiring extremely low bias currents such as integrators, sample and hold amplifiers, and general purpose operational amplifier applications.

The LH740A is specified for operation over the -55°C to +125°C military temperature range. The LH740AC is specified for operation over the 0°C to +85°C temperature range.


Connection Diagram




Order Number LH740AH or LH740ACH
See Package H08A

Typical Applications


Integrator

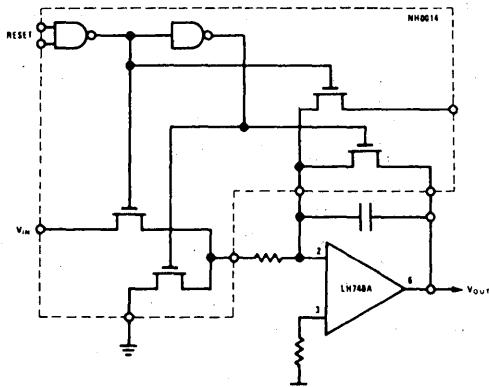

Transient Response

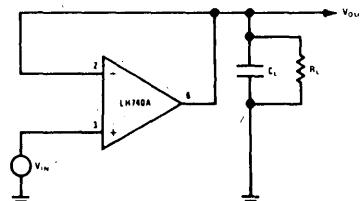

Offset Null



Absolute Maximum Ratings

Supply Voltage	$\pm 22V$		
Maximum Power Dissipation	500 mW		
Differential Input Voltage	$\pm 5V$		
Input Voltage	$\pm 15V$		
Short Circuit Duration	Continuous		
Operating Temperature Range	LH740A	-55°C to +125°C	
	LH740AC	0°C to +85°C	
Storage Temperature Range		-65°C to +150°C	
Lead Temperature (soldering, 10 sec.)		300°C	

Electrical Characteristics (Note 1) ($V_S = \pm 15V$, $T_A = 25^\circ C$ unless otherwise noted)

PARAMETER	CONDITIONS	LH740A			LH740AC			UNITS	
		MIN	Typ	MAX	MIN	Typ	MAX		
Input Offset Voltage	$R_S \leq 100 k\Omega$			10	15		10	20	mV
Input Offset Current	$T_J = 25^\circ C$ (Note 2)			40	100		60	150	pA
Input Current (either input)	$T_J = 25^\circ C$ (Note 2)			100	200		100	500	pA
Input Resistance	$T_J = 25^\circ C$ (Note 2)			1,000,000			1,000,000		MΩ
Large Signal Voltage Gain	$R_L \geq 2 k\Omega$, $V_{OUT} = \pm 10V$	50,000	100,000		50,000	100,000			V/V
Output Resistance				75			75		Ω
Output Short-Circuit Current				20			20		mA
Common Mode Rejection Ratio		80			80				dB
Supply Voltage Rejection Ratio		80			80				dB
Supply Current			3.0	4.0			3.0	4.0	mA
Slew Rate			6.0				6.0		V/μs
Unity Gain Bandwidth			1.0				1.0		MHz
Transient Response (Unity Gain)	$C_L \leq 100 pF$, $R_L = 2 k\Omega$, $V_{IN} = 100 mV$			110			300		ns
Risetime			10	20			10		%
Overshoot									
(These specifications apply for $-55^\circ C \leq T_A \leq 125^\circ C$ for the LH740A and $0^\circ C \leq T_A \leq 85^\circ C$ for the LH740AC unless otherwise noted.)									
Input Voltage Range			±12				±12		V
Common Mode Rejection Ratio			80				80		dB
Supply Voltage Rejection Ratio			80				80		dB
Large Signal Voltage Gain			40,000				40,000		V/V
Output Voltage Swing	$R_L \geq 10 k\Omega$	±12	±14		±12	±14			V
	$R_L \geq 2 k\Omega$	±10	±13		±10	±13			V
Input Offset Voltage			15	20			30		mV
Input Offset Current			100	500			60	500	pA
Input Current (either input)			2.5	4.0			1.1	5.0	nA
Offset Voltage Drift	$R_S \leq 100K$		5.0				5.0		$\mu V^\circ C$

Note 1: For supply voltages less than $\pm 10V$, the absolute maximum input voltage is equal to the supply voltage.

Note 2: Due to high speed automatic testing, these parameters are correlated to junction temperature.

Typical Performance Characteristics

