


Pyroelectric Infrared Detectors

Dual Channel Detector LHi 814 Q.../Q...

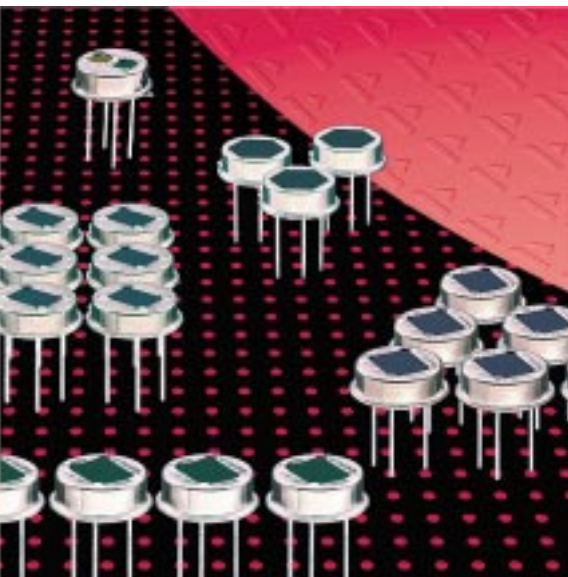



Two separate elements, size 1,5x1,5

Individual spectral window for each element

Designed for Gas Analysis applications

The **LHi 814** pyroelectric infrared-detector series is specially designed for gas analysis and monitoring applications. It includes two pyroelectric elements, each having a FET in source follower connection. Thus two outputs are given.


The detector is encapsulated into **TO-5** housing with two separated spectral narrow band infrared windows. There are many filters available for the selected spectral bandwidths. Often one channel is used as reference channel.

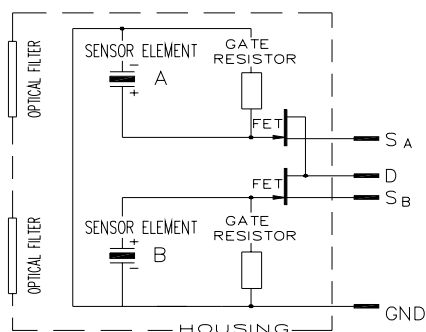


Field of View

Parameters	LHi 814			units	condition
	min	typical	max		
Element size		1,5x1,5		mm ²	
Responsivity	500	640		V/W	1Hz Bw, 100°C, 10 Hz
Noise		600	1200	nV _{RMS}	25°C, 10Hz
Offset Voltage	0,2		1,5	V	R _s =47kΩ, 25°C
NEP		9,4x10 ⁻¹⁰	24x10 ⁻¹⁰	W √Hz	1Hz Bw, 100°C, 1 Hz
D*	6x10 ⁷	16x10 ⁷		cm √Hz/W	1Hz Bw, 100°C, 1 Hz
Output Impedance		5	10	kΩ	R _s =47kΩ, 25°C
Operating Voltage	2		15	V	R _s =47kΩ, 25°C
Field of View, horizontal		77°			unobstructed
Field of View, vertical		95°			unobstructed
Operating Temp.	-40		85	°C	non permanent
Storage Temperature	-40		85	°C	non permanent

Right for modification reserved / WS / 29.6.2001

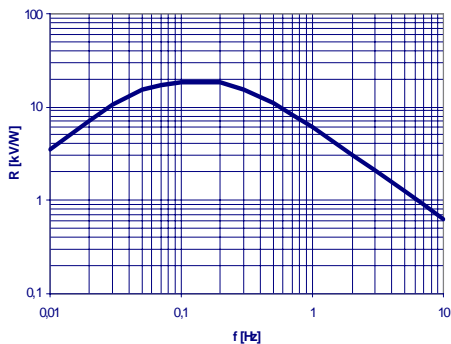

Frequency Response

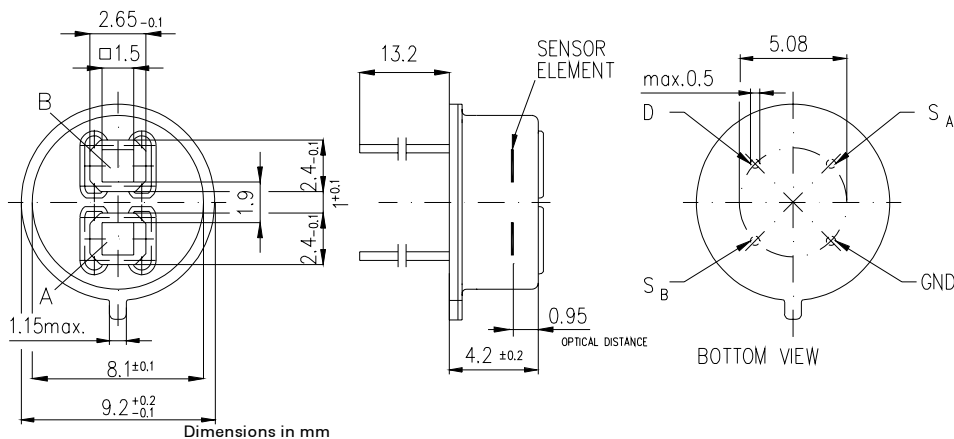

Europe:
PerkinElmer Optoelectronics GmbH
 Wenzel Jaksch Str 31
 Wiesbaden / Germany
 Phone +49(0)611 492 0
 Fax +49(0)611 492 170

USA:
PerkinElmer Optoelectronics
 2175 Mission College Blvd
 Santa Clara, CA 95054
 Phone +408 565 0830
 Fax +408 565 0703

Asia:
PerkinElmer Optoelectronics
 47, Ayer Rajah Crescent #06-12
 Singapore 139947
 Phone +65 775 2022
 Fax +65 775 1008

