

LM075L

- 16 character × 2 lines
- Controller LSI HD44780 is built-in (see section 6).
- +5V single power supply
- Large numeral font set (see page 176).

MECHANICAL DATA (Nominal dimensions)

Module size	80W × 36H × 11T (max.) mm
Effective display area	64.5W × 13.8H mm
Character size (5 × 7 dots)	2.95W × 3.8H mm
Character pitch	3.65 mm
Dot size	0.55W × 0.5H mm
Weight	about 25 g

ABSOLUTE MAXIMUM RATINGS

	min.	max.
Power supply for logic ($V_{DD}-V_{SS}$)	0	7.0 V
Power supply for LCD drive ($V_{DD}-V_O$)	0	13.5 V
Input voltage (V_i)	V_{SS}	V_{DD} V
Operating temperature (T_a)	0	50°C
Storage temperature (T_{stg})	-20	70°C

ELECTRICAL CHARACTERISTICS

$T_a = 25^\circ\text{C}$, $V_{DD} = 5.0 \text{ V} \pm 0.25 \text{ V}$.

Input "high" voltage (V_{IH})	2.2 V min.
Input "low" voltage (V_{IL})	0.6 V max.
Output "high" voltage (V_{OH}) ($-I_{OH} = 0.2 \text{ mA}$)	2.4 V min.
Output "low" voltage (V_{OL}) ($I_{OL} = 1.2 \text{ mA}$)	0.4 V max.
Power supply current (I_{DD}) ($V_{DD} = 5.0 \text{ V}$)	1.0 mA typ. 3.0 mA max.
Power supply for LCD drive (Recommended) ($V_{DD}-V_O$)	Duty = 1/16

$T_a = 0^\circ\text{C}$	4.2 V typ.
$T_a = 25^\circ\text{C}$	4.0 V typ.
$T_a = 50^\circ\text{C}$	3.6 V typ.

OPTICAL DATA See page 15.


INTERNAL PIN CONNECTION

Pin No.	Symbol	Level	Function
1	V_{SS}	—	0V
2	V_{DD}	—	+5V
3	V_O	—	—
4	RS	H/L	L: Instruction code input H: Data input
5	R/W	H/L	H: Data read (LCD module → MPU) L: Data write (LCD module ← MPU)
6	E	H, H→L	Enable signal
7	DB0	H/L	Data bus line Note (1), (2)
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	

Notes:

In the HD44780, the data can be sent in either 4-bit 2-operation or 8-bit 1-operation so that it can interface to both 4 and 8 bit MPU's.

- (1) When interface data is 4 bits long, data is transferred using only 4 buses of $DB_4 \sim DB_7$ and $DB_0 \sim DB_3$ are not used. Data transfer between the HD44780 and the MPU completes when 4-bit data is transferred twice. Data of the higher order 4 bits (contents of $DB_4 \sim DB_7$, when interface data is 8 bits long) is transferred first and then lower order 4 bits (contents of $DB_0 \sim DB_3$, when interface data is 8 bits long).
- (2) When interface data is 8 bits long, data is transferred using 8 data buses of $DB_0 \sim DB_7$.

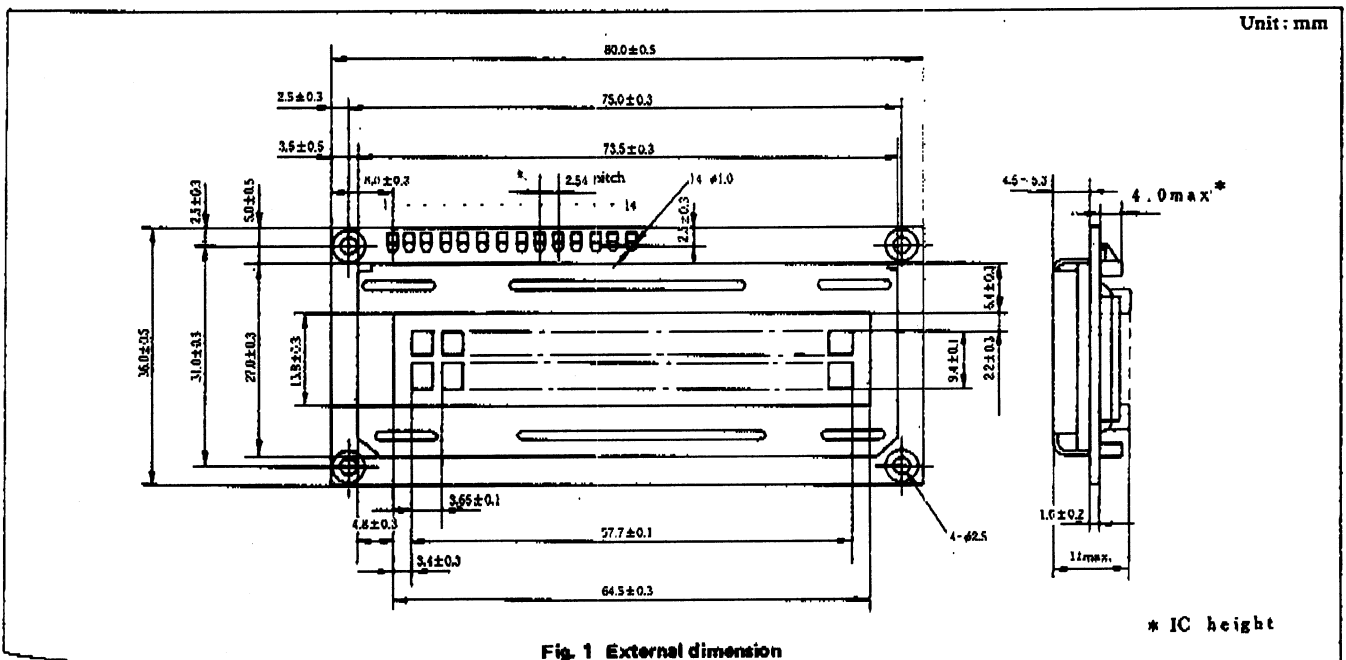

* IC height

4. FEATURES

THE FEATURES OF LCD MODULE ARE AS FOLLOWS.

- DISPLAY MODE : SIM. NORMAL TEMPERATURE
 [POSITIVE, T/F
- COLOR : DISPLAY DOT : BLUE
 [BACK GROUND : GRAY
- DISPLAY FORMAT : 40 CHARACTERS X 4 LINE
- INPUT DATA : 4-BIT OR 8-BIT INTERFACE AVAILABLE
- MULTIPLEXING RATIO : 1/16 DUTY
- VIEWING DIRECTION : 6 O'CLOCK
- BACK LIGHT : E/L WHITE
- OTHERS : SPC 0.6T. BLACK COATING

5. MECHANICAL SPECIFICATION

ITEM	SPECIFICATION	UNIT	REMARK
MODULE SIZE	190.0 [W] X 54.0 [H] X 10.0MAX. [T]	mm	* REFERENCE DIMENSIONAL OUTLINE
VIEWING AREA	147.0 [W] X 29.5 [H]	mm	
EFFECTIVE DISPLAY AREA	141.25 [W] X 23.24 [H]	mm	
CHARACTER FONT	5 X 7 DOT WITH CURSOR	-	
CHARACTER SIZE	2.80 [W] X 4.91 [H]	mm	
CHARACTER PITCH	3.55 [W] X 6.11 [H]	mm	
DOT SIZE	0.52[W] X 0.57 [H]	mm	
WEIGHT	ABOUT 105	g	

SAMSUNG

SAMSUNG DISPLAY DEVICES CO., LTD. (ALL RIGHTS RESERVED).

DOC. NO : UC-404-004 BP

REF. NO :

REV. : A

8

8. ELECTRICAL & OPTICAL CHARACTERISTICS

8-1. ELECTRICAL CHARACTERISTICS

[V_{dd} = 5V ± 10%, I_{OH} = 0.2mA, I_{OL} = 1.2mA, Ta = -20°C to +75°C]

I T E M	SYMBOL	CONDITION	STANDARD VALUE			UNIT	REMARK
			MIN.	TYP.	MAX.		
POWER SUPPLY FOR LOGIC	V _{dd} -V _{es}	-	4.5	5.0	5.5	V	
INPUT HIGH VOLTAGE	V _{IH}	-	2.2	-	V _{dd}	V	
INPUT LOW VOLTAGE	V _{IL}	-	-0.3	-	0.6	V	
OUTPUT HIGH VOLTAGE	V _{OH}	I _{OH} = 0.2mA	2.4	-	-	V	
OUTPUT LOW VOLTAGE	V _{OL}	I _{OL} = 1.2mA	-	-	0.4	V	
CURRENT CONSUMPTION FOR LOGIC & LC DRIVING	I _d	V _{dd} = 5.0V	-	6.5	8.0	mA	
OPERATING VOLTAGE FOR LCD	V _{dd} - V _o	Top = °C	-	-	-	V	
		Top = 25°C	-	4.2	-		
		Top = °C	-	-	-		
FRAME FREQUENCY	f _{FLM}	-	-	32.0	-	Hz	

** : WHEN ALL CHARACTER FONT ARE DISPLAYED AS "5".

8-2. ELECTRO-OPTICAL CHARACTERISTICS

I T E M	SYMBOL	CONDITIONS	STANDARD VALUE			UNIT	NOTE	
			MIN.	TYP.	MAX.			
VIEWING ANGLE	φ ₂ -φ ₁	K ≥ 20	60	-	-	DEG.	1, 2	
CONTRAST RATIO	K	θ = 0°, φ = 15°	3	5	-	-	3	
RESPONSE TIME(RISING)	Tr	φ, θ = 0°	Top = 0°C	-	700	800	ms	4
			Top = 25°C	-	200	250		
			Top = °C	-	-	-		
RESPONSE TIME(FALLING)	Tf	φ, θ = 0°	Top = 0°C	-	300	1000	ms	4
			Top = 25°C	-	250	300		
			Top = °C	-	-	-		

- ALL VALUE IS MEASURED BY DMS (MADE IN AUTRONIC) UNDER THE TEST CONDITIONS - V_{dd}-V_o = 4.2V, 1/16 DUTY, 1/4 BIAS, f_{FLM} = 32 Hz, Ta = 25°C.

SAMSUNG

SAMSUNG DISPLAY DEVICES CO., LTD. (All Rights Reserved).

DOC. NO : UC-404-004 BP

REP. NO :

REV. : A


10

9. TERMINAL FUNCTIONS & BLOCK DIAGRAM

9-1. TERMINAL FUNCTIONS

PIN NO	SYMBOL	LEVEL	NAME	FUNCTION DESCRIPTION
1	Vcc	-	GND	0 V
2	Vdd	-	POWER SUPPLY FOR LOGIC	5V± 10%
3	V0	-	OPERATING VOLTAGE FOR LCD	REF. 7
4	Rc	H/L	REGISTER SELECTION	R: DATA INPUT L: INSTR. DATA INPUT
5	R/W	H/L	READ / WRITE	R: READ, L: WRITE
6	E1	H/L	ENABLE SIGNAL1	-
7	E2	H/L	ENABLE SIGNAL2	-
8	D0	H/L	DATA LINE	DISPLAY DATA INPUT
9	D1	H/L	DATA LINE	DISPLAY DATA INPUT
10	D2	H/L	DATA LINE	DISPLAY DATA INPUT
11	D3	H/L	DATA LINE	DISPLAY DATA INPUT
12	D4	H/L	DATA LINE	DISPLAY DATA INPUT
13	D5	H/L	DATA LINE	DISPLAY DATA INPUT
14	D6	H/L	DATA LINE	DISPLAY DATA INPUT
15	D7	H/L	DATA LINE	DISPLAY DATA INPUT
16	NC	-	-	-

9-2. BLOCK DIAGRAM

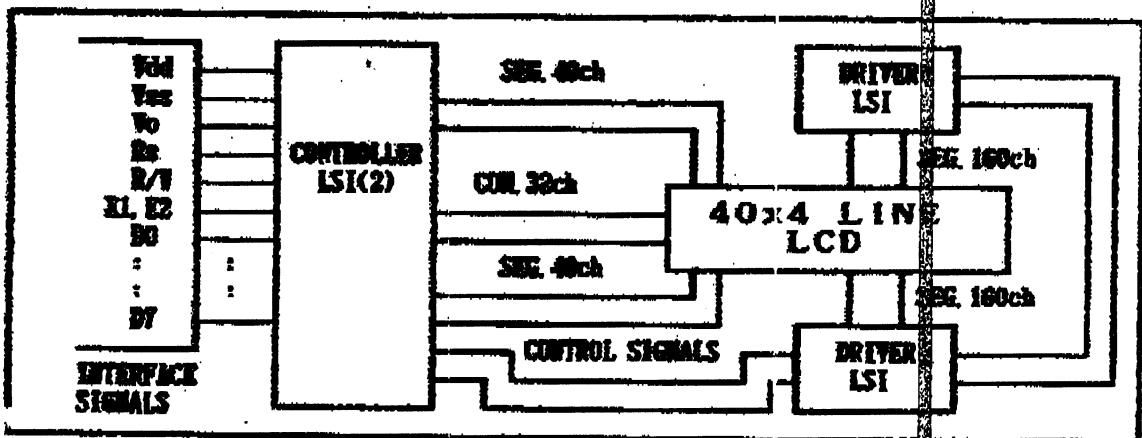

SAMUNG

SAMSUNG DISPLAY DEVICES CO., LTD. (All Rights Reserved).

DOC. NO : UC-404-001 BP REF. NO :

REV. : A 12