

TO: 众诚伟业

规格书编号

File No.

PN-RD-0022A

作成日 Issue Date:

2012年(Y)05月(M)30日(D)

改订日 Revision Date:

2012年(Y)08月(M)07日(D)

《新规
New《变更》
Revision

产品规格书

Product Specification

产品名
Product TFT-LCD Module

机种名
Model LM315TU5A

【接收印栏】

| |
|--|
| |
|--|

※ 本基准书由封面、附件等全 20 页构成。

如果对该规格书有异议, 请在下订单前提出。

※ This Product Specification have 20 pages including the coversheet and Appendices. Please negotiate the objection point before purchase order.

中电熊猫集团
南京中电熊猫液晶显示科技有限公司
研发中心 设计整合部

CEC PANDA GROUP

NANJING CEC PANDA LCD TECHNOLOGY CO., LTD.

R&D CENTER, DESIGN INTEGRATION SECTION.

| 部长 | 科长 | 主管 | 担当 |
|-------------|-------------------------|----|--------------------|
| 林 伟 伟 | 李 建 邦 2012.8.7 | | 徐 阳 2012.8.7 |

-CONTENTS -

| | |
|--|-----------|
| REVISION HISTORY | 3 |
| 1. GENERAL DESCRIPTION | 4 |
| 1.1 OVERVIEW | 4 |
| 1.2 CHARACTERISTICS | 4 |
| 1.3 MECHANICAL SPECIFICATIONS | 4 |
| 2. ABSOLUTE MAXIMUM RATINGS | 4 |
| 2.1 ABSOLUTE RATINGS OF ENVIRONMENT | 4 |
| 3. ELECTRICAL CHARACTERISTICS | 5 |
| 3.1 ABSOLUTE MAXIMUM RATING | 5 |
| 3.2 CONTROL CIRCUIT DRIVING | 5 |
| 3.3 LED LIGHTBAR SPECIFICATION FOR BACKLIGHT | 7 |
| 4. INTERFACE PIN CONNECTION | 7 |
| 4.1 TFT LCD MODULE | 7 |
| 4.2 BLOCK DIAGRAM (TFT LCD MODULE) | 9 |
| 4.3 LVDS INTERFACE | 9 |
| 4.4 COLOR DATA INPUT ASSIGNMENT | 10 |
| 4.5 BACKLIGHT INTERFACE CONNECTION | 11 |
| 4.6 BACKLIGHT UNIT | 11 |
| 5. INTERFACE TIMING | 12 |
| 5.1 INPUT SIGNAL TIMING SPECIFICATIONS | 12 |
| 5.2 LVDS SIGNAL CHARACTERISTICS | 12 |
| 6. OPTICAL CHARACTERISTICS | 14 |
| 6.1 OPTICAL SPECIFICATION | 14 |
| 7. DEFINITION OF LABELS | 16 |
| 7.1 MODULE LABEL | 16 |
| 7.2 PACKING LABEL | 16 |
| 8. PACKING | 16 |
| 8.1 PACKING SPECIFICATIONS | 16 |
| 8.2 PACKING METHOD | 16 |
| 9. CARTON STORAGE CONDITION | 17 |
| 10. PRECAUTIONS | 17 |
| 10.1 ASSEMBLY AND HANDLING PRECAUTIONS | 17 |
| 10.2 SAFETY PRECAUTIONS | 18 |
| 11. RELIABILITY | 18 |
| 12. MECHANICAL DRAWING | 18 |



REVISION HISTORY

MODEL NO: LM315TU5A

| DATE | NO. | REVISED No. | PAGE | SUMMARY | NOTE |
|------------|-------------|-------------|---------------------|--|---------------|
| 2012/05/30 | PN-RD-0022A | T 1.0 | 20 | First Edition | Tentative |
| 2012/06/16 | PN-RD-0022A | T 1.1 | 4, 7, 11, 14, 17 | P4. Update the value of mechanical specifications. P7. Update the value of backlight specifications. P11. Change the description of interface connection. P14. Update the value of optical specification. P17. Add packing method. | Tentative |
| 2012/08/07 | PN-RD-0022A | V 1.0 | 5,7,8,12, 16 | P5. Add Permissible input ripple voltage. P7. Add [Note 3]. P8. Correct Pin 10,27,28,29,30. P12.Add TH-THd and TV-TVd. P16. Update packing specification. | Final Version |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

1. GENERAL DESCRIPTION

1.1 OVERVIEW

This module is color active matrix LCD module incorporating amorphous silicon TFT(Thin Film Transistor) LCD panel. It is composed of a color TFT-LCD panel, driver ICs, LED Backlight... etc. Graphics and texts can be displayed on a 1366×RGB×768 dots panel with about 16,777,216 colors(R/G/B 8bit in each color) by using LVDS(Low Voltage Differential Signaling) to interface, +12V of DC supply voltage.

In order to improve the response time of LCD, this module applies the Over Shoot driving (O/S driving) technology for the control circuit. In the O/S driving technology, signals are being applied to the Liquid Crystal according to a pre-fixed process as an image signal of the present frame when a difference is found between image signal of the previous frame and that of the current frame after comparing them.

By using the captioned process, the image signals of this LCD module are being set so that image response can be completed within one frame, as a result, image blur can be improved and clear image performance can be realized.

1.2 CHARACTERISTICS

| CHARACTERISTICS ITEMS | SPECIFICATIONS |
|--|---------------------------|
| Screen Diagonal [in] | 31.5" |
| Pixels [lines] | 1366×768 |
| Active Area [mm] | 697.685 (H) x 392.256 (V) |
| Pixel Pitch [mm] | 0.51075(H) x 0.51075 (V) |
| Pixel Arrangement | RGB vertical stripe |
| Display Colors | 16.7M |
| Display Mode | Normally Black |
| Surface treatment (Without the protection film) | Anti-glare,2H |

1.3 MECHANICAL SPECIFICATIONS

| Item | | Min. | Typ. | Max. | Unit | Remark |
|-------------|----------------|-------|-------|-------|------|----------|
| Module Size | Horizontal (H) | 734.9 | 735.4 | 735.9 | mm | [Note 1] |
| | Vertical (V) | 432.5 | 433 | 433.5 | mm | [Note 1] |
| | Depth (D) | 16.3 | 16.5 | 17.5 | mm | [Note 1] |
| Weight | | | 5500 | 6000 | g | |

[Note 1] Please refer to the attached drawings for more information of front and back outline dimensions and the dimension of bosses are not included.

2. ABSOLUTE MAXIMUM RATINGS

2.1 ABSOLUTE RATINGS OF ENVIRONMENT


| Item | Symbol | Value | | Unit | Remark |
|-------------------------------|-----------------|-------|------|------|--------------|
| | | Min. | Max. | | |
| Storage Temperature | T _{ST} | -20 | +60 | °C | [Note 1,3] |
| Operating Ambient Temperature | T _{OP} | 0 | 50 | °C | [Note 1,2,3] |

Storage Condition: With shipping package.

Shelf life: one year

[Note 1] Temperature and relative humidity range is shown in the figure below.

- (a) 80 %RH Max. (Ta ≤ 40 °C).
- (b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).
- (c) No condensation.

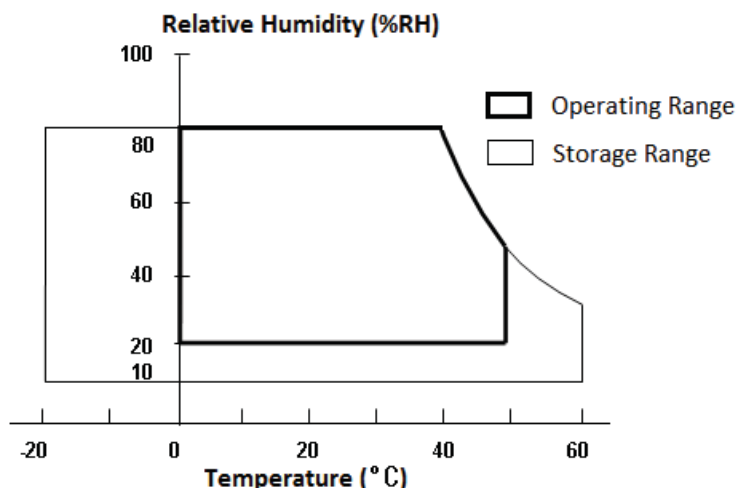

[Note 2] The maximum operating temperature is based on the test condition that the surface temperature of display area is less than or equal to 50 °C with LCD module alone in a temperature controlled chamber. Thermal management should be considered in your product design to prevent the surface temperature of display area from being over 60 °C. The range of operating temperature may degrade in case of improper thermal management in your product design.

[Note 3] The rating of environment is base on LCD module. Except LCD module, the customer has to consider the ability of other parts of LCD set and LCD set assembly process.

3. ELECTRICAL CHARACTERISTICS

3.1 ABSOLUTE MAXIMUM RATING

| Parameter | Symbol | Condition | Ratings | Unit | Remark |
|-----------------------|----------------------|----------------------|----------|------|------------|
| +12V supply voltage | V _{CC} | T _a =25°C | 0~+14 | V | CN1 Pin1~4 |
| Control voltage | V _{SELLVDS} | T _a =25°C | -0.3~3.6 | V | CN1 Pin9 |
| Storage temperature | T _{stg} | - | -20~+60 | °C | |
| Operation temperature | T _{opa} | - | 0~+50 | °C | |

3.2 CONTROL CIRCUIT DRIVING

| Parameter | | Symbol | Min. | Typ. | Max. | Unit | Remark |
|--|---------------------|-------------------|---------------------|-------|--------------------------------|-------|-------------------------------|
| +12V supply voltage | Supply voltage | V _{CC} | +10.8 | +12.0 | +13.2 | V | [Note 1] |
| | Current dissipation | I _{CC} | - | 350 | 600 | mA | [Note 2] |
| | | I _{RUSH} | - | - | 5 | A | |
| Permissible input ripple voltage | | V _{RP} | - | - | 100 | mVp-p | V _{CC} =+12.0V |
| Differential input threshold voltage | High | V _{TH} | | - | 100 | mV | [Note 4] |
| | Low | V _{TL} | -100 | - | - | mV | |
| Input Low voltage | | V _{IL} | 0 | | 0.7 | V | [Note 3] |
| Input High voltage | | V _{IH} | 2.6 | - | 3.3 | V | |
| Input leak current (Low) | | I _{IL} | - | - | 400 | μA | V _I =0V [Note 3] |
| Input leak current (High) | | I _{IH} | - | - | 100 | μA | V _I =3.3V [Note 3] |
| Terminal resistor | | R _T | - | 100 | - | Ω | Differential input |
| Input Differential voltage | | V _{ID} | 200 | 400 | 600 | mV | [Note 4] |
| Differential input common mode voltage | | V _{CM} | V _{ID} /2 | 1.2 | $\frac{2.4 \cdot V_{ID} }{2}$ | V | [Note 4] |

V_{CM}: Common mode voltage of LVDS driver.

[Note 1]


Input voltage sequences

 $50\mu\text{s} \leq t1 \leq 20\text{ms}$ $20\text{ms} < t2-1$ $20\text{ms} < t2-2$ $0 < t3-1 \leq 1\text{s}$ $0 < t3-2 \leq 1\text{s}$ $1\text{s} \leq t4$ $300\text{ms} \leq t5-1$ $300\text{ms} \leq t5-2$ $0 < t6-1$ $0 < t6-2$

Dip conditions for supply voltage

a) $9.1\text{V} \leq V_{CC} < 10.8\text{V}$ $t_d \leq 10\text{ms}$ b) $V_{CC} < 9.1\text{V}$

Dip conditions for supply voltage is based on input voltage sequence.

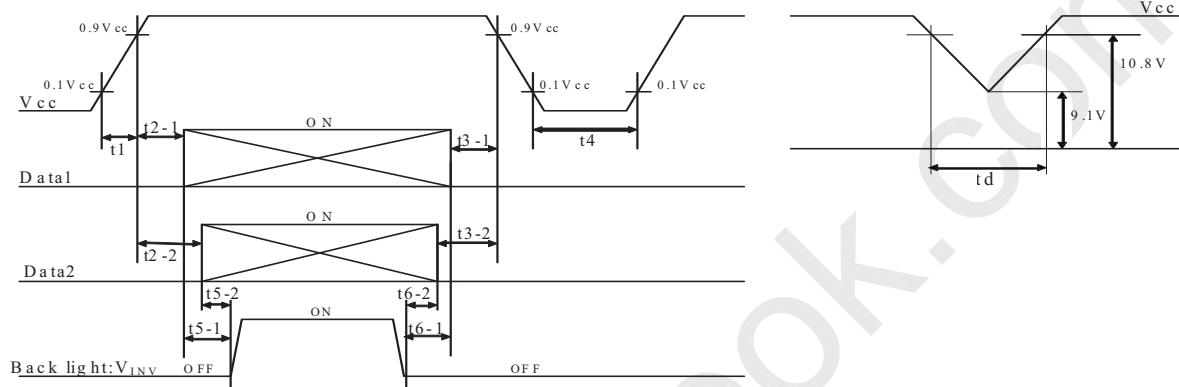

※ Data1: CLKIN±, RIN0±, RIN1±, RIN2±, RIN3±


※ Data2: SELLVDS

※ About the relation between data input and back light lighting, please base on the above-mentioned input sequence.

※ When back light is switched on before panel operation or after a panel operation stop, it may not display normally. But this phenomenon is not based on change of an incoming signal, and does not give damage to a liquid crystal display.

[Note 2] Typical current situation: 256 gray-bar pattern ($V_{CC} = +12.0\text{V}$).


The explanation of RGB gray scale is seen in section 8.

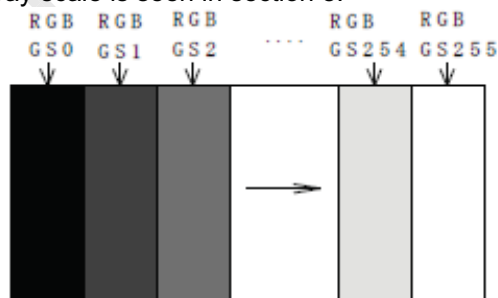

Typical current situation

[Note 3] SELLVDS

[Note 4] CLKIN+/CLKIN-, RIN0+/RIN0-, RIN1+/RIN1-, RIN2+/RIN2-, RIN3+/RIN3-

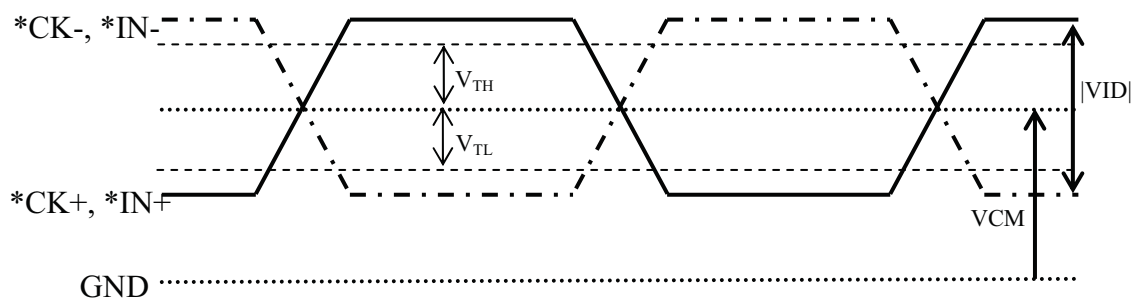

3.3 LED LIGHTBAR SPECIFICATION FOR BACKLIGHT

| Parameter | Symbol | Value | | | Unit | Note |
|-----------------------------|-----------|--------|------|------|------|-----------------------|
| | | Min. | Typ. | Max. | | |
| Input Voltage | V_{pin} | 52.2 | 55.8 | 59.4 | VDC | Duty 100% [Note 1] |
| Input Current Per input pin | I_{pin} | - | 120 | - | mADC | Duty 100% [Note 1] |
| LED Life Time | LT | 30,000 | - | - | Hrs | [Note 2] |
| Power Consumption | PBL | 25.1 | 26.8 | 28.5 | W | Duty 100% [Note 3] |
| Dimming Duty Ratio | - | 20 | - | 100 | % | |

[Note 1] Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

[Note 2] The life time of LED is defined as the time when it continues to operate under the condition at $T_a = 25 \pm 2^\circ\text{C}$ and $I_{pin} = 120 \text{ mA}$ (per string) until the brightness becomes $\leq 50\%$ of its original value.

[Note 3] $P_{BL} = V_{pin} \times I_{pin} \times (4)$ input pins.

4. INTERFACE PIN CONNECTION

4.1 TFT LCD MODULE

CN1 (Interface signals and +12V DC power supply) shown on the next table.

Using connector: IS100-L30B-C23 (UJU)

Matching connector: FI-X30C2L (Japan Aviation Electronics Ind., Ltd) or Equivalent

Matching LVDS transmitter: THC63LVDM83R (THine) or equivalent device

| Pin No. | Symbol | | Remark |
|---------|----------|--|-------------------------------------|
| 1 | VCC | +12V Power Supply | [Note 3] |
| 2 | VCC | +12V Power Supply | |
| 3 | VCC | +12V Power Supply | |
| 4 | VCC | +12V Power Supply | |
| 5 | GND | Ground | |
| 6 | GND | Ground | |
| 7 | GND | Ground | |
| 8 | GND | Ground | |
| 9 | SELLVDS | Select LVDS data order[Note1] | Default: pull down (L:GND) [Note 2] |
| 10 | Reserved | It is required to set non-connection(OPEN) | |
| 11 | GND | Ground | |
| 12 | RIN0- | Negative(-) LVDS differential data input | LVDS |
| 13 | RIN0+ | Positive(+) LVDS differential data input | LVDS |
| 14 | GND | Ground | |
| 15 | RIN1- | Negative(-) LVDS differential data input | LVDS |
| 16 | RIN1+ | Positive(+) LVDS differential data input | LVDS |
| 17 | GND | Ground | |
| 18 | RIN2- | Negative(-) LVDS differential data input | LVDS |

| | | | |
|----|----------|--|------|
| 19 | RIN2+ | Positive(+) LVDS differential data input | LVDS |
| 20 | GND | Ground | |
| 21 | CLKIN- | Clock Signal(-) | LVDS |
| 22 | CLKIN+ | Clock Signal(+) | LVDS |
| 23 | GND | Ground | |
| 24 | RIN3- | Negative(-) LVDS differential data input | LVDS |
| 25 | RIN3+ | Positive(+) LVDS differential data input | LVDS |
| 26 | GND | Ground | |
| 27 | Reserved | It is required to set non-connection(OPEN) | |
| 28 | Reserved | It is required to set non-connection(OPEN) | |
| 29 | Reserved | It is required to set non-connection(OPEN) | |
| 30 | Reserved | It is required to set non-connection(OPEN) | |


[Note 1] SELLVDS

| Transmitter | | SELLVDS | |
|-------------|------|------------------|----------|
| Pin No | Data | VESA | JEITA |
| | | = L(GND) or Open | =H(3.3V) |
| 51 | TA0 | R0(LSB) | R2 |
| 52 | TA1 | R1 | R3 |
| 54 | TA2 | R2 | R4 |
| 55 | TA3 | R3 | R5 |
| 56 | TA4 | R4 | R6 |
| 3 | TA5 | R5 | R7(MSB) |
| 4 | TA6 | G0(LSB) | G2 |
| 6 | TB0 | G1 | G3 |
| 7 | TB1 | G2 | G4 |
| 11 | TB2 | G3 | G5 |
| 12 | TB3 | G4 | G6 |
| 14 | TB4 | G5 | G7(MSB) |
| 15 | TB5 | B0(LSB) | B2 |
| 19 | TB6 | B1 | B3 |
| 20 | TC0 | B2 | B4 |
| 22 | TC1 | B3 | B5 |
| 23 | TC2 | B4 | B6 |
| 24 | TC3 | B5 | B7(MSB) |
| 27 | TC4 | NA | NA |
| 28 | TC5 | NA | NA |
| 30 | TC6 | DE(*) | DE(*) |
| 50 | TD0 | R6 | R0(LSB) |
| 2 | TD1 | R7(MSB) | R1 |
| 8 | TD2 | G6 | G0(LSB) |
| 10 | TD3 | G7(MSB) | G1 |
| 16 | TD4 | B6 | B0(LSB) |
| 18 | TD5 | B7(MSB) | B1 |
| 25 | TD6 | NA | NA |

NA: Not Available


(*)The display position is prescribed by the rise of DE (Display Enable) signal, please do not fix DE signal during operation at "High."

[Note 2] The equivalent circuit figure of the terminal

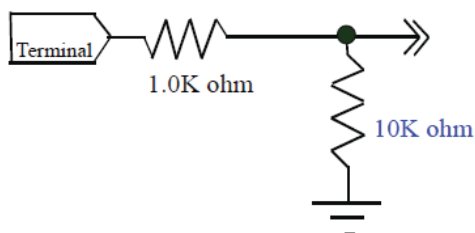


[Note 3] The location of Pin 1 is shown in Fig.12-2.

4.2 BLOCK DIAGRAM (TFT LCD MODULE)

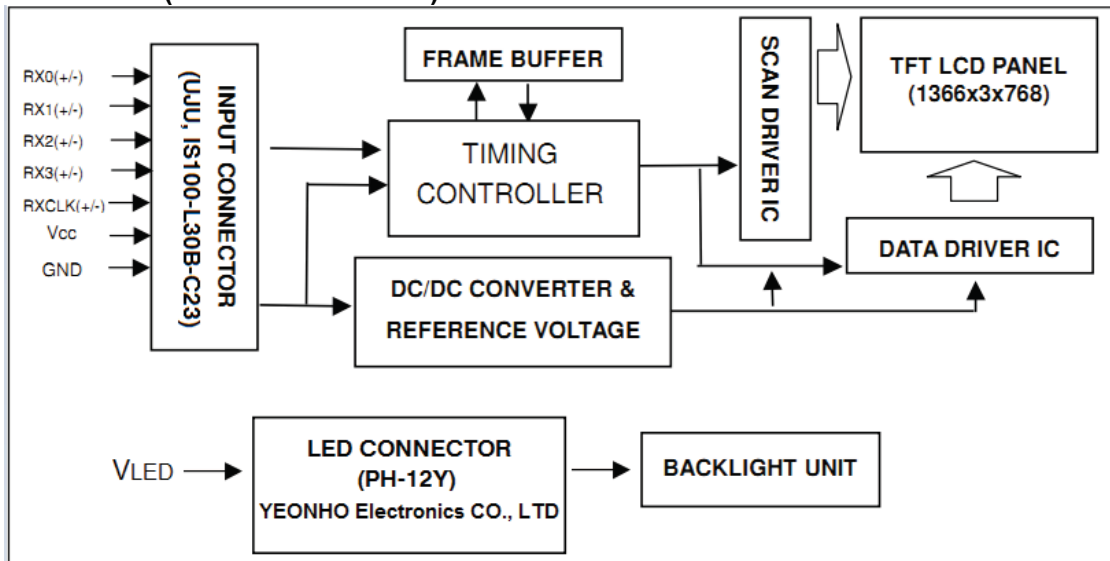


4.3 LVDS INTERFACE

SELLVDS(JEITA)= High (3.3V)

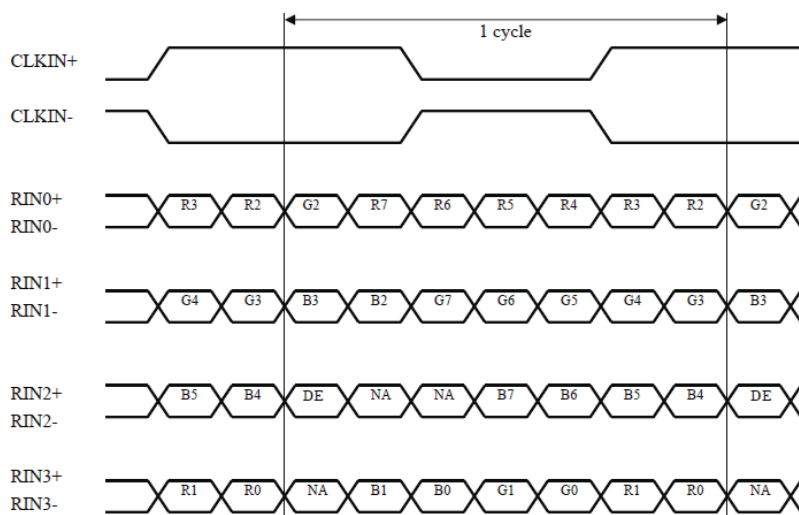

SELLVDS(VESA)= LOW (GND) or OPEN

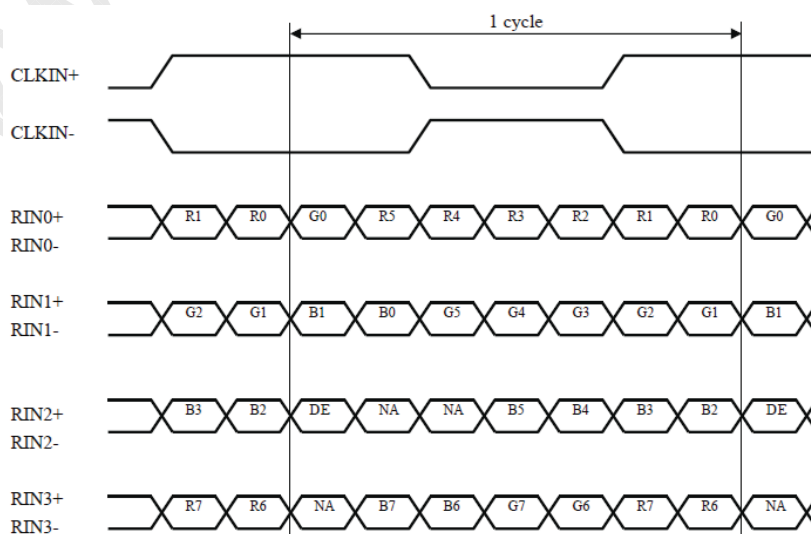

LVDS data map

DE: Display Enable

NA: Not Available (Fixed Low)

4.4 COLOR DATA INPUT ASSIGNMENT

| Colors & Gray scale | Data signal | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|-------------|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | Gray Scale | R0 | R1 | R2 | R3 | R4 | R5 | R6 | R7 | G0 | G1 | G2 | G3 | G4 | G5 | G6 | G7 | B0 | B1 | B2 | B3 | B4 | B5 | B6 | B7 |
| Basic Color | Black | — | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue | — | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Green | — | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Cyan | — | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Red | — | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Magenta | — | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | — | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | — | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Gray Scale of Red | Black | GS0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | GS1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | GS2 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | ↓ | | | | ↓ | | | | | | | ↓ | | | | | | | ↓ | | | | | |
| | ↓ | ↓ | | | | ↓ | | | | | | | ↓ | | | | | | | ↓ | | | | | |
| | Brighter | GS253 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↓ | GS254 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red | GS255 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Gray Scale of Green | Black | GS0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | GS1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | GS2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | ↓ | | | | ↓ | | | | | | | ↓ | | | | | | | ↓ | | | | | |
| | ↓ | ↓ | | | | ↓ | | | | | | | ↓ | | | | | | | ↓ | | | | | |
| | Brighter | GS253 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↓ | GS254 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green | GS255 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Gray Scale of Blue | Black | GS0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | GS1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Darker | GS2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | ↑ | ↓ | | | | ↓ | | | | | | | ↓ | | | | | | | ↓ | | | | | |
| | ↓ | ↓ | | | | ↓ | | | | | | | ↓ | | | | | | | ↓ | | | | | |
| | Brighter | GS253 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | ↓ | GS254 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Blue | GS255 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

0: Low level voltage,


1: High level voltage.

Each basic color can be displayed in 256 gray scales from 8 bit data signals. According to the combination of total 24 bit data signals, the 16,7M colors display can be achieved on the screen.

4.5 BACKLIGHT INTERFACE CONNECTION


LED lightbar housing type : PH-12Y, manufactured by YEONHO Electronics CO., LTD or equivalent. The mating connector is 20022WR-12BD, or equivalent.

| Pin No. | Symbol | Description |
|---------|--------|------------------------|
| 1 | LED+ | Positive of LED String |
| 2 | NC | No connection |
| 3 | LED- | Negative of LED String |
| 4 | NC | No connection |
| 5 | LED- | Negative of LED String |
| 6 | NC | No connection |
| 7 | NC | No connection |
| 8 | LED- | Negative of LED String |
| 9 | NC | No connection |
| 10 | LED- | Negative of LED String |
| 11 | NC | No connection |
| 12 | LED+ | Positive of LED String |

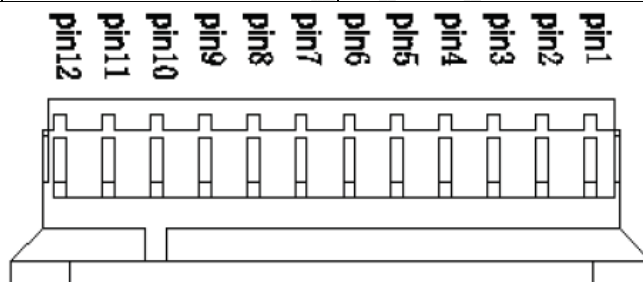

4.6 BACKLIGHT UNIT

The backlight unit contains one lightbar.

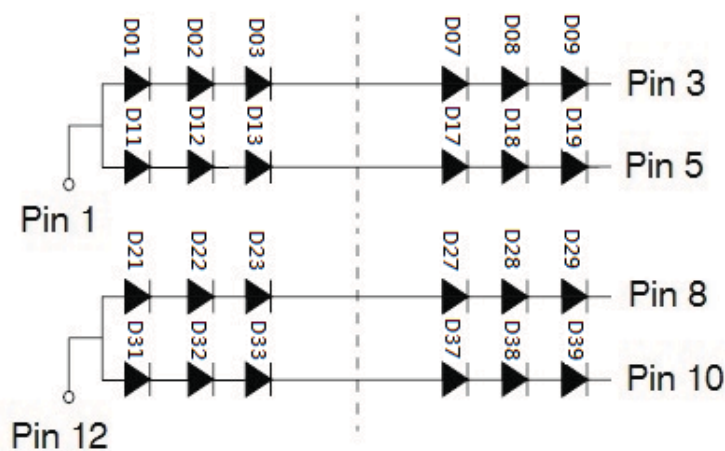

LED: $9 \times 4 = 36$ (pcs)

Electrical Circuit


5. INTERFACE TIMING

5.1 INPUT SIGNAL TIMING SPECIFICATIONS


The input signal timing specifications are shown as the following table and timing diagram.

| Parameter | | Symbol | Min | Typ. | | Max. | Unit |
|--------------------------|----------------------------|--------|-------|-------|-------|-------|-------|
| | | | | NTSC | PAL | | |
| Clock | Frequency | 1/Tc | 72 | 82 | 82 | 85 | MHz |
| Data enable signal | Horizontal period | TH | 1540 | 1696 | 1696 | 1940 | clock |
| | | | 17.15 | 20.68 | 20.68 | 21.42 | μs |
| | Horizontal period (High) | THd | 1366 | 1366 | 1366 | 1366 | clock |
| | Horizontal Blanking period | TH-THd | 174 | 330 | 330 | 574 | clock |
| | Vertical period | TV | 778 | 806 | 967 | 972 | line |
| | | | 47.70 | 60 | 50 | 62.35 | Hz |
| | Vertical period (High) | TVd | 768 | 768 | 768 | 768 | line |
| Vertical Blanking period | TV-TVd | 10 | 38 | 199 | 204 | line | |

*Timing diagrams of input signal are shown below

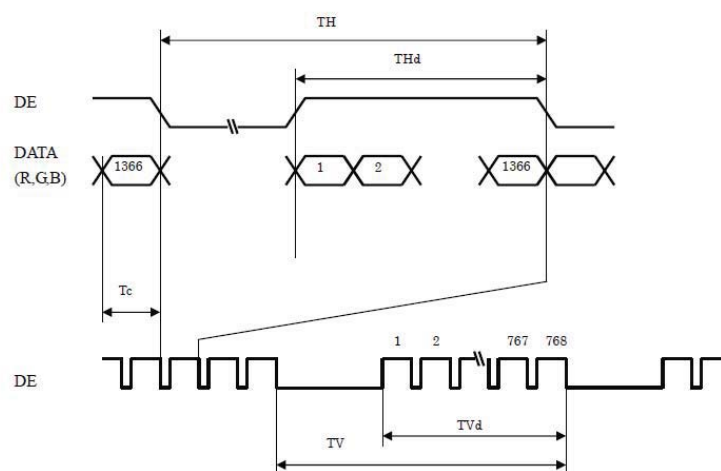

5.2 LVDS SIGNAL CHARACTERISTICS

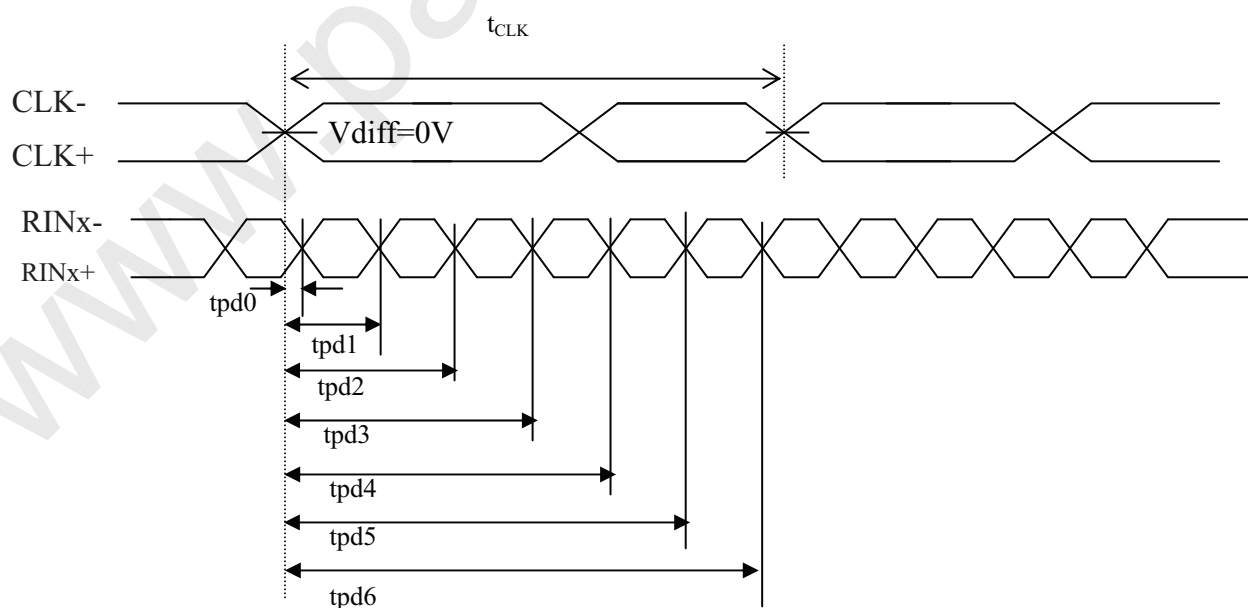

LVDS signal characteristics

| The item | | Symbol | min. | typ. | Max. | unit |
|---------------|--|--------|----------|------------------------|----------|------|
| Data position | Delay time, CLK rising edge to serial bit position 0 | tpd0 | -0.40 | 0 | 0.40 | ns |
| | Delay time, CLK rising edge to serial bit position 1 | tpd1 | typ-0.40 | 1* t _{CLK} /7 | typ+0.40 | |
| | Delay time, CLK rising edge to serial bit position 2 | tpd2 | typ-0.40 | 2* t _{CLK} /7 | typ+0.40 | |
| | Delay time, CLK rising edge to serial bit position 3 | tpd3 | typ-0.40 | 3* t _{CLK} /7 | typ+0.40 | |
| | Delay time, CLK rising edge to serial bit position 4 | tpd4 | typ-0.40 | 4* t _{CLK} /7 | typ+0.40 | |
| | Delay time, CLK rising edge to serial bit position 5 | tpd5 | typ-0.40 | 5* t _{CLK} /7 | typ+0.40 | |
| | Delay time, CLK rising edge to serial bit position 6 | tpd6 | typ-0.40 | 6* t _{CLK} /7 | typ+0.40 | |

6. OPTICAL CHARACTERISTICS



6.1 OPTICAL SPECIFICATION

Ta=25°C


| Parameter | | Symbol | Condition | Min. | Typ. | Max. | Unit | Remark |
|-----------------------|-------------------|----------------------------|-------------------|----------|-------|----------|-------------------|------------|
| Luminance | Central Luminance | Lwc | $\theta = 0$ deg. | 300 | 350 | - | cd/m ² | [Note 1,4] |
| | Uniformity | ΔLw | $\theta = 0$ deg. | 75 | - | - | % | [Note 1,5] |
| Viewing angle range | Horizontal | $\theta 21$ $\theta 22$ | CR \geq 10 | - | 88 | - | Deg. | [Note 1,4] |
| | Vertical | $\theta 11$ $\theta 12$ | | - | 88 | - | Deg. | |
| Contrast ratio | | CR | $\theta = 0$ deg. | - | 5000 | - | - | [Note 2,4] |
| Response time | | τ_{DRV} | | - | 7 | - | ms | [Note 3,4] |
| Chromaticity of white | x | y | | Typ-0.03 | 0.280 | Typ+0.03 | - | [Note 4] |
| | y | | | | 0.285 | | - | |
| Chromaticity of red | x | y | | 0.639 | - | | | |
| | y | | | 0.349 | - | | | |
| Chromaticity of green | x | y | | 0.313 | - | | | |
| | y | | | 0.636 | - | | | |
| Chromaticity of blue | x | y | | 0.152 | - | | | |
| | y | | | 0.064 | - | | | |
| Color Gamut | | C.G. | - | 72 | - | % | | |

*The measurement shall be executed 30 minutes after lighting at rating.

*The optical characteristics are measured using the following equipment.

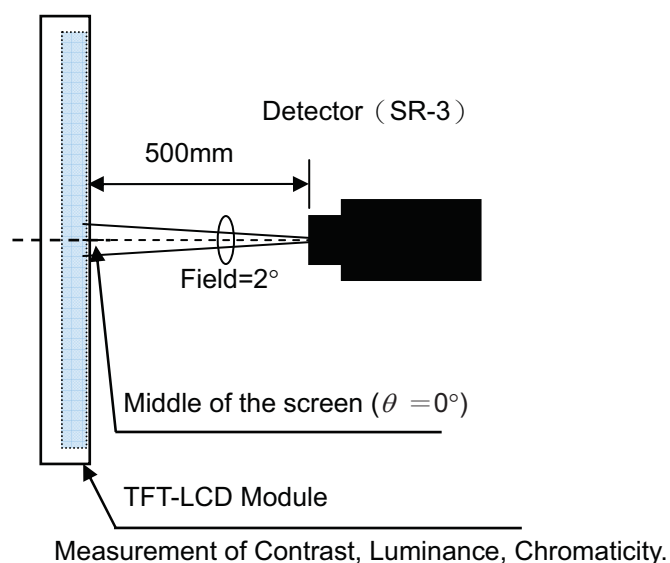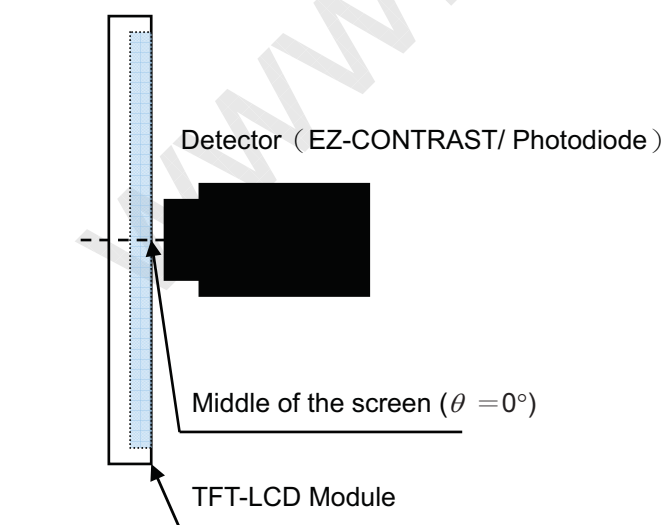

[Note 1] Definitions of viewing angle range:

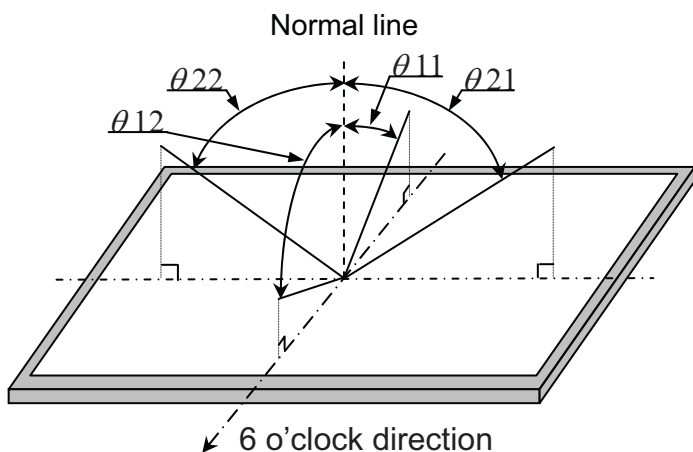

[Note 2] Definition of contrast ratio:

The contrast ratio is defined as the following.

$$\text{Contrast Ratio} = \frac{\text{Luminance (Brightness) with white screen}}{\text{Luminance (Brightness) with black screen}}$$


[Note 3] Definition of response time

The response time (τ_{DRV}) is defined as the following figure and shall be measured by switching the input signal for “any level of gray (0%, 25%, 50%, 75% and 100%) and “any level of gray (0%, 25%, 50%, 75% and 100%).

| | 0% | 25% | 50% | 75% | 100% |
|------|--------------------|---------------------|---------------------|---------------------|---------------------|
| 0% | | $\tau_r:0\%-25\%$ | $\tau_r:0\%-50\%$ | $\tau_r:0\%-75\%$ | $\tau_r:0\%-100\%$ |
| 25% | $\tau_d:25\%-0\%$ | | $\tau_r:25\%-50\%$ | $\tau_r:25\%-75\%$ | $\tau_r:25\%-100\%$ |
| 50% | $\tau_d:50\%-0\%$ | $\tau_d:50\%-25\%$ | | $\tau_r:50\%-75\%$ | $\tau_r:50\%-100\%$ |
| 75% | $\tau_d:75\%-0\%$ | $\tau_d:75\%-25\%$ | $\tau_d:75\%-50\%$ | | $\tau_r:75\%-100\%$ |
| 100% | $\tau_d:100\%-0\%$ | $\tau_d:100\%-25\%$ | $\tau_d:100\%-50\%$ | $\tau_d:100\%-75\%$ | |

$\tau^*:x-y...$ response time from level of gray(x) to level of gray(y)

$$\tau_{DRV} = \Sigma (\tau^*:x-y)/20$$

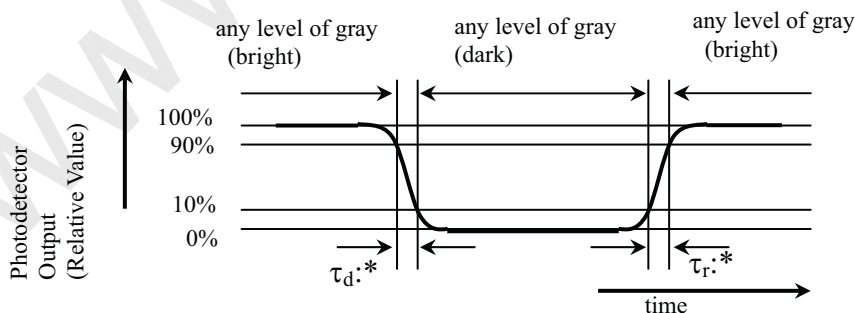


[Note 4] This shall be measured at center of the screen.

[Note 5] Definition of Luminance and Luminance uniformity:

Luminance: To measure at the center position “5” on the screen (NO.5).

Luminance uniformity: Lw (MAX) and Lw(MIN) are the maximum and minimum luminance value measure at the position “1~5” on the screen (NO.1~5) and the equation:

$$\Delta Lw = Lw(MIN) / Lw(MAX) \times 100\%$$

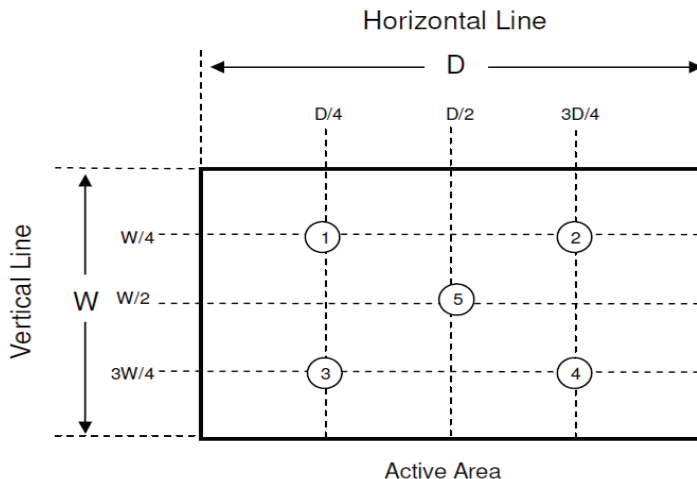


7. DEFINITION OF LABELS

7.1 MODULE LABEL

The label of displays, product model (LM315TU5A), and product label is stuck on the back side of the Module.



7.2 PACKING LABEL

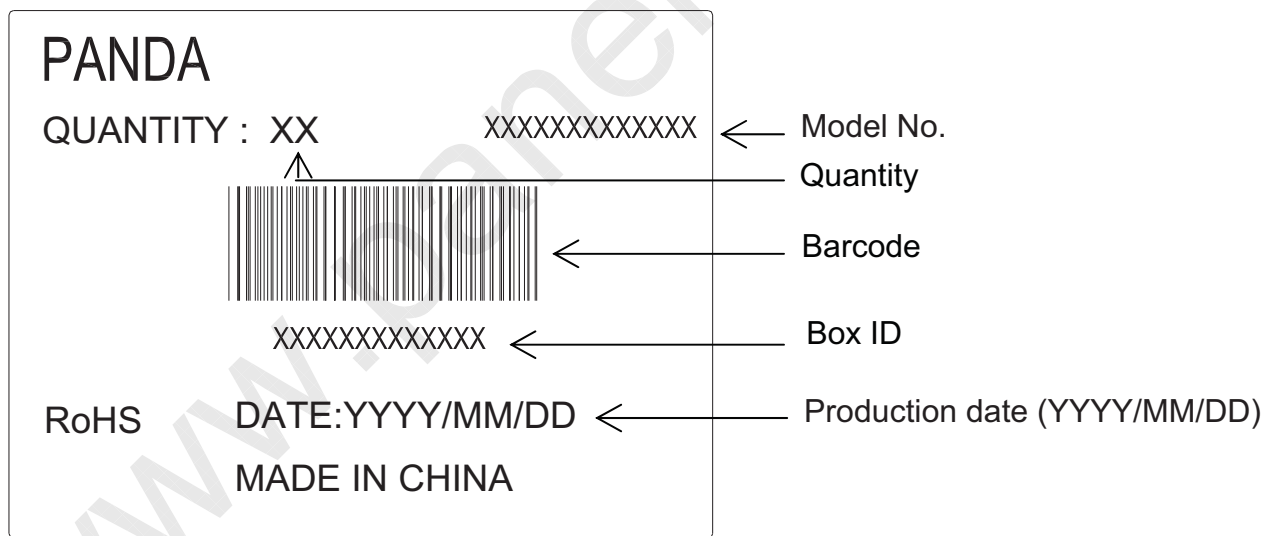


8. PACKING

8.1 PACKING SPECIFICATIONS

- a) Piling number of cartons : 6 Cartons/1 pallet
- b) Packing quantity in one Carton : 12 pcs
- c) Packing size : 1558mm(W)×900mm(D)×1737mm(H)
- d) Total mass of one Carton filled with full LCM : Approximately 72kg

8.2 PACKING METHOD

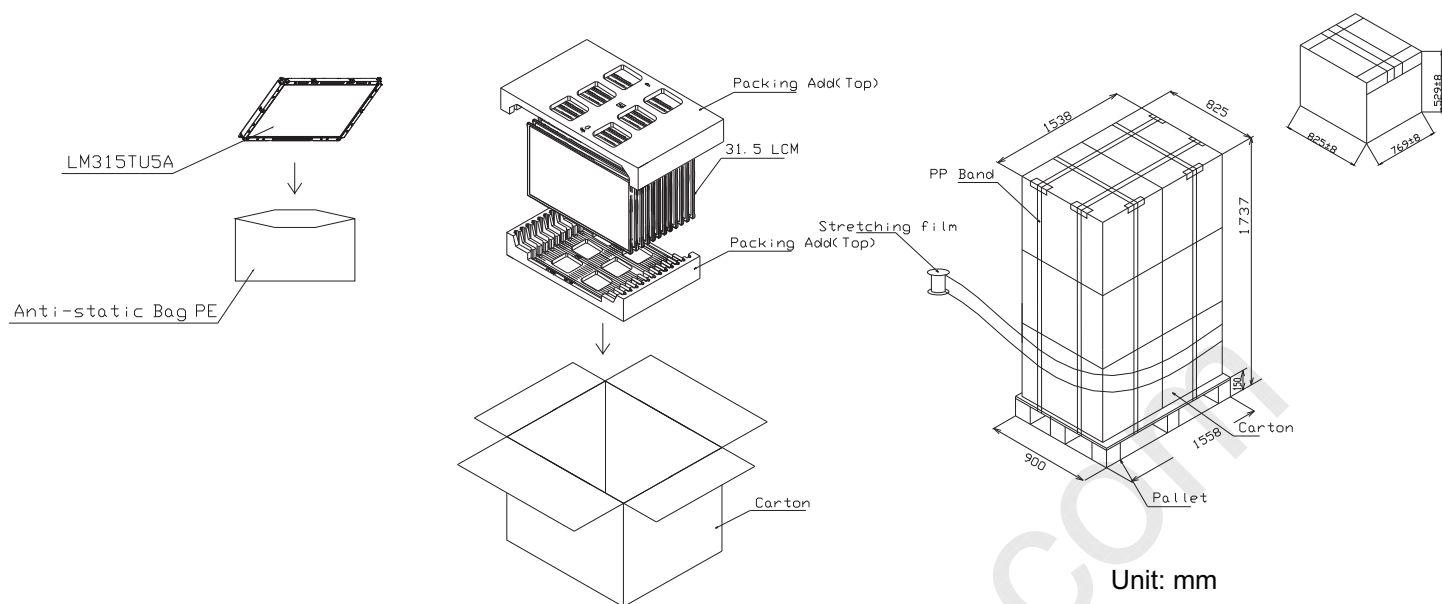

9. CARTON STORAGE CONDITION

Temperature: 0°C to 40°C

Humidity: 80%RH or less

Reference condition: 20°C to 35°C, 80%RH or less (summer)

5°C to 15°C, 80%RH or less (winter)

The total storage time (40°C, 80%RH): 240h or less

Sunlight

Be sure to shelter a product from the direct sunlight.

Atmosphere

Harmful gas, such as acid and alkali which bites electronic components and/or wires must not be detected.

Be sure to put cartons on pallet or base, don't put it on floor, and store them with removing from wall. Please take care of ventilation in storehouse and around cartons, and control changing temperature is within limits of natural environment.

10. PRECAUTIONS

10.1 ASSEMBLY AND HANDLING PRECAUTIONS

- Do not apply rough force such as bending or twisting to the module during assembly.
- It is recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- Since the LCM consists of TFT and electronic circuits with CMOS-ICs, which are very weak to electrostatic discharge, person who is handling an LCM should be grounded through adequate methods such as an anti-static wrist band. Connector pins should not be touched directly with bare hands.

Reference: Process control standard is shown as follow,

| item | Management standard value and performance standard |
|--|--|
| 1 Anti-static mat(shelf) | 1to50 [Mega ohm] |
| 2 Anti-static mat(floor, desk) | 1to100 [Mega ohm] |
| 3 Ionizer | Attenuate from $\pm 1000V$ to $\pm 100V$ within two seconds. |
| 4 Anti-static wrist band | 0.8 to 10 [Mega ohm] |
| 5 Anti-static wrist band entry and ground resistance | Below 1000 [ohm] |
| 6 Temperature | 22 to 26 [°C] |
| 7 Humidity | 60 to 70 [%] |

- Do not apply pressure or impulse to the module to prevent the damage of LCD panel and backlight.
- Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.
- Be sure to turn off the power supply when inserting or disconnecting the cable.
- Do not disassemble the module.

- (h) Front polarizer can easily be damaged, so please pay attention on it.
- (i) Using a absorbent cotton or other soft cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (j) Since long contact with drops of water may cause discoloration or spots, please wipe off them as soon as possible.
- (k) The Panel will be broken or chipped when it is dropped or bumped against a hard substance.
- (l) Applying too much force and stress to PWBs and drivers may cause a malfunction electrically and mechanically.
- (m) Please be careful since image retention may occur when a fixed pattern is displayed for a long time.
- (n) Moisture can easily penetrate into LCD module and may cause the damage during operation.
- (o) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD modules in the specified storage conditions.
- (p) This LCM is corresponded to ROHS.
- (q) When any question or issue occurs, it shall be solved by mutual discussion.

10.2 SAFETY PRECAUTIONS

- (a) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (b) After the module's end of life, it is not harmful in case of normal operation and storage.

11. RELIABILITY

- (a) Environment test condition

| Test item | Condition |
|---|--|
| High temperature storage test | Ta= 60°C, 240h |
| Low temperature storage test | Ta= -20°C, 240h |
| High temperature and high humidity storage test | Ta= 50°C, 80%RH, 240h (No condensation) |
| High temperature operation test | Ta= 50°C, 240h |
| Low temperature operation test | Ta= 0°C,240h |


- (b) Shock & Vibration

| Test item | Condition |
|------------------------------|--|
| Shock (Non-Operation) | Shock level: 50 Grms Waveform: half sine wave, 11ms Direction: ±X,±Y,±Z One time each direction |
| Vibration (Non-Operation) | Wave form: Random Vibration level: 1.0 Grms Bandwidth: 10-300 Hz Duration: X,Y,Z, 30 min Each direction per 10 min |

[Result evaluation criteria]


Under the display quality test condition with normal operation state, there shall be no change, which may affect practical display function.

12. MECHANICAL DRAWING

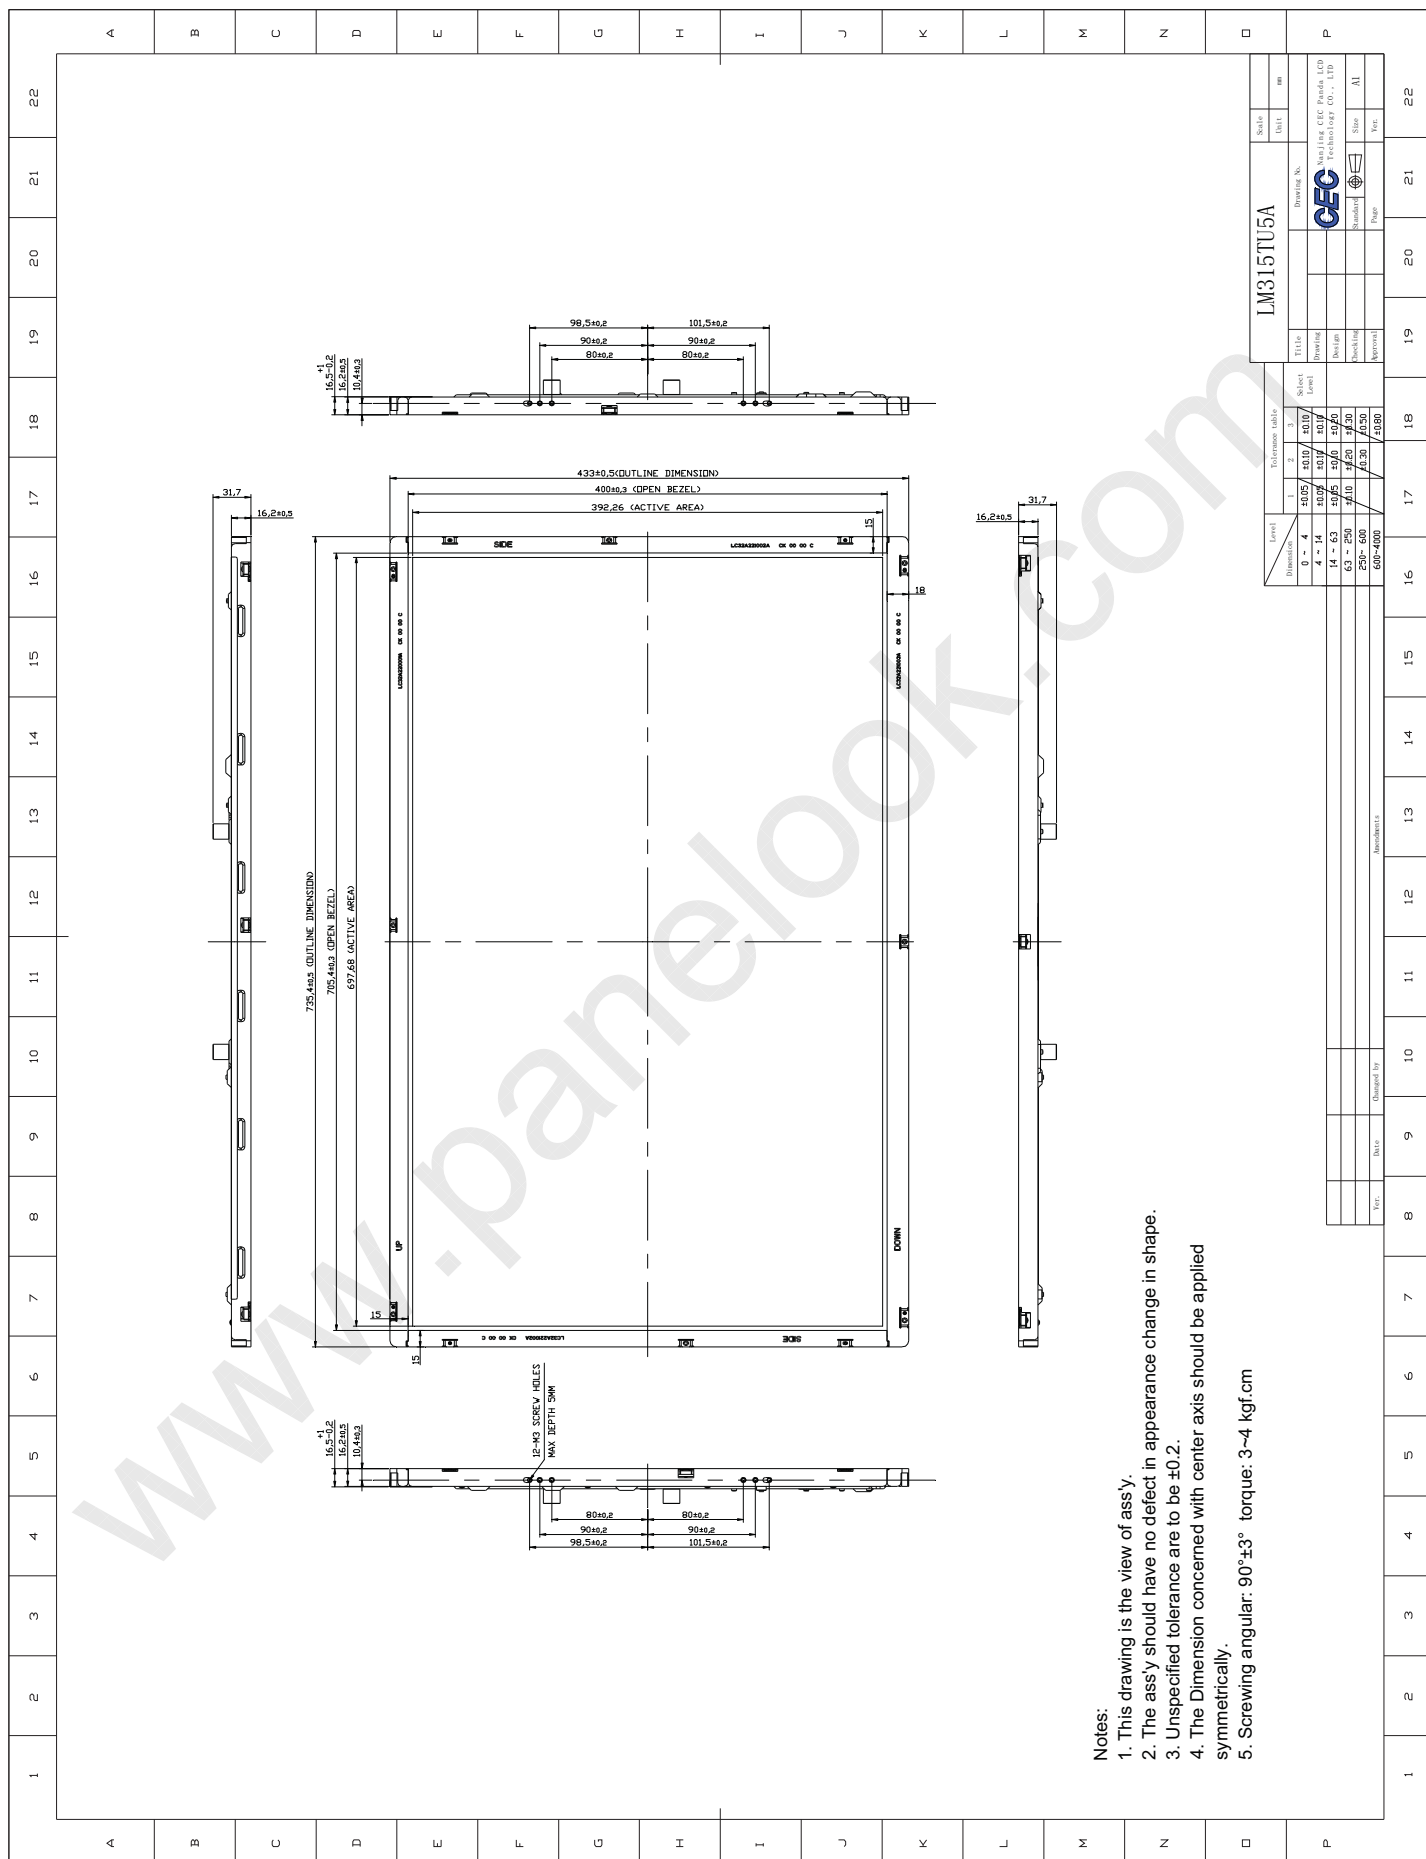

- Notes:
1. This drawing is the view of ass'y.
 2. The ass'y should have no defect in appearance change in shape.
 3. Unspecified tolerance are to be ± 0.2 .
 4. The Dimension concerned with center axis should be applied symmetrically.
 5. Screwing angular: $90^\circ \pm 3^\circ$ torque: 3~4 kgf.cm

Fig.12-1. Front outline drawing

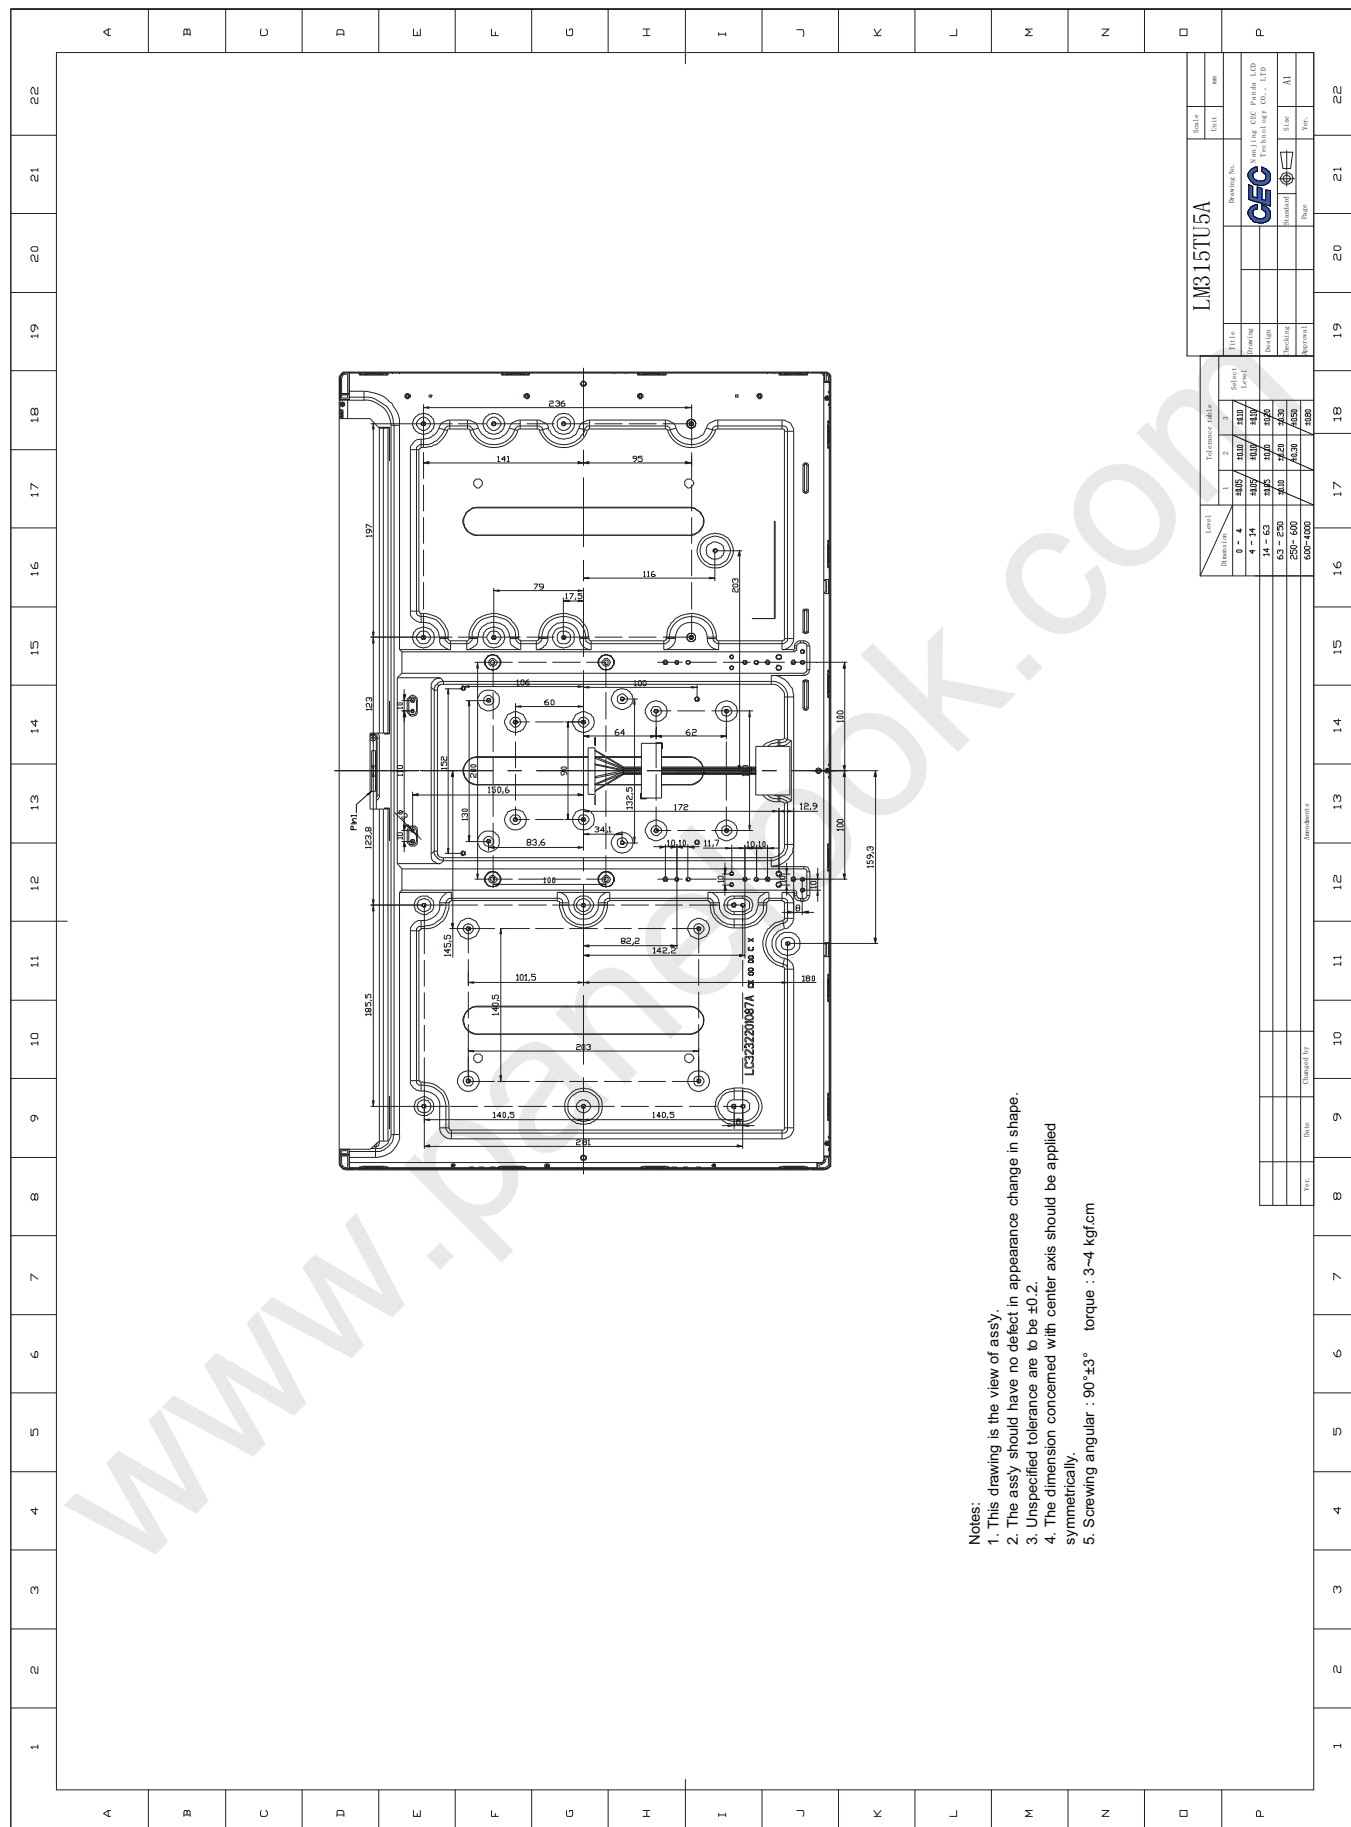

- Notes:
1. This drawing is the view of assy.
 2. The assy should have no defect in appearance change in shape.
 3. Unspecified tolerance are to be ±0.2.
 4. The dimension concerned with center axis should be applied symmetrically.
 5. Screwing angular : 90°±3° torque : 3~4 kgf.cm

Fig.12-2. Back outline drawing