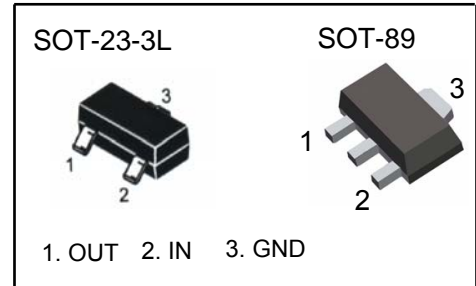


## Three-terminal positive voltage regulator

Maximum output current  $I_O$ : 0.1 A  
 Output voltage  $V_O$ : 5 V  
 Continuous total dissipation  
 $P_D$ : SOT-23-3L 0.35 W ( $T_a=25^\circ\text{C}$ )  
 SOT-89 0.5 W ( $T_a=25^\circ\text{C}$ )



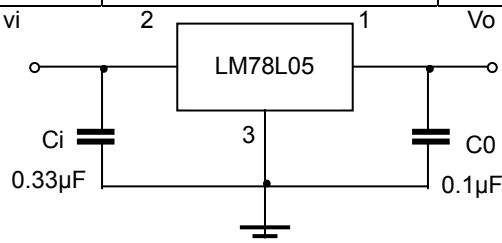
### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	0~+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55~+150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_I=10\text{V}, I_O=40\text{mA}, C_i=0.33\mu\text{F}, C_o=0.1\mu\text{F}$ , unless otherwise specified)

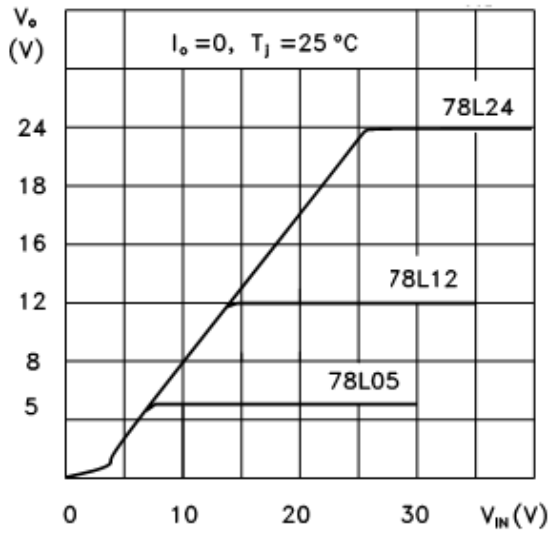
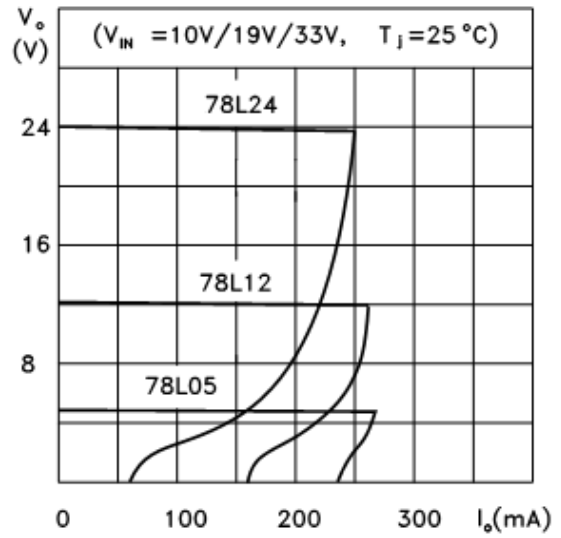
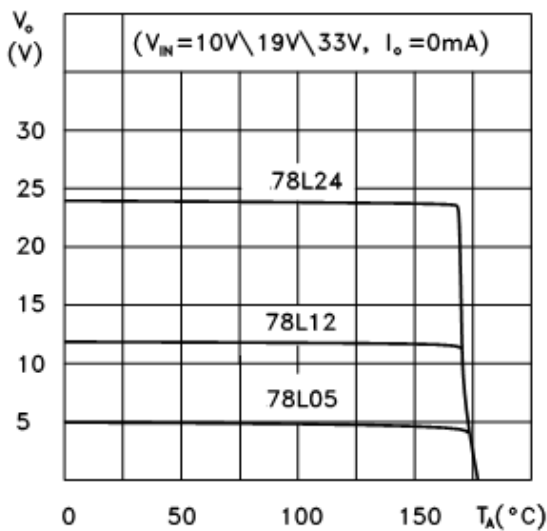
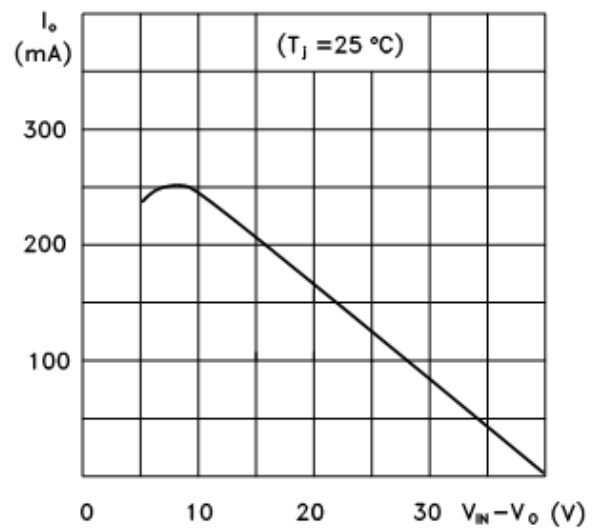
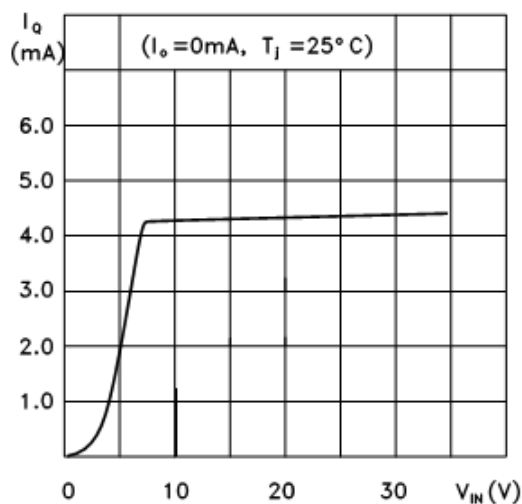
Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	$V_O$	$25^\circ\text{C}$	4.8	5.0	5.2	V	
		0-125 $^\circ\text{C}$	$7\text{V} \leq V_I \leq 20\text{V}, I_O=1\text{mA} \sim 40\text{mA}$	4.75	5.0	5.25	V
			$I_O=1\text{mA} \sim 70\text{mA}$	4.75	5.0	5.25	V
Load Regulation	$\Delta V_O$	$I_O=1\text{mA} \sim 100\text{mA}$	$25^\circ\text{C}$	15	60	mV	
		$I_O=1\text{mA} \sim 40\text{mA}$	$25^\circ\text{C}$	8	30	mV	
Line regulation	$\Delta V_O$	$7\text{V} \leq V_I \leq 20\text{V}$		32	150	mV	
		$8\text{V} \leq V_I \leq 20\text{V}$	$25^\circ\text{C}$	26	100	mV	
Quiescent Current	$I_q$	$25^\circ\text{C}$		3.8	6	mA	
Quiescent Current Change	$\Delta I_q$	$8\text{V} \leq V_I \leq 20\text{V}$	0-125 $^\circ\text{C}$		1.5	mA	
		$1\text{mA} \leq I_O \leq 40\text{mA}$	0-125 $^\circ\text{C}$		0.1	mA	
Output Noise Voltage	$V_N$	10Hz $\leq f \leq$ 100KHz	$25^\circ\text{C}$	42		$\mu\text{V}$	
Ripple Rejection	RR	$8\text{V} \leq V_I \leq 20\text{V}, f=120\text{Hz}$	0-125 $^\circ\text{C}$	41	49	dB	
Dropout Voltage	$V_d$	$25^\circ\text{C}$		1.7		V	

### TYPICAL APPLICATION



Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

# Typical Characteristics

**78L05/12/24 Output Characteristics**

**78L05/12/24 Load Characteristics**

**78L05/12/24 Thermal Shutdown**

**78L00 Series Short Circuit Output Current**

**78L05 Quiescent Current vs Input Voltage**

**PD-TA**
