


Three-terminal positive voltage regulator

Maximum output current  $I_O$ : 0.1 A

Output voltage  $V_O$ : 6 V

Continuous total dissipation

$P_D$ : SOT-23-3L 0.35 W ( $T_a = 25^\circ C$ )  
SOT-89 0.5 W ( $T_a = 25^\circ C$ )

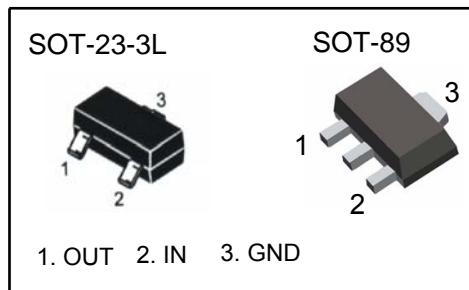


#### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	$V_I$	30	V
Operating Junction Temperature Range	$T_{OPR}$	0-+125	°C
Storage Temperature Range	$T_{STG}$	-55-+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_I=11V$ ,  $I_O=40mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_O$		25°C	5.75	6.0	6.25
		$8V \leq V_I \leq 20V$ , $I_O=1mA-40mA$	0-125°C	5.7	6.0	6.3
		$I_O=1mA-70mA$		5.7	6.0	6.3
Load Regulation	$\Delta V_O$	$I_O=1mA-100mA$	25°C	16	80	mV
		$I_O=1mA-40mA$	25°C	9	40	mV
Line regulation	$\Delta V_O$	$8V \leq V_I \leq 20V$	25°C	35	175	mV
		$9V \leq V_I \leq 20V$	25°C	29	125	mV
Quiescent Current	$I_Q$		25°C	3.9	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$9V \leq V_I \leq 20V$	0-125°C		1.5	mA
		$1mA \leq I_O \leq 40mA$	0-125°C		0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$	25°C	46		uV
Ripple Rejection	$RR$	$9V \leq V_I \leq 19V$ , $f=120Hz$	0-125°C	40	48	dB
Dropout Voltage	$V_d$		25°C	1.7		V


#### TYPICAL APPLICATION

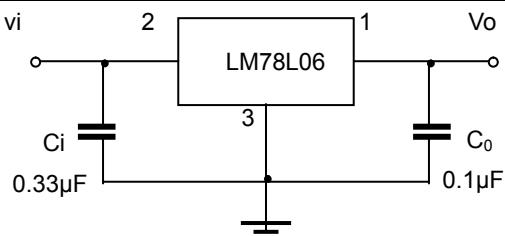


Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

## Typical Characteristics


**78L05/12/24 Output Characteristics**

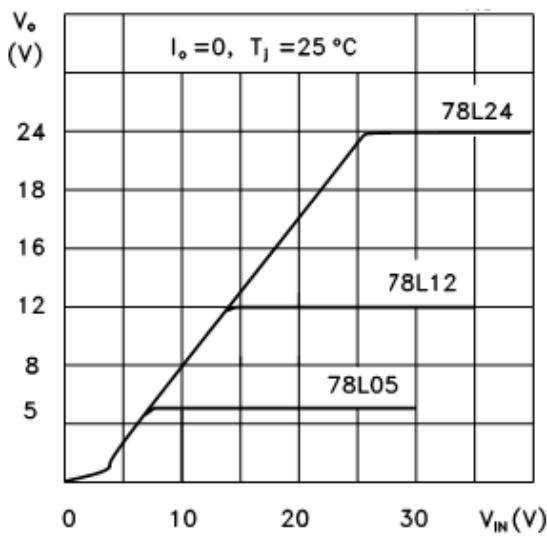


**78L05/12/24 Load Characteristics**

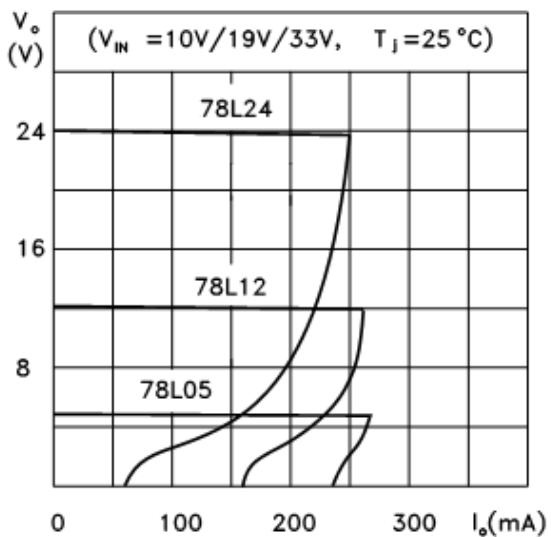


**78L05/12/24 Thermal Shutdown**

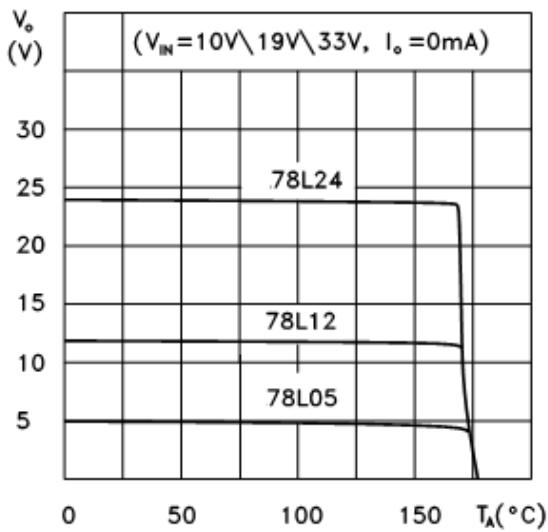

**78L00 Series Short Circuit Output Current**

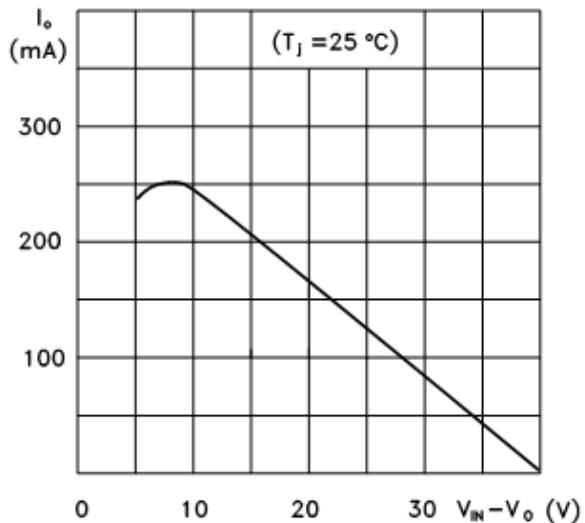

**78L05 Quiescent Current vs Input Voltage**

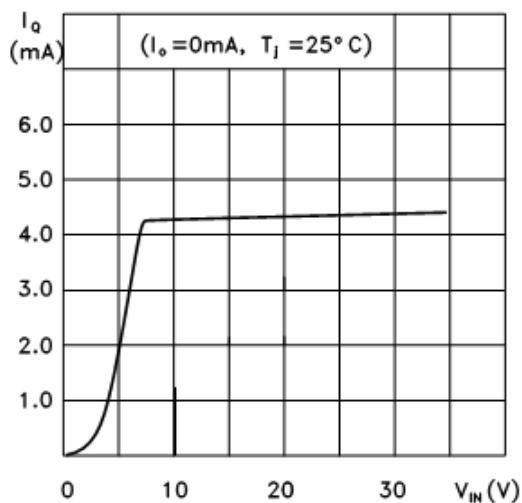

**PD-TA**

