


## Three-terminal positive voltage regulator

Maximum output current  $I_o$ : 0.1 A  
 Output voltage  $V_o$ : 12 V  
 Continuous total dissipation  
 $P_D$ : SOT-23-3L 0.35 W ( $T_a=25^\circ\text{C}$ )  
 SOT-89 0.5 W ( $T_a=25^\circ\text{C}$ )

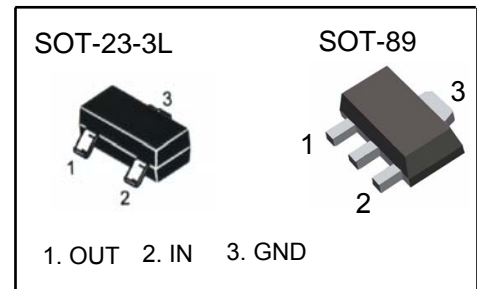


### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Operating Junction Temperature Range	$T_{OPR}$	0-+125	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55-+150	$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=19\text{V}$ , $I_o=40\text{mA}$ , $C_i=0.33\mu\text{F}$ , $C_o=0.1\mu\text{F}$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	$V_o$	$25^\circ\text{C}$	11.5	12	12.5	V	
		0-125 $^\circ\text{C}$	$14\text{V} \leq V_i \leq 27\text{V}$ , $I_o=1\text{mA}-40\text{mA}$	11.4	12	12.6	V
			$I_o=1\text{mA}-70\text{mA}$	11.4	12	12.6	V
Load Regulation	$\Delta V_o$	$I_o=1\text{mA}-100\text{mA}$ , $25^\circ\text{C}$		22	100	mV	
		$I_o=1\text{mA}-40\text{mA}$ , $25^\circ\text{C}$		13	50	mV	
Line regulation	$\Delta V_o$	$14.5\text{V} \leq V_i \leq 27\text{V}$ , $25^\circ\text{C}$		55	250	mV	
		$16\text{V} \leq V_i \leq 27\text{V}$ , $25^\circ\text{C}$		49	200	mV	
Quiescent Current	$I_q$	$25^\circ\text{C}$		4.3	6.5	mA	
Quiescent Current Change	$\Delta I_q$	$16\text{V} \leq V_i \leq 27\text{V}$ , 0-125 $^\circ\text{C}$			1.5	mA	
	$\Delta I_q$	$1\text{mA} \leq I_o \leq 40\text{mA}$ , 0-125 $^\circ\text{C}$			0.1	mA	
Output Noise Voltage	$V_N$	$10\text{Hz} \leq f \leq 100\text{KHz}$ , $25^\circ\text{C}$		70		$\mu\text{V}$	
Ripple Rejection	RR	$15\text{V} \leq V_i \leq 25\text{V}$ , $f=120\text{Hz}$ , 0-125 $^\circ\text{C}$	37	42		dB	
Dropout Voltage	$V_d$	$25^\circ\text{C}$		1.7		V	


### TYPICAL APPLICATION

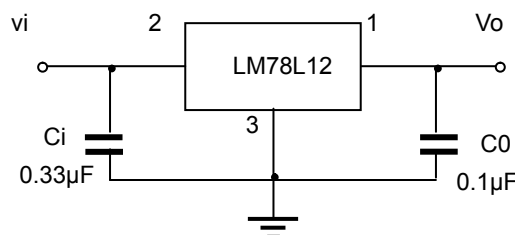


Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

## Typical Characteristics


### 78L05/12/24 Output Characteristics

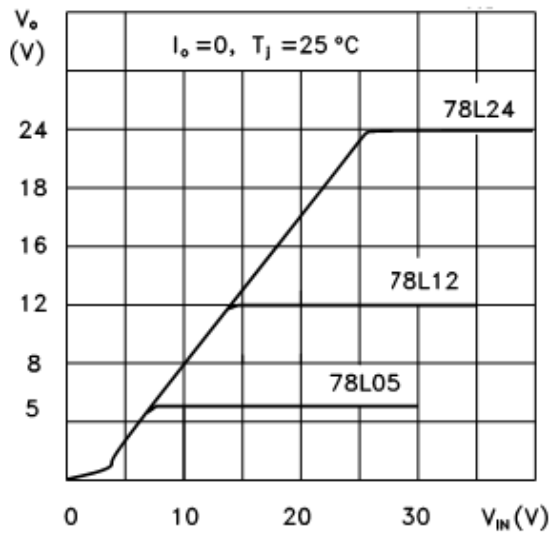


### 78L05/12/24 Load Characteristics

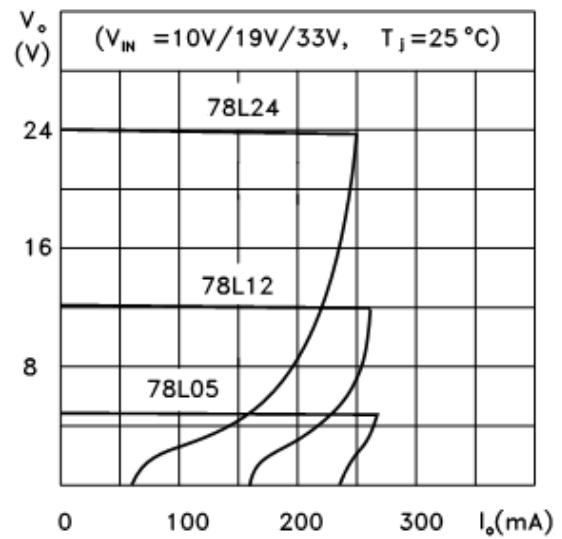


### 78L05/12/24 Thermal Shutdown

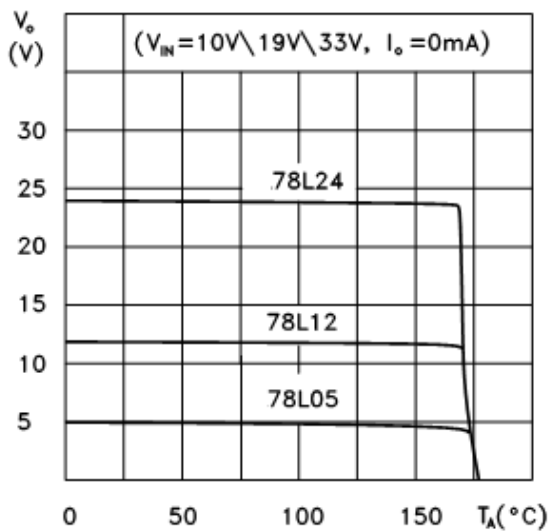

### 78L00 Series Short Circuit Output Current

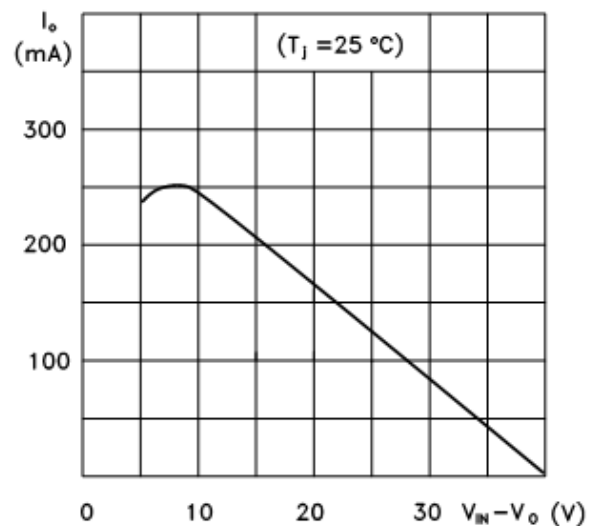

### 78L05 Quiescent Current vs Input Voltage

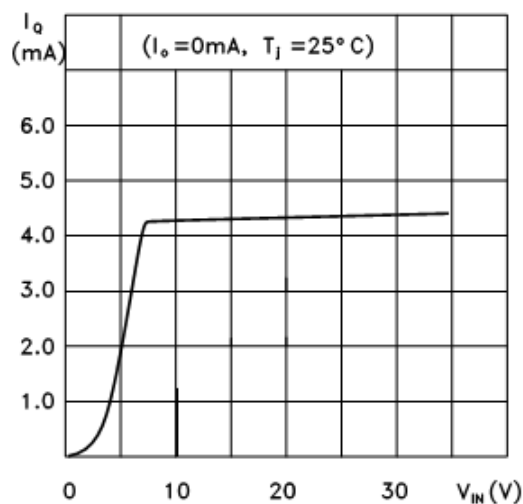

### PD-TA

