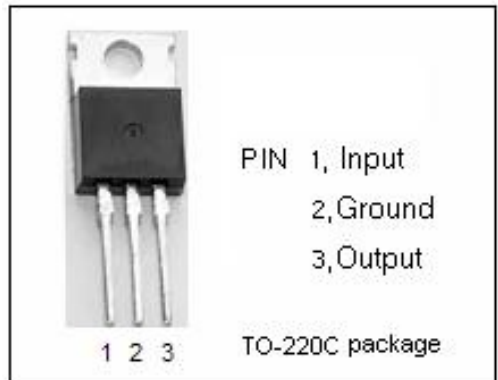
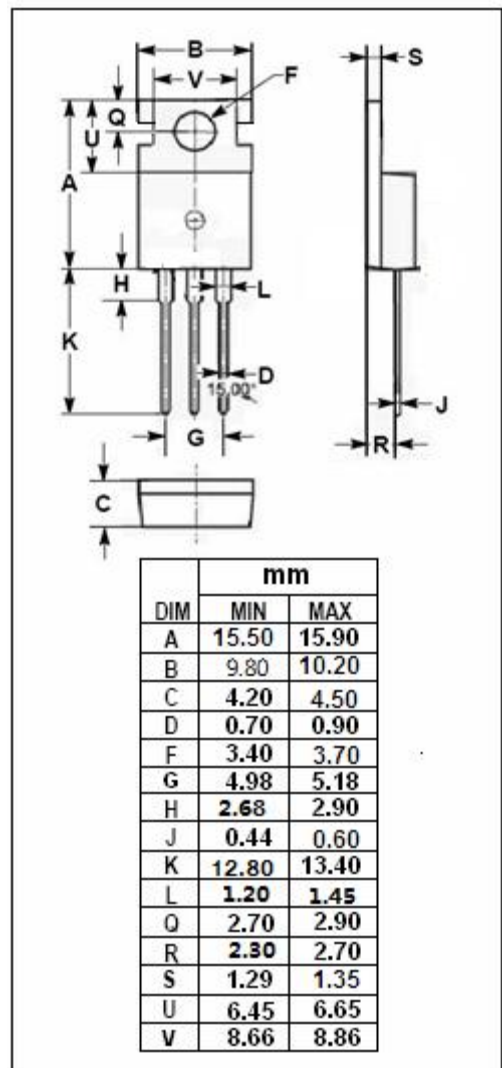


isc Three Terminal Negative Voltage Regulator
LM7915
FEATURES

- Output current in excess of 1.5 A
- Output voltage of 15V
- Internal thermal overload protection
- Output transition Safe-Area compensation
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	RATING	UNIT
V _i	DC input voltage	-35	V
I _o	Output current	internally limited	
P _{tot}	Power dissipation	internally limited	
T _{OP}	Operating junction temperature	0~125	°C
T _{stg}	Storage temperature	-55~150	°C


THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance, Junction to Case	3	°C/W
R _{th j-a}	Thermal Resistance, Junction to Ambient	50	°C/W

isc Three Terminal Negative Voltage Regulator

LM7915

• ELECTRICAL CHARACTERISTICS

T_j=25°C (V_i= -23V, I_o=0.5A, C_i= 2.2 μ F, C_o= 1.0 μ F unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _o	Output Voltage	V _{in} =-23V; I _o =1A	-14.4		-15.6	V
V _o	Output Voltage	V _{in} =-17.5 to -30V; I _o = 5mA to 1A;	-14.25		-15.75	V
ΔV _v	Line Regulation	-17.5V ≤ V _{in} ≤ -30V; I _o =0.5A			100	mV
ΔV _i	Load Regulation	5.0mA ≤ I _o ≤ 1.5A; V _{in} =-23V			200	mV
I _b	Quiescent Current	V _{in} =-23V; I _o =1A			3	mA
ΔI _{b1}	Quiescent Current Change	5.0mA ≤ I _o ≤ 1.0A; V _{in} =-23V			0.5	mA
ΔI _{b2}	Quiescent Current Change	-17.5V ≤ V _{in} ≤ -30V; I _o =0.5A			0.5	mA

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.