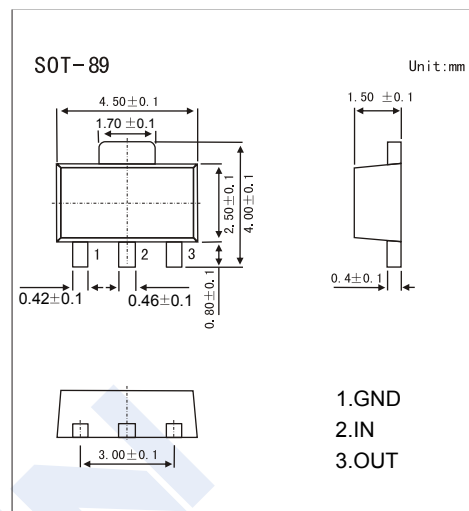


Three-Terminal Negative Voltage Regulator

LM79L08

■ Features

- Maximum output current I_{OM} : 0.1A.
- Output voltage: V_O : -8V.
- Continuous total dissipation P_D : 0.5 W

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	-30	V
Operating junction temperature range	T_{OPR}	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$

■ Electrical Characteristics ($V_I = -14\text{V}$, $I_O = 40\text{mA}$, $0^\circ\text{C} < T_J < 125^\circ\text{C}$, $C_1 = 0.33\ \mu\text{F}$, $C_O = 0.1\ \mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	V_O	$T_J = 25^\circ\text{C}$	-7.7	-8.0	-8.3	V
		$-10.5\text{V} \leq V_I \leq -23\text{V}$, $I_O = 1\text{mA}-40\text{mA}$	-7.6	-8.0	-8.4	V
		$I_O = 1\text{mA}-70\text{mA}$	-7.6	-8.0	-8.4	V
Load regulation	ΔV_O	$T_J = 25^\circ\text{C}$, $I_O = 1\text{mA}-100\text{mA}$		30	100	mV
		$T_J = 25^\circ\text{C}$, $I_O = 1\text{mA}-40\text{mA}$		15	50	mV
Line regulation	ΔV_O	$-10.5\text{V} \leq V_I \leq -23\text{V}$, $T_J = 25^\circ\text{C}$		42	200	mV
		$-11\text{V} \leq V_I \leq -23\text{V}$, $T_J = 25^\circ\text{C}$		36	150	mV
Quiescent current	I_q	25°C		4	6	mA
Quiescent current change	ΔI_q	$0^\circ\text{C} < T_J < 125^\circ\text{C}$, $-11\text{V} \leq V_I \leq -23\text{V}$			1.5	mA
	ΔI_q	$0^\circ\text{C} < T_J < 125^\circ\text{C}$, $1\text{mA} \leq I_O \leq 40\text{mA}$			0.1	mA
Output noise voltage	V_N	$10\text{Hz} \leq f \leq 100\text{KHz}$, $T_J = 25^\circ\text{C}$		54		μV
Ripple rejection	RR	$-11\text{V} \leq V_I \leq -21\text{V}$, $f = 120\text{Hz}$	37	46		dB
Dropout voltage	V_d	$T_J = 25^\circ\text{C}$		1.7		V

■ Typical Application

