


- ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Test Conditions	Min	Max	Units
Drain Voltage	V_D	$T_{\text{Ambient}} = 22 \pm 3 \text{ }^\circ\text{C}$		6	V
Operating Current	I_{OP}	$T_{\text{Ambient}} = 22 \pm 3 \text{ }^\circ\text{C}$		495	mA
RF Input Power	P_{IN}	$T_{\text{Ambient}} = 22 \pm 3 \text{ }^\circ\text{C}$		12	dBm
Total Power Dissipation	P_{TOT}	$T_{\text{Ambient}} = 22 \pm 3 \text{ }^\circ\text{C}$		4	W
Channel Operating Temperature	T_{CH}	$T_{\text{Ambient}} = 22 \pm 3 \text{ }^\circ\text{C}$		150	$^\circ\text{C}$
Storage Temperature	T_{STG}	—	-65	165	$^\circ\text{C}$
Maximum Assembly Temperature (1 min. max.)	T_{MAX}	—		300	$^\circ\text{C}$

Notes:


- Operating conditions that exceed the Absolute Maximum Ratings could result in permanent damage to the device.
- Recommended Continuous Operating Limits should be observed for reliable device operation.
- Power Dissipation defined as: $P_{\text{TOT}} \equiv (P_{\text{DC}} + P_{\text{IN}}) - P_{\text{OUT}}$, where
 P_{DC} : DC Bias Power
 P_{IN} : RF Input Power
 P_{OUT} : RF Output Power
- This GaAs MMIC is susceptible to damage from Electrostatic Discharge. Proper precautions should be used when handling these devices.

- ASSEMBLY DRAWING

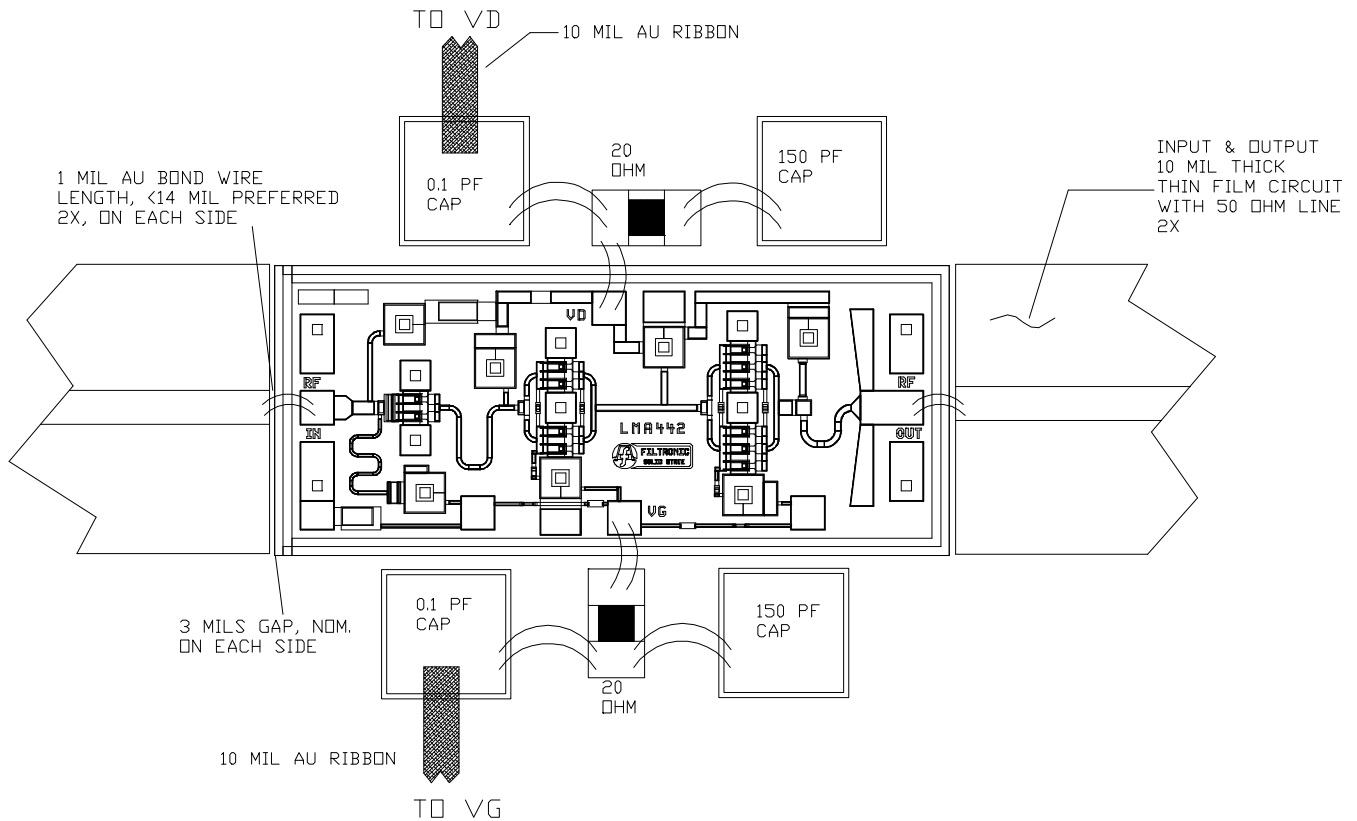

- Recommended lead bond technique is thermocompression wedge bonding with 0.001" (25 μ m) diameter wire. The bond tool force shall be 35-38 gram. Bonding stage temperature shall be 230-240°C, heated tool (150-160°C) is recommended. Ultrasonic bonding is not recommended.
- The recommended die attach is Ablebond silver epoxy, the stabilize bake temperature is set at 150°C for 45 minutes.
- Bond on bond or stitch bond acceptable.
- Conductor over conductor acceptable. Conductors must not short.

- MECHANICAL OUTLINE

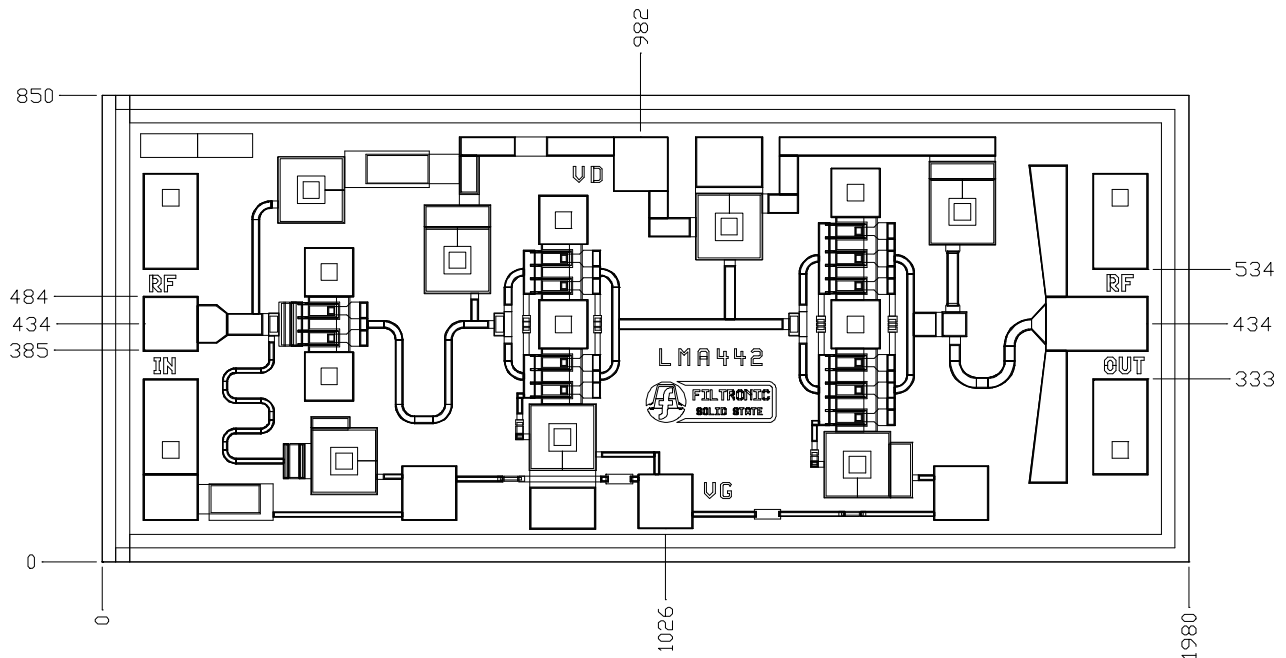

Notes:

- All units are in microns (μm).
- All bond pads are $100 \times 100 \mu\text{m}^2$.
- Bias pad (V_{DD}) size is $100 \times 121.5 \mu\text{m}^2$.
- Unless otherwise specified.

- HANDLING PRECAUTIONS

To avoid damage to the devices care should be exercised during handling. Proper Electrostatic Discharge (ESD) precautions should be observed at all stages of storage, handling, assembly, and testing. These devices should be treated as Class 1A (0-500 V). Further information on ESD control measures can be found in MIL-STD-1686 and MIL-HDBK-263.

All information and specifications are subject to change without notice.