

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LMBGANA32S27CK_

SPEC. NO.: LMA32-27-△

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

EDITED ON : JUNE 27, 2002



DESIGN MANAGER	DESIGN CHECK	DESIGNER
		C.F.SU

[illegible][illegible][illegible]

NAN YA PLASTICS CORP.
ELEC. MATERIALS DIV.
LCD DEPARTMENT

SPECIFICATION

SPEC. NO. : LMA32-27


DATE : JUNE 27, 2002

SHEET NO. : 1/24

1. MECHANICAL DATA

(1) Product No.	LMBGANA32S27CK_
(2) Module Size	167.1 (W)mm x 109.0 (H)mm x 11.0 (D)mm
(3) Dot Size	0.33 (W)mm x 0.33 (H)mm
(4) Dot Pitch	0.36 (W)mm x 0.36 (H)mm
(5) Number of Dots	320 (W) x 240 (H)Dots
(6) Duty	1/240
(7) LCD Display Mode	STN: Blue Mode Rear Polarizer: Transmission(Smoke Gray)
(8) Viewing Direction	6 O'clock
(9) Backlight	CCFT
(10) Weight	199 g(Approx.)

NOTE :

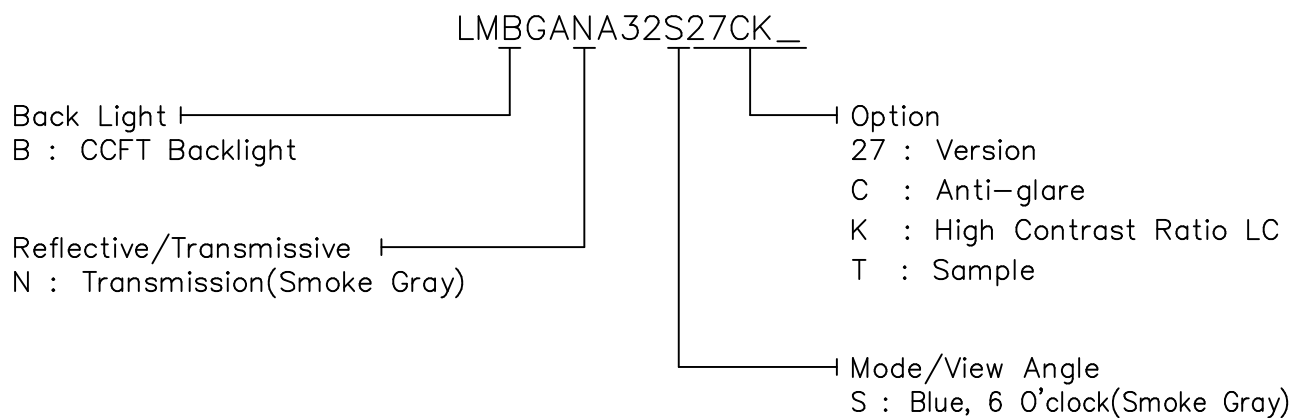

REV/DATE

R0/
06.27.02'

BY

C.F.SU

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Input Voltage	VI	-0.3	VDD+0.3	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	OPERATION		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-20	70	-30	80
Humidity(Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 70^{\circ}\text{C}$: 75%RH max

$T_a > 70^{\circ}\text{C}$: Absolute humidity must be lower
than the humidity of 75%RH at 70°C

Note 3 T_a at -30°C will be $< 48\text{hrs}$, at 80°C will be $< 120\text{hrs}$

Note 4 Background color will change slightly depending on ambient temperature.
That phenomenon is reversible.



3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS

(VDD = 5.0V±5%)

ITEM	SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-GND	—		4.75	5.0	5.25	V
Input Voltage	VIH	H level		0.7VDD	—	VDD	V
	VIL	L level		0	—	0.3VDD	V
Recommended LC Driving Voltage	VDD-VO	Duty=1/240 Bias=1/13	-20°C	25.8	26.1	26.4	V
			0°C	24.2	24.5	24.8	
			25°C	23.3	23.6	23.9	
			50°C	21.9	22.2	22.5	
			70°C	20.9	21.2	21.5	
Power Supply Current	IDD	FLM = 70 Hz VDD = 5.0 V VEE = -24.0 V VDD-VO = 23.4 V		—	2.9	4.4	mA
	IEE	PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		—	2.4	3.6	mA
Surface Luminance	L	(Dots All On)		—	170.0	—	cd/m ²
		(Dots All Off)		—	26.0	—	



Wondershare™

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 4 / 24
---	---------------	--

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used CCFL Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp voltage	V _L	—	260	—	Vrms	—
Lamp current	I _L	4	5	6	mA _{rms}	—
Lamp power consumption	P _L	—	1.3	—	W	(*1)
Starting voltage	V _S	—	—	420	Vrms	—
Lamp frequency	F _L	—	35	—	KHz	—
Lamp life time	L _L	—	20000	—	hrs	IL = 5 mA _{rms} (*2)

(*1) Power consumption excluded inverter loss .

(*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness .



REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------

NAN YA PLASTICS CORP.
ELEC. MATERIALS DIV.
LCD DEPARTMENT

SPECIFICATION

SPEC. NO. : LMA32-27

DATE : JUNE 27, 2002

SHEET NO. : 5/24

4.OPTICAL CHARACTERISTICS

AT VoP

ITEM MODE		Cr(Contrast Ratio)										θ (Viewing Angle)		ϕ (Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
N	S	2.5	4.0	3.5	5.0	4.0	5.5	3.0	4.5	2.0	3.0	—	67	—	±32
NOTE		NOTE 6										NOTE 5			

NOTE :

N : TRANSMISSION
S : BLUE

AT $\phi=0^\circ$ $\theta=0^\circ$

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	3200	4000	6000	ms	NOTE 2
		0℃	240	300	450		
		25℃	100	120	180		
		50℃	65	80	120		
		70℃	45	60	90		
Response Time (fall)	Tf	-20℃	1600	2000	3000	ms	NOTE 2
		0℃	350	450	670		
		25℃	110	140	210		
		50℃	45	60	90		
		70℃	40	50	75		



wondershare™


REV/DATE

R0/
06.27.02'


BY

C.F.SU

(FIG 1)

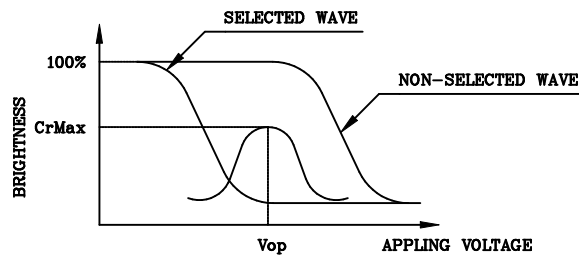Definition of Operation Voltage(Vop)

(positive type)

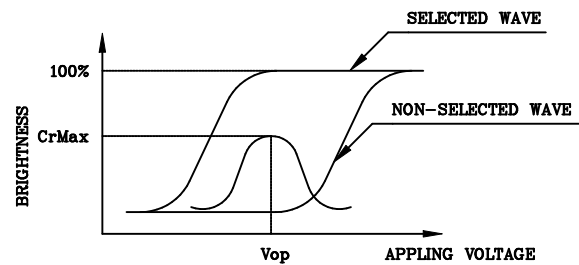

(negative type)


*Conditions

Viewing Angle : 0


Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias

(FIG 2)

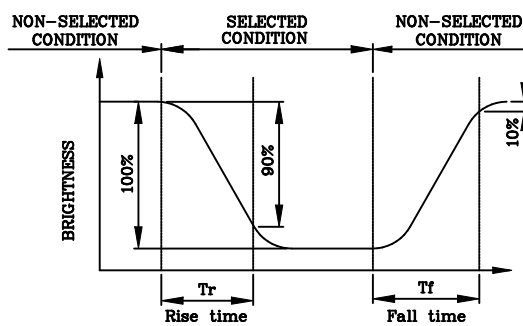Definition of Response Time(Tr,Tf)

(positive type)

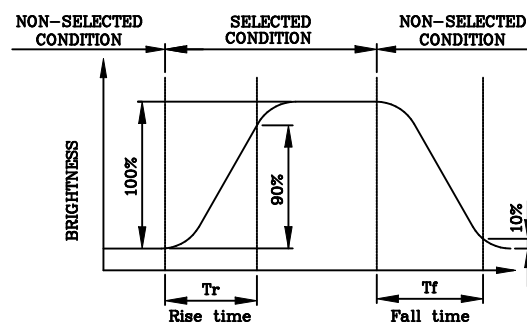

(negative type)

*Conditions



Operating Voltage : Vop

Viewing Angle (θ, ϕ) : (0,0)

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(FIG 3)

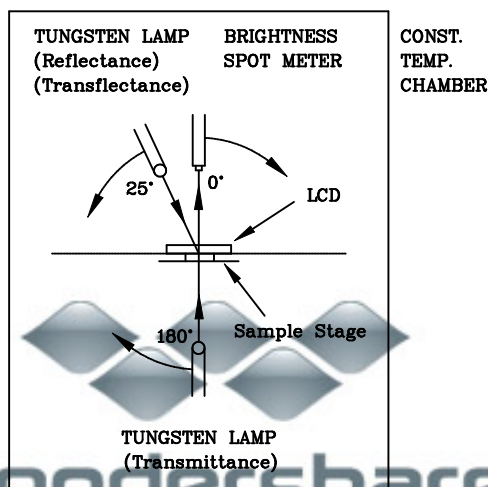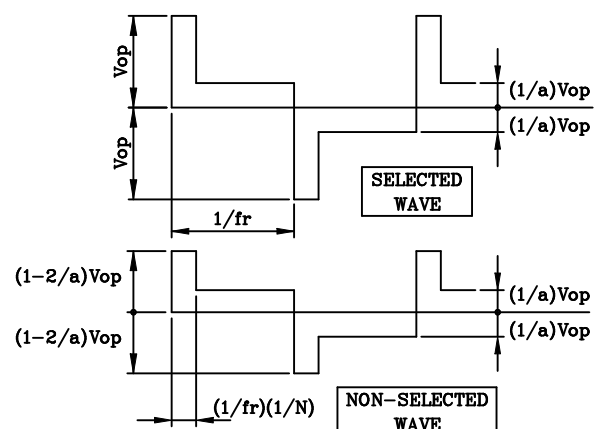Description of Measuring Equipment and Driving WaveformsMultiplex Driving (1/N duty 1/a bias)



(FIG 4)

Definition of Viewing Direction

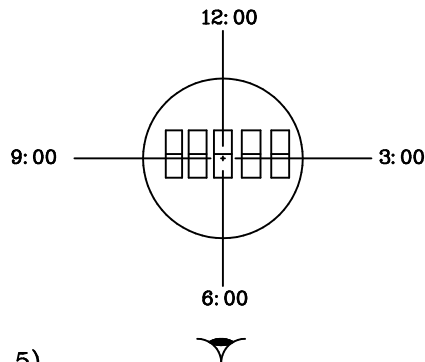

(FIG 5)

Definition of Viewing Angle

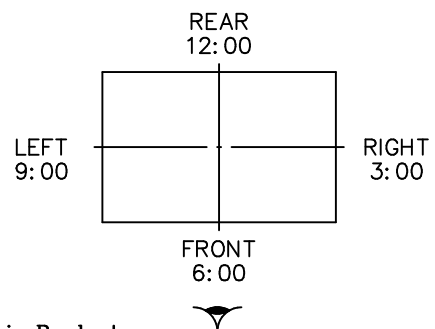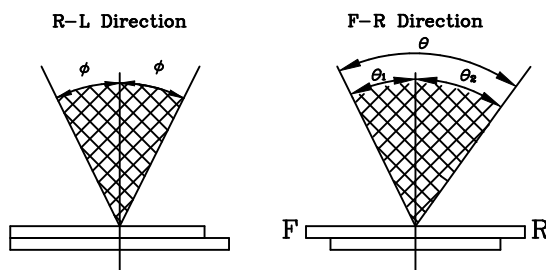

*For This Product

The Viewing Direction Is 6 O'clock
So $\theta_1 > \theta_2$

$$\theta = \theta_1 + \theta_2$$

*Conditions

Operating Voltage : V_{op}


Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias


Contrast Ratio : larger than 2

(FIG 6)

Definition of Contrast Ratio (Cr)

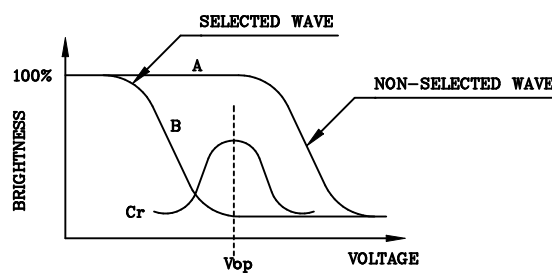

(positive type)

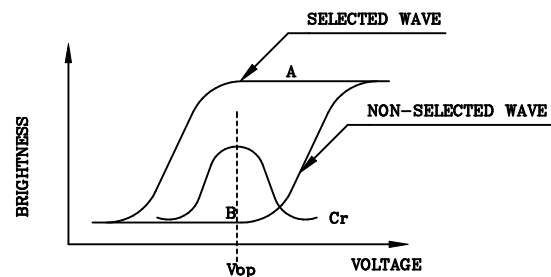

(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias



5. BLOCK DIAGRAM

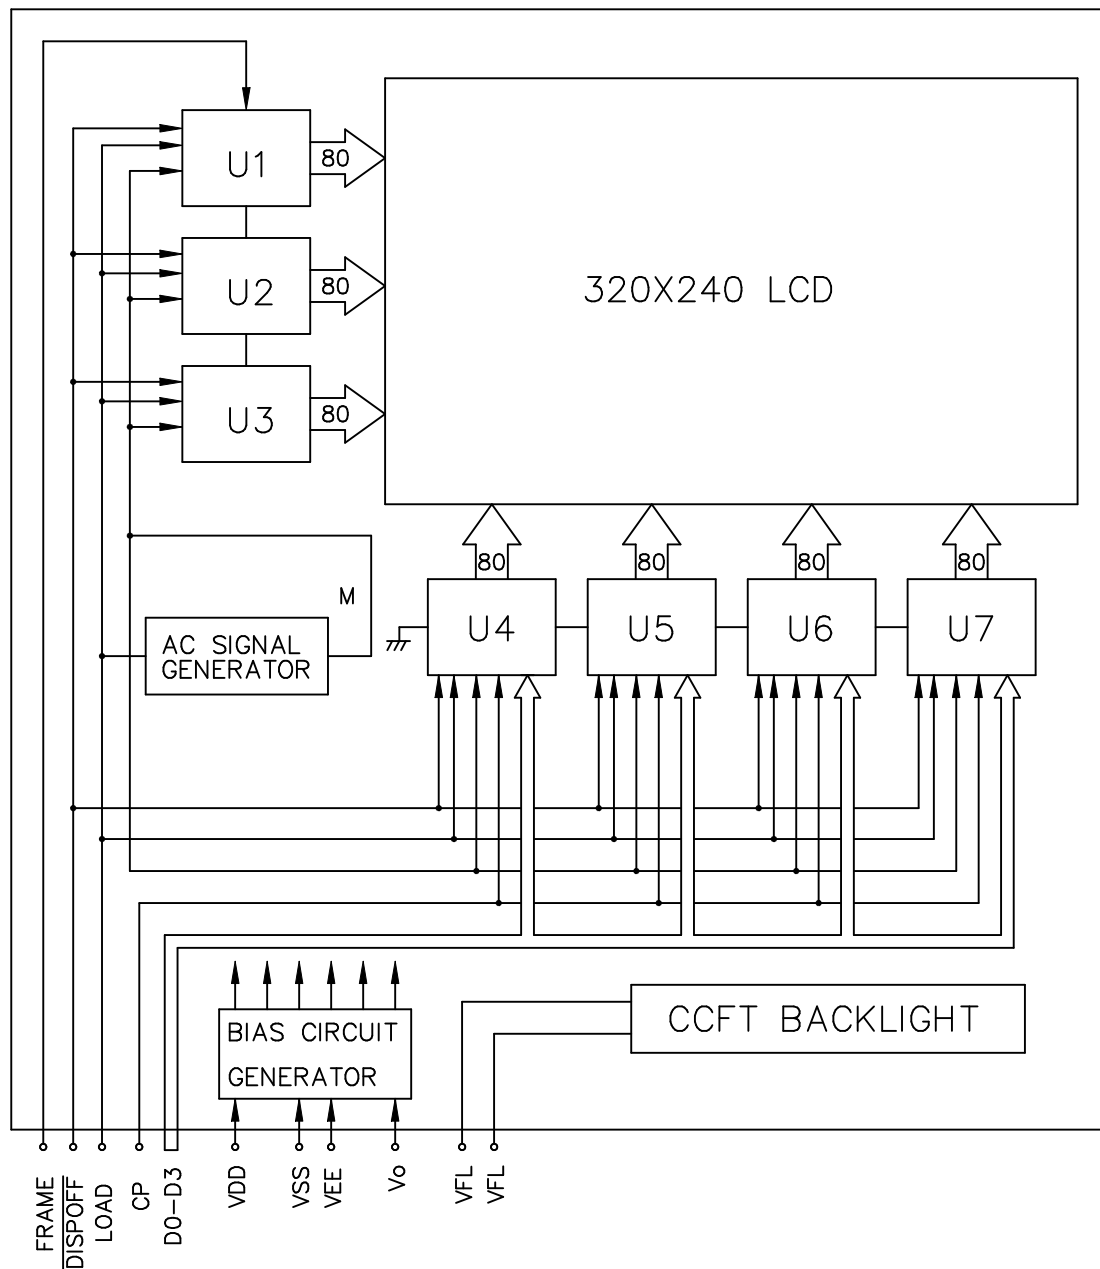

* AC SIGNAL SETTING

J1	J2	J3	J4	J5	J6	J7	J8
L	H	H	L	L	L	L	L

wondershare™

6.INTERNAL PIN CONNECTION

CN1: PITCH 1.25mm WIDTH 18.75mm


PIN NO.	SYMBOL	LEVEL	FUNCTION
1	D0	H/L	DISPLAY DATA SIGNAL
2	D1		
3	D2		
4	D3		
5	DISPOFF	H/L	H: ON/L: OFF
6	FRAME	H	SCAN START-UP SIGNAL
7	NC	—	NO CONNECTION
8	LOAD	H→L	INPUT DATA LATCH SIGNAL
9	CP	H→L	DATA INPUT CLOCK SIGNAL
10	VDD	—	POWER SUPPLY FOR LOGIC(+5V)
11	VSS	—	SIGNAL GROUND(0V)
12	VEE	—	POWER SUPPLY FOR LCD
13	VO	—	LCD CONTRAST ADJUST VOLTAGE
14	FGND	—	FRONT PANNEL GROUND

CN2: J.A.E./IL-G-4S-S3C2

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	HV	—	POWER SUPPLY VOLTAGE FOR CCFL
2	NC	—	—
3	NC	—	—
4	GROUND	—	GROUND LINE(FROM INVERTER)



7. POWER SUPPLY

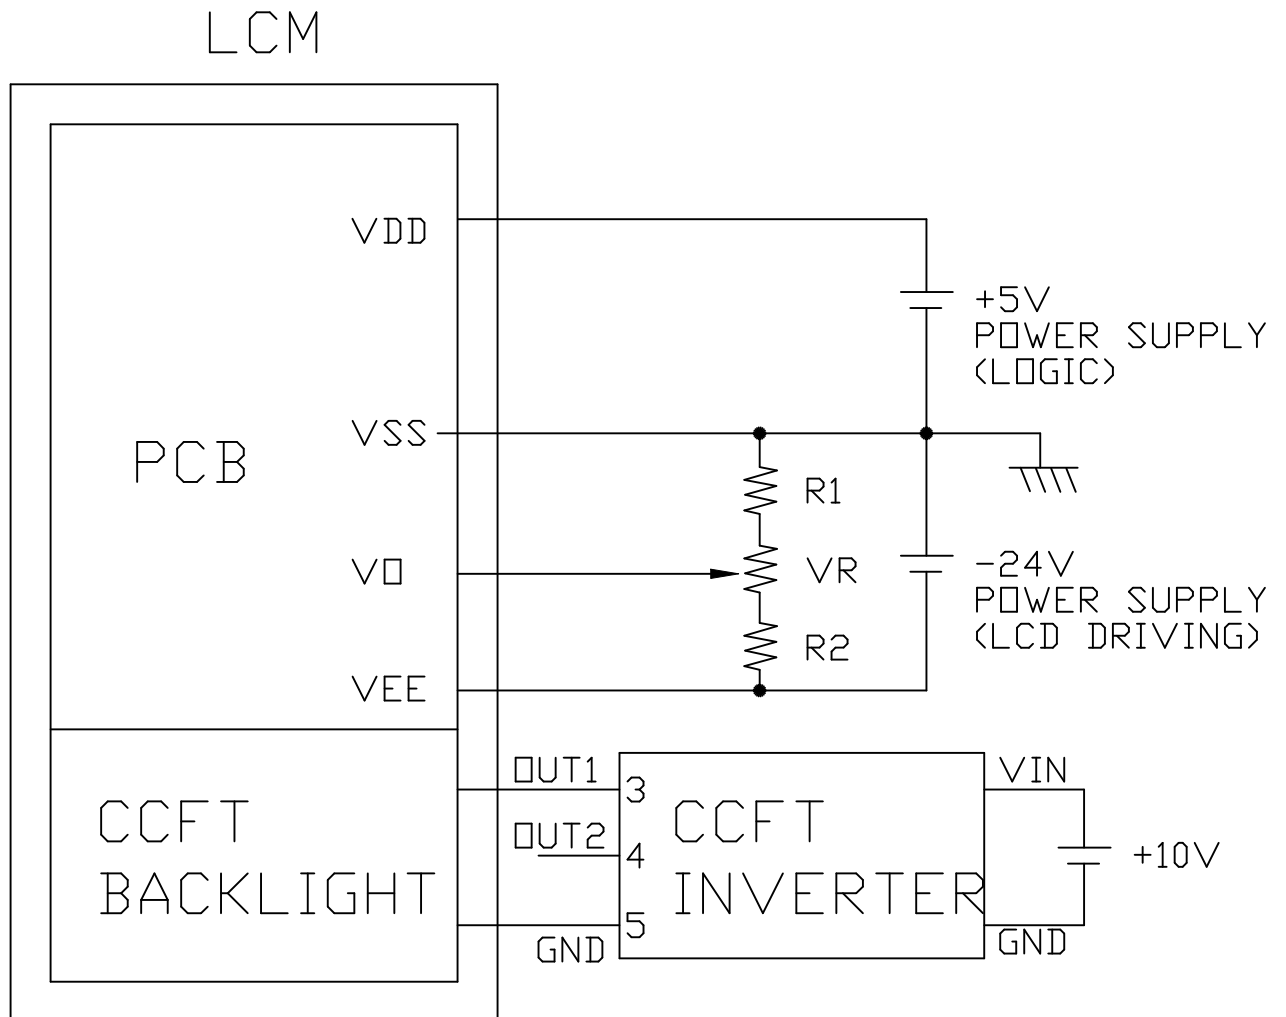

$$1. R1 + VR + R2 = 10K \sim 20K \Omega$$

2. RECOMMENDED CCFT INVERTER : CXA-L10L(TDK)
(OPERATING TEMP. $-10^{\circ} \sim 60^{\circ}C$)




wondershare™

8. TIMING CHARACTERISTICS

8-1. READ/WRITE CHARACTERISTICS(8080 FAMILY MPU)

VDD=5.0V±5%

ITEM	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
A0, $\overline{CS}$	ADDRESS HOLD TIME	t_{AH8}	10	—	—	ns
	ADDRESS SETUP TIME	t_{AW8}	0	—	—	ns
$\overline{WR}, \overline{RD}$	SYSTEM CYCLE TIME	t_{CYC8}	1	—	—	ns
	STROBE PULSE WIDTH	t_{CC}	120	—	—	ns
D0 to D7	DATA HOLD TIME	t_{DH8}	5	—	—	ns
	DATA SETUP TIME	t_{DS8}	120	—	—	ns
	$\overline{RD}$ ACCESS TIME	t_{ACC8}	—	—	50	ns
	OUTPUT DISABLE TIME	t_{OH8}	10	—	50	ns

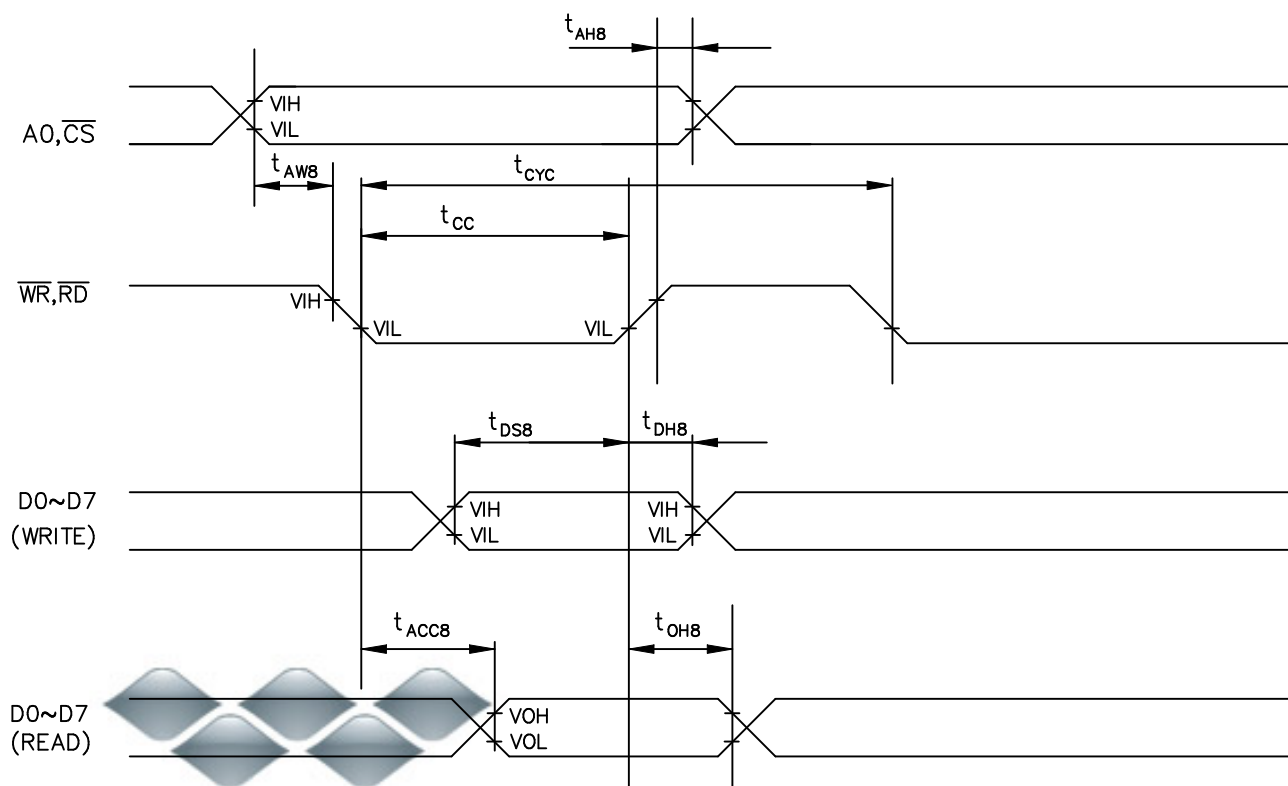


wondershare™


8-2.READ/WRITE CHARACTERISTICS(6800 FAMILY MPU)

VDD=5.0V±5%

ITEM	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
A0, $\overline{\text{CS}}$, $\overline{\text{WR}}$	ADDRESS HOLD TIME	t_{AH6}	0	—	—	ns
	ADDRESS SETUP TIME	t_{AW6}	0	—	—	ns
	SYSTEM CYCLE TIME	t_{CYC6}	1	—	—	ns
D0 to D7	DATA HOLD TIME	t_{DH6}	0	—	—	ns
	DATA SETUP TIME	t_{DS6}	100	—	—	ns
	ACCESS TIME	t_{ACC6}	—	—	85	ns
	OUTPUT DISABLE TIME	t_{OH6}	10	—	50	ns
$\overline{\text{RD}}$	ENABLE PULSE WIDTH	t_{RDW}	120	—	50	ns

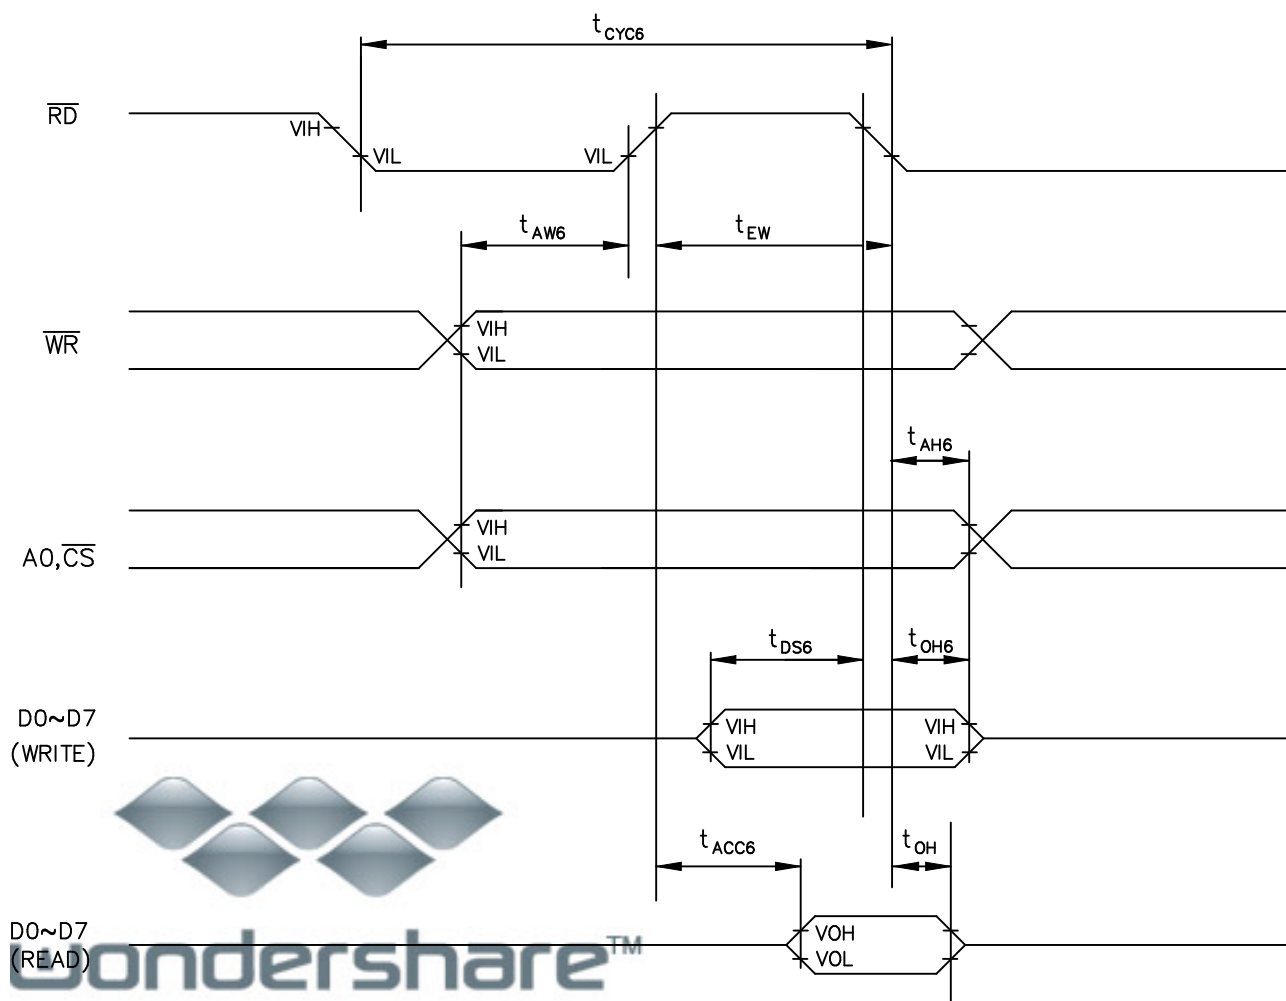

8-3. POWER ON/OFF TIMING

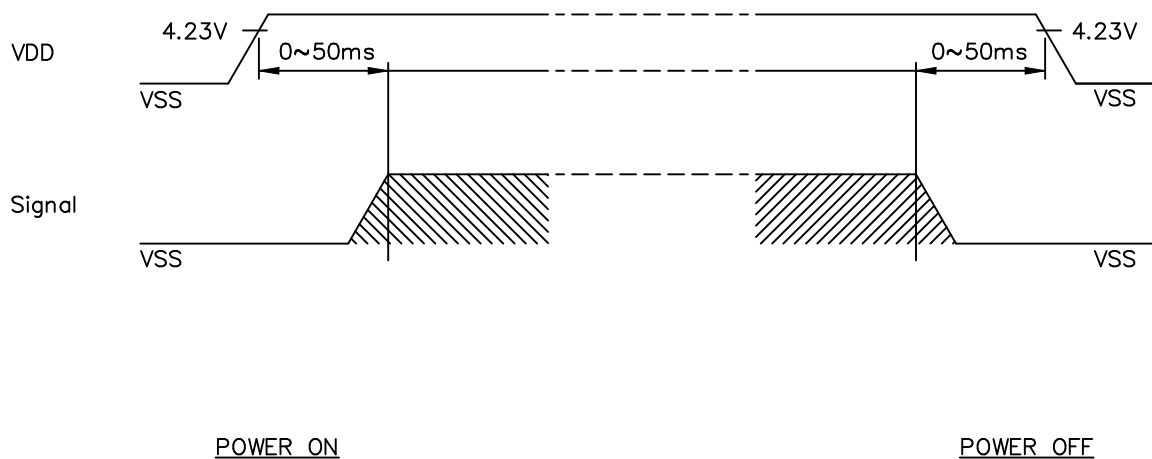

The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.



NAN YA PLASTICS CORP.
ELEC. MATERIALS DIV.
LCD DEPARTMENT

SPECIFICATION

SPEC. NO. : LMA32-27

DATE : JUNE 27, 2002

SHEET NO. : 14 /24

8-4.DISPLAY PATTERN

#001	D3	D2	D1	D0	D3					D0	D3	D2	D1	D0
#002	D3	D2	D1	D0	D3					D0	D3	D2	D1	D0
Data Input: Terninal : Dots (Row) on Display D0 : dot 4, dot 8 dot 316, dot 320 D1 : dot 3, dot 7 dot 315, dot 319 D2 : dot 2, dot 6 dot 314, dot 318 D3 : dot 1, dot 5 dot 313, dot 317														
#239	D3	D2	D1	D0	D3					D0	D3	D2	D1	D0
#240	D3	D2	D1	D0	D3					D0	D3	D2	D1	D0
	d1	d2	d3	d4	d5					d316	d317	d318	d319	d320

320 dots

240 dots



wondershare™

REV/DATE

R0/
06.27.02'

BY

C.F.SU

NAN YA PLASTICS CORP.
ELEC. MATERIALS DIV.
LCD DEPARTMENT

SPECIFICATION

SPEC. NO. : LMA32-27
DATE : JUNE 27, 2002
SHEET NO. : 15/24

9. RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120HR		Appearance without defect	
2	Low Temp. Storage	-20°C	120HR		Appearance without defect	
3	High Temp. & High Humi. Storage	40°C 90%RH	120HR		Appearance without defect	
4	Thermal Shock	-20°C, 30min → 25°C, 5min → 70°C, 30min → 25°C, 5min (1cycle)			Appearance without defect	5 cycles



wondershare™

REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 16/24
---	---------------	---

Inspection Provision

1. Purpose

The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2. Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3. Technical Terms

3-1 NAN YA Technical Terms



4. Outgoing Inspection Provision

Outgoing inspection is according to the product inspection manual.
(Per 1-1, 1-2 & 1-3)

4-1 Inspection Method

MIL-STD-105D Level II Regular inspection

4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		



REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------


NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 17/24
---	---------------	---

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions

*Viewing Area Definition

Fig. 1

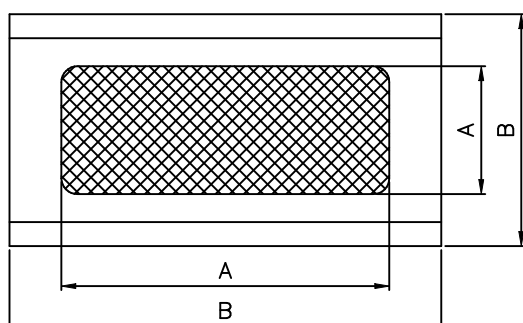

A : Zone Viewing Area
B : Zone Glass Plate Out Line

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.

The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.



REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 18/24
---	---------------	---

*Test and measurement are performed under the following conditions, unless otherwise specified.

Temperature	20± 15℃
Humidity	65± 20%R.H..
Pressure	860~1060hPa(mmbars)

In case of doubtful judgment, it is performed under the following conditions.

Temperature	20± 2℃
Humidity	65± 5%R.H..
Pressure	860~1060hPa(mmbars)

5.Specification for quality check 5-1 Electrical characteristics

NO.	Item	Criterion
1.	Non operational	Fail
2.	Miss operating	Fail
3.	Missing dot	Fail
4.	Contrast irregular	Not allowable
5.	Response time	Within Specified value
6.	CCFT backlight turn on/off	Within Specified value



REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 19/24
---	---------------	---

5-2 External Appearance Defect





NO.	Item	Criterion																		
1.	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	(1)–1–Spots(At non lighting condition) <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D \leq 0.1$</td><td>Ignore</td></tr><tr><td>$0.1 < D \leq 0.2$</td><td>5</td></tr><tr><td>$0.2 < D \leq 0.3$</td><td>2</td></tr><tr><td>$0.3 < D$</td><td>0</td></tr></table> Number of total pieces is set to within 5 pieces. Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2 (1)–2–Spots(At lighting condition) <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D \leq 0.3$</td><td>Ignore</td></tr><tr><td>$0.3 < D \leq 0.75$</td><td>5</td></tr><tr><td>$0.75 < D$</td><td>0</td></tr></table> Number of total pieces is set to within 5 pieces. Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			



wondershare™

REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 20/24																								
1. Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	(1)-1 Spots(At non lighting condition) <table border="1"> <thead> <tr> <th>Width(mm): W</th><th>Length(mm):L</th><th>Number of pieces permitted</th></tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 4$</td><td>2</td></tr> <tr> <td>$0.08 < W \leq 0.1$</td><td>$L \leq 1$</td><td>1</td></tr> </tbody> </table> Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated. (1)-2 Spots(At lighting condition) <table border="1"> <thead> <tr> <th>Width(mm): W</th><th>Length(mm):L</th><th>Number of pieces permitted</th></tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 3$</td><td>6</td></tr> <tr> <td>$0.08 < W$</td><td>$3 < L$</td><td>None</td></tr> </tbody> </table> Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.		Width(mm): W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm):L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm):L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2. Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																									
3. Color irregular	Not remarkable color irregular.																									
REV/DATE	R0/ 06.27.02'	 Wondershare™ BY C.F.SU																								

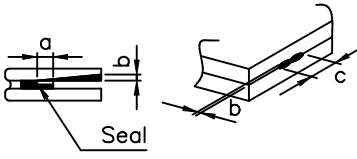NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION		SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 21/24						
4.	Air bubbles polarizing plates, and reflection plates	<table><tr><td>Average Diameter (mm): D</td><td>Number of pieces permitted</td><td rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td></tr><tr><td>D≤0.3 0.3<D</td><td>Ignore 0</td></tr></table> Note that when there are 4 pieces or more, they are not to be concentrated.		Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	D≤0.3 0.3<D	Ignore 0		
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2								
D≤0.3 0.3<D	Ignore 0									
5.	Cracks	(1)General crack 		a≤5 b≤2 c≤t Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.						
		(2)Corner crack 		a≤2.5 b≤2.5 c≤t a+b≤4						
		(3)Seal portion crack 		a≤The seal widthx1/3 b≤tx2/3 c≤5 The numbers of pieces are set at up to 5 pieces.						
		(4)ITO Pin crack 		a≤5 b≤1/3 pin length c≤t						
		(5)Progressive cracks		All taken to be unacceptable.						
										
wondershare™										
REV/DATE	R0/ 06.27.02'				BY C.F.SU					

REV/DATE

 R0/
06.27.02'




BY

C.F.SU

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 22/24
---	---------------	---

6.	Outer dimensions	Should be with in the tolerance.
7.	Newton ring	Orbicular of interference fringes. To be non. In case of doubtful judgenemt, agreement shall be reachment.
8.	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.




5-3 Dot Appearance Defect

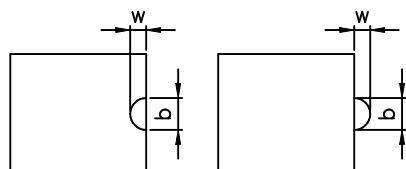NO.	Item	Criteria
1.	Plinhole	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.
2.	Missing	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.
3.	Thick and thin display	 Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).

wondershare™

REV/DATE	R0/ 06.27.02'							BY C.F.SU
----------	------------------	--	--	--	--	--	--	--------------

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION				SPEC. NO. : LMA32-27 DATE : JUNE 27, 2002 SHEET NO. : 23/24	
NOTE: • SAFETY 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin. 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water. • HANDLING 1.Avoid static electricity which can damage the CMOS LSI. 2.Do not remove the panel or frame from the module. 3.The polarizing plate of the display is very fragile. So, please handle it very carefully. 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate. 5.Do not use ketonics solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent. • STORAGE 1.Store the panel or module in a dark place where the temperature is 25°C±5°C and the humidity is below 65% RH. 2.Do not place the module near organics solvents or corrosive gases. 3.Do not crush, shake, or jolt the module. • TERMS OF WARRANT 1.Acceptance inspection period The period is within one month after the arrival of contracted commodity at the buyer's factory site. 2.Applicable warrant period The period is within twelve months since the date of shipping out under normal using and storage conditions.							
 wondershare™							
REV/DATE	R0/ 06.27.02'						BY C.F.SU

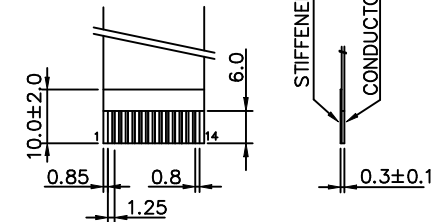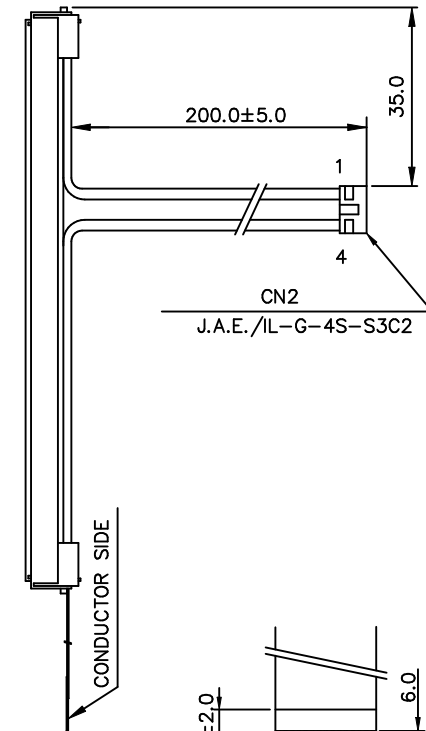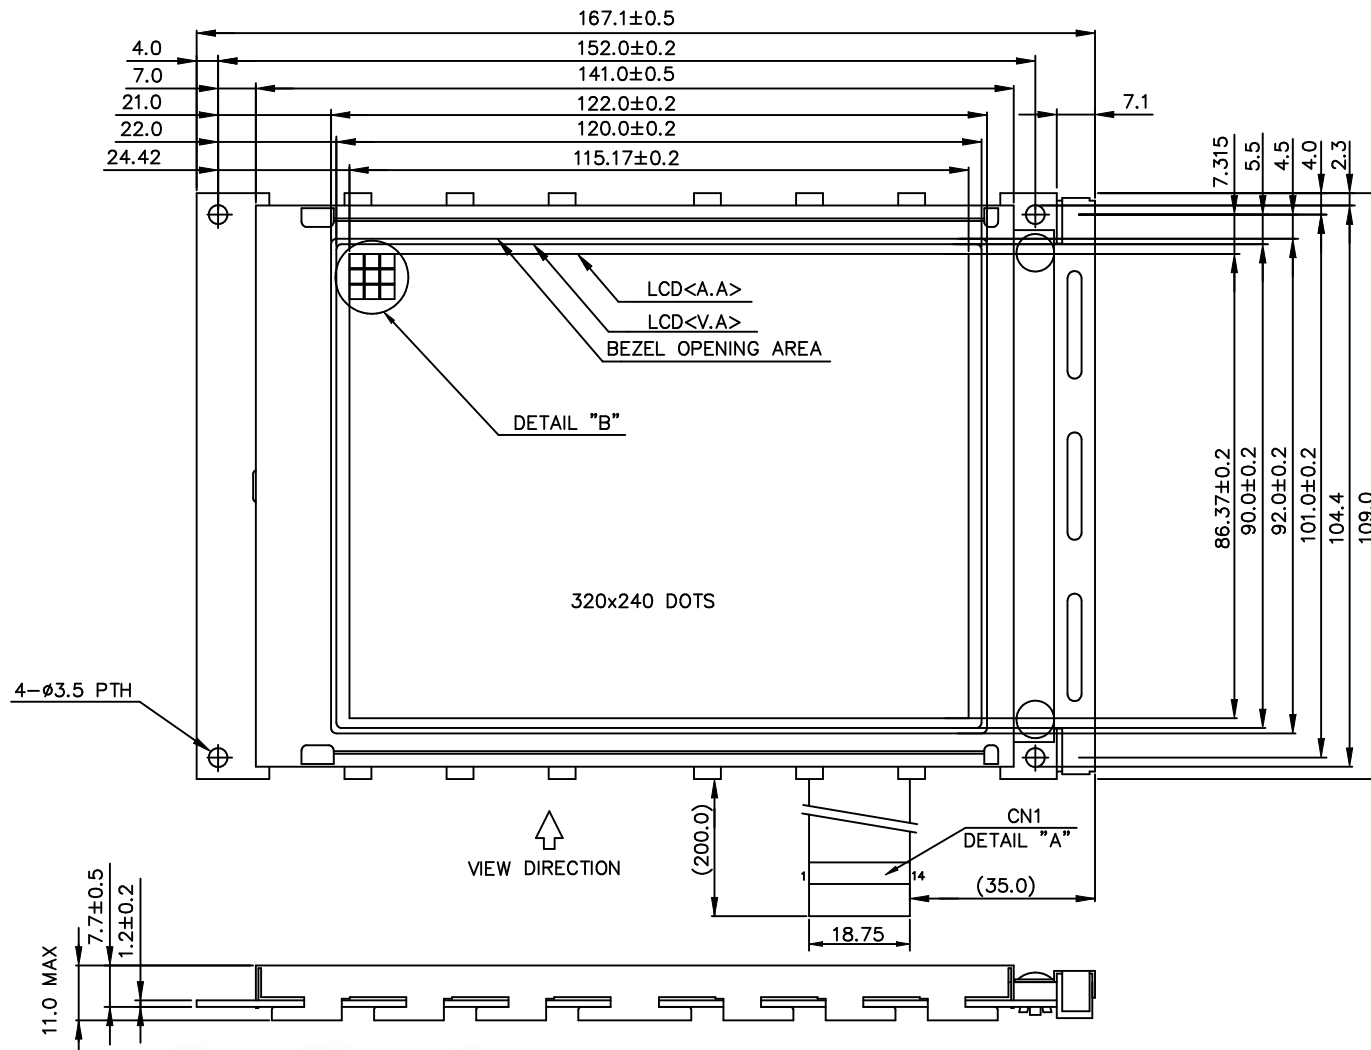


DETAIL "A"
(SCALE 1:1)

CN1: PITCH 1.25mm WIDTH 18.75mm

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	D0	H/L	DISPLAY DATA SIGNAL
2	D1		
3	D2		
4	D3		
5	DISPOFF	H/L	H: ON / L: OFF
6	FRAME	H	SCAN START-UP SIGNAL
7	NC	-	NO CONNECTION
8	LOAD	H-L	INPUT DATA LATCH SIGNAL
9	CP	H-L	DATA INPUT CLOCK SIGNAL
10	VDD	-	POWER SUPPLY FOR LOGIC(+5V)
11	VSS	-	SIGNAL GROUND(0V)
12	VEE	-	POWER SUPPLY FOR LCD
13	VO	-	LCD CONTRAST ADJUST VOLTAGE
14	FGND	-	FRONT PANNEL GROUND

CN2: J.A.E./IL-G-4S-S3C2

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	HV	-	POWER SUPPLY VOLTAGE FOR CCFL
2	NC	-	-
3	NC	-	-
4	GROUND	-	GROUND LINE(FROM INVERTER)



NOTES :

- 1.RESOLUTION : 320 X 240 DOTS
- 2.DRIVER IC: "SAMSUNG" KS0086
- 3.BACKLIGHT: CCFL
- 4.FRAME: SECC (0.5mm t)

DIMENSION	TOLERANCE
$L \leq 6$	± 0.25 (mm)
$6 < L \leq 18$	± 0.3 (mm)
$18 < L \leq 50$	± 0.4 (mm)
$50 < L \leq 125$	± 0.5 (mm)
$125 < L$	± 0.6 (mm)
ANGLE	$\pm 1^\circ$ (DEG)



南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

製品圖

LMBGANA32S27CK

APPROVE			THIRD ANGLE P.
CHECK			
DESIGN	Y.C.LIU	91.05.06	
DRAWN	Y.C.LIU	91.05.06	SCALE UNIT
	NAME	DATE	1/1 mm
DWG NO.	M/A32-D27A		



REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE
1					
2					
3					
4					

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

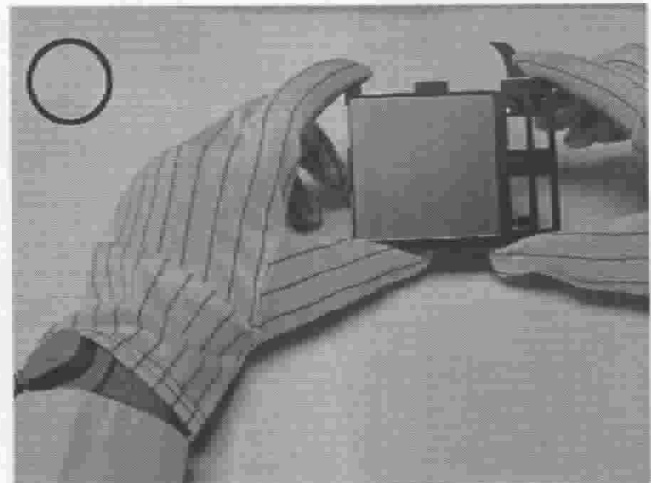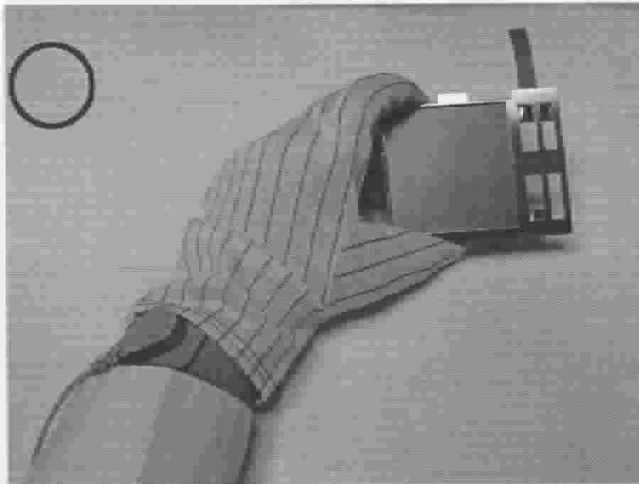


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

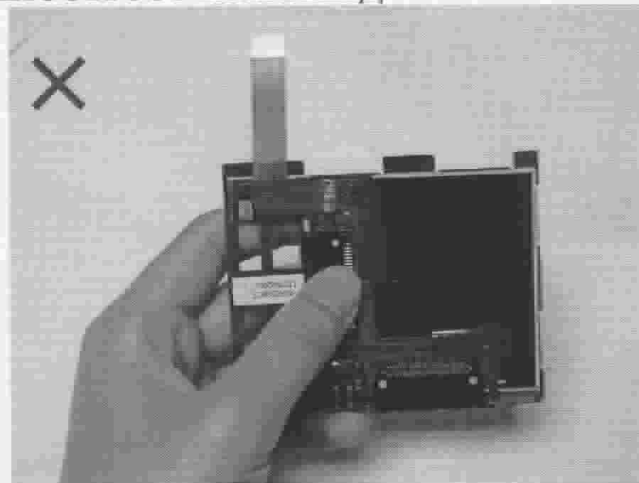


Please don't touch IC directly.

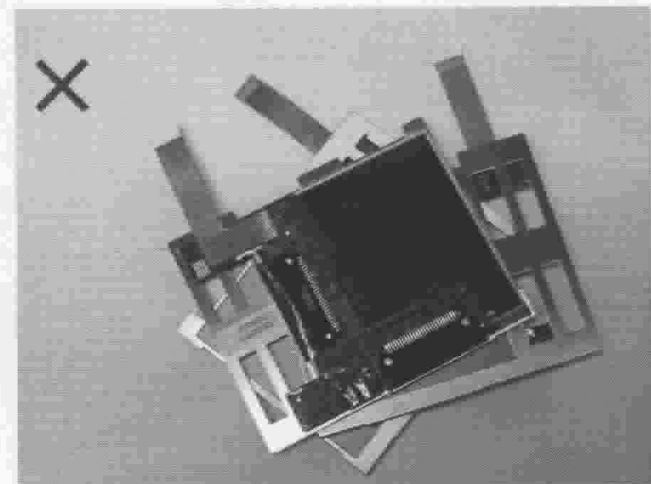

Please don't put one on another LCM.

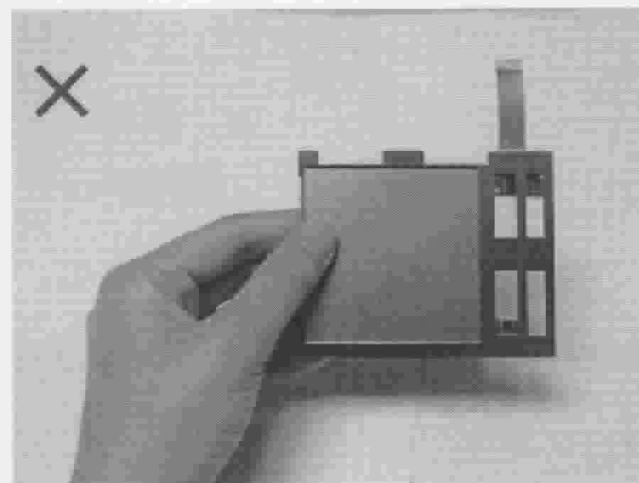

Please don't hold the surface of LCM.

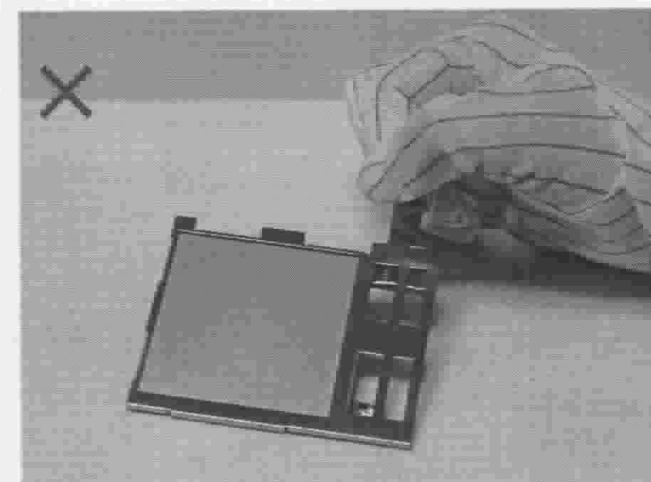



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

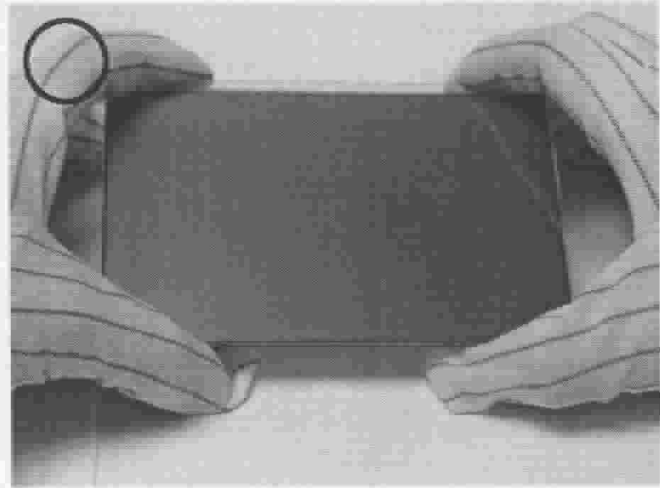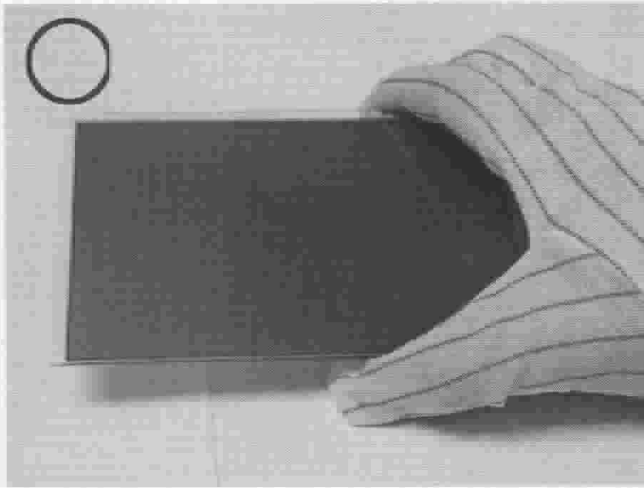


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

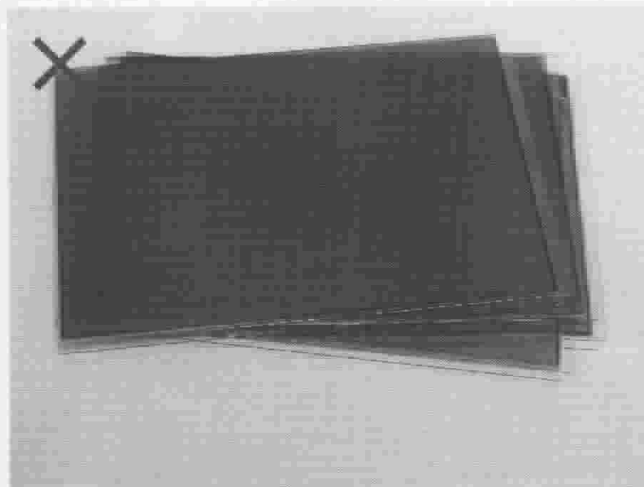


Please don't put one on another LCD.

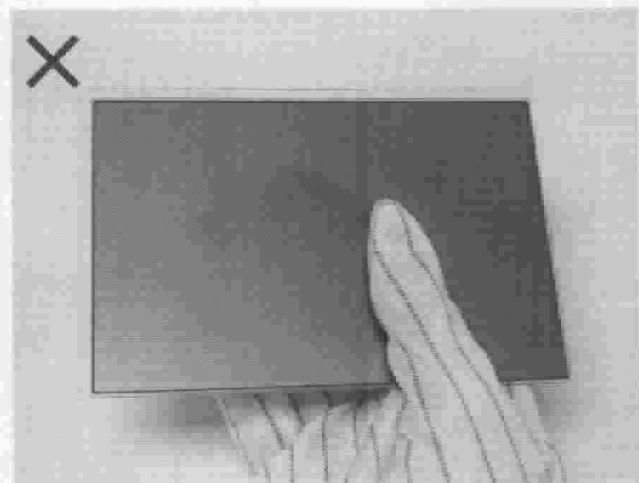

Please don't hold the surface of LCD.

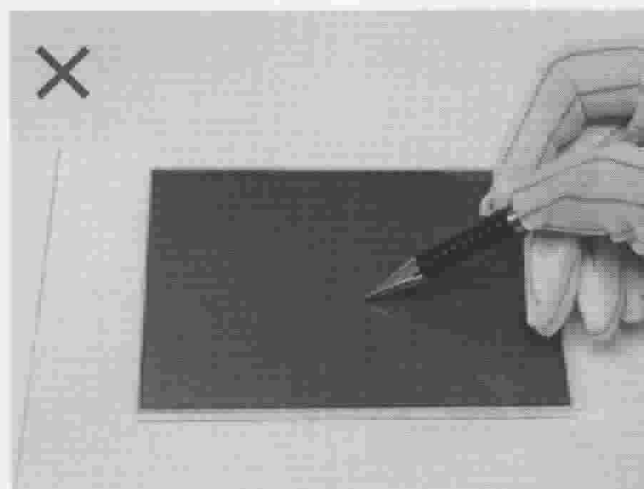

Please don't operate with sharp stick such as sharp pencil.

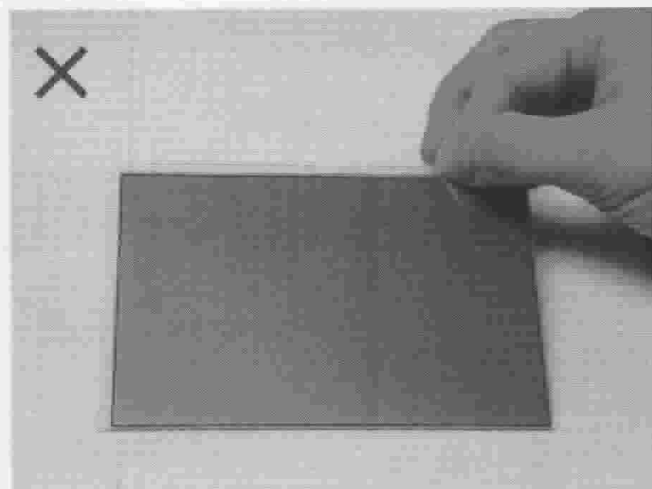

Please don't touch ITO glass without anti-static gloves.

