

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LMBJ6T003JPS

SPEC. NO.: LM003-0K-1

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw


EDITED ON : Jan. 08. 2007

Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			W. R. HSU

1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LMBJ6T003JPS	-
2	Module Size	190.0(W) X 65.0(H) X MAX 13.8(D)	mm
3	Dot Size	0.49 (W) x 0.49 (H)	mm
4	Dot Pitch	0.53 (W) x 0.53 (H)	mm
5	Number of Dots	240 (W) x 64 (H) Dots	Dot
6	Duty	1/64	-
7	LCD Display Mode	FSTN:Black and White(Normally White/Positive Image)	-
8	Rear Polarizer	Transmissive Type	-
9	Viewing Direction	6	O'clock
10	Backlight	CCFL	-
11	Controller	T6963CFG-0101(C)	-
12	DC/DC Converter	Excluded	-
13	Weight	173 (approx.)	g

Note :

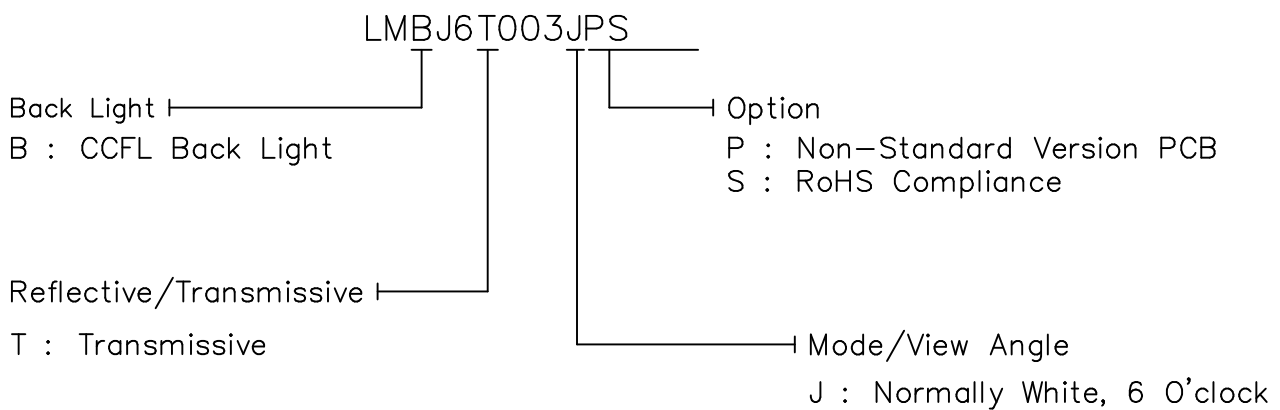

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

REV/DATE	R0/ 12.14.06'	R1/ 01.08.07'				BY W.R.HSU
----------	------------------	------------------	--	--	--	---------------

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V Standard

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Power Supply for LCM	VDD-VEE	0	20.0	V	
Input Voltage	VI	-0.3	VDD	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS


ITEM	NORMAL TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	0	50	-20	70
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 50^\circ\text{C}$: 80%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.
That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Logic Circuit Power Supply	VDD-VSS	-	4.5	5.0	5.5	V	
Input Voltage	VIH	H level	0.8VDD	-	VDD	V	
	VIO	L level	0	-	0.2VDD	V	
Recommended LC Driving Voltage (Normal Temp. LCM)	VDD-VEE	Duty= 1/64	0°C	12.8	13.2	13.6	V
			25°C	12.0	12.4	12.8	
			50°C	11.0	11.4	11.8	
Power Supply Current	IDD	FLM=72 Hz VDD=5.0 V VDD-VEE=12.4 V Ta=25°C	-	13.0	17.0	mA	
	IEE	PATTERN : 	-	1.7	2.3		
LCM	Surface Luminance	L	IL=5mA Ta=25°C PATTERN: Dots All ON	-	60	-	cd/m ²
			IL=5mA Ta=25°C PATTERN: Dots All Off	160	200	-	

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used Lamp Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp Voltage	V_L	-	207	-	Vrms	-
Lamp current	I_L	-	5	-	mArms	-
Lamp power consumption	P_L	-	1.04	-	W	(*1)
Starting voltage	V_S	-	-	780	Vrms	$T_a=25^\circ\text{C}$
		-	-	1020	Vrms	$T_a=0^\circ\text{C}$
Lamp life time	L_L	-	40000	-	hrs	at $I_L = 5 \text{ mArms}$ $T_a=25^\circ\text{C}$ (*2)

(*1) Power consumption excluded inverter loss .

(*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness .

(*3) a. Please follow the table of Lamp Characteristics shown above if not to use the inverter recommended by Nan Ya .

b. If customers want to design inverter by themselves , please inform Nan Ya to offer the detail lamp specification .

4.OPTICAL CHARACTERISTICS

4-1.Optical Char. of Normal Temp. Mode

AT Vop

ITEM MODE		Cr(Contrast Ratio)						θ (Viewing Angle)		ϕ (Viewing Angle)	
		0°C		25°C		50°C		25°C		25°C	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	J	3	4	4	6	2	3	-	F: 35 R: 25	-	L: 30 R: 30
NOTE		NOTE 6						NOTE 5			

NOTE:

T : TRANSMISSIVE


J : Normally White , 6 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	0℃	800	1000	1500	ms	NOTE 2
		25℃	200	250	380		
		50℃	80	100	150		
Response Time (fall)	Tf	0℃	500	600	900	ms	NOTE 2
		25℃	120	150	230		
		50℃	50	60	90		

(NOTE 1)

Definition of Operation Voltage(Vop)

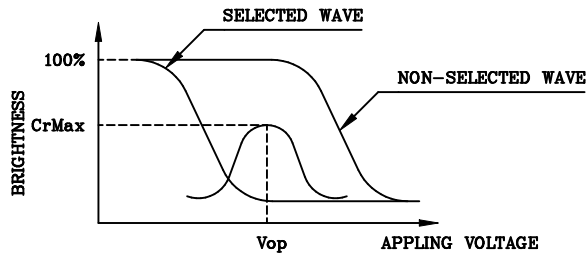

(positive type)

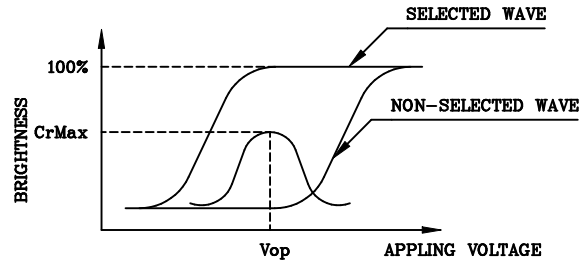


(negative type)

*Conditions


Viewing Angle : 0
 Frame Frequency : 72Hz
 Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

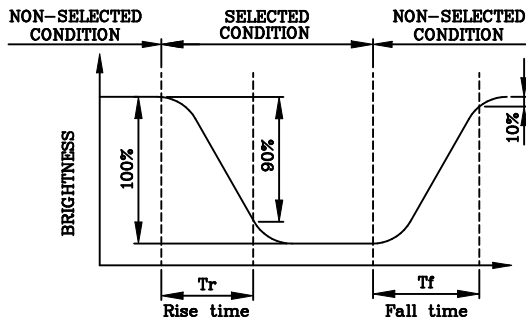

(positive type)

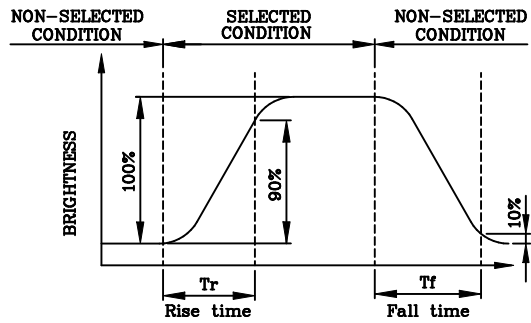



(negative type)

*Conditions

Operating Voltage : Vop
 Viewing Angle (θ,φ) : (0,0)
 Frame Frequency : 72Hz
 Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

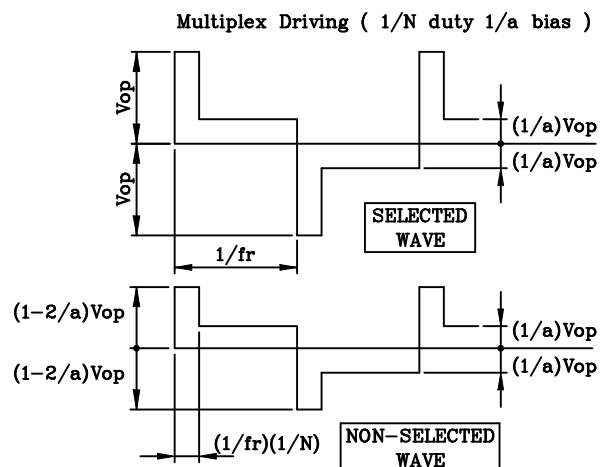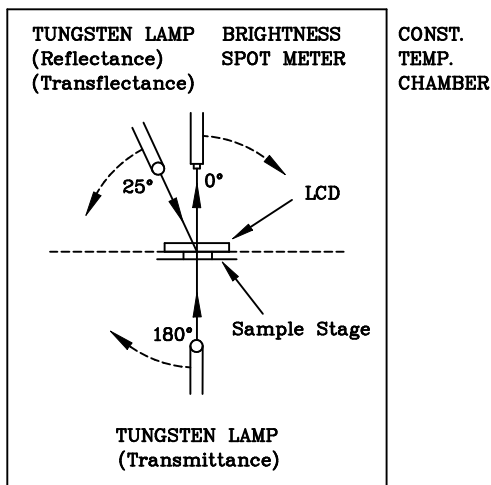



(NOTE 4)

Definition of Viewing Direction

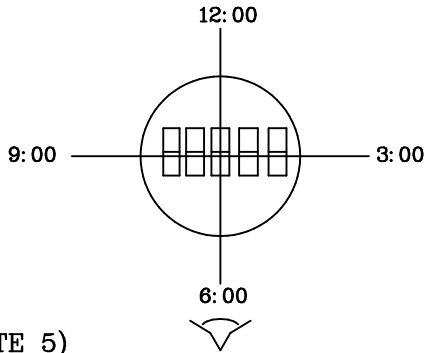

(NOTE 5)

Definition of Viewing Angle

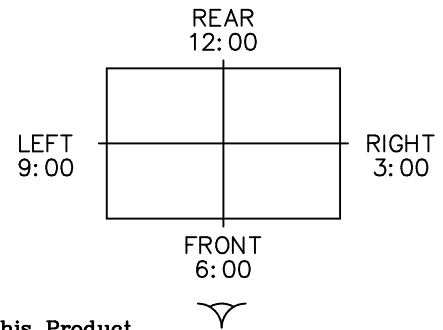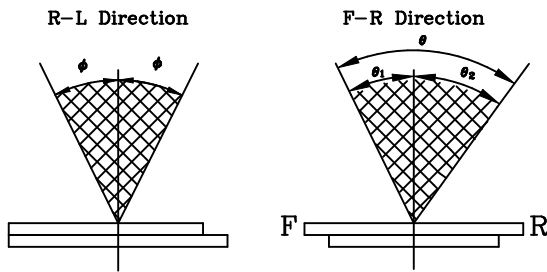

*For This Product
 The Viewing Direction Is 6 O'clock
 So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
 Frame Frequency : 72Hz
 Applying Waveform : 1/N duty 1/a bias
 Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

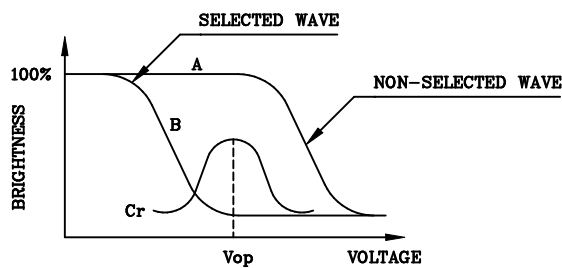

(positive type)

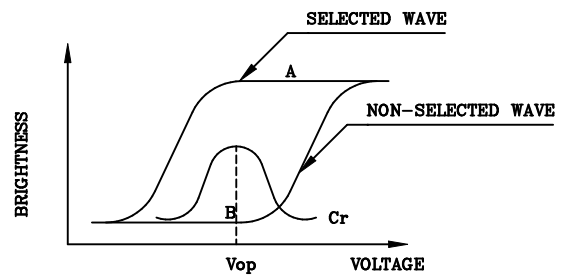


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
 Frame Frequency : 72Hz
 Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

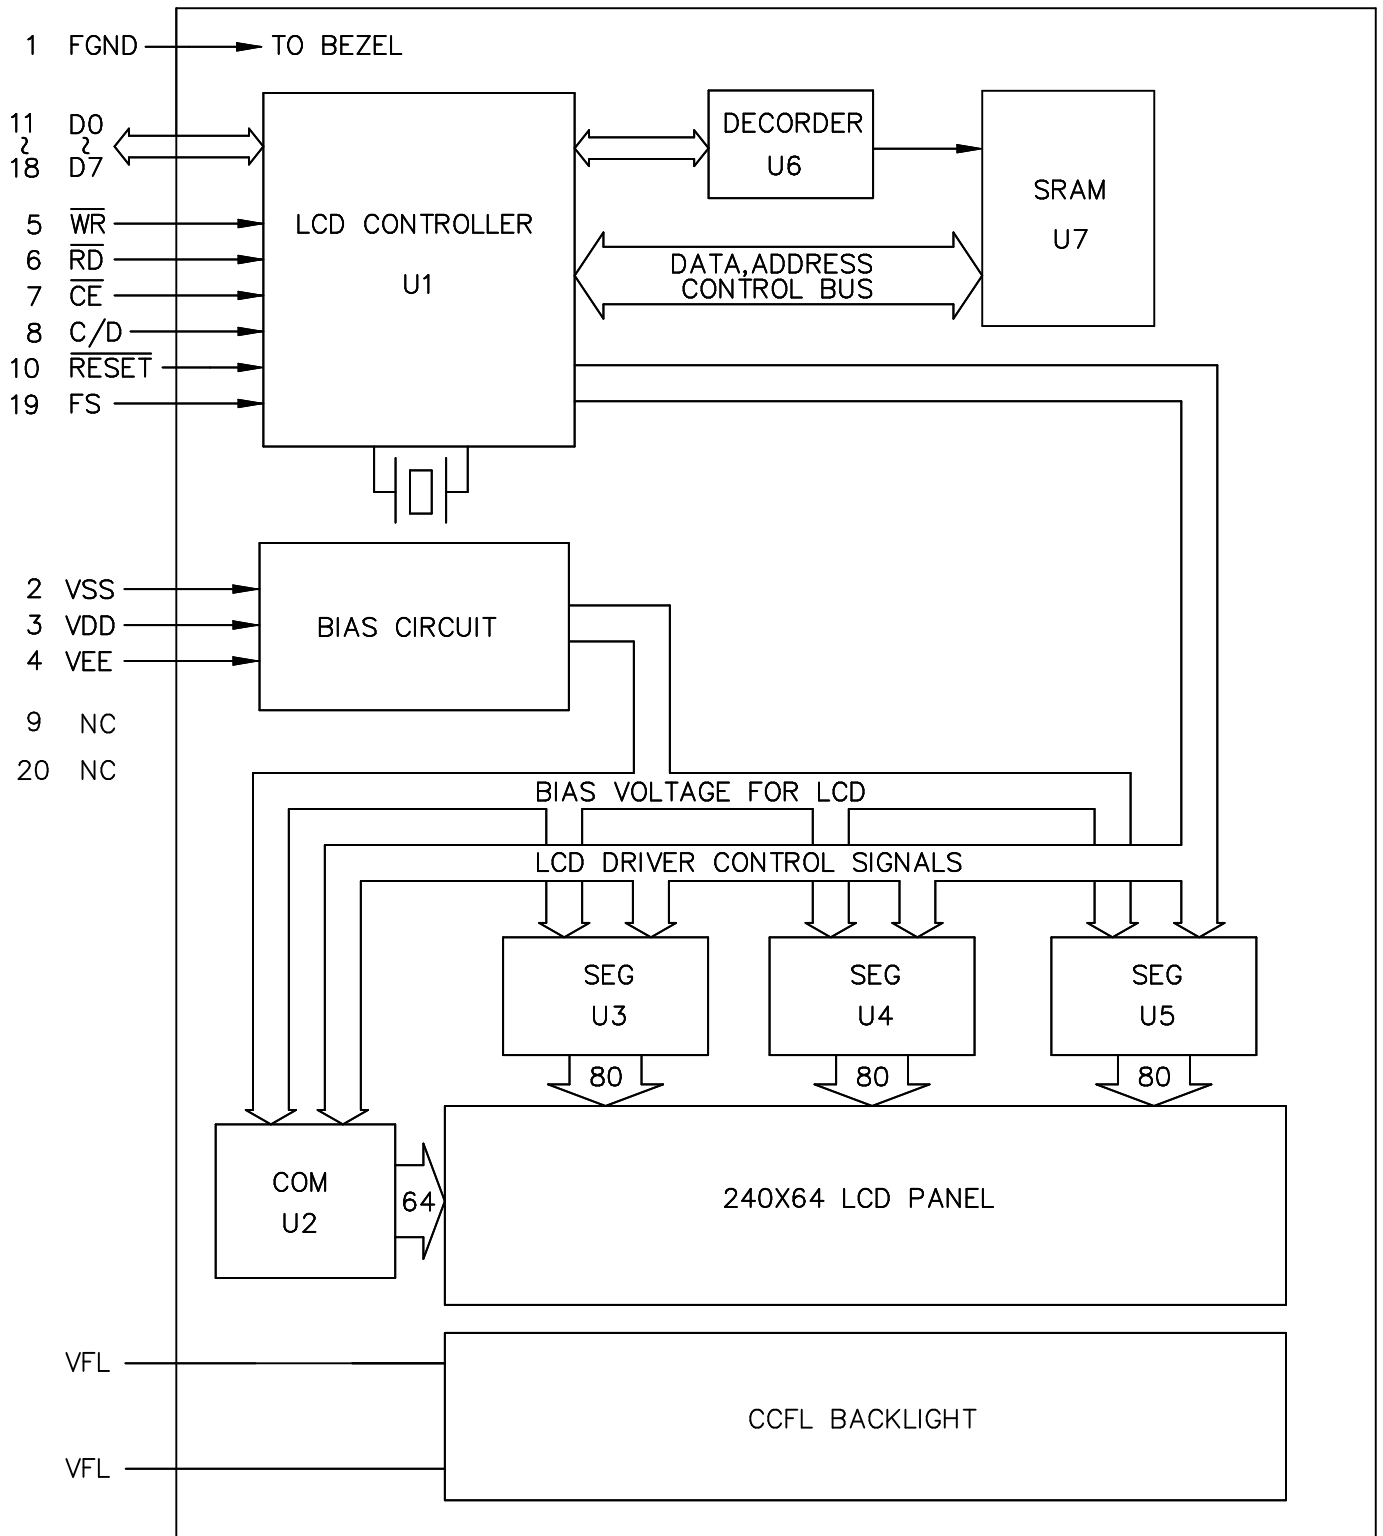


6. INTERNAL PIN CONNECTION

PIN NO.	SYMBOL	FUNCTION
1	FGND	FRAME GROUND (0V)
2	VSS	GROUND
3	VDD	POWER SUPPLY FOR LOGIC (+5V)
4	VEE	POWER SUPPLY FOR LC DRIVING
5	\overline{WR}	DATA WRITE
6	\overline{RD}	DATA READ
7	\overline{CE}	CHIP ENABLE
8	C/D	\overline{WR} ="L",C/D="H" :COMMAND WRITE \overline{WR} ="L",C/D="L" :DATA WRITE \overline{RD} ="L",C/D="H" :STATUS READ \overline{RD} ="L".C/D="L" :DATA READ
9	NC	NO CONNECT
10	\overline{RESET}	CONTROLLER RESET
11	D0	DATA INPUT/OUTPUT
12	D1	DATA INPUT/OUTPUT
13	D2	DATA INPUT/OUTPUT
14	D3	DATA INPUT/OUTPUT
15	D4	DATA INPUT/OUTPUT
16	D5	DATA INPUT/OUTPUT
17	D6	DATA INPUT/OUTPUT
18	D7	DATA INPUT/OUTPUT
19	FS	FONT SELECT CONNECT TO VDD :6X8 PIXELS/CHARACTER CONNECT TO GND :8X8 PIXELS/CHARACTER
20	NC	NO CONNECT

CCFL Connector : J.A.E/IL-G-4S-S3C2

PIN NO	SYMBOL	FUNCTION
1	VFL	POWER SUUPLY FOR CCFL DRIVE
2	NC	-
3	NC	-
4	VFL	POWER SUUPLY FOR CCFL DRIVE

7. POWER SUPPLY

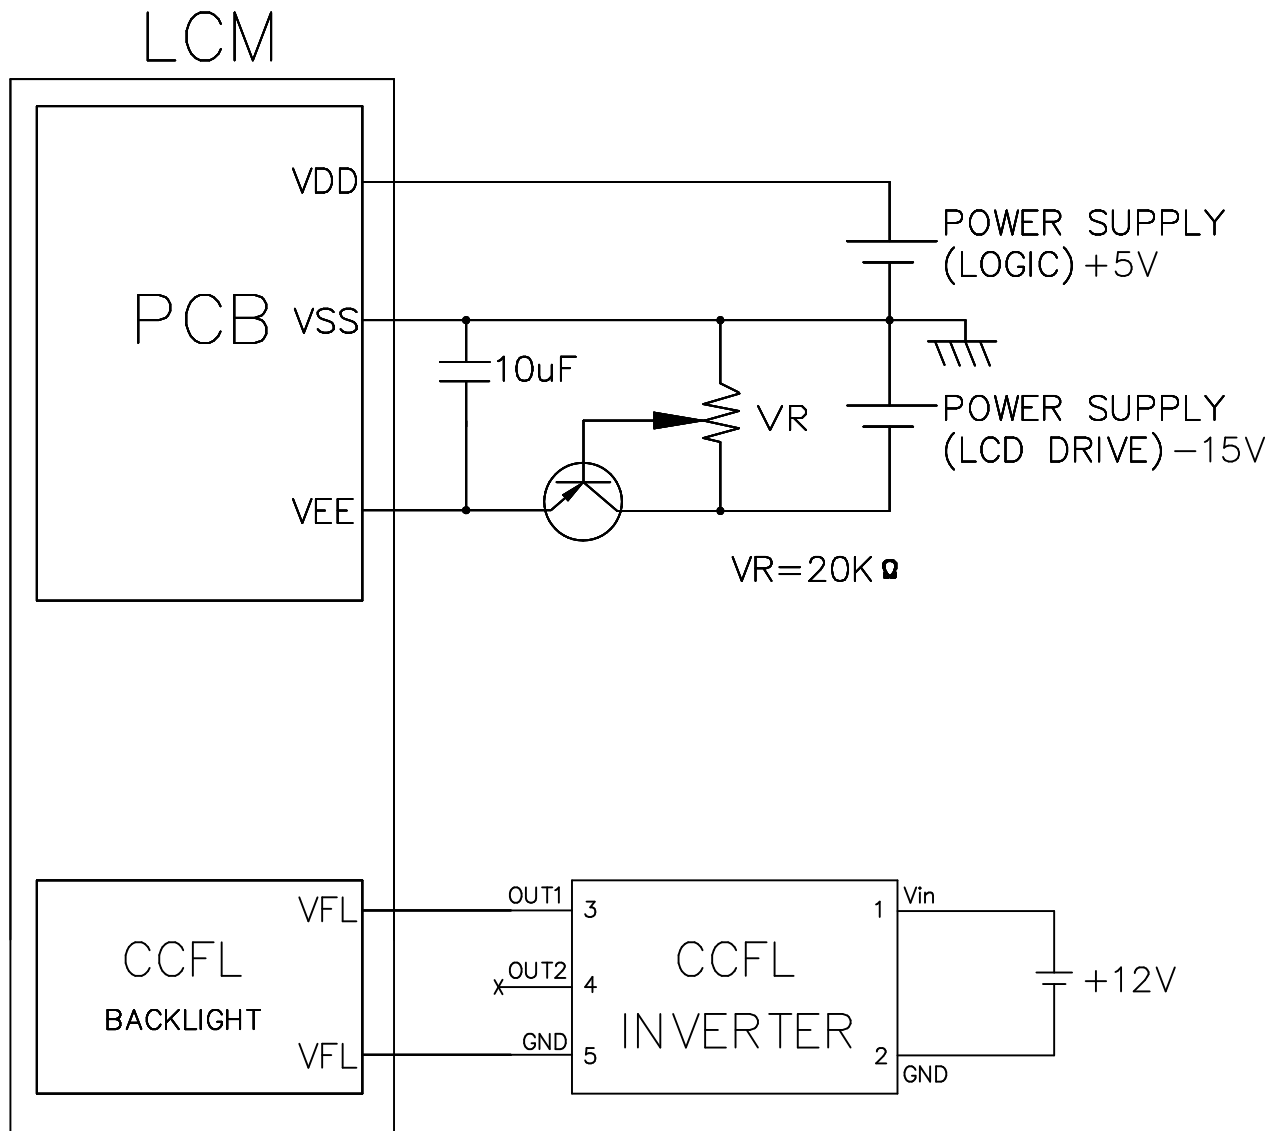

Recommended Inverter : CXA-L10L (TDK)

8. TIMING CHARACTERISTICS

8-1 INTERFACE TIMING

ITEM	ITEM	CONDITION	MIN.	MAX.	UNIT
C/D SET UP TIME	t_{CDS}	Fig.	100	-	ns
C/D HOLD TIME	t_{CDH}	Fig.	10	-	ns
$\overline{CE}, \overline{RD}, \overline{WR}$ CLOCK WIDTH	t_{CP}, t_{RP}, t_{WP}	Fig.	80	-	ns
DATA SET UP TIME	t_{DS}	Fig.	80	-	ns
DATA HOLD TIME	t_{DH}	Fig.	40	-	ns
ACCESS TIME	t_{ACC}	Fig.	-	150	ns
DATA OUTPUT HOLD TIME	t_{OH}	Fig.	10	50	ns


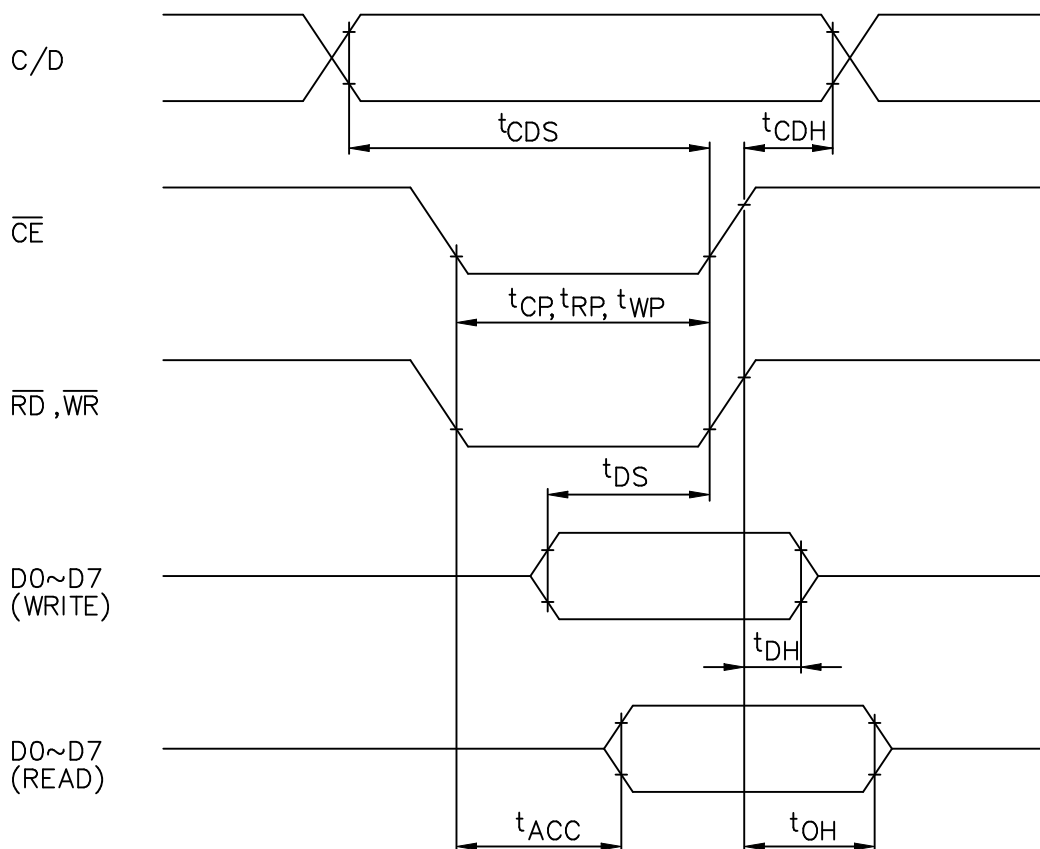



Fig. INTERFACE TIMING CHART

8-2 POWER ON/OFF TIMING

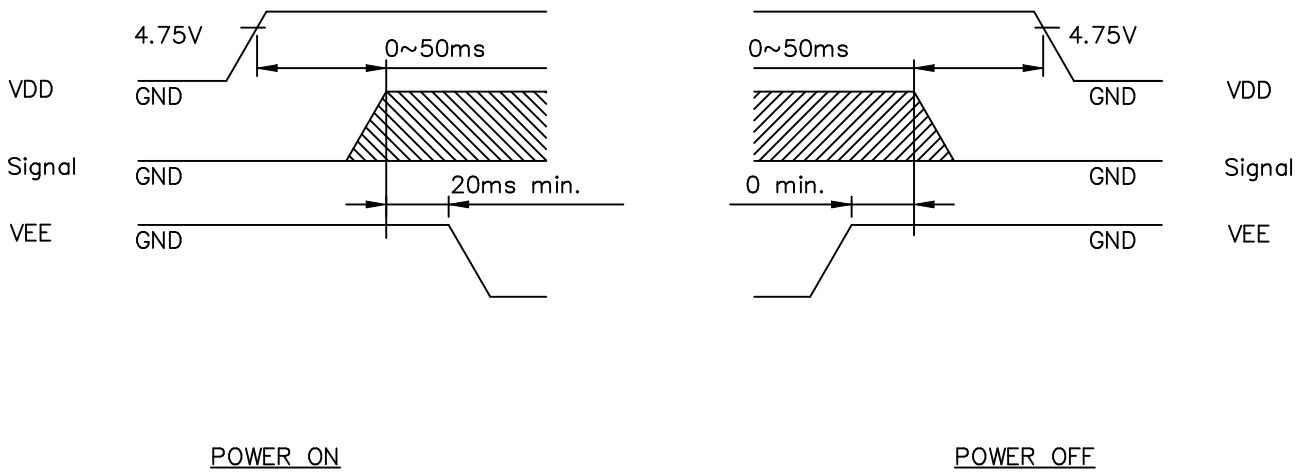

The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.


8-3 DISPLAY PATTERN

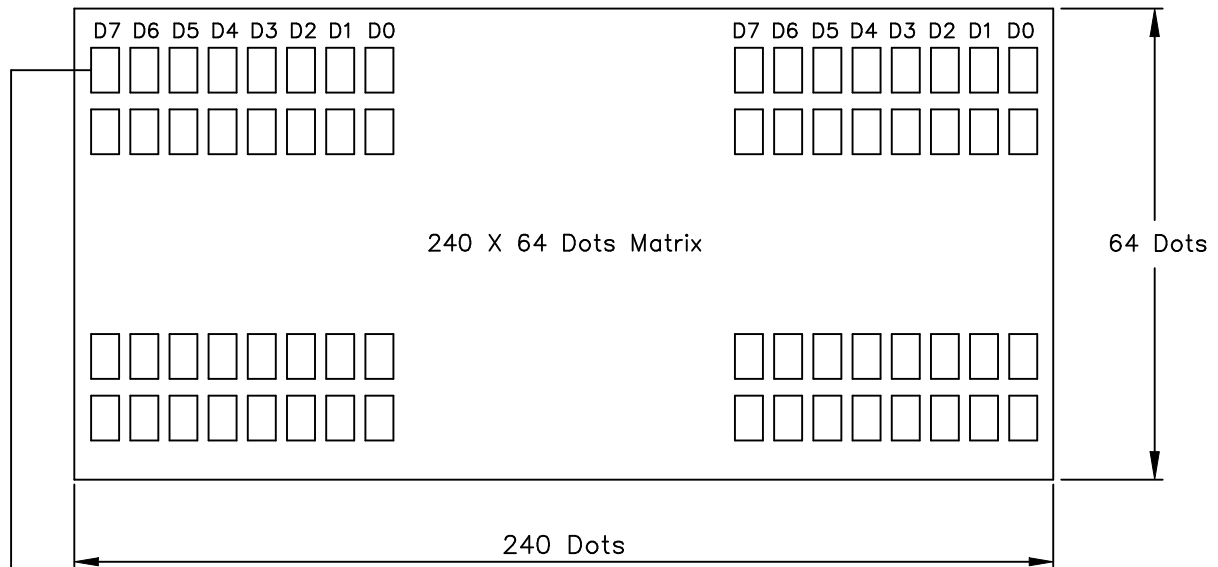

Starting dot for the starting address of display RAM D0~D7
 are 8 bits transmitted data ,where D0 is LSB and D7 is MSB.

9. RELIABILITY TEST

NORMAL TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	70°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-20°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	50°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	50°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	0°C	120Hrs		Appearance without defect	
6	Thermal Shock	$-20^{\circ}\text{C}, 30\text{min} \rightarrow 70^{\circ}\text{C}, 30\text{min}$  (1cycle)			Appearance without defect	10 cycles

Inspection Provision

1. Purpose


The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2. Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3. Technical Terms

3-1 NAN YA Technical Terms

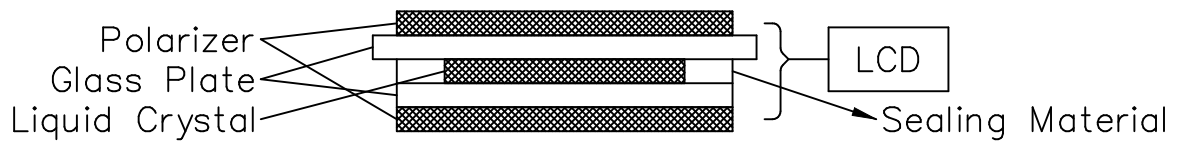

4. Outgoing Inspection

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection


4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions
*Viewing Area Definition

Fig. 1

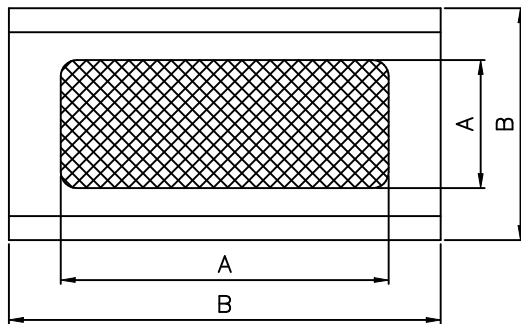

A : Zone Viewing Area
B : Zone Glass Plate Outline

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and sample to be 30cm to 50cm.

*Test and measurement are performed under the following conditions, unless otherwise specified.

Temperature 20± 15°C
Humidity 65± 20%R.H.
Pressure 860~1060hPa(mmbar)

In case of doubtful judgment, it is performed under the following conditions.

Temperature 20± 2°C
Humidity 65± 5%R.H.
Pressure 860~1060hPa(mmbar)





5.Specification for quality check
5-1 Electrical characteristics

NO.	Item	Criterion
1	Non operational	Fail
2	Miss operating	Fail
3	Missing dot	Fail
4	Contrast irregular	Fail
5	Response time	Within Specified value
6	Backlight turn on/off	Within Specified value

5-2 External Appearance Defect




NO.	Item	Criterion																		
1	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<p>(1)-1-Spots</p> <table border="1" data-bbox="700 533 1345 819"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.1 < D \leq 0.2$</td> <td>5</td> </tr> <tr> <td>$0.2 < D \leq 0.3$</td> <td>2</td> </tr> <tr> <td>$0.3 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <p>(1)-2-Blurred Spots(At lighting condition)</p> <table border="1" data-bbox="700 1240 1345 1480"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.3$</td> <td>Ignore</td> </tr> <tr> <td>$0.3 < D \leq 0.75$</td> <td>5</td> </tr> <tr> <td>$0.75 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			

1	Line	<p>(1)-1 Lines</p> <table border="1" data-bbox="699 483 1442 770"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 4$</td> <td>2</td> </tr> <tr> <td>$0.08 < W \leq 0.1$</td> <td>$L \leq 1$</td> <td>1</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurred Lines(At lighting condition)</p> <table border="1" data-bbox="699 1075 1442 1361"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 3$</td> <td>6</td> </tr> <tr> <td>$0.08 < W$</td> <td>$3 < L$</td> <td>None</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3	Color irregular	Not remarkable color irregular.																								

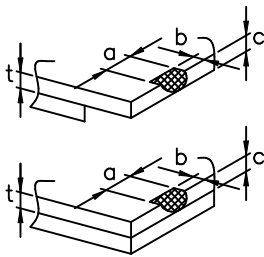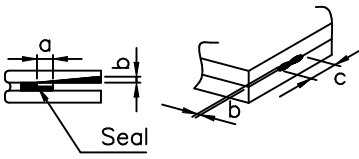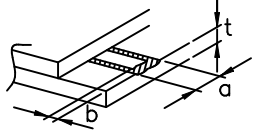4	Air bubbles polarizing plates, and reflection plates	<table border="1" data-bbox="699 434 1217 723"> <tr> <th data-bbox="699 434 959 577">Average Diameter (mm): D</th> <th data-bbox="959 434 1217 577">Number of pieces permitted</th> </tr> <tr> <td data-bbox="699 577 959 629">$D \leq 0.3$</td> <td data-bbox="959 577 1217 629">Ignore</td> </tr> <tr> <td data-bbox="699 629 959 723">$0.3 < D$</td> <td data-bbox="959 629 1217 723">0</td> </tr> </table> <p data-bbox="1217 434 1463 723">Average diameter = (Long diameter + Short diameter)/2</p> <p data-bbox="699 723 1463 831">Note that when there are 4 pieces or more, they are not to be concentrated.</p>		Average Diameter (mm): D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D$	0
Average Diameter (mm): D	Number of pieces permitted								
$D \leq 0.3$	Ignore								
$0.3 < D$	0								
5	Cracks	<p data-bbox="651 831 1054 882">(1) General crack</p> 	<p data-bbox="1054 831 1463 882">$a \leq 5$</p> <p data-bbox="1054 882 1463 934">$b \leq 2$</p> <p data-bbox="1054 934 1463 985">$c \leq t$</p> <p data-bbox="1054 985 1463 1227">Where, a and b are ignored when less than or equal to 0.5 The numbers of pieces are set at up to 5 pieces.</p>						
		<p data-bbox="651 1227 1054 1279">(2) Corner crack</p> 	<p data-bbox="1054 1227 1463 1279">$a \leq 2.5$</p> <p data-bbox="1054 1279 1463 1330">$b \leq 2.5$</p> <p data-bbox="1054 1330 1463 1382">$c \leq t$</p> <p data-bbox="1054 1382 1463 1420">$a + b \leq 4$</p>						
		<p data-bbox="651 1420 1054 1471">(3) Seal portion crack</p> 	<p data-bbox="1054 1420 1463 1471">$a \leq \text{The seal width} \times 1/3$</p> <p data-bbox="1054 1471 1463 1523">$b \leq t \times 2/3$</p> <p data-bbox="1054 1523 1463 1574">$c \leq 5$</p> <p data-bbox="1054 1574 1463 1688">The numbers of pieces are set at up to 5 pieces.</p>						
		<p data-bbox="651 1688 1054 1740">(4) ITO Pin crack</p> 	<p data-bbox="1054 1688 1463 1740">$a \leq 5$</p> <p data-bbox="1054 1740 1463 1792">$b \leq 1/3 \text{ pin length}$</p> <p data-bbox="1054 1792 1463 1843">$c \leq t$</p>						
		<p data-bbox="651 1928 1054 1980">(5) Progressive cracks</p>	<p data-bbox="1054 1928 1463 2018">All taken to be unacceptable.</p>						

6	Outer dimensions	Should be within the tolerance.
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.

5-3 Dot Appearance Defect

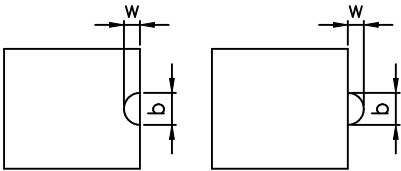NO.	Item	Criteria
1	Pinhole	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2	Missing	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.</p>
3	Thick and thin display	 <p>Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).</p>



NOTICE:

- SAFETY
 - 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
 - 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING
 - 1.Avoid static electricity which can damage the CMOS LSI.
 - 2.Do not remove the panel or frame from the module.
 - 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
 - 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
 - 5.Do not use ketonics solvent & Aromatic solvent. Use a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE
 - 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
 - 2.Do not place the module near organics solvents or corrosive gases.
 - 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT
 - 1.Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
 - 2.Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.

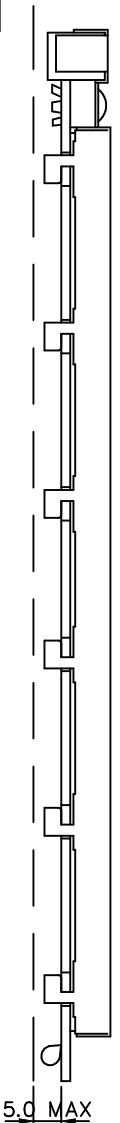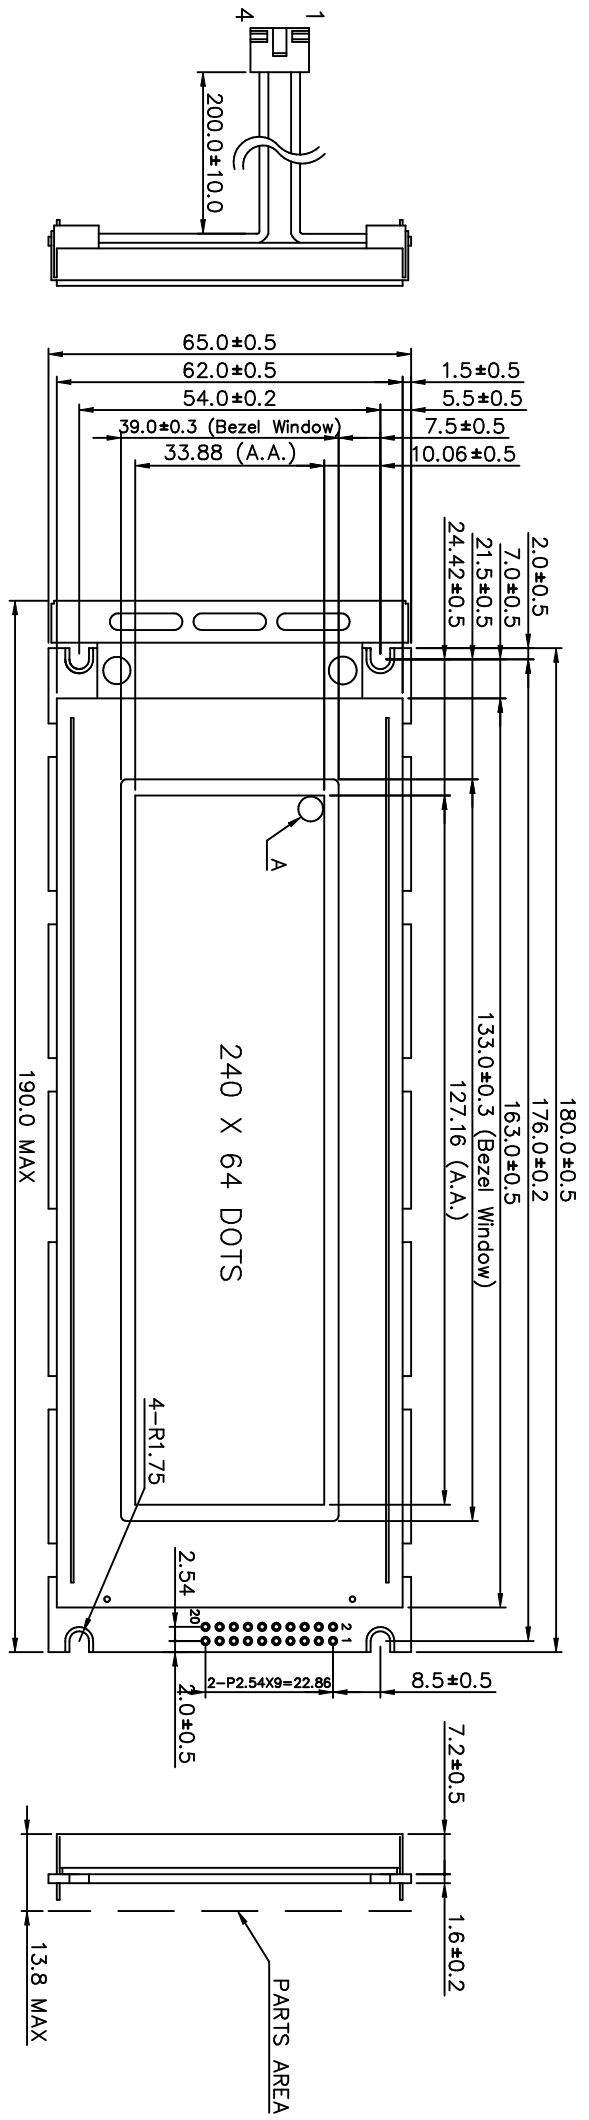


VIEW DIRECTION

CCFL Connector : J.A.E./L-G-4S-S3G2

PIN NO	SYMBOL	FUNCTION
1	VFL	POWER SUPPLY FOR CCFL DRIVE
2	NC	-
3	NC	-
4	VFL	POWER SUPPLY FOR CCFL DRIVE

PIN NO	SYMBOL	FUNCTION	PIN NO	SYMBOL	FUNCTION
1	FGND	FRAME GROUND (0V)	11	D0	DATA INPUT/OUTPUT, LSB
2	VSS	GROUND	12	D1	DATA INPUT/OUTPUT
3	VDD	POWER SUPPLY FOR LOGIC (+5V)	13	D2	DATA INPUT/OUTPUT
4	VEE	POWER SUPPLY FOR LC DRIVING	14	D3	DATA INPUT/OUTPUT
5	WR	DATA WRITE	15	D4	DATA INPUT/OUTPUT
6	RD	DATA READ	16	D5	DATA INPUT/OUTPUT
7	CE	CHIP ENABLE	17	D6	DATA INPUT/OUTPUT, MSB
8	C/D	WR="1",C/D="1": COMMAND WRITE WR="1",C/D="1": DATA WRITE RD="1",C/D="1": STATUS READ RD="1",C/D="1": DATA READ	18	D7	DATA INPUT/OUTPUT, MSB
9	NC	NO CONNECT	19	FS	FONT SELECT CONNECT TO VDD : 8X8 PIXELS/CHARACTER CONNECT TO Vss : 8X8 PIXELS/CHARACTER
10	RESET	CONTROLLER RESET	20	NC	NO CONNECT



GENERAL TOLERANCE LIST

DIMENSION	TOLERANCE
L ≤ 6	±0.25 (mm)
6 < L ≤ 18	±0.3 (mm)
18 < L ≤ 50	±0.4 (mm)
50 < L ≤ 125	±0.5 (mm)
125 < L	±0.6 (mm)
ANGLE	±1° (DEG)

- Notes:
- 1.Resolution : 240 x 64 Dots
 - 2.Backlight : CCFL
 - 3.Frame Material : SPT (0.5 mm)

南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

製品圖

LMBJ6T003JPS

REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE	DWG NO.
1						M1003KID01A



APPROVE	NAME	DATE	THIRD ANGLE P.
CHECK			
DESIGN	CLOUDE	95.12.14	SCALE UNIT
DRAWN	CLOUDE	95.12.14	1/1 mm

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

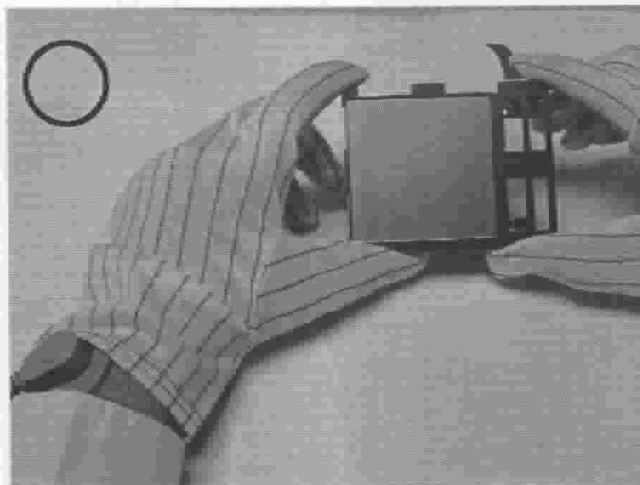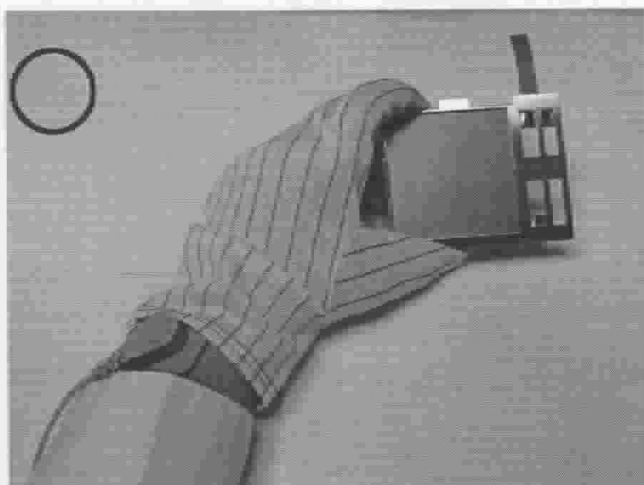


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

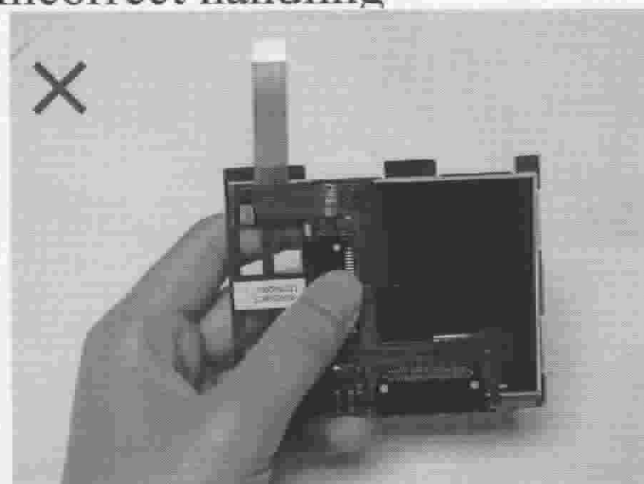


Please don't touch IC directly.

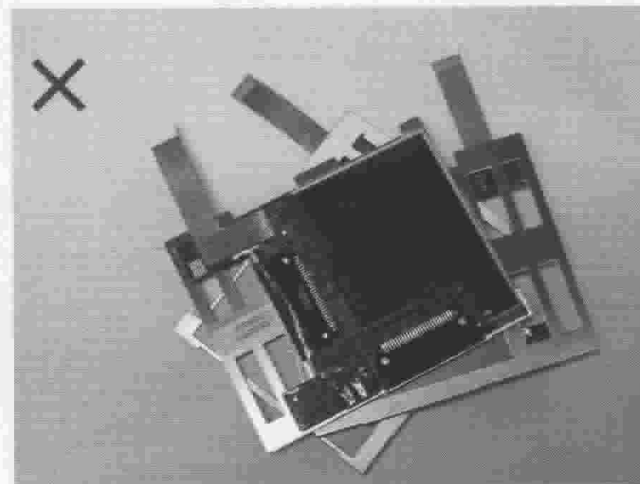

Please don't put one on another LCM.

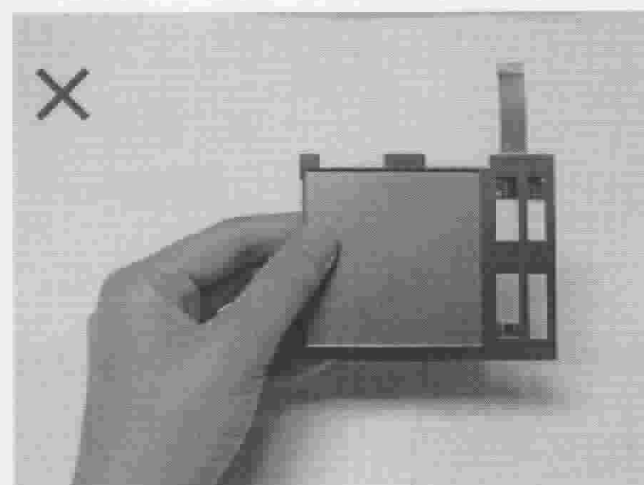

Please don't hold the surface of LCM.

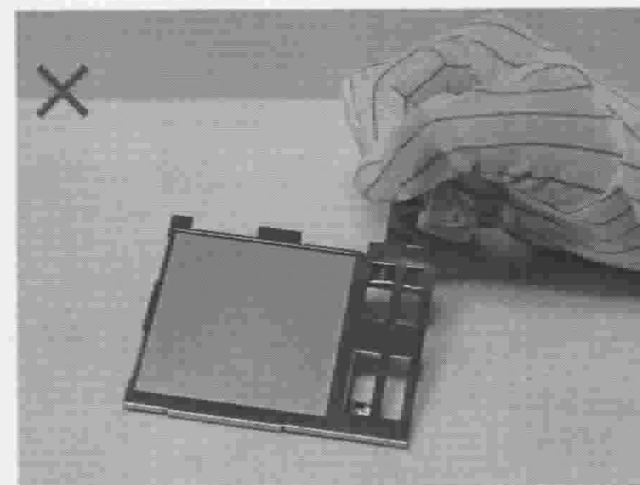



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

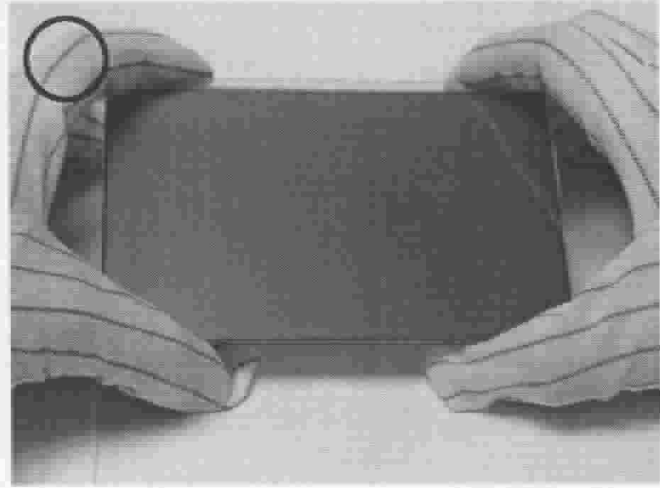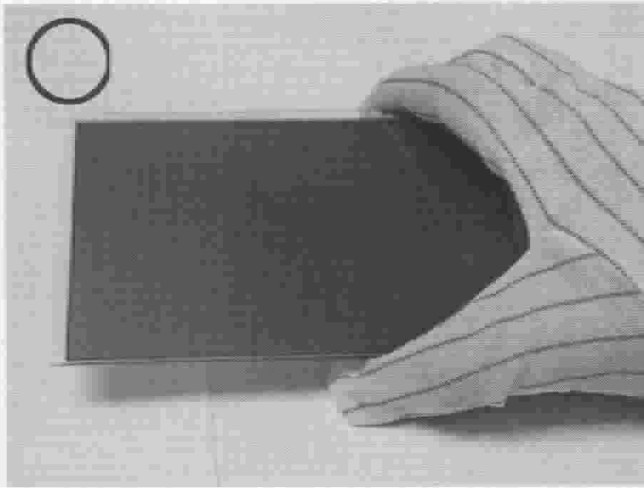


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

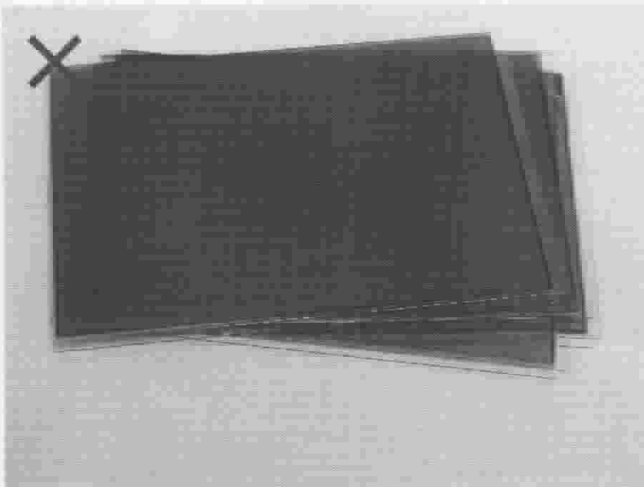


Please don't put one on another LCD.

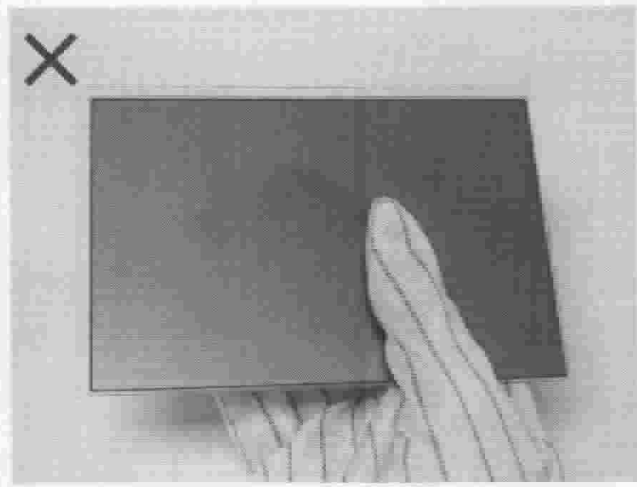

Please don't hold the surface of LCD.

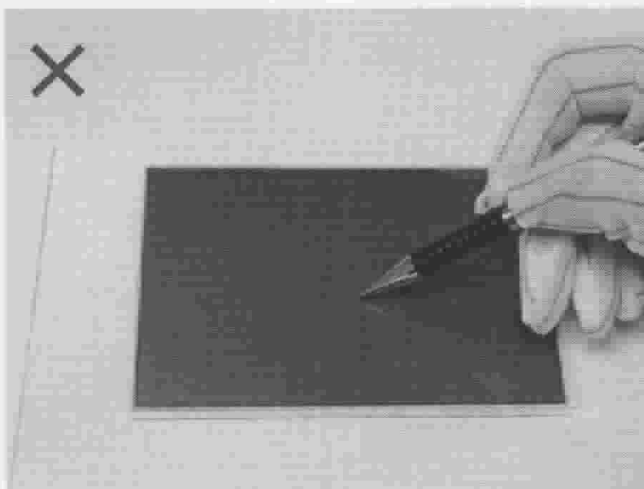

Please don't operate with sharp stick such as sharp pencil.

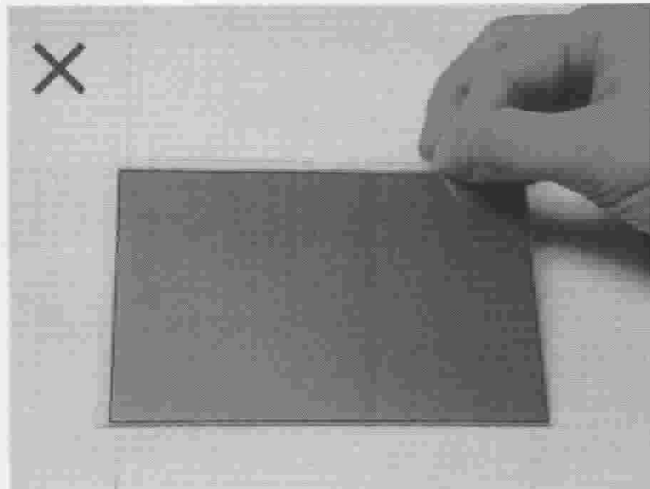

Please don't touch ITO glass without anti-static gloves.

