

General Purpose Transistors

NPN Silicon

●FEATURES

- 1) We declare that the material of product compliant with RoHS requirements and Halogen Free.
- 2) S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

●DEVICE MARKING AND ORDERING INFORMATION

Device	Marking	Shipping
LMBT4401LT1G	2X	3000/Tape&Reel
LMBT4401LT3G	2X	10000/Tape&Reel

●MAXIMUM RATINGS(Ta = 25°C)

Parameter	Symbol	Limits	Unit
Collector–Emitter Voltage	V _{CEO}	40	V _{dc}
Collector–Base Voltage	V _{CBO}	60	V _{dc}
Emitter–Base Voltage	V _{EBO}	6	V _{dc}
Collector Current — Continuous	I _C	600	mA _{dc}

●THERMAL CHARACTERISTICS



Total Device Dissipation, FR-5 Board (Note 1) @ T _A = 25°C Derate above 25°C	P _D	225 1.8	mW mW/°C
Thermal Resistance, Junction–to–Ambient(Note 1)	R _{θJA}	556	°C/W
Total Device Dissipation, Alumina Substrate (Note 2) @ T _A = 25°C Derate above 25°C	P _D	300 2.4	mW mW/°C
Thermal Resistance, Junction–to–Ambient(Note 2)	R _{θJA}	417	°C/W
Junction and Storage temperature	T _J , T _{stg}	–55 ~ +150	°C

1. FR-5 = 1.0×0.75×0.062 in.

2. Alumina = 0.4×0.3×0.024 in. 99.5% alumina.

LMBT4401LT1G

S-LMBT4401LT1G

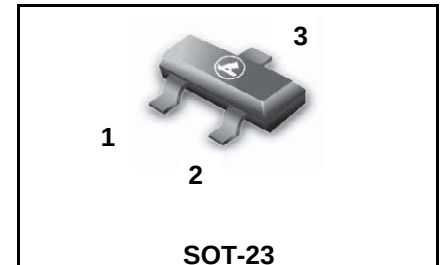

LMBT4401LT1G,S-LMBT4401LT1G

● ELECTRICAL CHARACTERISTICS (Ta= 25°C)

OFF CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Collector-Emitter Breakdown Voltage (I _C = 1.0 mA _{dc} , I _B = 0)	V _{BR(CEO)}	40	—	—	V
Collector-Base Breakdown Voltage (I _C = 0.1mA _{dc} , I _E = 0)	V _{BR(CBO)}	60	—	—	V
Emitter-Base Breakdown Voltage (I _E = 0.1mA _{dc} , I _C = 0)	V _{BR(EBO)}	6	—	—	V
Collector Cutoff Current (V _{CE} = 35 V _{dc} , V _{EB} = 0.4V _{dc})	I _{CEX}	—	—	0.1	μA
Base Cutoff Current (V _{CE} = 35 V _{dc} , V _{EB} = 0.4V _{dc})	I _{BEV}	—	—	0.1	μA

ON CHARACTERISTICS (Note 3.)

DC Current Gain (I _C = 0.1 mA _{dc} , V _{CE} = 1.0 V _{dc}) (I _C = 1.0 mA _{dc} , V _{CE} = 1.0 V _{dc}) (I _C = 10 mA _{dc} , V _{CE} = 1.0 V _{dc}) (I _C = 150 mA _{dc} , V _{CE} = 1.0 V _{dc}) (I _C = 500 mA _{dc} , V _{CE} = 2.0 V _{dc})	h _{FE}	20 40 80 100 40	— — — — —	— — — 300 —	
Collector-Emitter Saturation Voltage(3) (I _C = 150 mA _{dc} , I _B = 15 mA _{dc}) (I _C = 500mA _{dc} , I _B = 50 mA _{dc})	V _{CE(sat)}	— —	— —	0.4 0.75	V
Base-Emitter Saturation Voltage (I _C = 150 mA _{dc} , I _B = 15 mA _{dc}) (I _C = 500mA _{dc} , I _B = 50 mA _{dc})	V _{BE(sat)}	0.75 —	— —	0.95 1.2	V

SMALL-SIGNAL CHARACTERISTICS

Characteristic	Symbol	Min.	Typ.	Max.	Unit
Current-Gain — Bandwidth Product (I _C = 20mA _{dc} , V _{CE} = 20V _{dc} , f = 100MHz)	f _T	250	—	—	MHz
Collector-Base Capacitance (V _{CB} = 5.0 V _{dc} , I _E = 0, f = 1.0 MHz)	C _{cb}	—	—	6.5	pF
Emitter-Base Capacitance (V _{EB} = 0.5 V _{dc} , I _C = 0, f = 1.0 MHz)	C _{eb}	—	—	30	pF
Input Impedance (V _{CE} = 10 V _{dc} , I _C = 1.0 mA _{dc} , f = 1.0 kHz)	h _{ie}	1	—	15	kΩ
Voltage Feedback Ratio (V _{CE} = 10 V _{dc} , I _C = 1.0 mA _{dc} , f = 1.0 kHz)	h _{re}	0.1	—	8	X 10 ⁻⁴
Small-Signal Current Gain (V _{CE} = 10 V _{dc} , I _C = 1.0 mA _{dc} , f = 1.0 kHz)	h _{fe}	40	—	500	
Output Admittance (V _{CE} = 10 V _{dc} , I _C = 1.0 mA _{dc} , f = 1.0 kHz)	h _{oe}	1	—	30	μmhos

SWITCHING CHARACTERISTICS

Delay Time	(V _{CC} = 30 V _{dc} , V _{EB} = 2.0V _{dc} , I _C = 150 mA _{dc} , I _{B1} = 15 mA _{dc})	t _d	—	—	15	ns
Rise Time		t _r	—	—	20	
Storage Time	(V _{CC} = 30 V _{dc} , I _C = 150 mA _{dc} , I _{B1} = I _{B2} = 15 mA _{dc})	t _s	—	—	225	
Fall Time		t _f	—	—	30	

3. Pulse Test: Pulse Width <300 μs, Duty Cycle <2.0%.

LMBT4401LT1G,S-LMBT4401LT1G

ELRCTRICAL CHARACTERISTICS CURVES

SWITCHING TIME EQUIVALENT TEST CIRCUITS

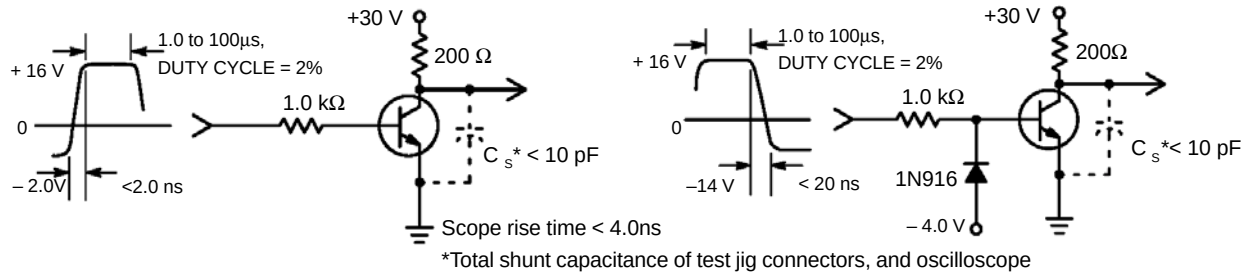


Figure 1. Turn-On Time

Figure 2. Turn-Off Time

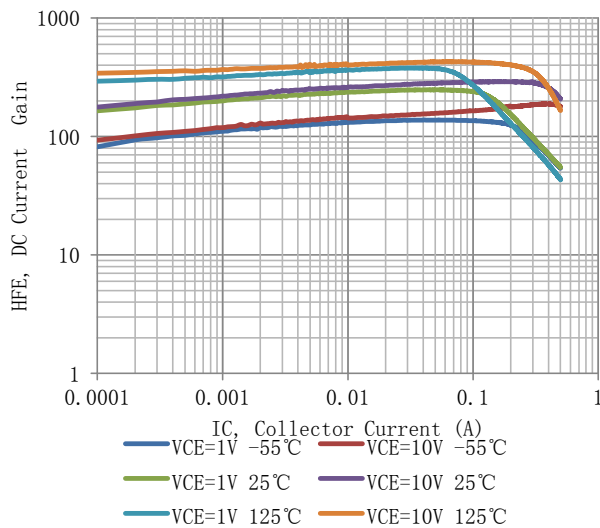


Figure 3. DC Current Gain

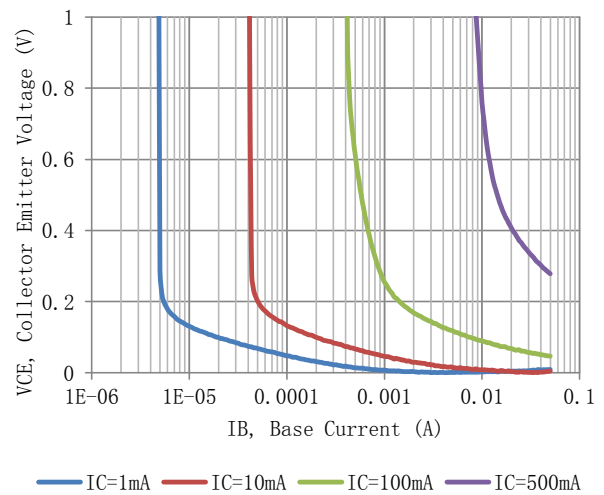


Figure 4. Collector Saturation Region

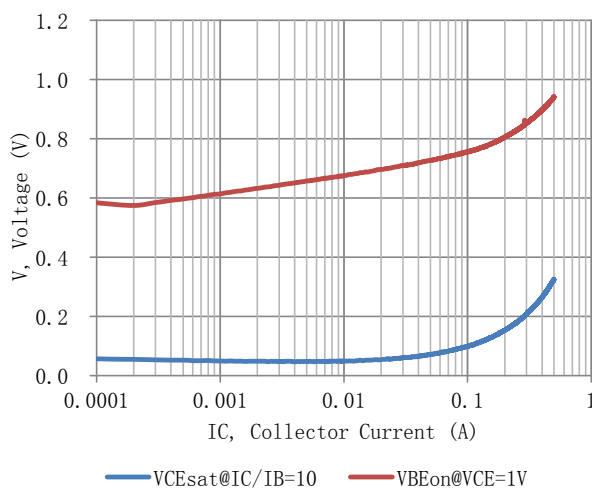


Figure 5. "On" Voltage

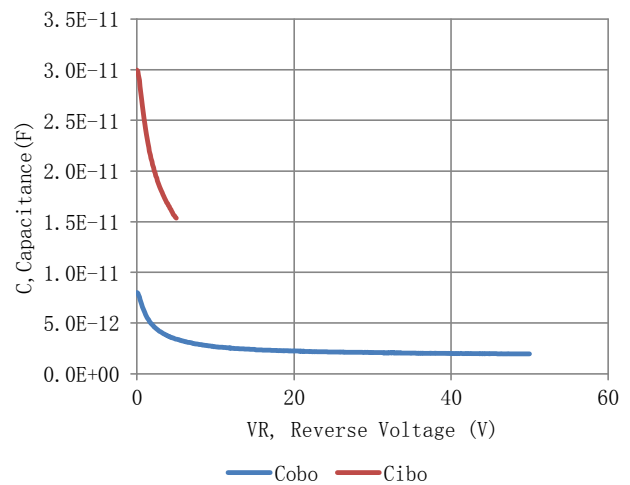


Figure 6. Capacitance

LMBT4401LT1G,S-LMBT4401LT1G

ELRCTRICAL CHARACTERISTICS CURVES

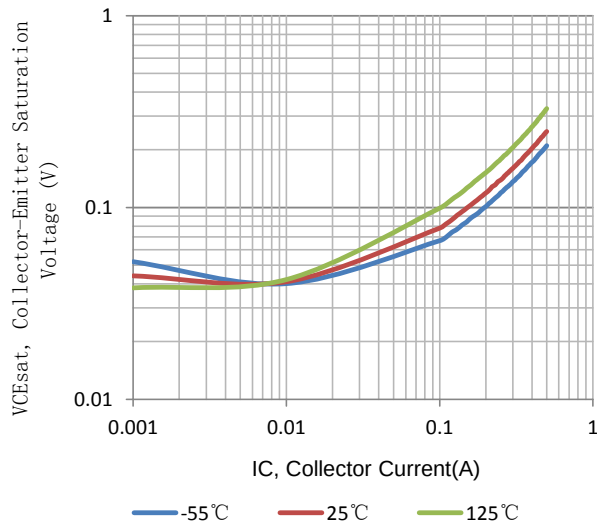


Figure 7. Collector Emitter Saturation Voltage vs. Collector Current

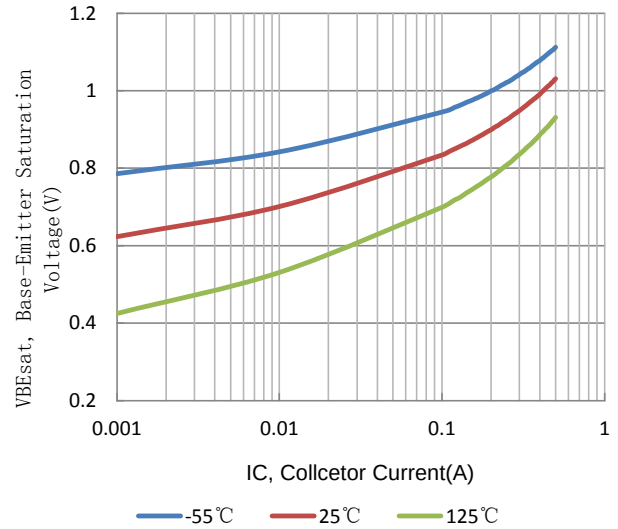


Figure 8. Base Emitter Saturation Voltage vs. Collector Current



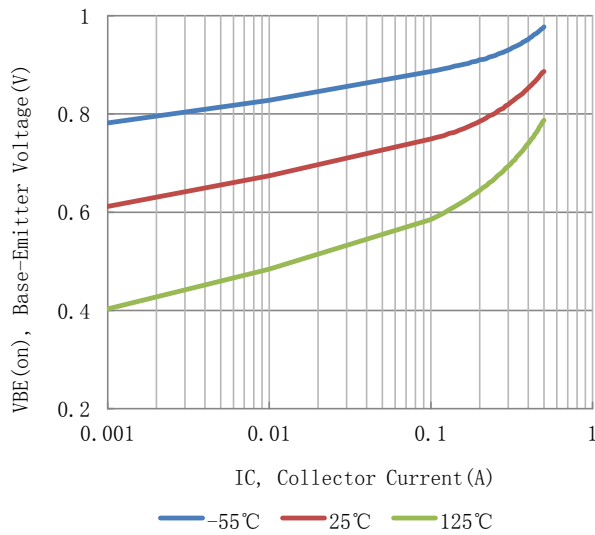


Figure 9. Base Emitter Voltage vs. Collector Current

LMBT4401LT1G,S-LMBT4401LT1G

SOT-23

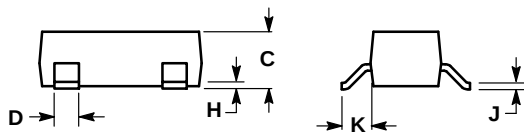

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
E	0.0701	0.0807	1.78	2.04
F	0.0005	0.0040	0.013	0.100
G	0.0034	0.0070	0.085	0.177
H	0.0140	0.0285	0.35	0.69
I	0.0350	0.0401	0.89	1.02
J	0.0830	0.1039	2.10	2.64
K	0.0177	0.0236	0.45	0.60

- PIN 1. BASE
2. EMITTER
3. COLLECTOR

