

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LMCGAH032P49CGKS_

SPEC. NO.: LM032-49I- Δ

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

EDITED ON : JUNE.12.2007


Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN

[illegible][illegible]

1.MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LMCGAH032P49CGKS_	-
2	Module Size	160.0 (W) x 109.0 (H) x 11.0 (D)	mm
3	Dot Size	0.33 (W) x 0.33 (H)	mm
4	Dot Pitch	0.36 (W) x 0.36 (H)	mm
5	Number of Dots	320 (W) x 240 (H)	Dot
6	Duty	1/240	-
7	LCD Display Mode	Black and White(Normally White/Positive Image)	-
8	Rear Polarizer	Transflective(High Transparency)	-
9	Viewing Direction	9	O'clock
10	Backlight	LED	-
11	Controller	S1D13305F00A100(With 32KB SRAM)	-
12	DC/DC Converter	Included	-
13	Touch Panel	Excluded	-
14	Weight	200 (Approx.)	g

NOTE :

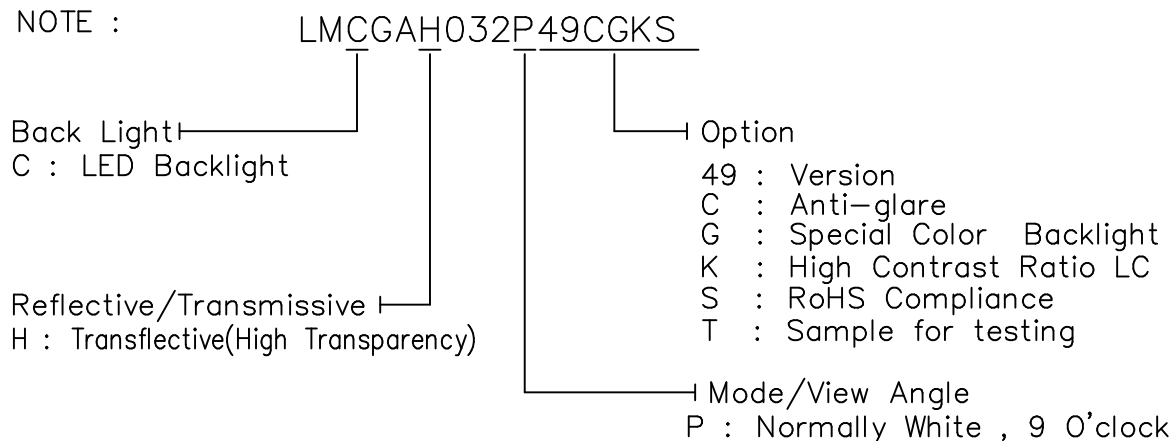

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

2.ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	
Input Voltage	VI	-0.3	VDD+0.3	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	WIDE TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-20	70	-40	80
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 70^{\circ}\text{C}$: 75%RH max

Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.

That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	—	4.75	5.0	5.25	V
Input Voltage	VIH	H level	0.7VDD	—	VDD	V
	VIL	L level	0	—	0.3VDD	V
Recommended LC Driving Voltage	VDD-V0	Duty=1/240	-20°C	25.1	25.5	V
			0°C	23.5	23.9	
			25°C	22.6	23.0	
			50°C	21.2	21.6	
			70°C	20.2	20.6	
Power Supply Current	IDD	Ta=25℃ VDD = 5.0 V VDD-V0 = 23.0 V PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □	—	70	110	mA
Surface Luminance of LCM	L	Ta=25℃ @ VAK = 5V PATTERN: (Dots All ON)	—	30	—	cd/m ²
		Ta=25℃ @ VAK = 5V PATTERN: (Dots All Off)	55	70	—	

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used LED Rating (Constant Voltage Driving)

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Peak forward current	I_P	—	—	200	mA	—
Maximum reverse voltage	V_R	—	—	5	V	—
Applied forward voltage	V_{AK}	—	5	—	V	—
Applied forward current	I_{AK}	—	—	160	mA	—
LED power consumption	P_F	—	—	1	W	—
LED life time	L_L	—	10000	—	hrs	at $V_{AK} = 5 \text{ V}$ (*1)

(*1) LED life time is defined as follows : The final brightness is at 50% of original brightness.

4.OPTICAL CHARACTERISTICS

AT V_{OP}

ITEM MODE		Cr(Contrast Ratio)										θ (Viewing Angle)		ϕ (Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
H	P	2.5	3.5	2.8	4.0	3.0	4.5	2.0	3.0	1.8	2.5	—	(F)30 (R)30	—	(L)25 (R)35
NOTE		NOTE 3,6										NOTE 3,5			

NOTE :

H : Transflective(High Transparency)


P : Normally White , 9 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	2400	3000	4500	ms	NOTE 2,3
		0℃	550	700	850		
		25℃	200	250	375		
		50℃	80	100	150		
		70℃	50	60	90		
Response Time (fall)	Tf	-20℃	1600	2000	3000	ms	NOTE 2,3
		0℃	320	400	600		
		25℃	120	150	225		
		50℃	55	70	100		
		70℃	30	40	60		

(NOTE 1)

Definition of Operation Voltage(Vop)

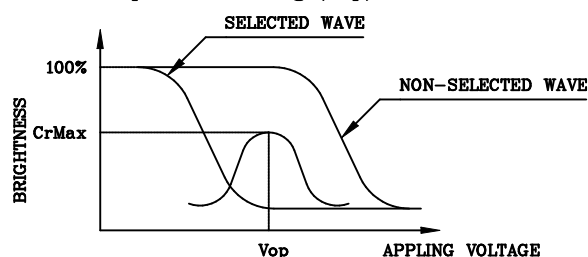

(positive type)

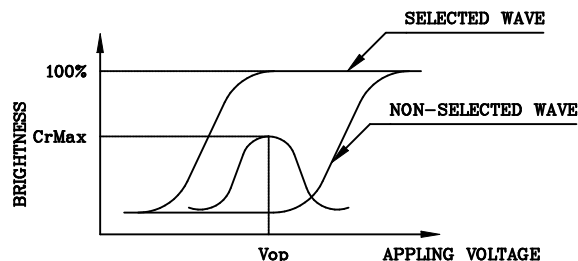

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

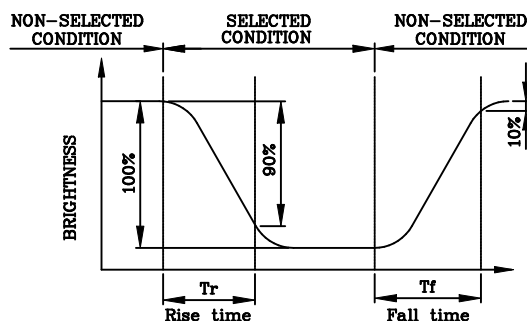

(positive type)

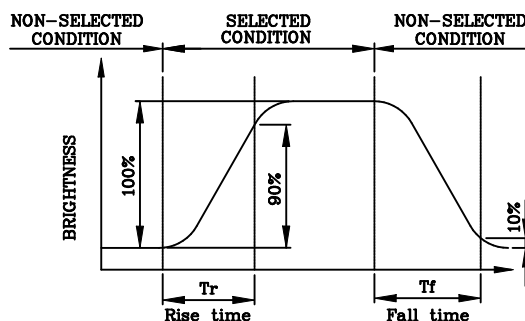

(negative type)

*Conditions

Operating Voltage : Vop


Viewing Angle (θ, ϕ) : (0,0)

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

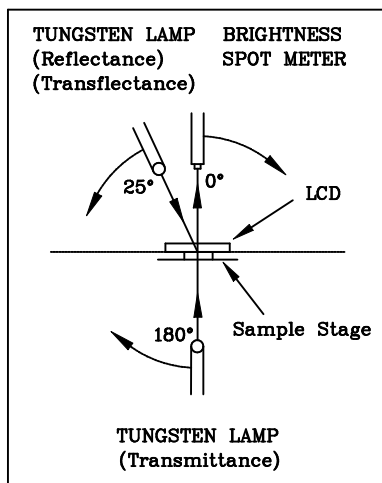


CONST.
TEMP.
CHAMBER

Multiplex Driving (1/N duty 1/a bias)

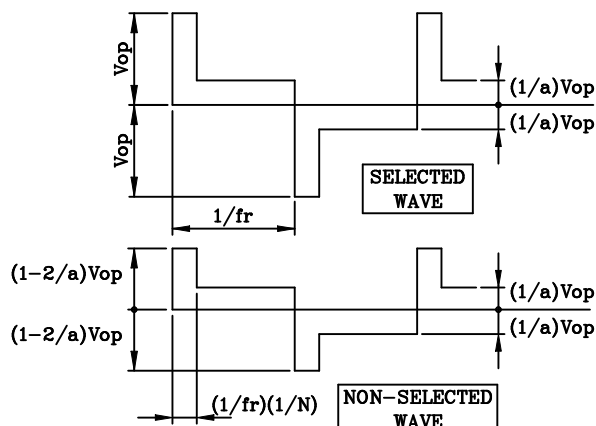



(NOTE 4)

Definition of Viewing Direction

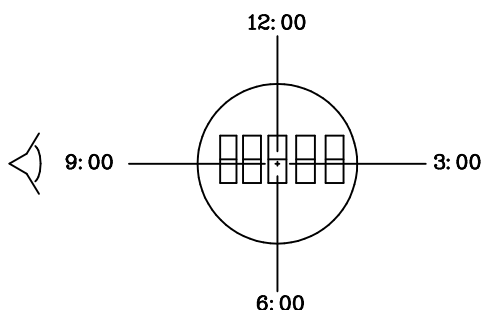

(NOTE 5)

Definition of Viewing Angle

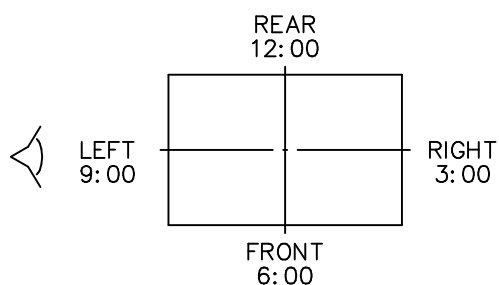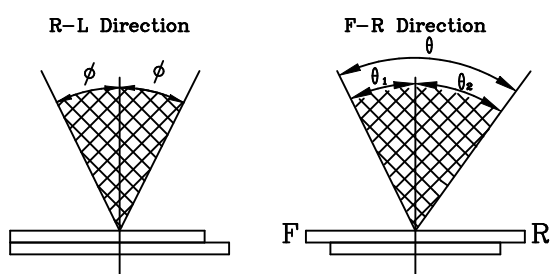


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

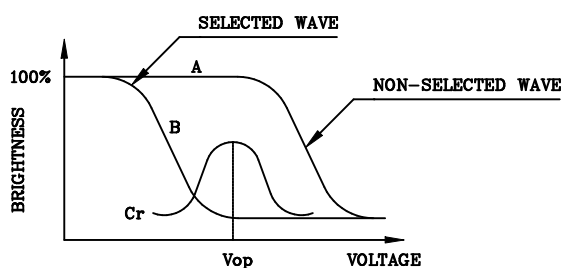

(positive type)

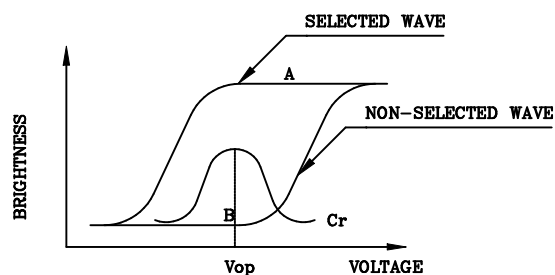


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

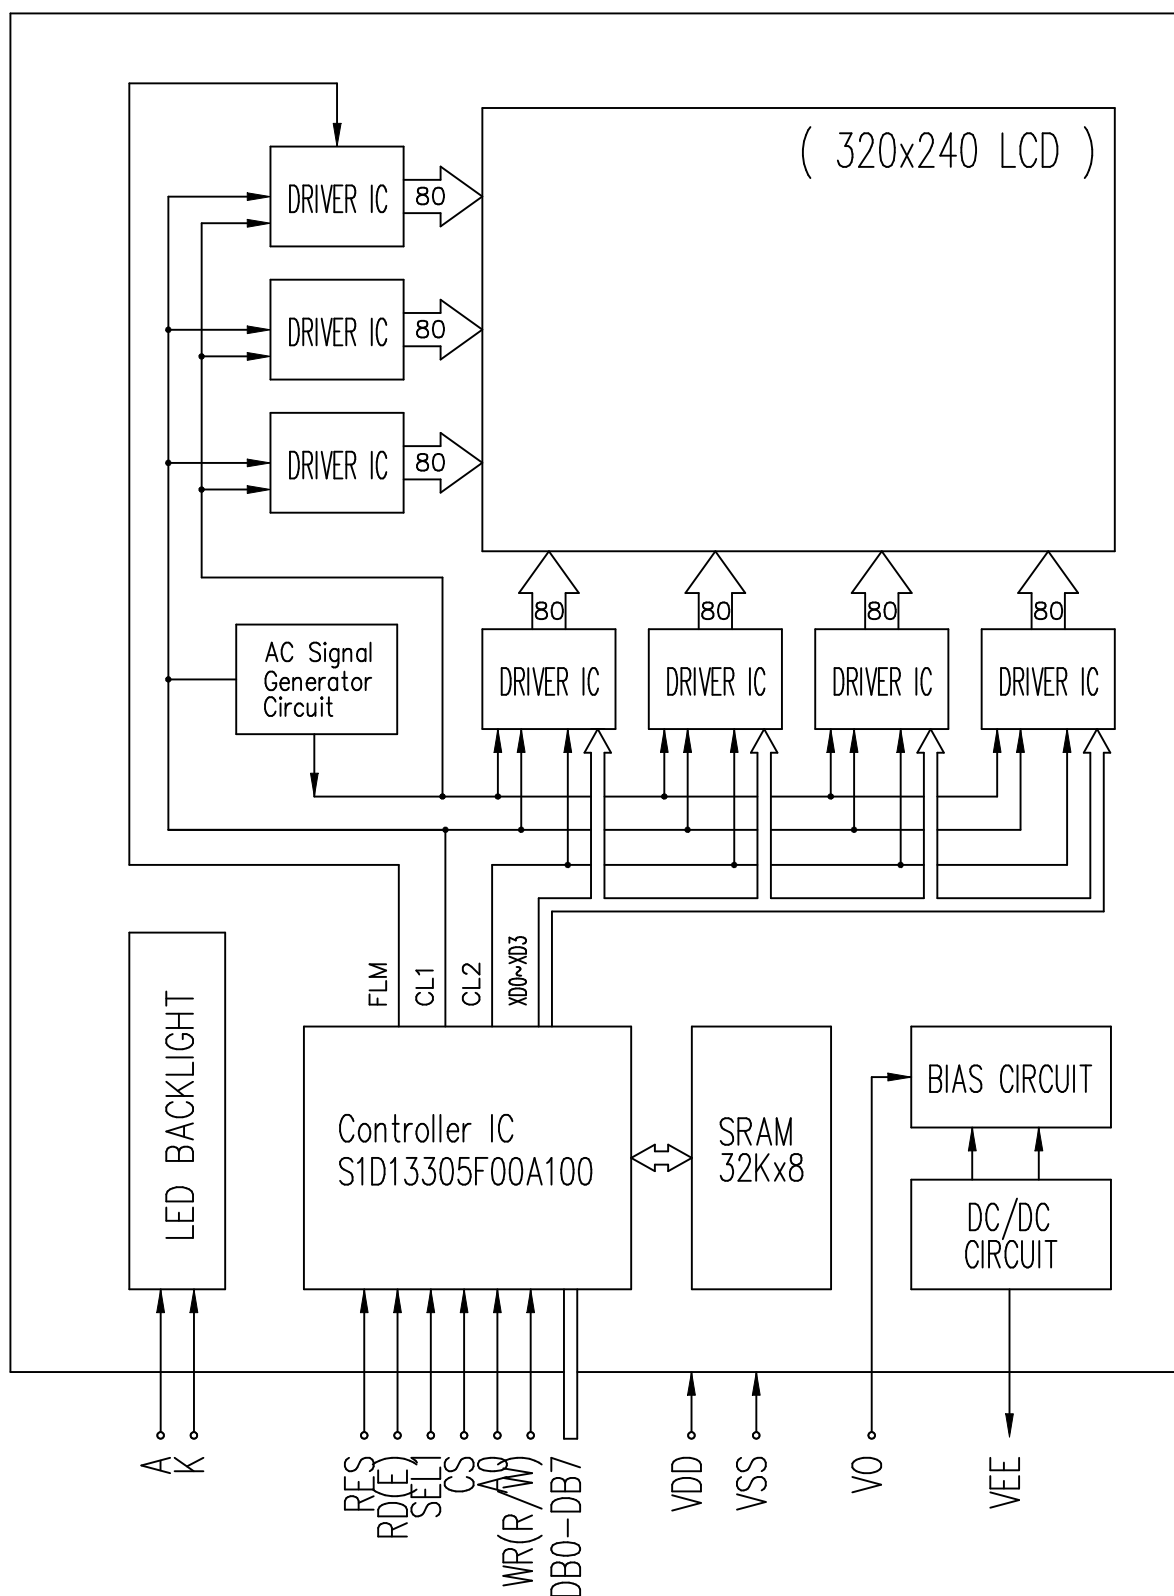

6.INTERNAL PIN CONNECTION

CN1: Pitch 1.0mm

Pin No.	Symbol	Function
1	VSS	Ground
2	VDD	Power supply for Logic
3	V0	Negative voltage power supply (Tuned from VDD-VEE)
4	A0	Data type select
5	WR (R/W)	8080 Family : Write signal 6800 Family : R/W signal
6	RD(E)	8080 Family : Read signal 6800 Family : Enable clock
7 5 14	DB0 S DB7	3-State I/O data bus
15	CS	Chip select
16	RES	This active Low input performs hardware reset on the S1D13305F00A100
17	VEE	Supply voltage for LCD panel (Generated from internal DC/DC converter)
18	SEL1	'0' FOR 8080 Family MPU , '1' for 6800 family MPU
19 5 22	N.C.	No connection


MATING CONNECTOR: ELC0 00-6200-227-022-800+

CN2: J.A.E./IL-G-4S-S3C2 (or compatible)

Pin No.	Symbol	Level	Function
1	A	-	Power supply for LED
2	NC	-	-
3	NC	-	-
4	K	-	Ground

MATING CONNECTOR: J.A.E./IL-G-4P-S3T2-SA
or J.A.E./IL-G-4P-S3L2-SA

7. POWER SUPPLY

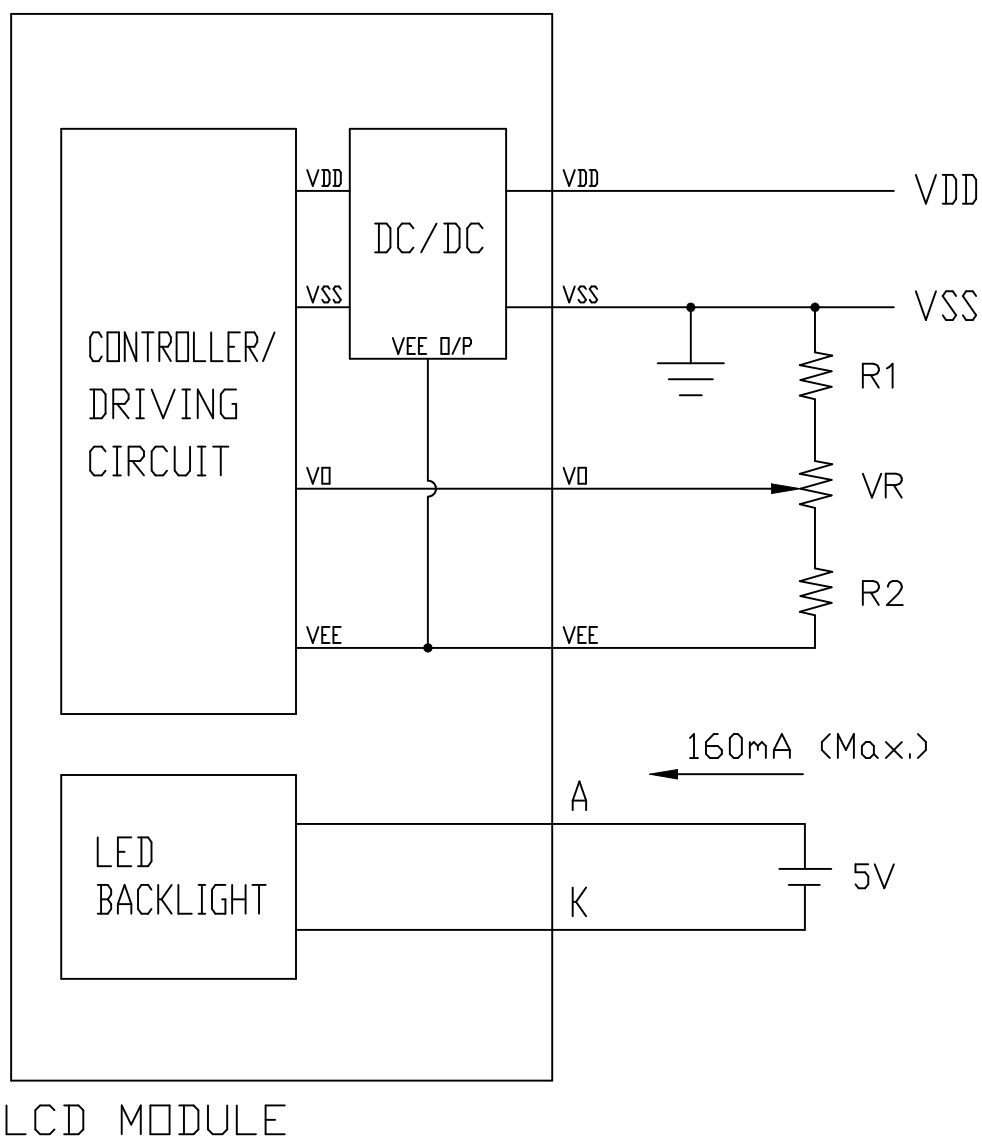


(NOTE) $R1 + VR + R2 \leq 20K\Omega$

8. TIMING CHARACTERISTICS

8-1. READ/WRITE CHARACTERISTICS(8080 FAMILY MPU)

VDD=5.0V±5%


ITEM	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
A0, \overline{CS}	ADDRESS HOLD TIME	t_{AH8}	10	—	—	ns
	ADDRESS SETUP TIME	t_{AW8}	0	—	—	ns
$\overline{WR}, \overline{RD}$	SYSTEM CYCLE TIME	t_{CYC8}	1	—	—	ns
	STROBE PULSE WIDTH	t_{CC}	120	—	—	ns
D0 to D7	DATA HOLD TIME	t_{DH8}	5	—	—	ns
	DATA SETUP TIME	t_{DS8}	120	—	—	ns
	\overline{RD} ACCESS TIME	t_{ACC8}	—	—	50	ns
	OUTPUT DISABLE TIME	t_{OH8}	10	—	50	ns

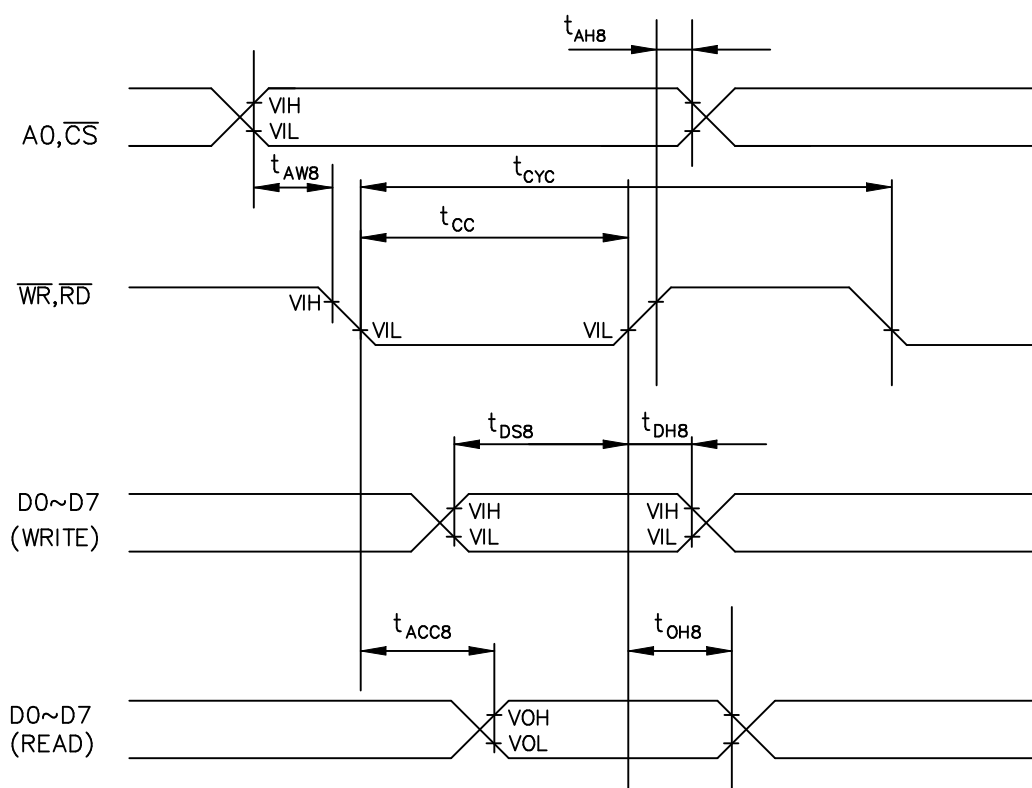


8-2.READ/WRITE CHARACTERISTICS(6800 FAMILY MPU)

VDD=5.0V±5%

ITEM	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
A0, $\overline{\text{CS}}$, $\overline{\text{WR}}$	ADDRESS HOLD TIME	t_{AH6}	0	—	—	ns
	ADDRESS SETUP TIME	t_{AW6}	0	—	—	ns
	SYSTEM CYCLE TIME	t_{CYC6}	1	—	—	ns
D0 to D7	DATA HOLD TIME	t_{DH6}	0	—	—	ns
	DATA SETUP TIME	t_{DS6}	100	—	—	ns
	ACCESS TIME	t_{ACC6}	—	—	85	ns
	OUTPUT DISABLE TIME	t_{OH6}	10	—	50	ns
$\overline{\text{RD}}$	ENABLE PULSE WIDTH	t_{RDW}	120	—	50	ns

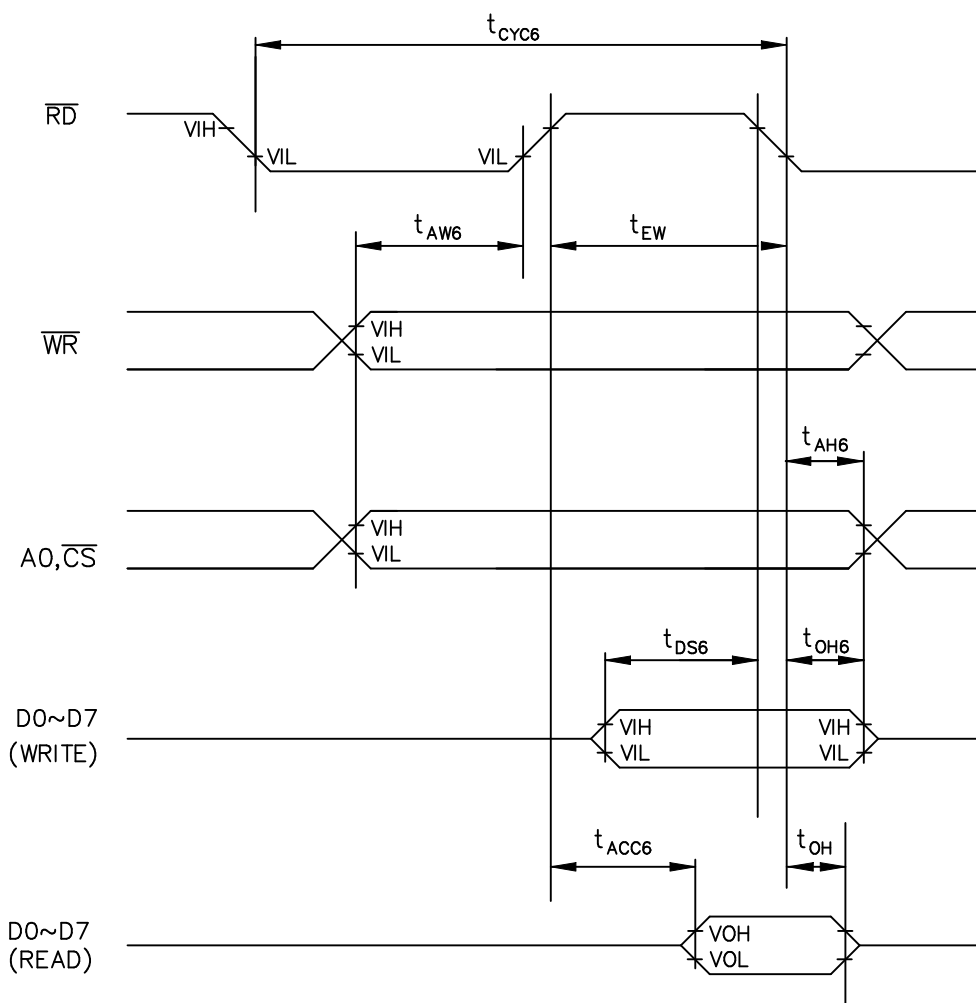

8-3.POWER ON/OFF TIMING

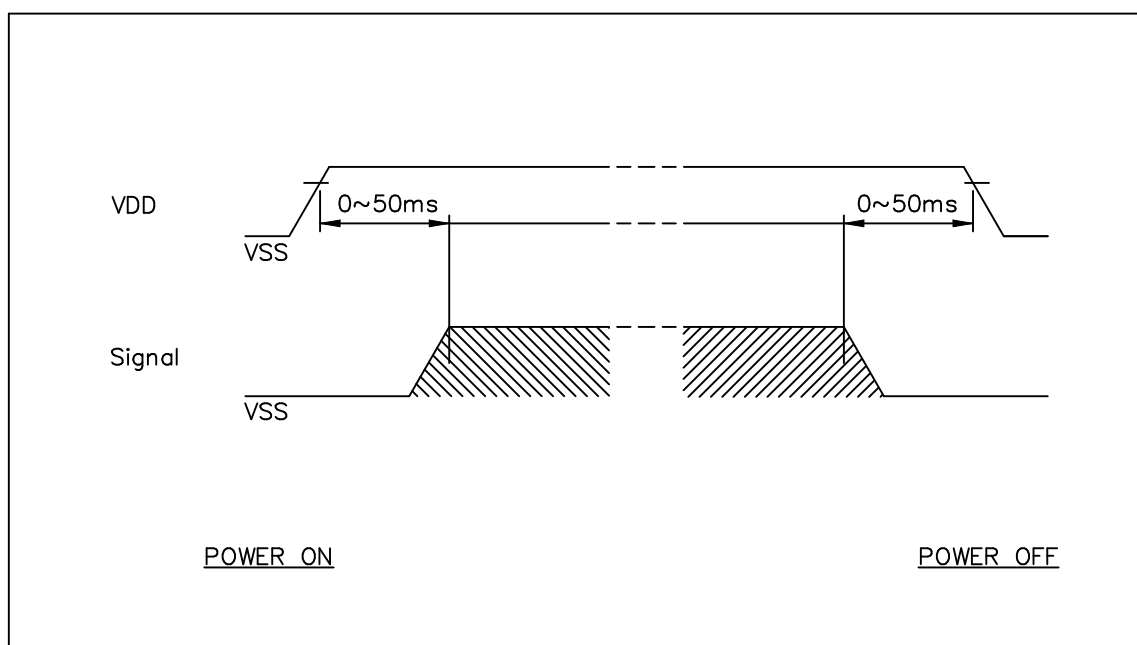


(Note)

The missing pixels may occur when the LCM is driven beyond above power interface timing sequence.

9. RELIABILITY TEST

WIDE TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	80°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-40°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	40°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	70°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	-20°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C,30min → 70°C,30min  (1cycle)			Appearance without defect	10 cycles

*Test and measurement are performed under the following conditions, unless otherwise specified.

Temperature	20± 15°C
Humidity	65± 20%R.H.
Pressure	860~1060hPa(mmbar)

In case of doubtful judgment, it is performed under the following conditions.

Temperature	20± 2°C
Humidity	65± 5%R.H.
Pressure	860~1060hPa(mmbar)

5.Specification for quality check

5-1 Electrical characteristics





NO.	Item	Criterion
1	Non operational	Fail
2	Miss operating	Fail
3	Missing dot	Fail
4	Contrast irregular	Fail
5	Response time	Within Specified value
6	Backlight turn on/off	Within Specified value

5-2 External Appearance Defect


NO.	Item	Criterion																		
1	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<div>(1)–1–Spots</div> <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>D≤0.1</td><td>Ignore</td></tr><tr><td>0.1<D≤0.2</td><td>5</td></tr><tr><td>0.2<D≤0.3</td><td>2</td></tr><tr><td>0.3<D</td><td>0</td></tr></table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <div>(1)–2–Blurred Spots(At lighting condition)</div> <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>D≤0.3</td><td>Ignore</td></tr><tr><td>0.3<D≤0.75</td><td>5</td></tr><tr><td>0.75<D</td><td>0</td></tr></table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	D≤0.1	Ignore	0.1<D≤0.2	5	0.2<D≤0.3	2	0.3<D	0	Average Diameter(mm):D	Number of pieces permitted	D≤0.3	Ignore	0.3<D≤0.75	5	0.75<D	0
Average Diameter(mm):D	Number of pieces permitted																			
D≤0.1	Ignore																			
0.1<D≤0.2	5																			
0.2<D≤0.3	2																			
0.3<D	0																			
Average Diameter(mm):D	Number of pieces permitted																			
D≤0.3	Ignore																			
0.3<D≤0.75	5																			
0.75<D	0																			

SPECIFICATION


1	Line	<p>(1)-1 Lines</p> <table> <tr> <th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 4$</td><td>2</td></tr> <tr> <td>$0.08 < W \leq 0.1$</td><td>$L \leq 1$</td><td>1</td></tr> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurred Lines(At lighting condition)</p> <table> <tr> <th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 3$</td><td>6</td></tr> <tr> <td>$0.08 < W$</td><td>$3 < L$</td><td>None</td></tr> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3	Color irregular	Not remarkable color irregular.																								

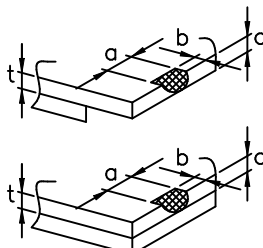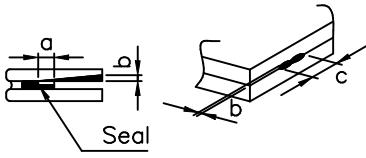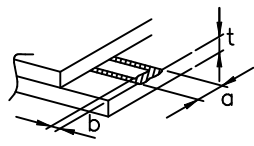4	Air bubbles polarizing plates, and reflection plates	<table><tr><td>Average Diameter (mm): D</td><td>Number of pieces permitted</td><td rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td></tr><tr><td>$D \leq 0.3$ $0.3 < D$</td><td>Ignore 0</td></tr></table> <p>Note that when there are 4 pieces or more, they are not to be concentrated.</p>	Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	$D \leq 0.3$ $0.3 < D$	Ignore 0
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2					
$D \leq 0.3$ $0.3 < D$	Ignore 0						
5	Cracks	(1)General crack		$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5 The numbers of pieces are set at up to 5 pieces.			
		(2)Corner crack		$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$			
		(3)Seal portion crack		$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.			
		(4)ITO Pin crack		$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$			
		(5)Progressive cracks	All taken to be unacceptable.				

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM032-49I DATE : JUNE.12.2007 SHEET NO. : 23/24
<p>NOTICE:</p> <ul style="list-style-type: none">SAFETY<ul style="list-style-type: none">1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.HANDLING<ul style="list-style-type: none">1.Avoid static electricity which can damage the CMOS LSI.2.Do not remove the panel or frame from the module.3.The polarizing plate of the display is very fragile. So, please handle it very carefully.4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.5.Do not use ketonics solvent & Aromatic solvent. Use a soft cloth soaked with a cleaning naphtha solvent.STORAGE<ul style="list-style-type: none">1.Store the panel or module in a dark place where the temperature is 25°C±5°C and the humidity is below 65% RH.2.Do not place the module near organics solvents or corrosive gases.3.Do not crush, shake, or jolt the module.TERMS OF WARRANT<ul style="list-style-type: none">1.Acceptance inspection period The period is within one month after the arrival of contracted commodity at the buyer's factory site.2.Applicable warrant period The period is within twelve months since the date of shipping out under normal using and storage conditions.		
REV/DATE	R0/ 06.12.2007	BY C.Y.CHAN



Detail "A"
(Scale 30:1)





View Direction

Detail "B"
(Scale 1.5:1)

CN1: FFC, Pitch=1.0mm

Pin No	Symbol	Function
1	VSS	Ground
2	VDD	Power supply for Logic
3	V0	Negative voltage power supply
4	A0	Data type select
5	WR (R/W)	8080 Family : Write signal 6800 Family : R/W signal
6	RD(E)	8080 Family : Read signal 6800 Family : Enable clock
7	DB0	3-State I/O data bus
5	S	
14	DB7	
15	CS	Chip select
16	RES	This active Low input performs hardware reset on the STD13305F00A100
17	VEE	Supply voltage for LCD panel
18	SEL1	0' FOR 8080 Family MPU , 1' for 6800 family MPU
19		
5	N.C.	No connection
22		

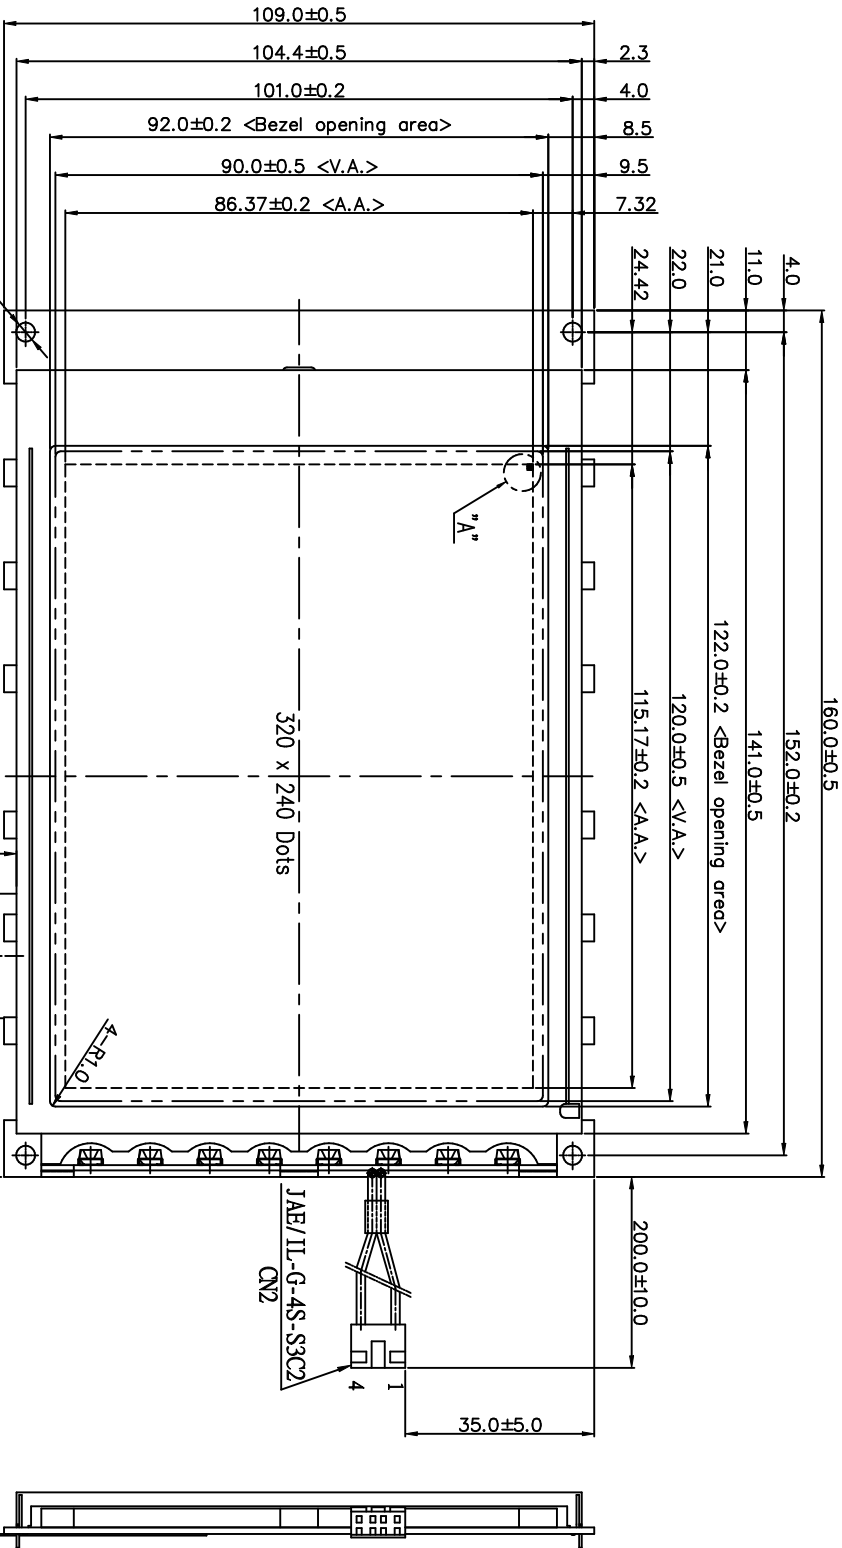

Max. 11.0

- Notes :
- Resolution : 320 x 240 Dots
 - Backlight : LED (White)
 - Frame : 尾口端 (0.5mm)

GENERAL TOLERANCE LIST

DIMENSION	TOLERANCE
L ≤ 6	±0.25 (mm)
6 < L ≤ 18	±0.3 (mm)
18 < L ≤ 50	±0.4 (mm)
50 < L ≤ 125	±0.5 (mm)
125 < L	±0.6 (mm)
ANGLE	±1° (DEG)

南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

製品圖

LMCGAH032P49CGKS



REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE	DWG NO.
1						M032FD49A
2						
3						
4						

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

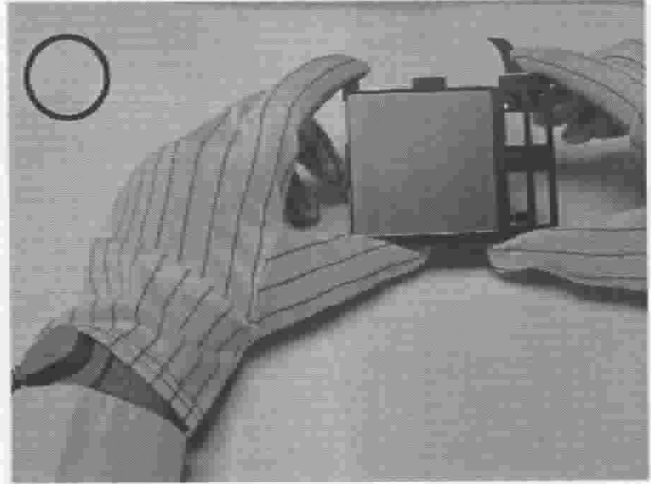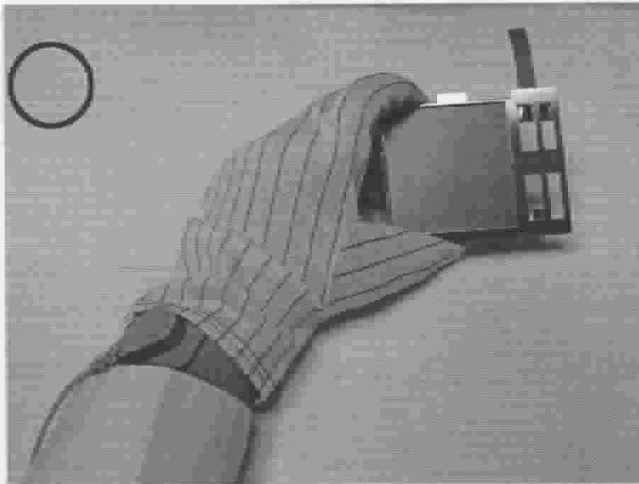


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

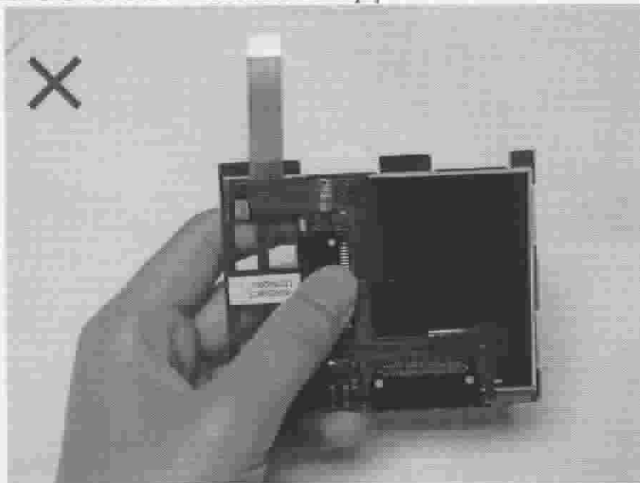


Please don't touch IC directly.

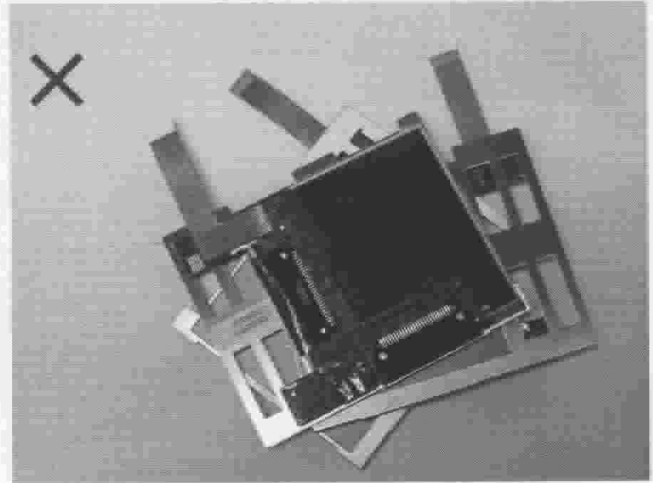

Please don't put one on another LCM.

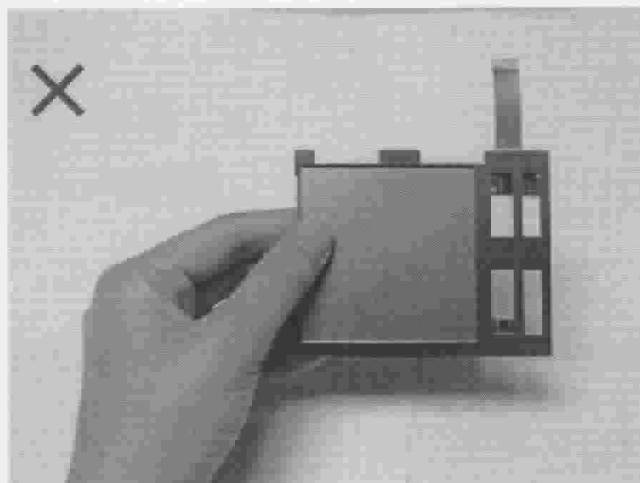

Please don't hold the surface of LCM.

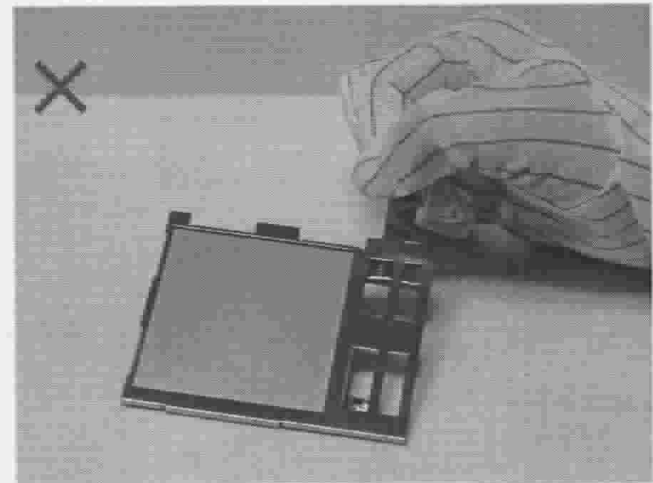



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

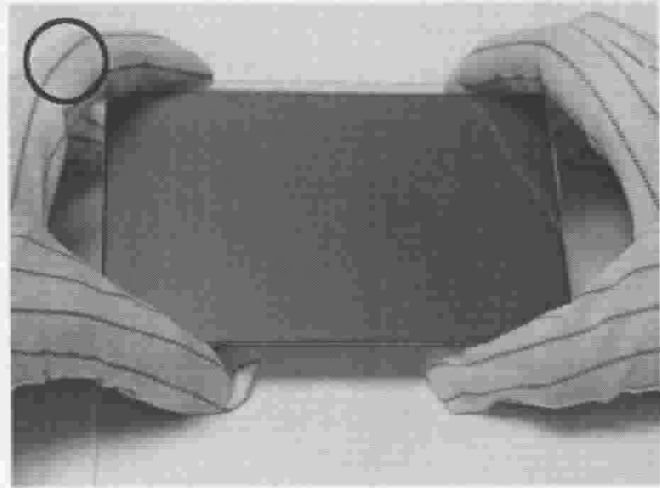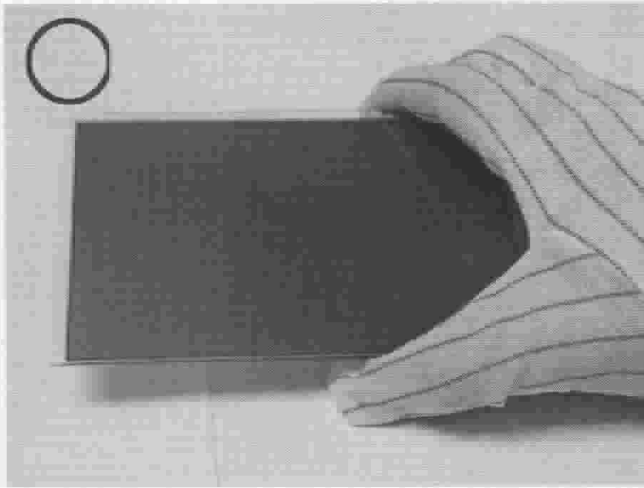


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

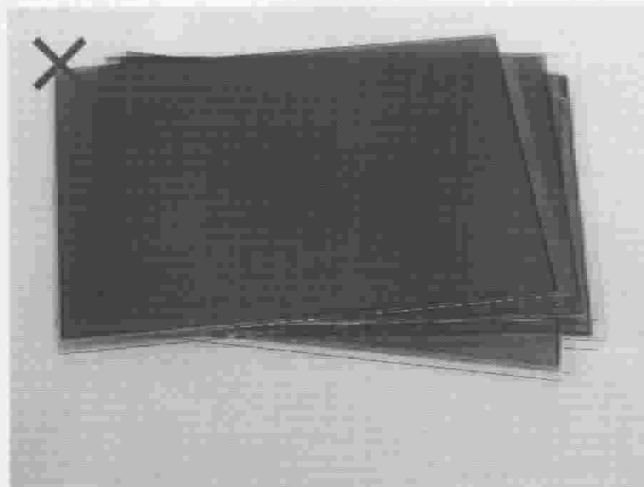


Please don't put one on another LCD.

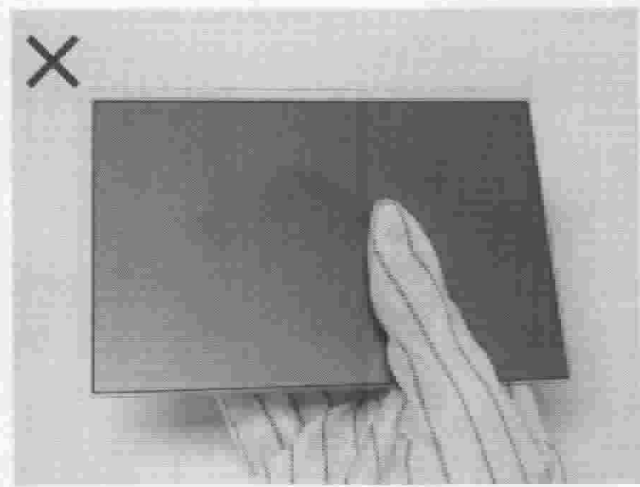

Please don't hold the surface of LCD.

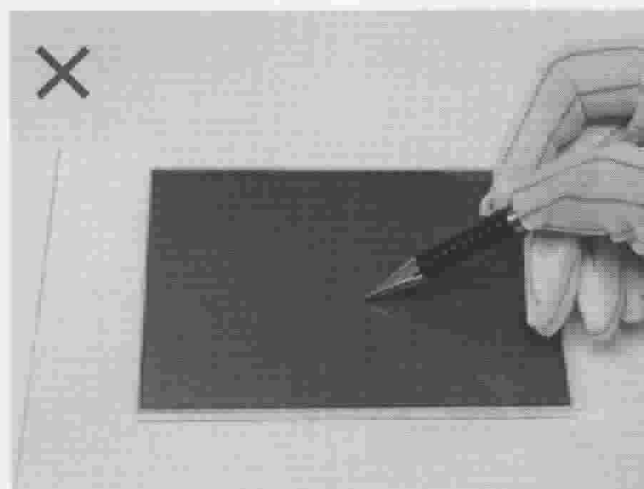

Please don't operate with sharp stick such as sharp pencil.

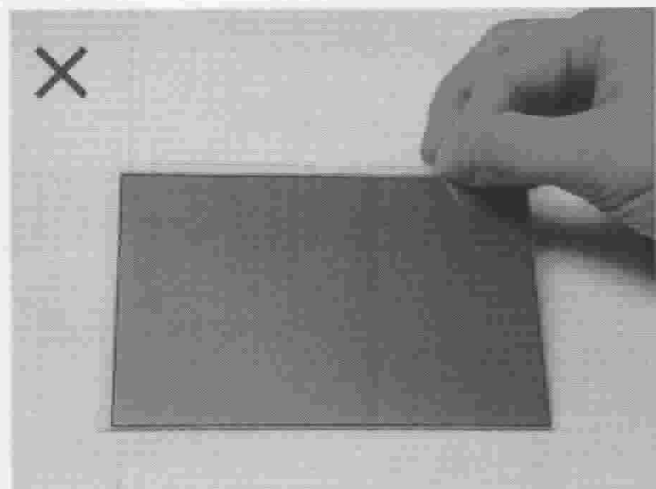

Please don't touch ITO glass without anti-static gloves.

