

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LMCAT032G27CGKS

SPEC. NO.: LM032-27N-△

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

EDITED ON : April.26.2005

Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			C.Y.CHAN

[illegible]

SPEC. NO. :
LM032-27N

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply for Logic	VDD-VSS	—	4.75	5.0	5.25	V
Recommended LC Driving Voltage	VDD-V0	Duty=1/240	-20°C	24.8	25.2	25.6
			0°C	23.2	23.6	24.0
			25°C	22.3	22.7	23.1
			50°C	20.9	21.3	21.7
			70°C	19.9	20.3	20.7
Input Voltage	VIH	H level	0.8VDD	—	VDD	V
	VIL	L level	0	—	0.2VDD	V
Power Supply Current	IDD	FLM = 70 Hz VDD = 5.0 V VEE = -24.0 V VDD-V0 = 22.7 V PATTERN : □ ■ □ ■ □ ■ ■ □ ■ □ ■ □	—	5	8	mA
	IEE		—	4	6	mA
Surface Luminance of LCM	L	VAK=5V IAK=160mA(Max.) Pattern: ALL ON	90	120	—	cd/m ²
		VAK=5V IAK=160mA(Max.) Pattern: ALL OFF	—	10	15	


3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used LED Rating (Constant Voltage Driving)

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Peak forward current	I_P	—	—	240	mA	—
Maximum reverse voltage	V_R	—	—	5	V	—
Applied forward voltage	V_{AK}	—	5	—	V	—
Applied forward current	I_{AK}	—	—	160	mA	—
LED power consumption	P_F	—	—	0.8	W	—
LED life time	L_L	—	10000	—	hrs	at $V_{AK} = 5\text{ V}$ (*1)

(*1) LED life time is defined as follows : The final brightness is at 50% of original brightness.

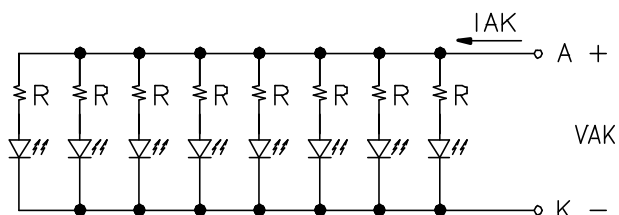

4. OPTICAL CHARACTERISTICS

AT V_{OP}

ITEM MODE		Cr(Contrast Ratio)										θ(Viewing Angle)		θ(Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
T	G	4.5	6.0	5.0	6.5	4.5	6.0	3.0	4.0	2.0	3.0	-	93	-	±37
NOTE		NOTE 6										NOTE 5			

NOTE :

T : Transmissive


G : Normally Black , 6 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	2800	3600	4800	ms	NOTE 2
		0℃	650	800	1200		
		25℃	200	250	375		
		50℃	80	100	150		
		70℃	60	80	120		
Response Time (fall)	Tf	-20℃	2400	2900	4500	ms	NOTE 2
		0℃	480	600	900		
		25℃	130	170	240		
		50℃	90	110	160		
		70℃	50	70	100		

(NOTE 1)

Definition of Operation Voltage(V_{op})

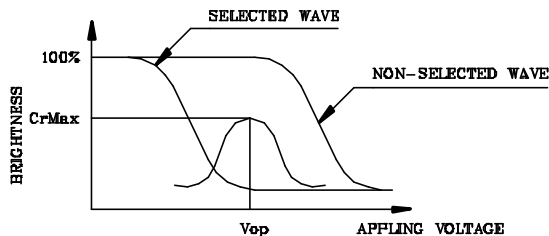

(positive type)

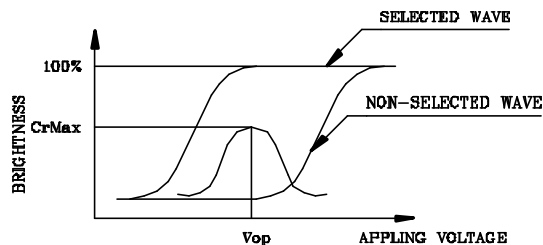

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(T_r, T_f)

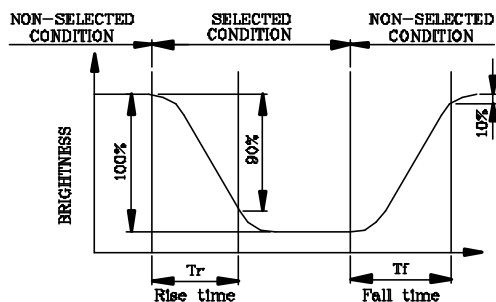

(positive type)

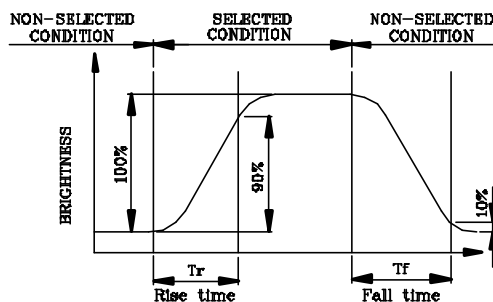

(negative type)

*Conditions

Operating Voltage : V_{op}


Viewing Angle (θ, ϕ) : (0,0)

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

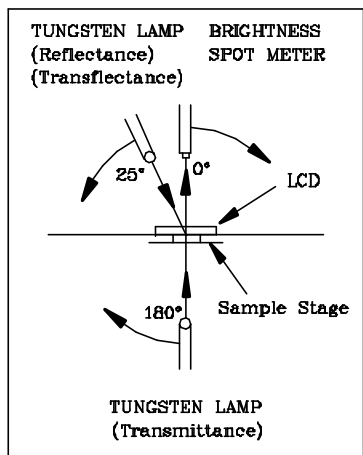


CONST.
TEMP.
CHAMBER

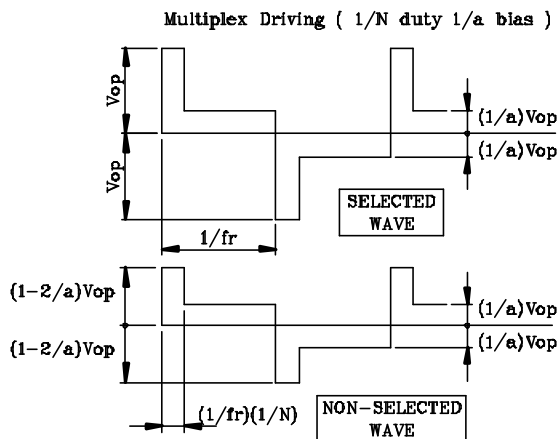



(NOTE 4)

Definition of Viewing Direction

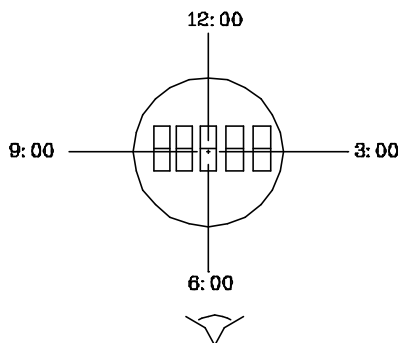

(NOTE 5)

Definition of Viewing Angle

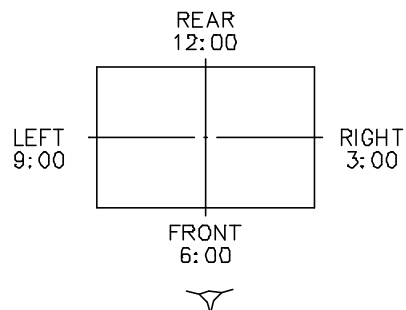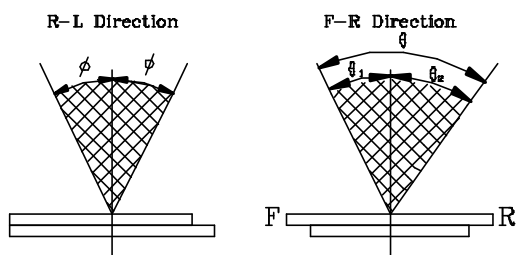


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

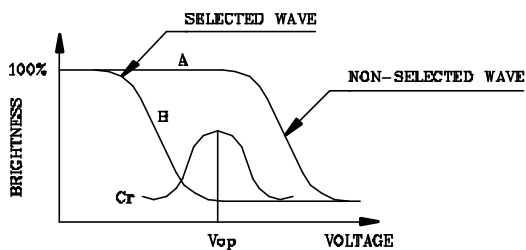

(positive type)

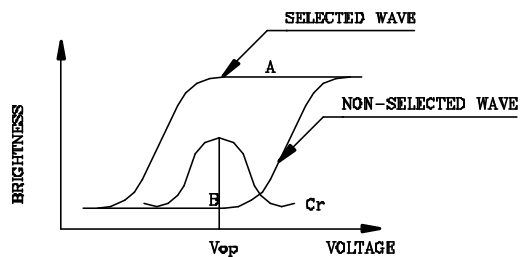


(negative type)

Contrast Ratio : $Cr = A/B$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

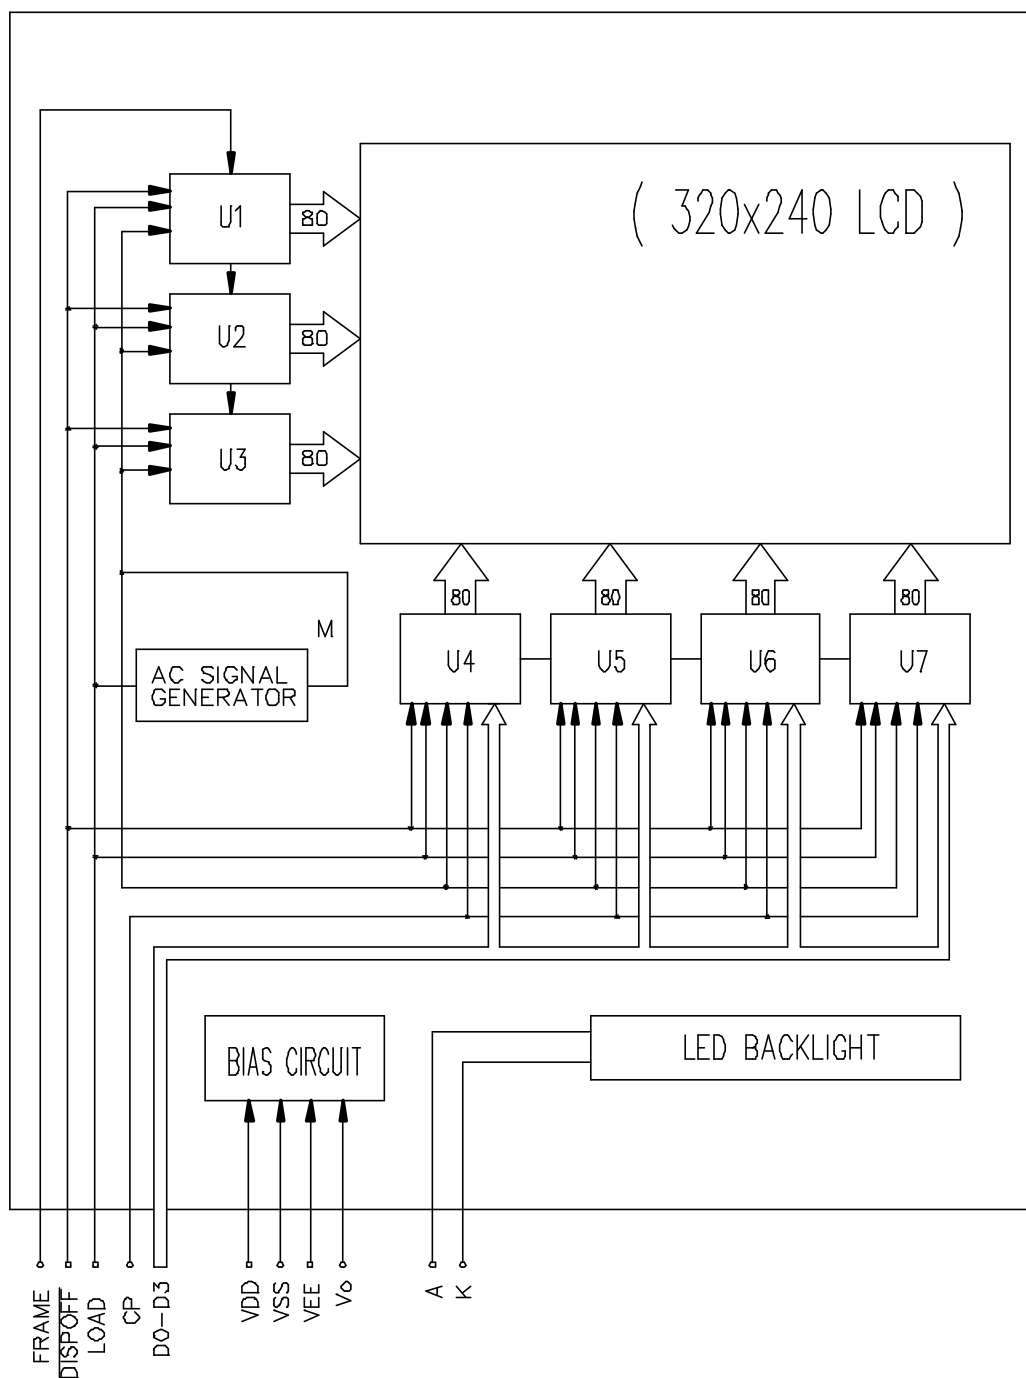

6. DEFINITION OF INTERFACE

QN1:PITCH 1.25mm WIDTH 18.75mm


PIN NO.	SYMBOL	LEVEL	FUNCTION
1	D0	H/L	DISPLAY DATA SIGNAL
2	D1		
3	D2		
4	D3		
5	DISPOFF	H/L	H:ON/L:OFF
6	FRAME	H	SCAN START-UP SIGNAL
7	NC	-	NO CONNECTION
8	LOAD	H-L	INPUT DATA LATCH SIGNAL
9	CP	H-L	DATA INPUT CLOCK SIGNAL
10	VDD	-	POWER SUPPLY FOR LOGIC(+5V)
11	VSS	-	SIGNAL GROUND(0V)
12	VEE	-	POWER SUPPLY FOR LCD
13	VO	-	LCD CONTRAST ADJUST VOLTAGE
14	FGND	-	FRAME GROUND

QN2:J.A.B./IL-G-4S-S3C2

PIN NO.	SYMBOL	LEVEL	FUNCTION
1	A	-	POWER SUPPLY VOLTAGE FOR LED
2	NC	-	-
3	NC	-	-
4	K	-	GROUND

7. POWER SUPPLY

LCD MODULE

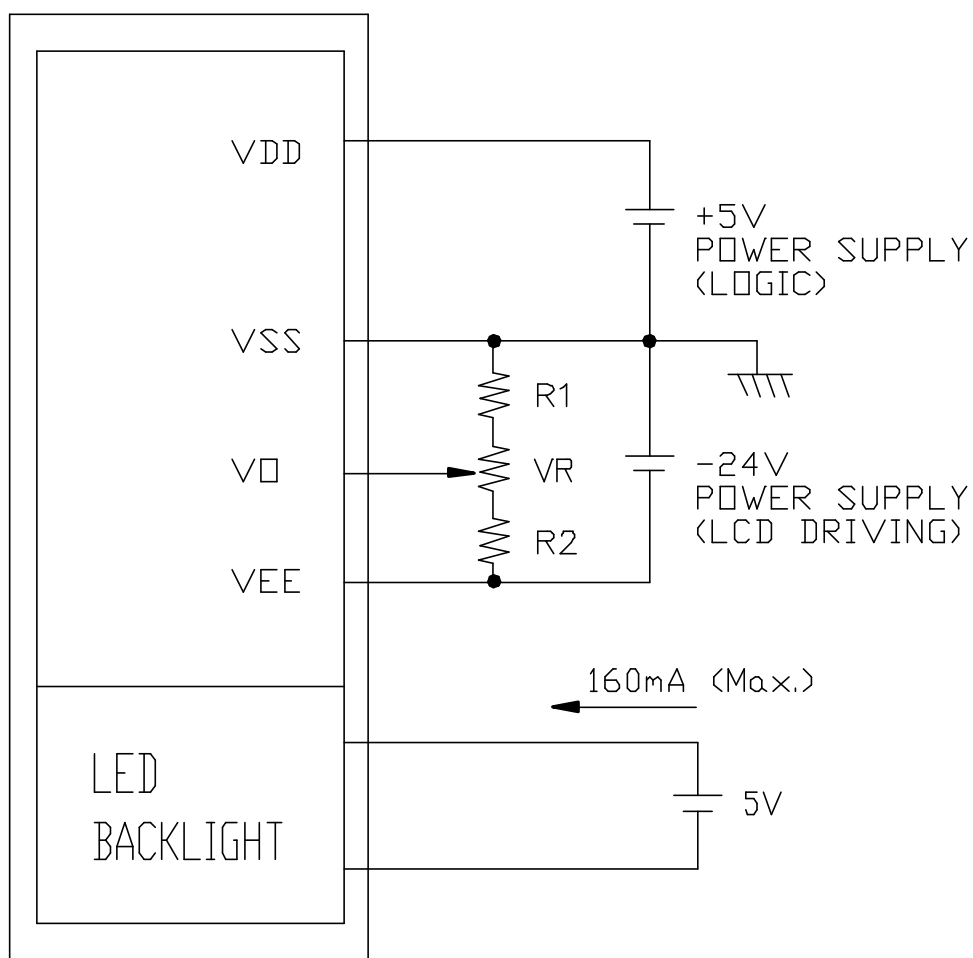


(NOTE) $R1 + VR + R2 \approx 20K\Omega$

8. TIMING CHARACTERISTICS

VDD = 5V













ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
CLOCK CYCLE TIME	t_{cyc}	250	—	—	ns
CLOCK HIGH LEVEL WIDTH	t_{cwh}	45	—	—	ns
CLOCK LOW LEVEL WIDTH	t_{cwl}	45	—	—	ns
CLOCK RISE TIME	t_r	—	—	50	ns
CLOCK FALL TIME	t_f	—	—	50	ns
DATA SETUP TIME	t_{ds}	30	—	—	ns
DATA HOLD TIME	t_{dh}	30	—	—	ns
CLOCK SETUP TIME	t_{scl}	80	—	—	ns
CLOCK HOLD TIME	t_{hcl}	80	—	—	ns
FRAME SETUP TIME	t_{setup}	30	—	—	ns
FRAME HOLD TIME	t_{hold}	30	—	—	ns

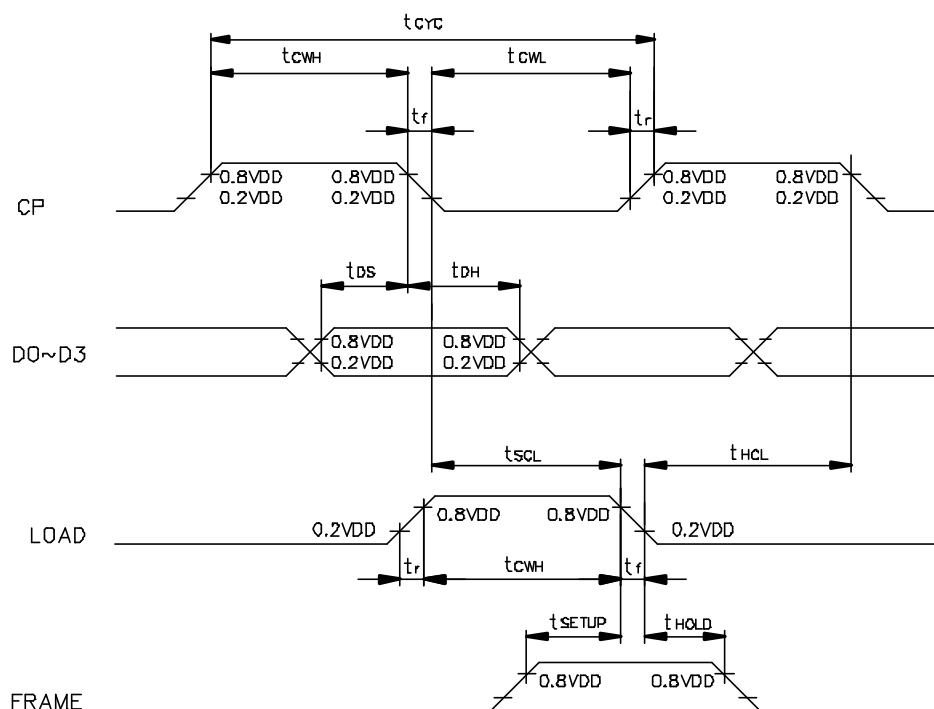

5-2 External Appearance Defect




NO.	Item	Criterion										
1	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	(1)-1-Spots										
		<table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D \leq 0.1$</td><td>Ignore</td></tr><tr><td>$0.1 < D \leq 0.2$</td><td>5</td></tr><tr><td>$0.2 < D \leq 0.3$</td><td>2</td></tr><tr><td>$0.3 < D$</td><td>0</td></tr></table>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0
		Average Diameter(mm):D	Number of pieces permitted									
		$D \leq 0.1$	Ignore									
		$0.1 < D \leq 0.2$	5									
		$0.2 < D \leq 0.3$	2									
		$0.3 < D$	0									
		Number of total pieces is set to within 5 pieces.										
		Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2										
		(1)-2-Blurred Spots(At lighting condition)										
<table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>$D \leq 0.3$</td><td>Ignore</td></tr><tr><td>$0.3 < D \leq 0.75$</td><td>5</td></tr><tr><td>$0.75 < D$</td><td>0</td></tr></table>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0				
Average Diameter(mm):D	Number of pieces permitted											
$D \leq 0.3$	Ignore											
$0.3 < D \leq 0.75$	5											
$0.75 < D$	0											
Number of total pieces is set to within 5 pieces.												
Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2												

SPECIFICATION

4	Air bubbles polarizing plates, and reflection plates	<table><tr><td>Average Diameter (mm):D</td><td>Number of pieces permitted</td><td rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td></tr><tr><td>$D \leq 0.3$ $0.3 < D$</td><td>Ignore 0</td></tr></table> Note that when there are 4 pieces or more, they are not to be concentrated.	Average Diameter (mm):D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	$D \leq 0.3$ $0.3 < D$	Ignore 0										
Average Diameter (mm):D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2															
$D \leq 0.3$ $0.3 < D$	Ignore 0																
5	Cracks	<table><tr><td>(1)General crack</td><td></td><td>$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.</td></tr><tr><td>(2)Corner crack</td><td></td><td>$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$</td></tr><tr><td>(3)Seal portion crack</td><td></td><td>$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.</td></tr><tr><td>(4)ITO Pin crack</td><td></td><td>$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$</td></tr><tr><td>(5)Progressive cracks</td><td colspan="2">All taken to be unacceptable.</td></tr></table>	(1)General crack		$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.	(2)Corner crack		$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$	(3)Seal portion crack		$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.	(4)ITO Pin crack		$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$	(5)Progressive cracks	All taken to be unacceptable.	
(1)General crack		$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal to 0.5. The numbers of pieces are set at up to 5 pieces.															
(2)Corner crack		$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$															
(3)Seal portion crack		$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.															
(4)ITO Pin crack		$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$															
(5)Progressive cracks	All taken to be unacceptable.																

6	Outer dimensions	Should be within the tolerance.
7	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mounting position, etc.

5-3 Dot Appearance Defect

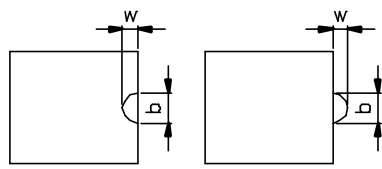NO.	Item	Criteria
1	Pinhole	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.
2	Missing	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.
3	Thick and thin display	 Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).



NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM032-27N DATE : APRIL.17.2006 SHEET NO. : 23/24
NOTICE: • SAFETY 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin. 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water. • HANDLING 1.Avoid static electricity which can damage the CMOS LSI. 2.Do not remove the panel or frame from the module. 3.The polarizing plate of the display is very fragile. So, please handle it very carefully. 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate. 5.Do not use ketonics solvent & Aromatic solvent. Use a soft cloth soaked with a cleaning naphtha solvent. • STORAGE 1.Store the panel or module in a dark place where the temperature is 25°C±5°C and the humidity is below 65% RH. 2.Do not place the module near organics solvents or corrosive gases. 3.Do not crush, shake, or jolt the module. • TERMS OF WARRANT 1.Acceptance inspection period The period is within one month after the arrival of contracted commodity at the buyer's factory site. 2.Applicable warrant period The period is within twelve months since the date of shipping out under normal using and storage conditions.		
REV/DATE	RD/ 04.17.2006	BY C.Y.CHAN

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

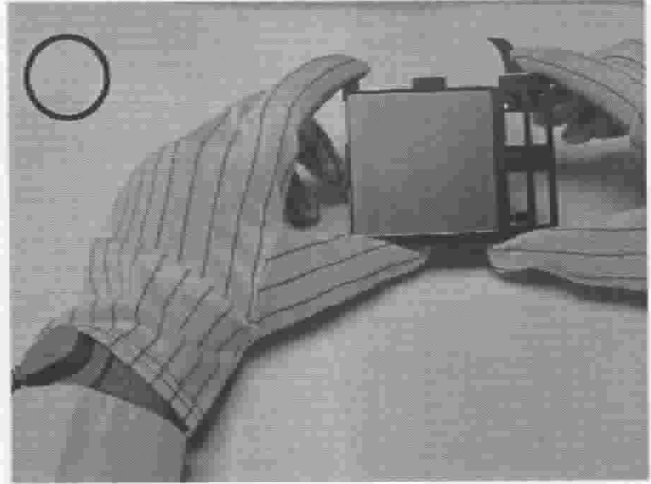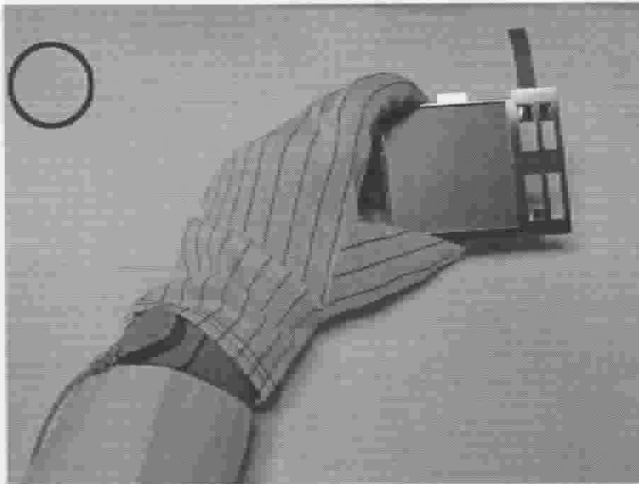


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

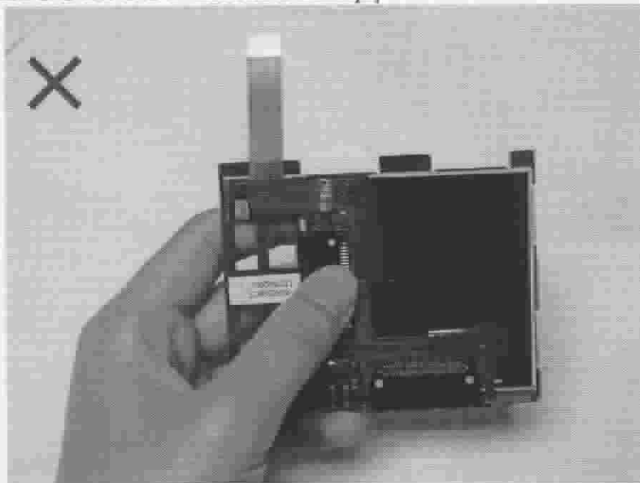


Please don't touch IC directly.

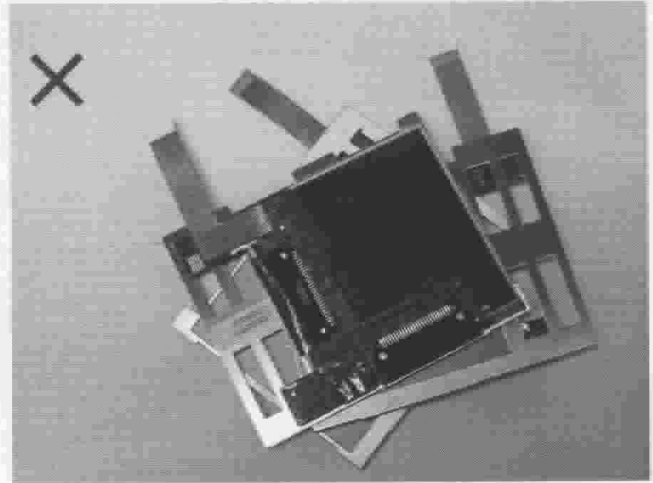

Please don't put one on another LCM.

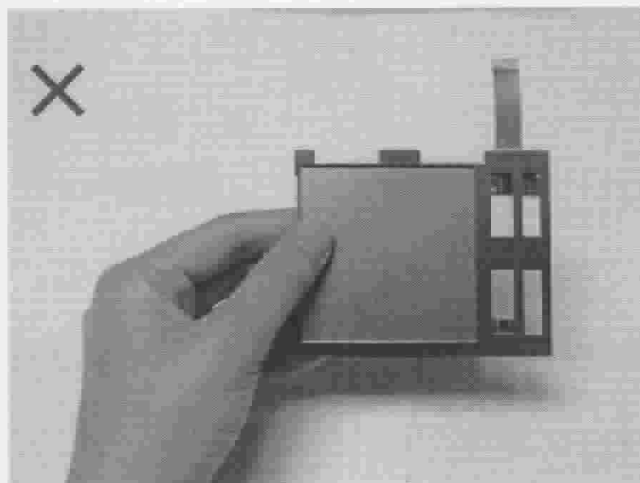

Please don't hold the surface of LCM.

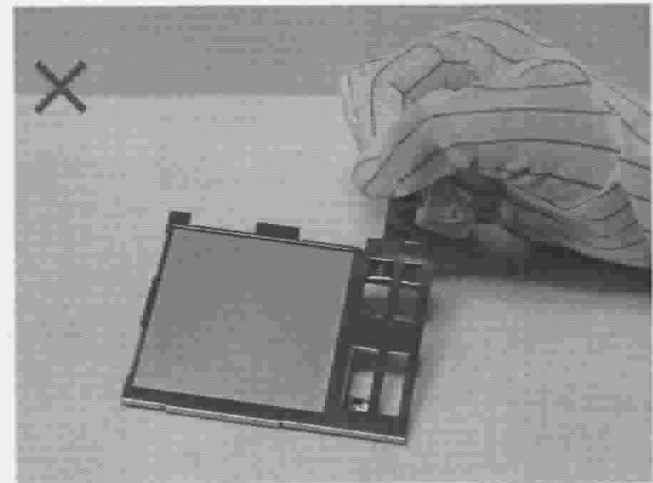



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

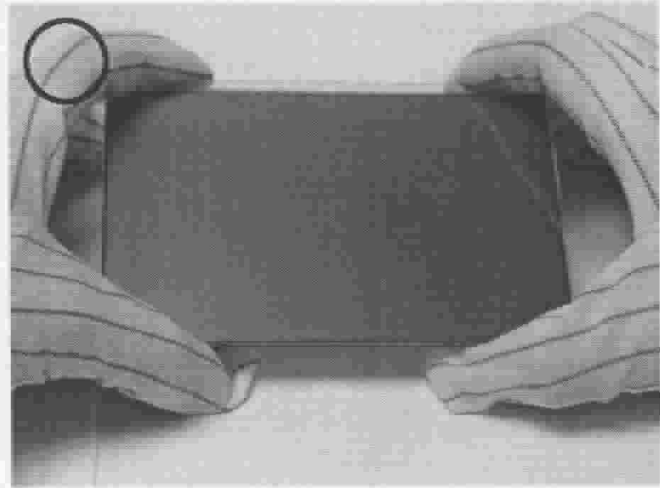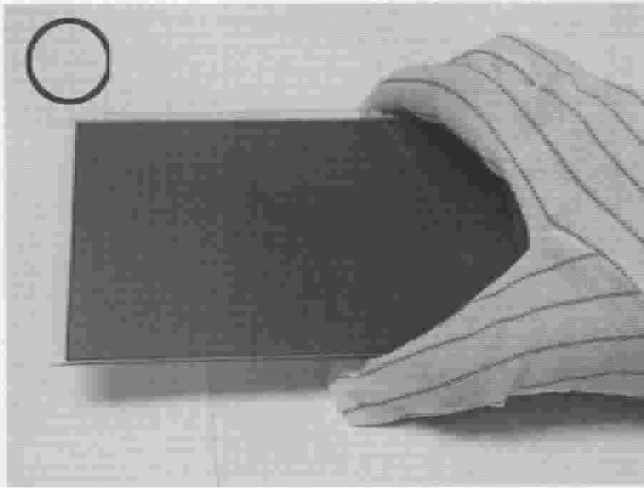


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

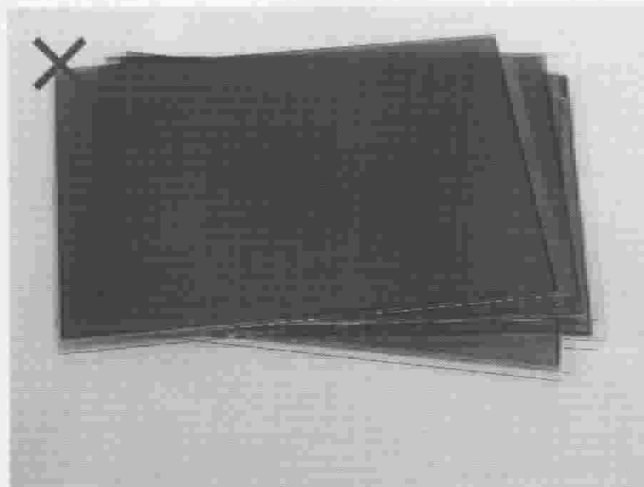


Please don't put one on another LCD.

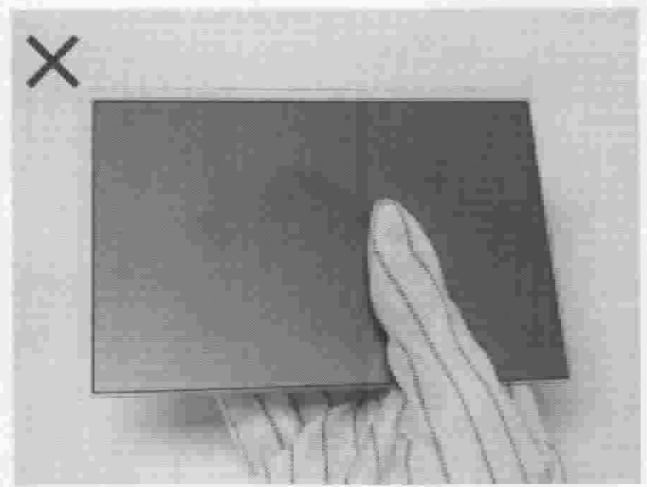

Please don't hold the surface of LCD.

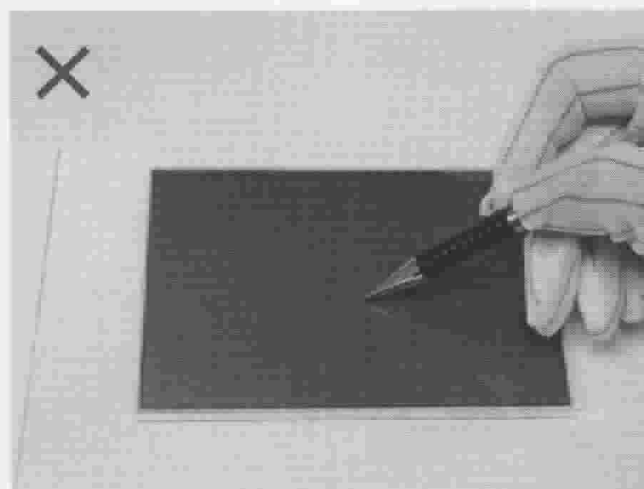

Please don't operate with sharp stick such as sharp pencil.

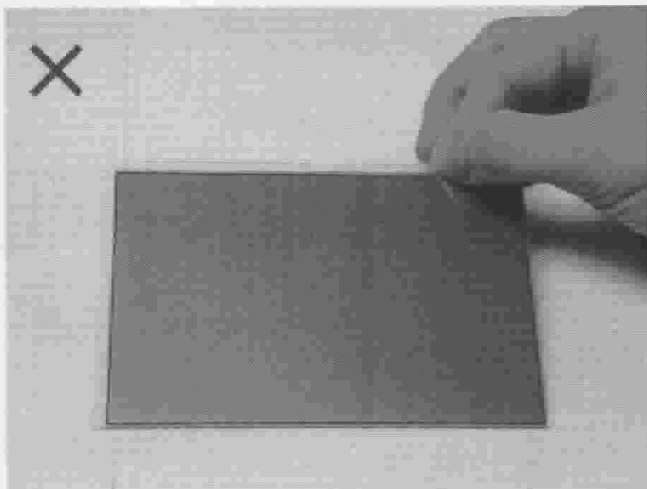

Please don't touch ITO glass without anti-static gloves.

