

High Ripple-rejection Middle Output Current CMOS Voltage Regulator

■ General Description

The LN1230 Series is a positive voltage regulator with a low dropout voltage, high output voltage accuracy, and low current consumption developed based on CMOS technology.

A built-in low on-resistance transistor provides a low dropout voltage and large output current, and a built-in overcurrent protector prevents the load current from exceeding the current capacitance of the output transistor. Small SOT-89-3, SOT23-3 package realize high-density mounting.

■ Applications

- Power supply for DVD and CD-ROM drives
- Power supply for battery-powered devices
- Power supply for personal communication devices
- Power supply for note PCs

■ Features

- Output voltage: 1.5V to 5.5V, selectable in 0.1V steps.
- High-accuracy output voltage: 2.0%
- Low dropout voltage: 250 mV typ. (3.0V output product, I_{OUT} : 100 mA)
- Low current consumption:
During operation: 40 μ A (typ.)
During shutdown: 0.1 μ A (typ.), 1.0 μ A (max.)
- High peak current capability: 300mA output is possible (at $V_{IN} \geq V_{OUT(S)} + 1.0$ V)
- Built-in ON/OFF circuit: ensures long battery life.
- High ripple rejection: 70 dB typ. (at 1.0 kHz)
- Built-in overcurrent protector: overcurrent of output transistor can be restricted.
- Small package: SOT-89-3, SOT-23-3, other required

■ Package


- SOT-23-3L
- SOT-89-3L

■ Ordering Information

LN1230P ①②③④⑤

Designator	Symbol	Description
① ②	Integer	Output voltage: eg. ①=3, ②=0 presents 3.0V
③	2	Accuracy: $\pm 2\%$
④	M	SOT23-3(Type A)
	N	SOT23-3(Type B)
	P	SOT89-3(Type B)
	R	SOT89-3(Type A)
⑤	R	Embossed Tape : Standard Feed
	L	Embossed Tape : Reverse Feed


■ Pin Configuration

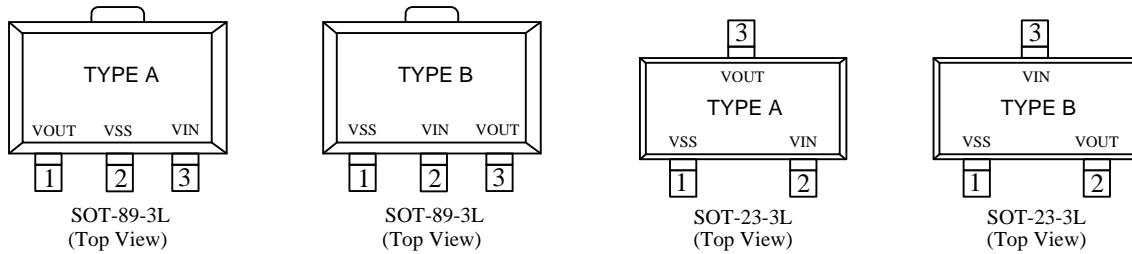

■ Pin Assignment

Pin Number				Pin Name	Function
SOT-89-3L(A)	SOT-89-3L(B)	SOT-23-3L(A)	SOT-23-3L(B)		
1	3	3	2	VOUT	Output pin
2	1	1	1	VSS	Ground
3	2	2	3	VIN	Input pin

■ Typical Application Circuit

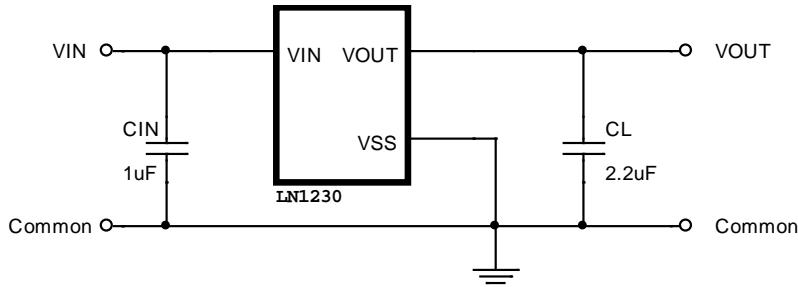

Caution: The above connection diagram and constant will not guarantee successful operation. Perform thorough evaluation using the actual application to set the constant.

■ Application Conditions


Input capacitor (CIN): 1.0 μ F or more

Output capacitor (CL): 2.2 μ F or more (tantalum capacitor)

Caution A general series regulator may oscillate, depending on the external components selected. Check that no oscillation occurs with the application using the above capacitor.

■ Marking Rule

- SOT-23-3L, SOT-89-3L

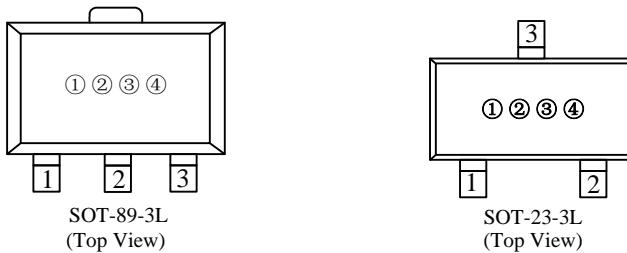

① Represents the product name

Symbol	Product Name
1S	LN1230◆◆◆◆M◆

② Represents the range of output voltage

Voltage(V)	0.1~3.0	3.1~6.0	6.1~9.0
Symbol	5	6	7

③ Represents the output Voltage

Symbol	Output Voltage (V)		Symbol	Output Voltage (V)			
0	-	3.1	-	F	1.6	4.6	-
1	-	3.2	-	H	1.7	4.7	-
2	-	3.3	-	K	1.8	4.8	-
3	-	3.4	-	L	1.9	4.9	-
4	-	3.5	-	M	2	5.0	-
5	-	3.6	-	N	2.1	5.1	-
6	-	3.7	-	P	2.2	5.2	-
7	-	3.8	-	R	2.3	5.3	-
8	-	3.9	-	S	2.4	5.4	-
9	-	4	-	T	2.5	5.5	-
A	-	4.1	-	U	2.6	5.6	-
B	1.2	4.2	-	V	2.7	5.7	-
C	1.3	4.3	-	X	2.8	5.8	-
D	1.4	4.4	-	Y	2.9	5.9	-
E	1.5	4.5	-	Z	3	6.0	-

④ Represents the assembly lot no.

0~9, A~Z repeated (G, I, J, O, Q, W excepted)


■ Absolute Maximum Ratings

Item	Symbol	Absolute Maximum Rating		Unit
Input voltage	V _{IN}	V _{SS} -0.3~V _{SS} +8		V
	V _{ON/OFF}	V _{SS} -0.3~V _{IN} +0.3		
Output voltage	V _{OUT}	V _{SS} -0.3~V _{IN} +0.3		mW
Power dissipation	P _D	SOT-89-3	500	
		SOT-23-3	300	
Operating ambient temperature	T _{opr}	-40~+85		°C
Storage temperature	T _{stg}	-40~+125		


Caution: The absolute maximum ratings are rated values exceeding which the product could suffer physical damage.
These values must therefore not be exceeded under any conditions.

■ Function Block Diagram


(1) 无电源关闭功能(封装: SOT-89-3)

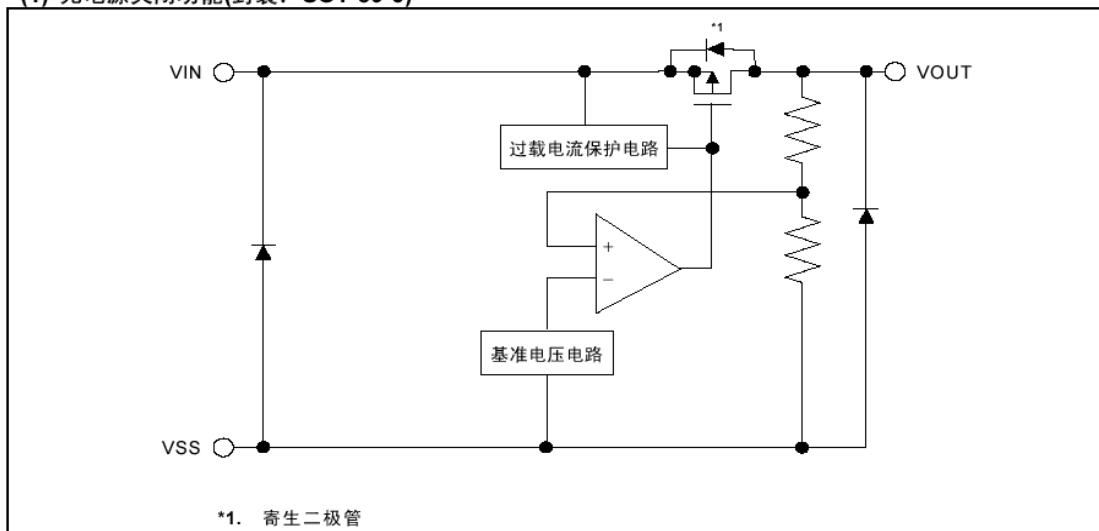


■ Test Circuits

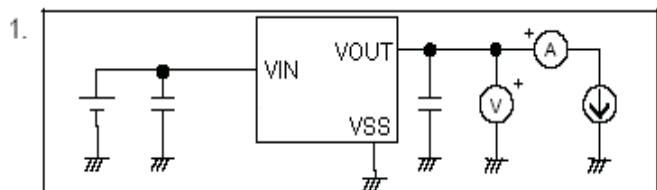


Circuit 1

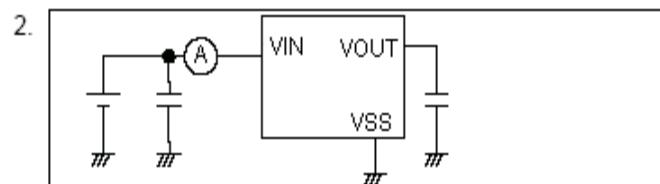

Circuit 2

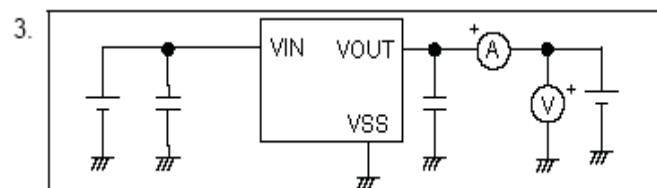

Circuit 3

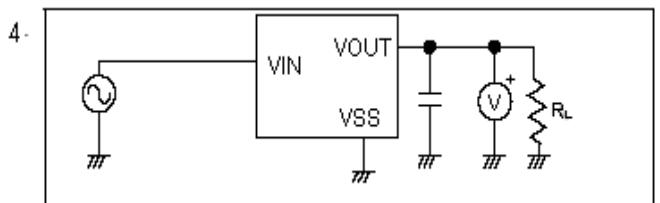

Circuit 4


■ Electrical Characteristics

Item	Symbol	Condition		Min	Typ	Max	Unit	Test circuit
Output voltage	V _{OUT(E)1}	V _{IN} =V _{OUT(S)} +1.0 V, I _{OUT} =30 mA		V _{OUT(S)} ×0.99	V _{OUT(S)}	V _{OUT(S)} ×1.01	V	1
	V _{OUT(E)2}	V _{IN} =V _{OUT(S)} +1.0 V, I _{OUT} =80 mA		V _{OUT(S)} ×0.98	V _{OUT(S)}	V _{OUT(S)} ×1.02	V	
Output current ^{*2}	I _{OUT}	V _{IN} ≥V _{OUT(S)} +1.0 V		300	—	—	mA	3
Dropout voltage	V _{drop}	I _{OUT} =100 mA	2.2 V ≤V _{OUT(S)} ≤2.5 V	—	0.30	0.49	V	1
			2.6 V ≤V _{OUT(S)} ≤3.3 V	—	0.25	0.34		
			3.4 V ≤V _{OUT(S)} ≤5.5 V	—	0.20	0.28		
Line regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \bullet V_{OUT}}$	V _{OUT(S)} +0.5 V ≤V _{IN} ≤7 V I _{OUT} =80 mA		—	0.05	0.2	%/V	1
Load regulation	ΔV _{OUT2}	V _{IN} =V _{OUT(S)} +1.0 V 1.0 mA ≤I _{OUT} ≤80 mA		—	20	40	mV	
temperature coefficient	$\frac{\Delta V_{OUT}}{\Delta T_a \bullet V_{OUT}}$	V _{IN} =V _{OUT(S)} +1.0 V, I _{OUT} =10 mA -40°C ≤T _a ≤85°C		—	±100	—	ppm/°C	
Current consumption during operation	I _{SS1}	V _{IN} =V _{OUT(S)} +1.0 V,		—	40	90	μA	2
Input voltage	V _{IN}	—		2.0	—	8	V	—
Ripple rejection	RR	V _{IN} =V _{OUT(S)} +1.0 V, f=10 kHz V _{rip} =0.5 Vrms, I _{OUT} =40 mA		—	70	—	dB	4
Short-circuit current	I _{short}	V _{IN} =V _{OUT(S)} +1.0 V, ON/OFF pin ON, V _{OUT} =0 V		—	30	—	mA	3


■ Typical Performance Characteristics

1、Output voltage VS. Output current (when load current increases)


LN1230 (1.5V)

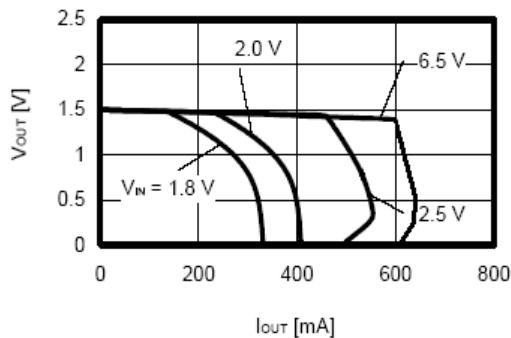

LN1230 (3.0V)

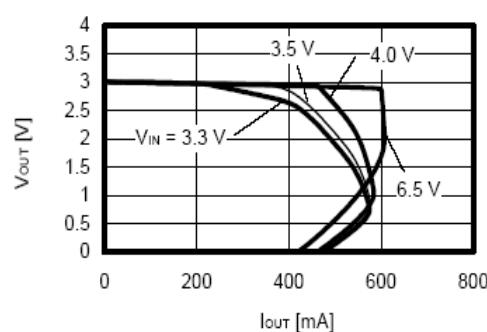


LN1230 (5.0V)

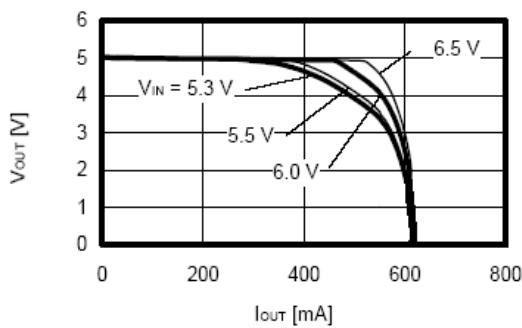


2、Output voltage VS. Input voltage


LN1230 (1.5V)

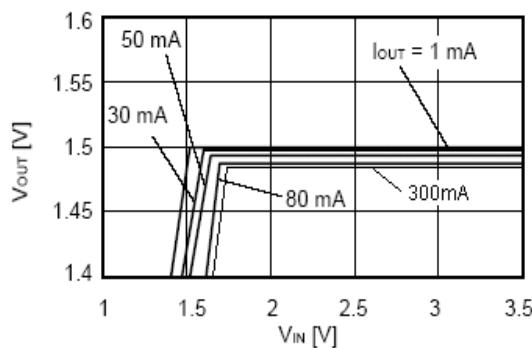

LN1230 (3.0V)

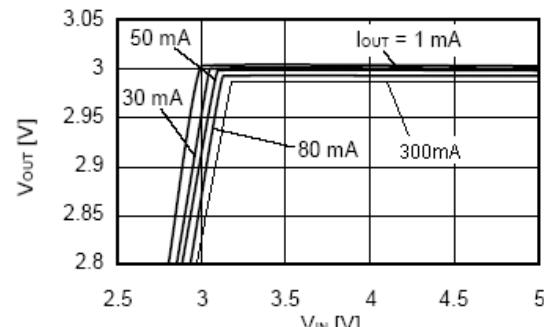




LN1230 (5.0V)

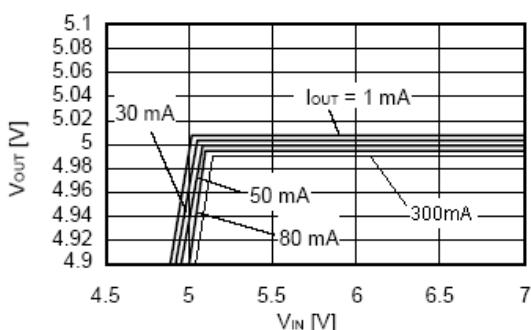


Remark: In determining the output current, attention should be paid to the following.

- 1) The minimum output current value and footnote *5 in the electrical characteristics
- 2) The package power dissipation



3、Dropout voltage vs. Output current

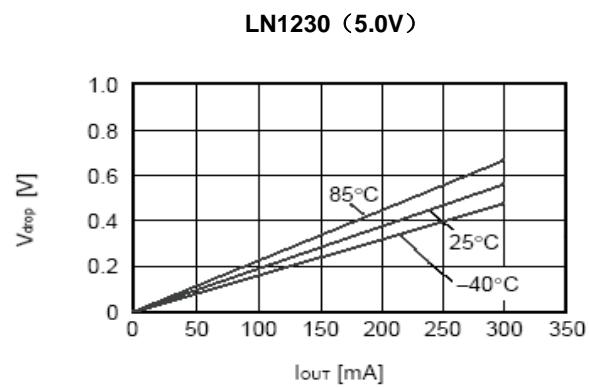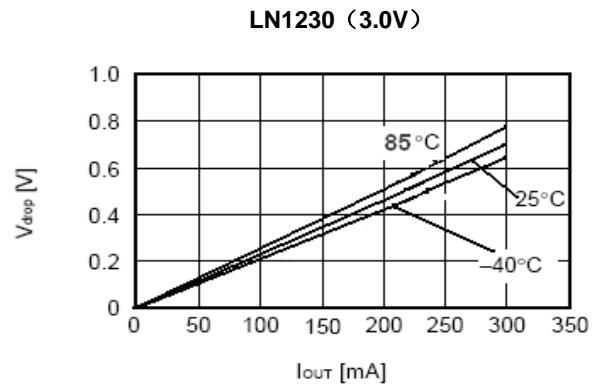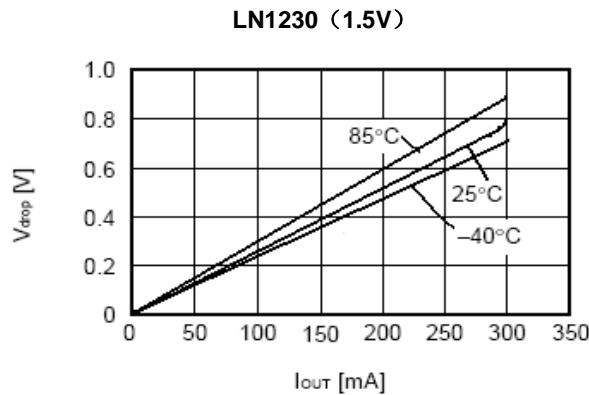


4、Dropout voltage VS. set output voltage

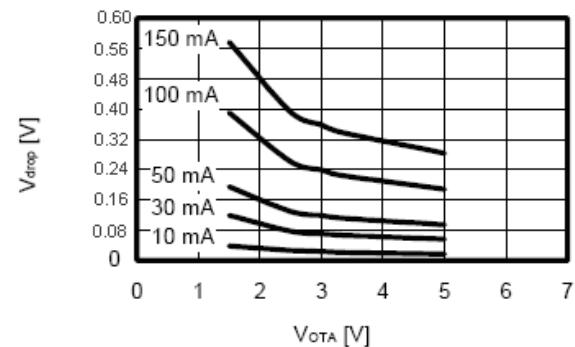

5、Output voltage VS. Ambient temperature

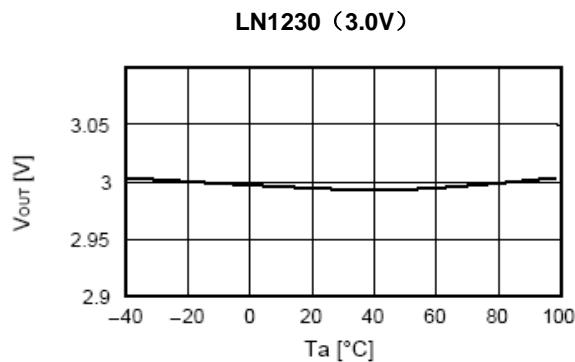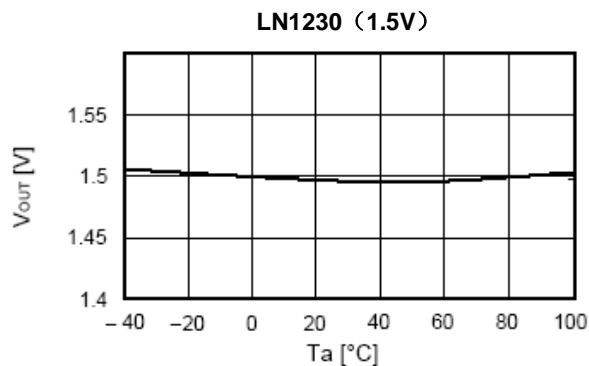


LN1230 (5.0V)

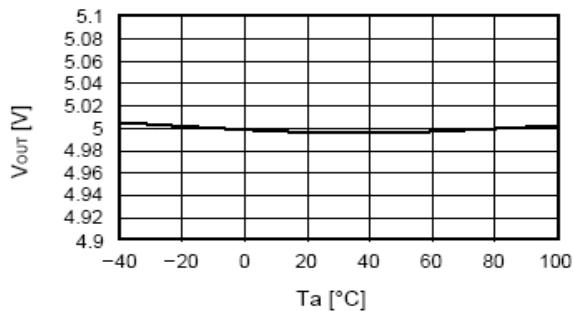


6、 Ripple rejection


LN1230 (1.5V)

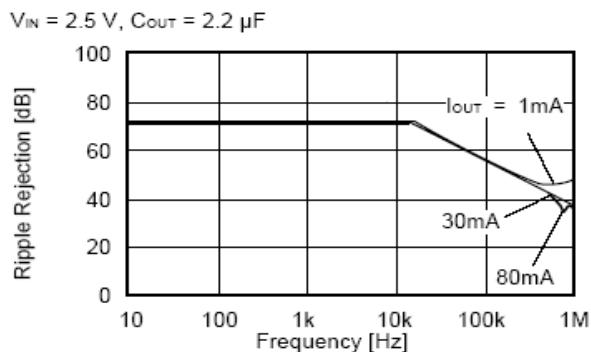

LN1230 (3.0V)

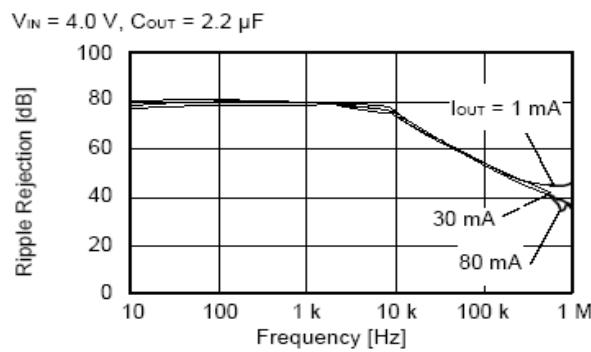


LN1230 (5.0V)

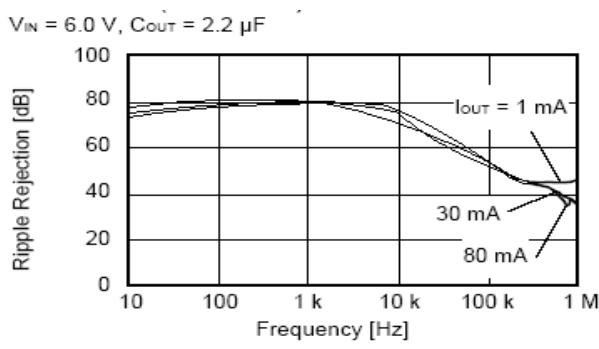


7、 Transient response characteristics

Input transient response characteristics

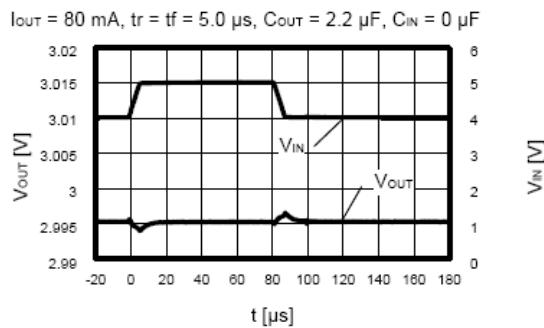


Load transient response characteristics

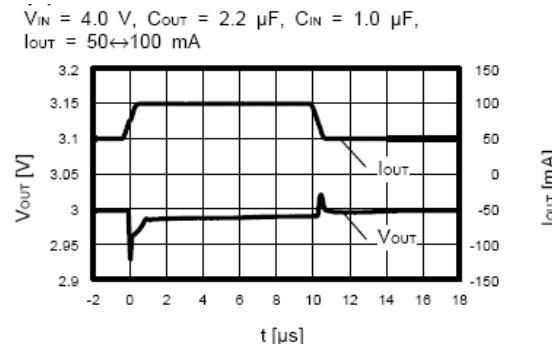


■ Package Information

- SOT-23-3L

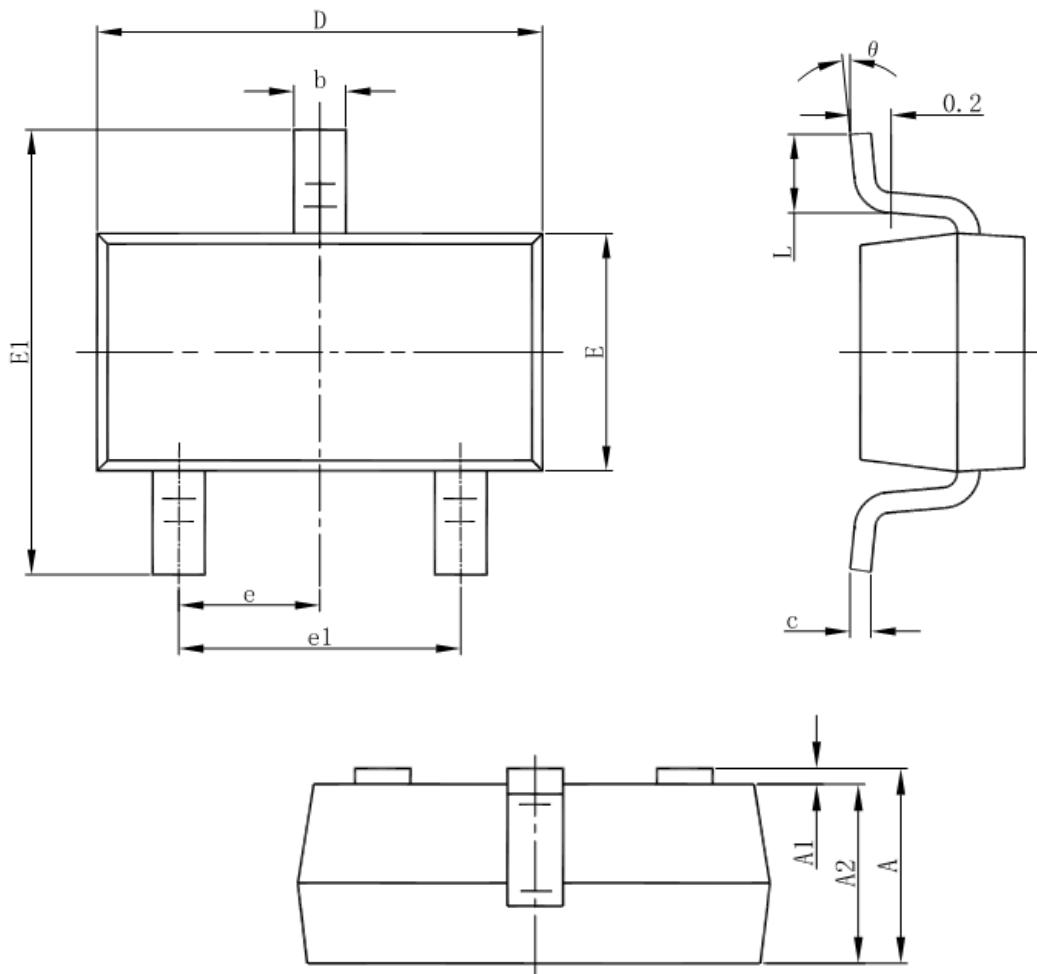

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

● SOT-89-3L

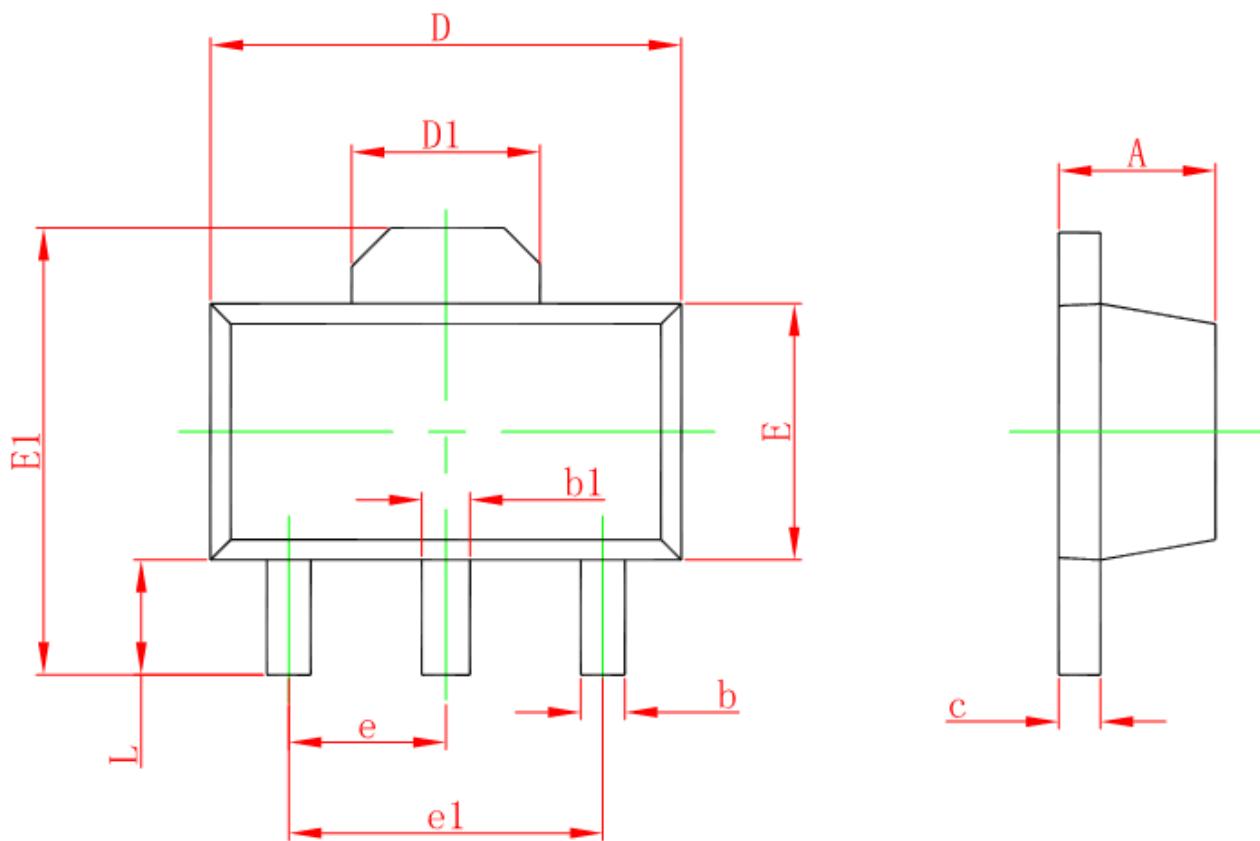

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047