

## Super-Small Package PWM Control Step-up Switching Regulator

### General Description

The LN2262 is a compact, high efficiency, and low voltage step-up DC/DC converter with an Adaptive Current Mode PWM control loop, includes an error amplifier, ramp generator, comparator, switch pass element and driver in which providing a stable and high efficient operation over a wide range of load currents. It operates in stable waveforms without external compensation.

LN2262 can provide 1100mA output current when input voltage above 3.5V. Besides, the 21 $\mu$ A low quiescent current together with high efficiency maintains long battery lifetime. The output voltage is set with two external resistors. Both internal 2.5A switch and driver for driving external power devices (NMOS or NPN) are provided.

### Features


- 1MHz fixed switching frequency
- 90% efficiency

### Ordering Information

LN2262P①②③④⑤⑥

Designator	Symbol	Description	Designator	Symbol	Description
①	K	CE without internal pull down resistor	⑤	M	SOT-23-6L
②③	Voltage		⑥	R	Embossed Tape :Standard Feed
	50	VDD is 5.0V		L	Embossed Tape : Reverse Feed
④	2	Reference accuracy:±2%			

### Pin Configuration



- 21 $\mu$ A quiescent (switch-off) supply current
- 0.01 $\mu$ A shutdown mode supply current
- Providing flexibility for using internal power switches
- Output voltage: settable to between 2.5V to 5.5V ,accuracy of 2%

### Applications

- MP3
- PDA
- DSC
- LCD panel
- RF-Tags
- Portable instrument
- Wireless equipment

### Package


- SOT-23-6L

## Pin Assignment

Pin Number	Pin Name	Function
SOT-23-6		
1	LX	Pin for switching
2	GND	Ground
3	VDD	Output pin
4	CE	Chip enable
5	NC	No. Connected
6	NC	No. Connected

## Marking Rule

- SOT-23-6L



- 1 Represents the product name

Symbol	Product Name
A	LN2262P****

- 2 Represents the type of regulator

Symbol	K
Type	CE without internal pull down resistor

- 3 Represents the accuracy of reference voltage


Symbol	Output voltage	Symbol	Output voltage	Symbol	Output voltage
1	2.1	B	3.1	P	4.1
2	2.2	C	3.2	Q	4.2
3	2.3	D	3.3	R	4.3
4	2.4	E	3.4	S	4.4
5	2.5	F	3.5	T	4.5
6	2.6	H	3.6	U	4.6
7	2.7	J	3.7	V	4.7
9	2.8	K	3.8	X	4.8
9	2.9	L	3.9	Y	4.9
A	3.0	N	4.0	Z	5.0

4 Represents products quality tracking information

0-9, A-Z; 0-9, A-Z mirror writing, repeated (G, I, J, O, Q, W exception)

Note:①②③④⑤⑥ Representative of code points, which means that production batch.

■ Function Block Diagram

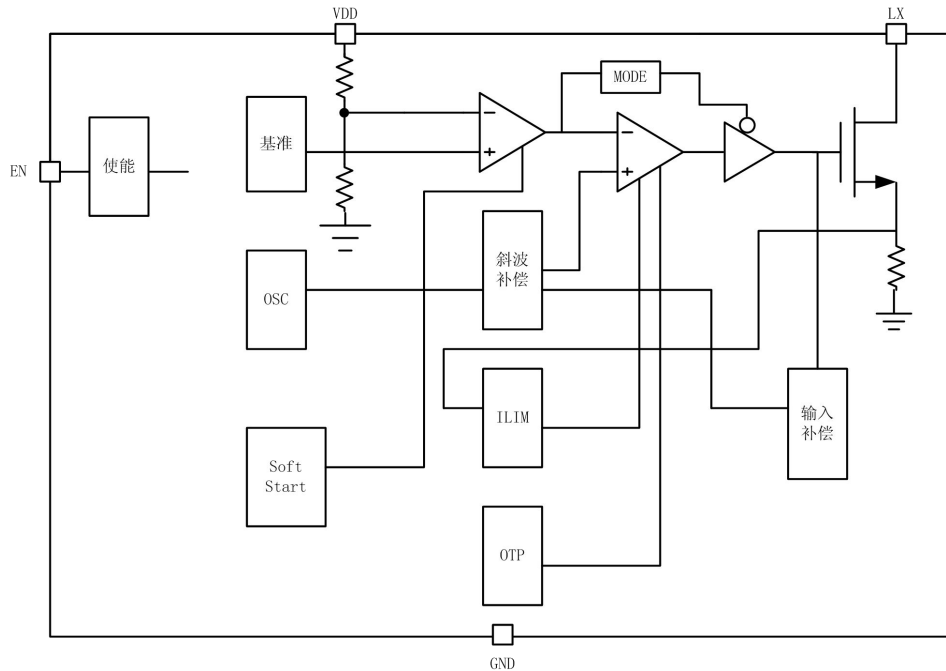


■ Absolute Maximum Ratings

Parameter	Symbol		Maximum Rating	Unit
Input voltage	$V_{DD}$		$V_{SS}-0.3 \sim V_{SS}+7$	V
Output voltage	$V_{OUT}$		$V_{SS}-0.3 \sim V_{SS}+7$	
	$V_{LX}$		$V_{SS}-0.3 \sim V_{SS}+7$	
LX pin Switch Current	$I_{LX}$		2.2	A
Power dissipation	PD	SOT-23-6	250	mW
Operating ambient temperature	$T_{opr}$		$-40 \sim +85$	°C
Storage ambient temperature	$T_{stg}$		$-40 \sim +125$	

**Caution:** The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

## Typical Application Circuit

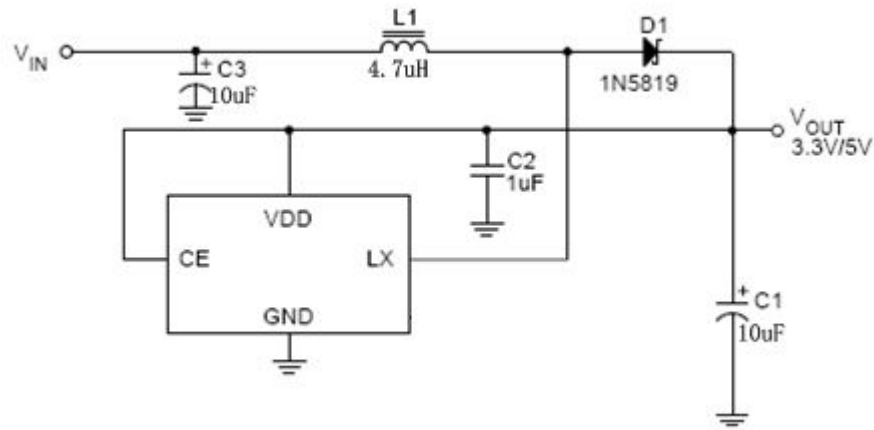


Circuit 1 . LN2262 Typical Application for Portable Instruments

## Electrical Characteristics

(VIN=3.3V, VDD=5.0V, I<sub>Load</sub>=0, Ta=25°C, unless otherwise noted)


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operation start voltage	V <sub>ST</sub>	I <sub>OUT</sub> =1mA	2.2			V
VDD supply voltage	V <sub>DD</sub>	VDD pin voltage	2.5		5.5	
Shut down current	I <sub>OFF</sub>	CE=0, VIN=4.5V	—	0.01	1	μA
Switch-off Current	I <sub>switch-off</sub>	VIN=6V	—	21	30	μA
Continuous Switching Current	I <sub>switch</sub>	VIN=CE=3.3V, VFB=GND	—	500	—	μA
No load Current	I <sub>no-load</sub>	VIN=3.3V, VOUT=5V	—	65	—	μA
Switching Frequency	F <sub>s</sub>	Vdd=5V	900	1000	1100	KHz
Maximum Duty	D <sub>max</sub>	Vdd=5V	78	82	—	%
LX on resistance		Vdd=5V	—	0.2	1.0	Ω
Current Limit Setting	I <sub>limit</sub>	Vdd=5V	2.3	2.5	2.7	A
Line Regulation	ΔV <sub>line</sub>	Vin=3.5~6V, IL=1mA	—	0.25	5	mV/V
Load Regulation	ΔV <sub>load</sub>	VIN=2.5V, IL=1~100mA	—	0.5	—	mV/mA
CE pin maximum low level	V <sub>CEL</sub>	VDD=5V	0.4	0.8	1.2	V
CE pin minimum high level	V <sub>CEH</sub>	VDD=5V	0.8	1.0	1.5	V
Temperature Stability for Vout	T <sub>s</sub>		—	50	—	Ppm/°C
Thermal Shut down Hysterises	ΔT <sub>sd</sub>		—	10	—	°C

Test Circuits

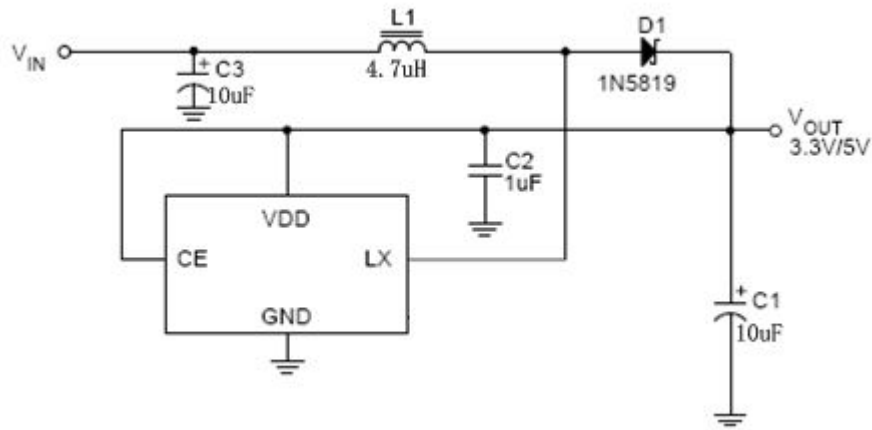


Typical Performance Characteristics


1. Efficiency vs. Output Current

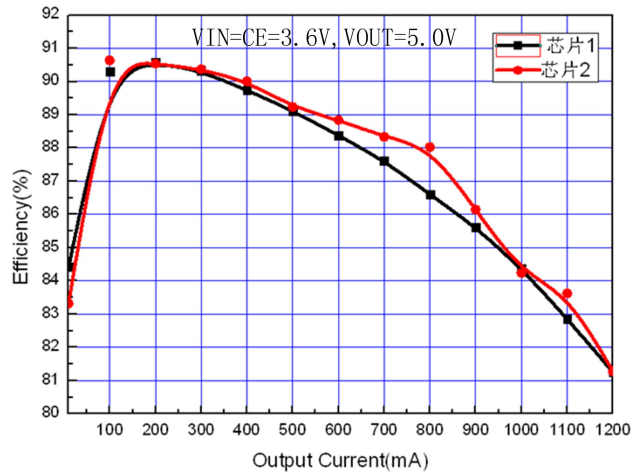


2. LX pin wave form & Output Ripple

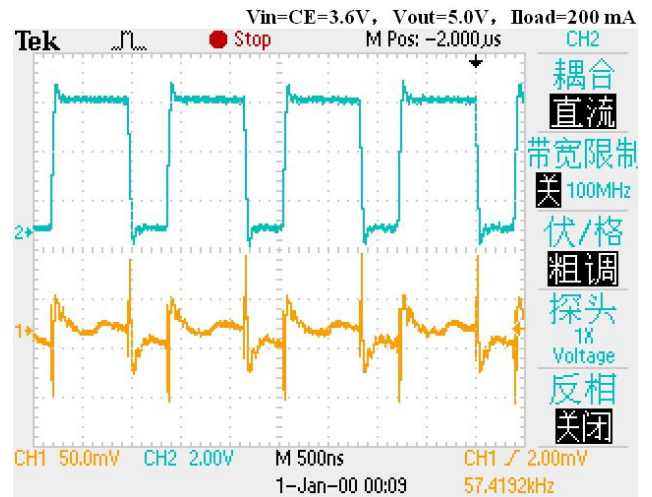


3. Transient Response

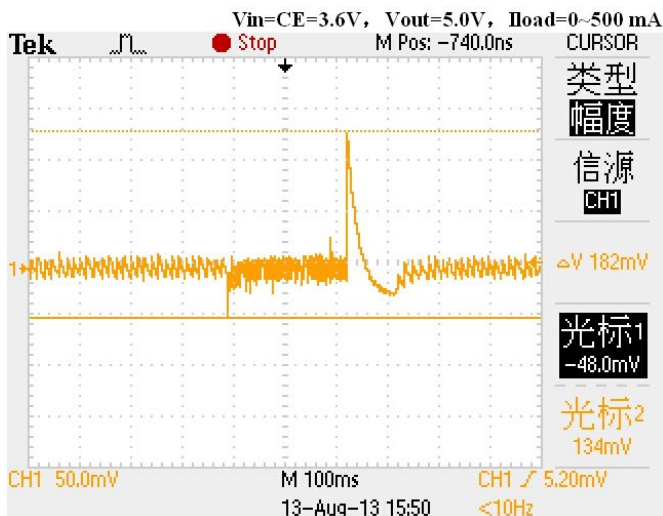

4. Output Voltage vs. Temperature

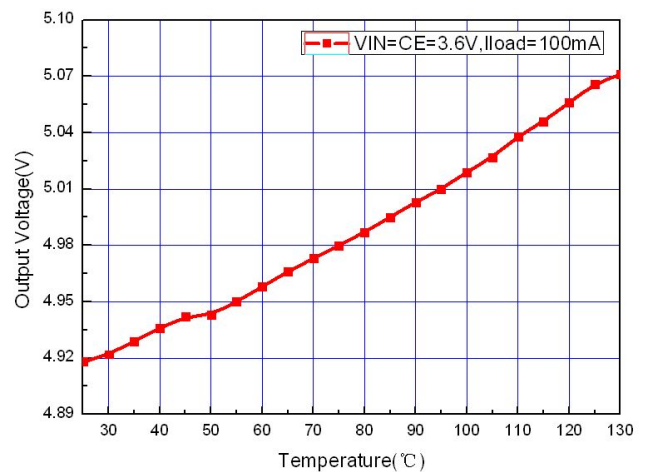


5. VIN VS The Max Output Current (VOUT=5.0V)

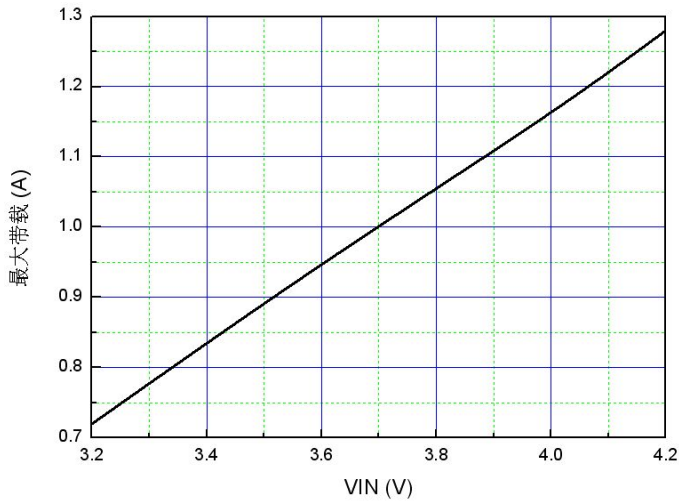

■ Package Information

- SOT-23-6L

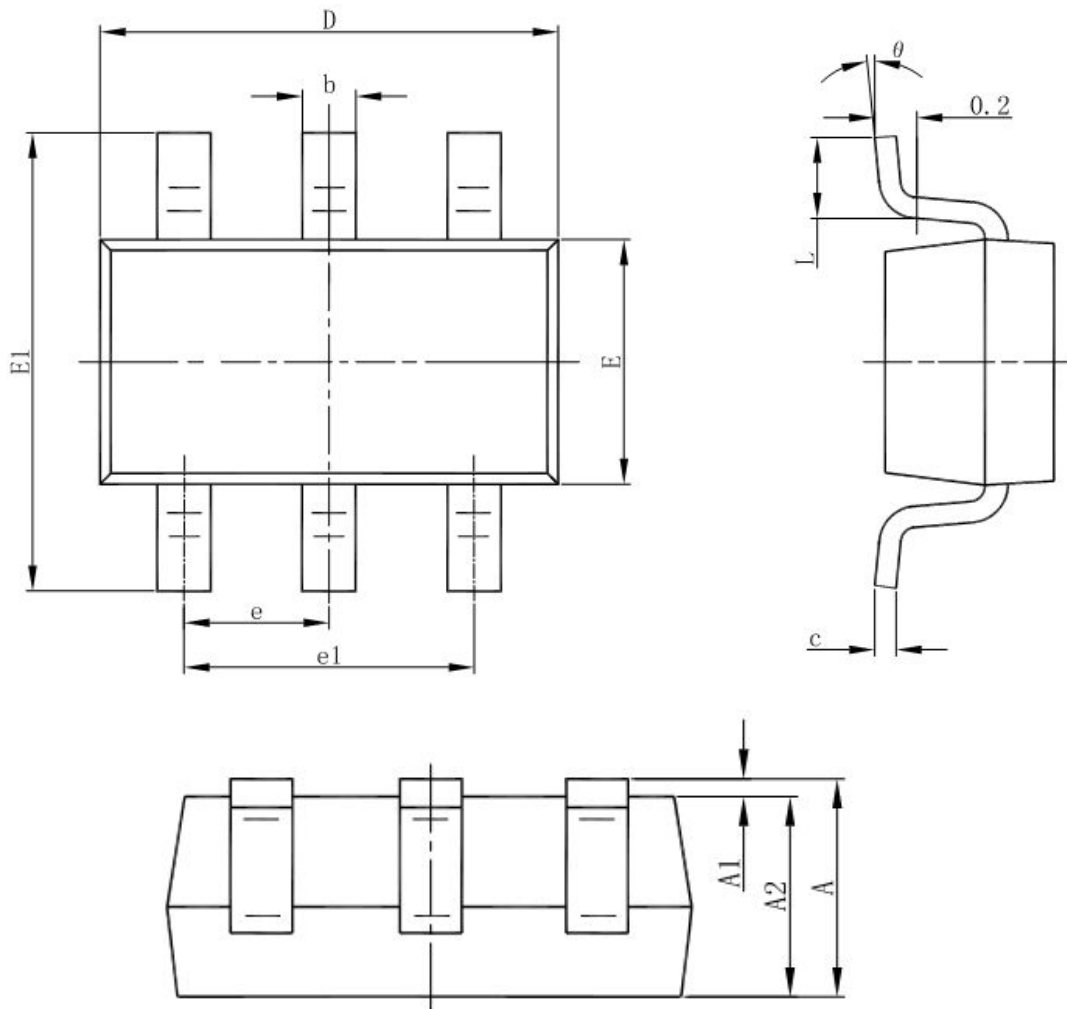

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°