

Low-Cost 1.27W Audio Power Amplifier

General Description

The LN2992 is a Class-AB audio power amplifier designed for mobile phones and other portable communication devices. It is capable of delivering 1.2W of continuous average power to an 8Ω BTL load with less than 1% distortion (THD+N) from a 5V DC power supply.

The LN2992 was designed specifically to provide high quality output power with a minimal amount of external components. It does not require output coupling capacitors or bootstrap capacitors. And with ultra low shutdown current, the LN2992 is ideally suited for mobile phone and other low voltage applications where minimal power consumption is a primary requirement. With special pop-click eliminating circuit, the LN2992 provides perfect pop-click characteristic during turn-on and turn-off transitions.

The LN2992 is unity-gain stable and can be configured by external gain-setting resistors.

Features

- 2.2V – 5.5V operation
- Improved circuitry eliminates pop-click noise during turn-on and turn-off transitions
- No output coupling capacitors, snubber networks or bootstrap capacitors required
- Unity-gain stable
- External gain configuration capability
- Available in space-saving packages: DFN 3x3-8L

Applications

- Mobile Phones
- PDAs
- Portable electronic devices

Package

- DFN3×3-8L

Key Specifications

- PSRR @ $f_{IN}=217\text{Hz}$, VDD = 5V 62dB(typ.)
- Power Output @VDD = 5.0V & 1% THD RL=8Ω
1.27W(typ.)
- Power Output @VDD = 3.0V & 1% THD RL=8Ω
400mW(typ.)
- Power Output @VDD = 5.0V & 1% THD RL=4Ω
2W(typ.)
- Shutdown Current 0.1μA(typ.)

Operating Ratings

Temperature Range


$T_{MIN} \leq T_A \leq T_{MAX}$ ----- $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$

Supply Voltage ----- $2.2\text{V} \leq \text{VDD} \leq 5.0\text{V}$

Ordering Information


Ordering Number	Package
LN2992LD	DFN3×3-8

Pin Configuration

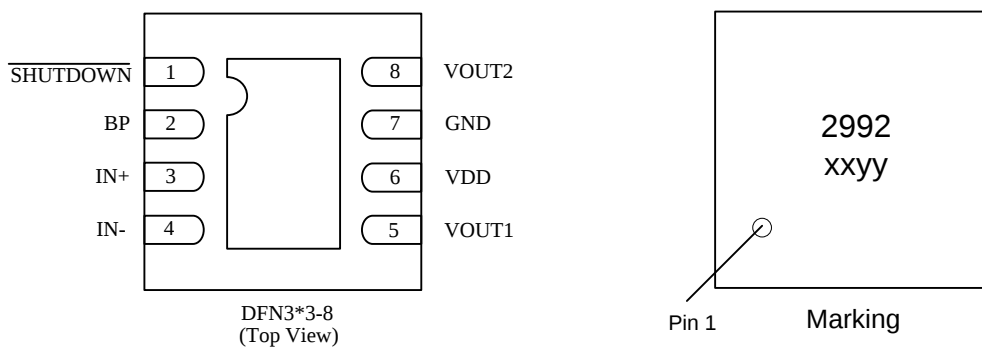

xxyy: Date Code

Function Block Diagram

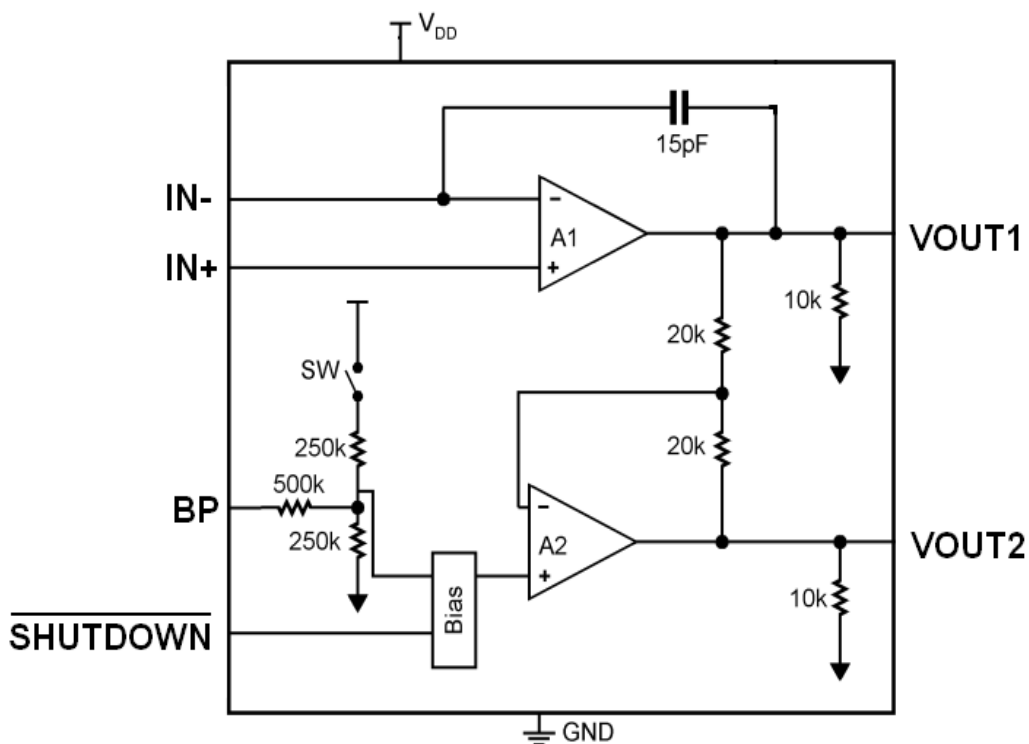

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	VDD	-0.3—6.0	V
Input Voltage	VIN	-0.3—VDD+0.3	V
Operation Temperature	Topr	-40—85	°C
Storage Temperature	Tstg	-65—150	°C
ESD Susceptibility	-	4000	V

■ Electrical Characteristics

(VDD = 5V Unless otherwise specified. Limits apply for TA = 25°C.)

Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
I _{DD}	Quiescent Power Supply Current	VIN = 0V, Io = 0A, No Load	—	4	8	mA
		VIN = 0V, Io = 0A, 8Ω Load	—	5	10	mA
I _{SD}	Shutdown Current	V _{SHUTDOWN} = 0V	—	0.1	2	μA
V _{SDIH}	Shutdown Voltage Input High		1.2	—	—	V
V _{SDIL}	Shutdown Voltage Input Low		—	—	0.4	V
V _{OS}	Output Offset Voltage		—	7	50	mV
R _{OUT-GND}	Resistor Output to GND		7.0	8.5	9.7	kΩ
P _O	Output Power (8Ω)	THD = 2% (max); f = 1 kHz 8Ω Load	0.8	1.2	—	W
T _{WU}	Wake-up time		—	170	220	ms
T _{SD}	Thermal Shutdown Temperature		150	170	190	°C
THD+N	Total Harmonic Distortion+Noise	Po = 0.4 Wrms; f = 1kHz	—	0.1	—	%
PSRR	Power Supply Rejection Ratio	V _{ripple} = 200mV _{sine p-p} f=217Hz	55	62	—	dB
		V _{ripple} = 200mV _{sine p-p} f=1kHz		66		
T _{SDT}	Shut Down Time	8Ω Load	—	1.0	—	ms

(VDD = 3V, Unless otherwise specified. Limits apply for TA = 25°C.)


Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
I _{DD}	Quiescent Power Supply Current	VIN = 0V, I _o = 0A, No Load	—	3.5	7	mA
		VIN = 0V, I _o = 0A, 8Ω Load	—	4.5	9	mA
I _{SD}	Shutdown Current	V _{SHUTDOWN} = 0V	—	0.1	2	μA
V _{SDIH}	Shutdown Voltage Input High		1.2	—	—	V
V _{SDIL}	Shutdown Voltage Input Low		—	—	0.4	V
V _{OS}	Output Offset Voltage		—	7	50	mV
R _{OUT-GND}	Resistor Output to GND		7.0	8.5	9.7	kΩ
P _O	Output Power (8Ω)	THD = 2% (max); f = 1 kHz 8Ω Load	0.28	0.41	—	W
T _{WU}	Wake-up time		—	170	220	ms
T _{SD}	Thermal Shutdown Temperature		150	170	190	°C
THD+N	Total Harmonic Distortion+Noise	P _o = 0.4 Wrms; f = 1kHz	—	0.1	—	%
PSRR	Power Supply Rejection Ratio	V _{ripple} = 200mV _{sine p-p} f=217Hz	45	56	—	dB
		V _{ripple} = 200mV _{sine p-p} f=1kHz		62		

(VDD = 2.6V , Unless otherwise specified. Limits apply for TA = 25°C.)


Symbol	Parameters	Test Conditions	Min.	Typ.	Max.	Unit
I _{DD}	Quiescent Power Supply Current	VIN = 0V, I _o = 0A, No Load	—	2.6	5.5	mA
I _{SD}		V _{SHUTDOWN} = 0V	—	0.1	2	μA
P _O	Output Power	THD = 1% (max); f = 1 kHz		0.3	—	W
		8Ω Load 4Ω Load		0.5		
THD+N	Total Harmonic Distortion+Noise	P _o = 0.1 Wrms; f = 1kHz	—	0.08	—	%
PSRR	Power Supply Rejection Ratio	V _{ripple} = 200mV _{sine p-p} f=217Hz	—	44	—	dB
		V _{ripple} = 200mV _{sine p-p} f=1kHz		44		

■ Typical Application Circuit

● Single-Ended Input Configuration

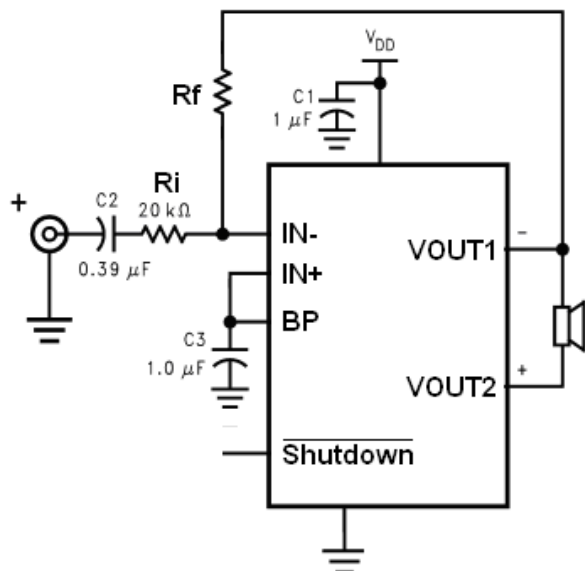

● Differential Input Configuration

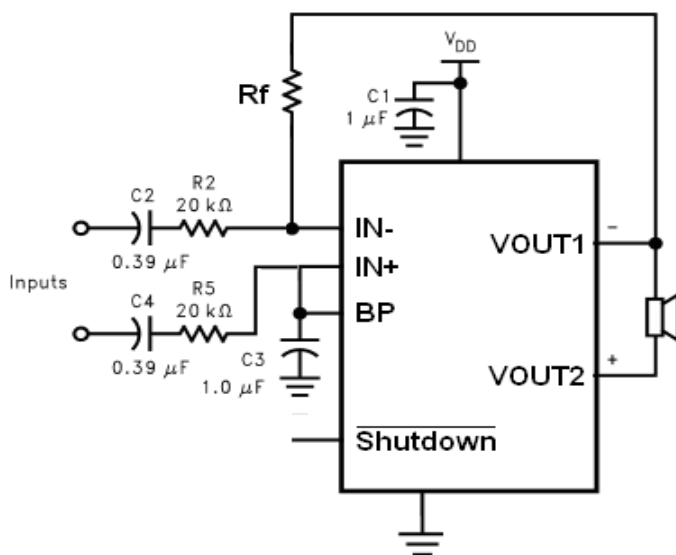


Note: The resistors (R_f) set the gain of the amplifier according to equation $\text{Gain} = 2 * R_f / R_i$


Typical $R_i=20K$ $R_f=20K$, $\text{GAIN}=2$; Gain depends on the values of the size of the source signal and V_{DD} . If the source signal amplitude is too small proposed increase in R_f to increase gain.

Package Information


- DFN3×3-8L

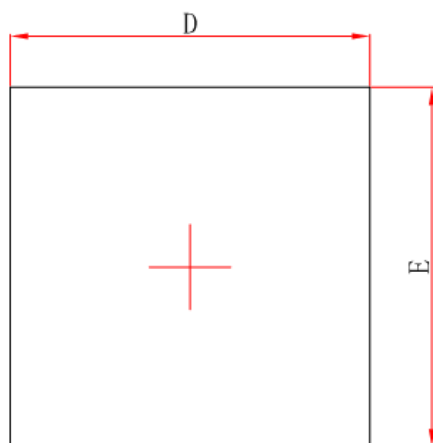

Top View

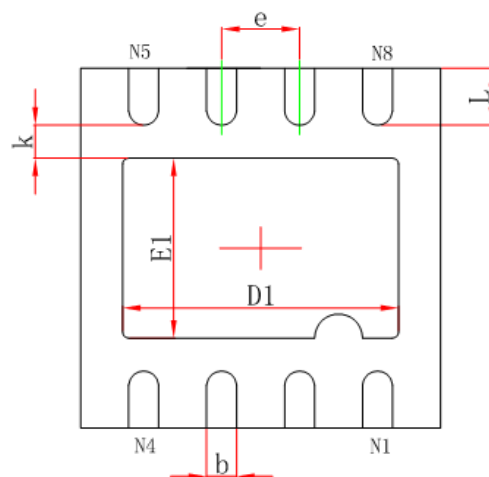

Bottom View

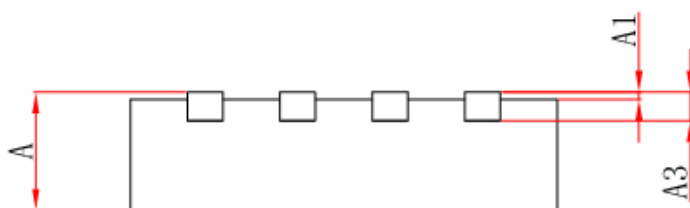

Side View

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700/0.800	0.800/0.900	0.028/0.031	0.031/0.035
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
D1	2.200	2.400	0.087	0.094
E1	1.400	1.600	0.055	0.063
k	0.200MIN.		0.008MIN.	
b	0.180	0.300	0.007	0.012
e	0.650TYP.		0.026TYP.	
L	0.375	0.575	0.015	0.023