


## 4.0 mm × 4.0 mm Series

Conventional Part No.      Global Part No.      Lighting Color  
 LN252RPX ..... LNG252RKR ..... Red  
 LN352GPX ..... LNG352GKG ..... Green  
 LN452YPX ..... LNG452YKX ..... Amber

### ■ 絶対最大定格 Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )




Lighting Color	$P_D$ (mW)	$I_F$ (mA)	$I_{FP}$ (mA)*	$V_R$ (V)	$T_{opr}$ ( $^\circ\text{C}$ )	$T_{stg}$ ( $^\circ\text{C}$ )
Red	70	25	150	4	-25 ~ +85	-30 ~ +100
Green	90	30	150	4	-25 ~ +85	-30 ~ +100
Amber	90	30	150	4	-25 ~ +85	-30 ~ +100

$I_{FP}$ の条件は duty 10% , Pulse width 1 msec. The condition of  $I_{FP}$  is duty 10%, Pulse width 1 msec

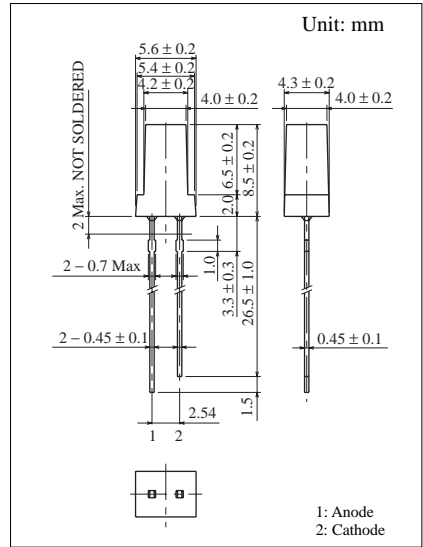


### ■ 電気的光学的特性 Electro-Optical Characteristics ( $T_a = 25^\circ\text{C}$ )

Conventional Part No.	Lighting Color	Lens Color	$I_O$		$I_F$	$V_F$		$\lambda_P$	$\Delta\lambda$	$I_F$	$I_R$	
			Typ	Min		Typ	Max				Max	$V_R$
LN252RPX	Red	Red Diffused	0.6	0.2	15	2.2	2.8	700	100	20	5	4
LN352GPX	Green	Green Diffused	2.0	0.7	20	2.2	2.8	565	30	20	10	4
LN452YPX	Amber	Amber Diffused	1.5	0.5	20	2.2	2.8	590	30	20	10	4
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	$\mu\text{A}$	V

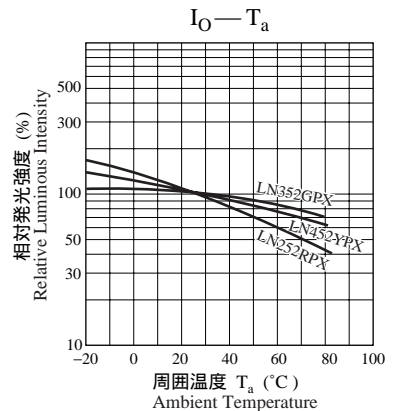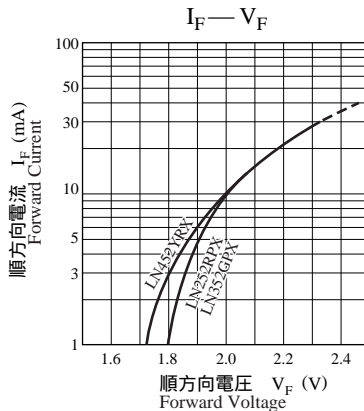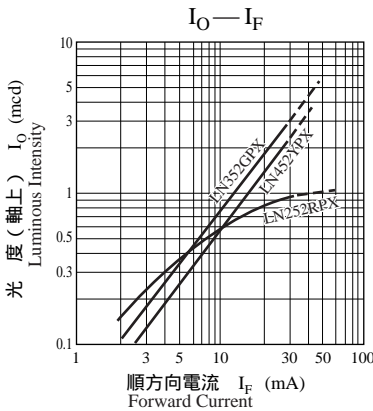

相对発光強度 — 波長特性  
Relative Luminous Intensity  
Wavelength Characteristics

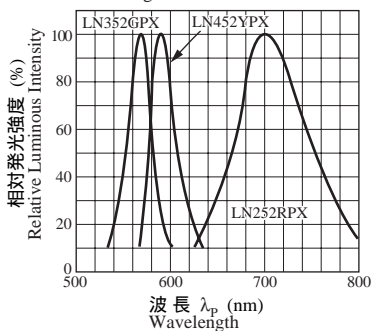

指向特性  
Directive Characteristics

