

**Product Specification**

# SPECIFICATION FOR APPROVAL

( ) Preliminary Specification

( ♦ ) Final Specification

|       |                   |
|-------|-------------------|
| Title | 13.3" XGA TFT LCD |
|-------|-------------------|

|       |  |
|-------|--|
| BUYER |  |
| MODEL |  |

|                             |                          |
|-----------------------------|--------------------------|
| SUPPLIER                    | LG.PHILIPS LCD Co., Ltd. |
| MODEL                       | LP133X7-K2QT             |
| Safety<br>Application Model | LP133X7                  |

\* When you obtain standard approval ,  
please use the above model name without suffix.

| SIGNATURE | DATE |
|-----------|------|
| /         |      |
| /         |      |
| /         |      |

Please return 1 copy for your confirmation  
with your signature and comments.

| APPROVED BY                                              | DATE |
|----------------------------------------------------------|------|
| S. W. LEE / G. Manager                                   |      |
| REVIEWED BY<br>Y.W.PARK / Manager<br>J.K.AHN / Manager   |      |
| PREPARED BY<br>J. W.PARK / Engineer<br>S.K.AHN / Manager |      |

Product Engineering Dept.  
LG.PHILIPS LCD Co., Ltd.

**Product Specification**

## CONTENTS

| NO. | ITEM                                                    | Page |
|-----|---------------------------------------------------------|------|
| -   | COVER                                                   | 1    |
| -   | CONTENTS                                                | 2    |
| -   | RECORD OF REVISIONS                                     | 3    |
| 1   | GENERAL DESCRIPTION                                     | 4    |
| 2   | ABSOLUTE MAXIMUM RATINGS                                | 5    |
| 3   | ELECTRICAL SPECIFICATIONS                               | 6    |
| 3-1 | ELECTRICAL CHARACTERISTICS                              | 6    |
| 3-2 | INTERFACE CONNECTIONS                                   | 7    |
| 3-3 | SIGNAL TIMING SPECIFICATIONS                            | 9    |
| 3-4 | SIGNAL TIMING WAVEFORMS                                 | 10   |
| 3-5 | COLOR INPUT DATA REFERENCE                              | 11   |
| 3-6 | POWER SEQUENCE                                          | 12   |
| 3-7 | V <sub>CC</sub> DIP CONDITION                           | 13   |
| 4   | OPTICAL SPECIFICATIONS                                  | 14   |
| 5   | MECHANICAL CHARACTERISTICS                              | 15   |
| 6   | RELIABILITY                                             | 19   |
| 7   | INTERNATIONAL STANDARDS                                 | 20   |
| 7-1 | SAFETY                                                  | 20   |
| 7-2 | EMC                                                     | 20   |
| 8   | PACKING                                                 | 21   |
| 8-1 | DESIGNATION OF LOT MARK                                 | 21   |
| 8-2 | PACKING FORM                                            | 21   |
| 9   | PRECAUTIONS                                             | 22   |
|     | APPENDIX                                                |      |
| A-1 | OPTICAL CHARACTERISTIC MEASUREMENT EQUIPMENT AND METHOD | 24   |
| A-2 | LUMINANCE                                               | 24   |
| A-3 | RESPONSE TIME                                           | 24   |
| A-4 | VIEWING ANGLE                                           | 25   |

**Product Specification**
**RECORDS OF REVISIONS**


| Version No | Date                | Page                | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|------------|---------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------|---------------|---------------------|---------------------|----|------|------|----|------|------|-----|------|------|-----|-----|-----|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|-----|-----|
| 1.0        | OCT. 17, 2000       | -                   | First Draft                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| 1.1        | JAN. 03, 2001       | 1/24                | -Change Model(LP133X7-> LP133X7-K2QT )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     |                     | -Change Safety Application Model(K2QT ->LP133X7)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     | 6/24                | -Item 10) added on 3-1. Electrical Characteristics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| 1.2        | FEB. 01, 2001       | 6/24                | -Change Lamp Power Consumption                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     |                     | Max. (3.92->3.82W)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     | 6/24                | -Change Lamp Life Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     |                     | Typ.(15,000-> -)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     | 6/24                | - he used lamp current is the lamp typical current?                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     |                     | is added on Item 5) and 8).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     | 14/24               | -Change Gray Scale Spec.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            |                     |                     | <table><tr><th rowspan="2">Gray Level</th><th>Changed Before</th><th>Changed After</th></tr><tr><th>Luminance (%) (typ)</th><th>Luminance (%) (typ)</th></tr><tr><td>L0</td><td>0.22</td><td>0.31</td></tr><tr><td>L7</td><td>1.03</td><td>1.66</td></tr><tr><td>L15</td><td>2.86</td><td>4.29</td></tr><tr><td>L23</td><td>6.9</td><td>9.6</td></tr><tr><td>L31</td><td>16.2</td><td>21.2</td></tr><tr><td>L39</td><td>33.9</td><td>40.5</td></tr><tr><td>L47</td><td>59.1</td><td>65.4</td></tr><tr><td>L55</td><td>85.8</td><td>89.1</td></tr><tr><td>L63</td><td>100</td><td>100</td></tr></table> | Gray Level | Changed Before | Changed After | Luminance (%) (typ) | Luminance (%) (typ) | L0 | 0.22 | 0.31 | L7 | 1.03 | 1.66 | L15 | 2.86 | 4.29 | L23 | 6.9 | 9.6 | L31 | 16.2 | 21.2 | L39 | 33.9 | 40.5 | L47 | 59.1 | 65.4 | L55 | 85.8 | 89.1 | L63 | 100 | 100 |
| Gray Level | Changed Before      | Changed After       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
|            | Luminance (%) (typ) | Luminance (%) (typ) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L0         | 0.22                | 0.31                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L7         | 1.03                | 1.66                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L15        | 2.86                | 4.29                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L23        | 6.9                 | 9.6                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L31        | 16.2                | 21.2                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L39        | 33.9                | 40.5                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L47        | 59.1                | 65.4                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L55        | 85.8                | 89.1                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |
| L63        | 100                 | 100                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                |               |                     |                     |    |      |      |    |      |      |     |      |      |     |     |     |     |      |      |     |      |      |     |      |      |     |      |      |     |     |     |

**Product Specification**
**1. General Description**

The LP133X7-K2QT is a Color Active Matrix Liquid Crystal Display with an integral Cold Cathode Fluorescent Lamp(CCFL) back light system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has a 13.3 inch diagonally measured active display area with XGA resolution(768 vertical by 1024 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors.

The LP133X7-K2QT has been designed to apply the interface method that enables low power, high speed low EMI. Flat Link must be used as a LVDS(Low Voltage Differential Signaling) chip.

The LP133X7-K2QT is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP133X7-M2XT characteristics provide an excellent flat panel display for office automation products such as Notebook PC.

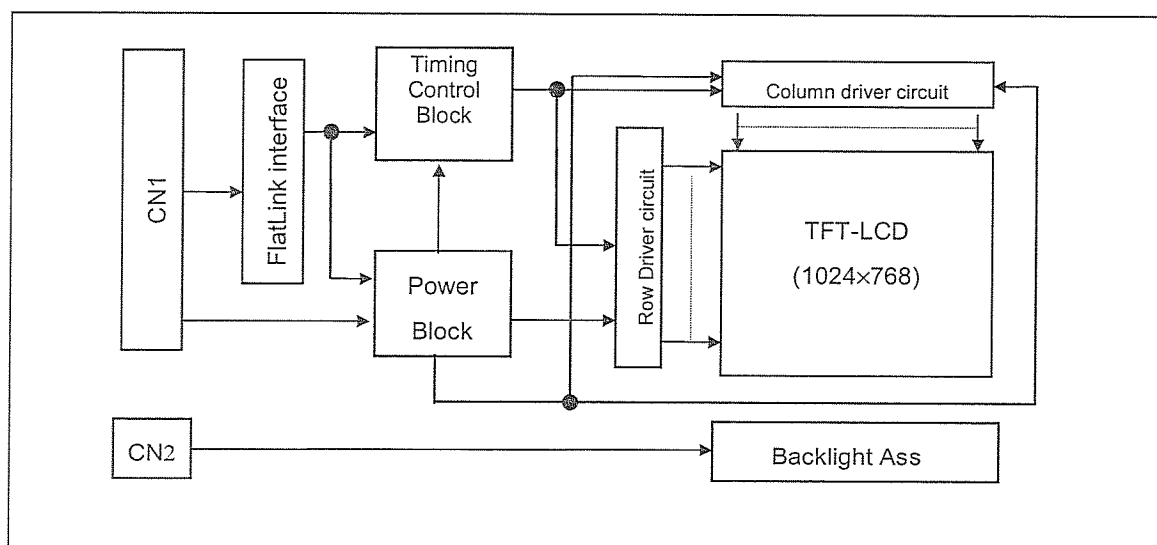
**General Features**

|                        |                                                                  |
|------------------------|------------------------------------------------------------------|
| Active screen size     | 13.3 inches(33.78cm) diagonal                                    |
| Outline dimensions     | 284(H) × 214.5(V) × 5.8(D) mm (Typ.)                             |
| Pixel pitch            | 0.264 mm × 0.264 mm                                              |
| Pixel format           | 1024 horiz. By 768 vert. pixels                                  |
|                        | RGB stripe arrangement                                           |
| Color depth            | 6-bit, 262,144 colors                                            |
| Luminance, White       | 120 cd/m <sup>2</sup> (Typ.)                                     |
| Power Consumption      | Total 4.21Watt(Typ.)                                             |
| Weight                 | 490g (Typ.)                                                      |
| Display operating mode | Transmissive mode, normally white                                |
| Surface treatments     | hard coating(3H),<br>Anti-glare treatment of the front polarizer |

Product Specification

## 2. Absolute Maximum Ratings


The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

Table 1 ABSOLUTE MAXIMUM RATINGS

| Parameter                  | symbol   | Values |      | Units        | Notes                      |
|----------------------------|----------|--------|------|--------------|----------------------------|
|                            |          | Min.   | Max. |              |                            |
| Power Input Voltage        | $V_{CC}$ | 0      | 3.6  | Vdc          | at 25 $\pm$ 5 $^{\circ}$ C |
| Operating Temperature      | $T_{OP}$ | 0      | 50   | $^{\circ}$ C | 1                          |
| Storage Temperature        | $T_{ST}$ | -20    | 60   | $^{\circ}$ C | 1                          |
| Operating Ambient Humidity | $H_{OP}$ | 10     | 90   | %RH          | 1                          |
| Storage Humidity           | $H_{ST}$ | 10     | 90   | %RH          | 1                          |

Note: 1. Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 $^{\circ}$ C Max, and no condensation of water.

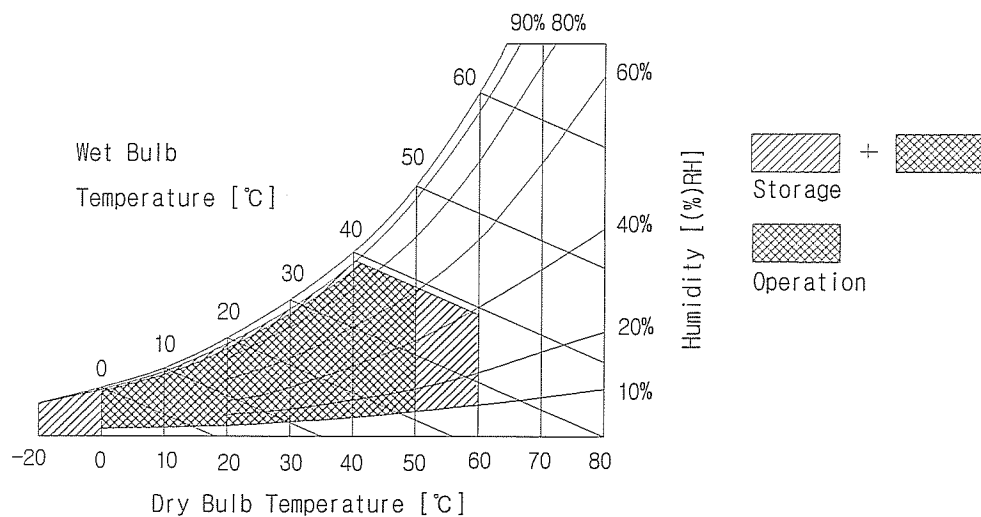

## 3. Electrical Specifications

**Product Specification**
**3-1. Electrical Characteristics**

The LP133X7-K2QT requires two power inputs. One is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second input which powers the CCFL, is typically generated by an inverter. The inverter is an external unit to the LCD.

**Table 2 ELECTRICAL CHARACTERISTICS:**

| Parameter                    | Symbol            | Values |       |       | Units            | Notes |
|------------------------------|-------------------|--------|-------|-------|------------------|-------|
|                              |                   | Min.   | Typ.  | Max.  |                  |       |
| MODULE:                      |                   |        |       |       |                  |       |
| Power Supply Input Voltage   | V <sub>CC</sub>   | 3.0    | 3.3   | 3.6   | V <sub>dc</sub>  |       |
| Power Supply Input Current   | I <sub>CC</sub>   | 0.195  | 0.225 | 0.255 | A                | 1     |
| Differential Impedance       | Z <sub>m</sub>    | 90     | 100   | 110   | ohm              | 2     |
| Power Consumption            | P <sub>c</sub>    | 0.64   | 0.74  | 0.84  | Watts            | 1     |
| Rush current                 | I <sub>RUSH</sub> | -      | 1.5   | 1.8   | A                | 3     |
| LAMP                         |                   |        |       |       |                  |       |
| Operating Voltage            | V <sub>BL</sub>   | 560    | 630   | 765   | V <sub>RMS</sub> | 4     |
| Operating Current            | I <sub>BL</sub>   | 3.0    | 5.5   | 7.0   | mA               |       |
| Established Starting Voltage | V <sub>s</sub>    |        |       |       |                  | 5     |
| at 25 °C                     |                   | -      | -     | 1050  | V <sub>RMS</sub> |       |
| at 0 °C                      |                   | -      | -     | 1260  | V <sub>RMS</sub> |       |
| Discharge Stabilization Time | T <sub>s</sub>    |        |       | 3     | min              | 6     |
| Operating Frequency          | f <sub>BL</sub>   | 40     | 55    | 70    | kHz              | 7     |
| Power Consumption            | P <sub>BL</sub>   | -      | 3.47  | 3.82  | Watts            | 8     |
| Life Time                    |                   | 10,000 | -     | -     | Hrs              | 9     |

Notes: The design of the inverter must have specifications for the lamp in LCD Assembly.

The performance of the Lamp in LCM, for example life time or brightness, is extremely influenced by the characteristics of the DC-AC Inverter. So all the parameters of an inverter should be carefully designed so as not to produce too much leakage current from high-voltage output of the inverter.

When you design or order the inverter, please make sure unwanted lighting caused by the mismatch of the lamp and the inverter (no lighting, flicker, etc) never occurs. When you confirm it, the LCD Assembly should be operated in the same condition as installed in your instrument.

- The specified current and power consumption are under the  $V_{CC} = 3.3V$ ,  $25^{\circ}C$ ,  $f_v = 60Hz$  condition whereas 64 gray pattern is displayed.
- This impedance value is needed to proper display and measured from LVDS Tx to the mating connector.
- The duration of rush current is about 20ms.
- The variance of the voltage is  $\pm 10\%$ .
- The voltage above  $V_s$  should be applied to the lamps for more than 1 second for start-up. Otherwise, the lamps may not be turned on. The used lamp current is the lamp typical current.
- The output of the inverter must have symmetrical (negative and positive) voltage waveform and symmetrical current waveform. (Unsymmetrical ratio is less than 10%) Please do not use the inverter which has unsymmetrical voltage and unsymmetrical current and spike wave.  
Lamp frequency may produce interference with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away as possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.
- Let  $T_s$  define the brightness of the lamp after being lighted for 5 minutes as 100%.  
 $T_s$  is the time required for the brightness of the center of the lamp to be not less than 95%.
- The lamp power consumption shown above does not include loss of external inverter.  
The used lamp current is the lamp typical current.
- The life time is determined as the time at which brightness of lamp is 50% compared to that of initial value at the typical lamp current on condition of continuous operating at  $25 \pm 2^{\circ}C$ .
- Do not attach a conducting tape to lamp connecting wire.  
If the lamp wire attach to a conducting tape, TFT-LCD Module has a low luminance and the inverter has abnormal action. Because leakage current is occurred between lamp wire and conducting tape.

**3-2. Interface Connections**


**Product Specification**

Interface chip must be used FlatLink ,part No. THC63LVDM63A(Transmitter) , KZ4E038C12CFP(Receiver) made by THine Microsystems,Inc.

This LCD employs two interface connections, a 20 pin connector is used for the module electronics and the other connector is used for the integral backlight system.

The electronics interface connector is a model DF19KR-20P-1Hmanufactured by HIROSE. The pin configuration for the connector is shown in the table below.

**Table 3 MODULE CONNECTOR PIN CONFIGURATION (LVDS) [CN1]**
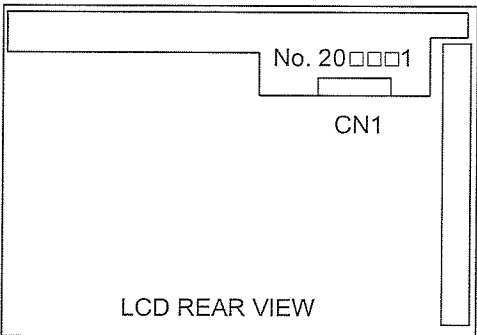
| Pin | Symbol | Description       | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|--------|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | VCC    | Power (3.3V)      | <p>1. Interface chips<br/> 1.1 LCD : KZ4E038C12CFP<br/> (THC63LVDF64A Core)<br/> 1.2 System : THC63LVDM63A 48T SSOP<br/> * Pin to Pin compatible with TI LVDS</p> <p>2. Connector<br/> 2.1 LCD : DF19KR-20P-1H(HIROSE)<br/> or GT100-20-LS-SMT-R(LG CABLE)<br/> → Pin to Pin compatible with HIROSE</p> <p>2.2 Mating<br/> -. Wire type : DF19G-20S-1C(HIROSE)<br/> -. FPC type : DF19-20S-1F(HIROSE)</p> <p>2.3 Connector pin arrangement</p>  <p>LCD REAR VIEW</p> |
| 2   | VCC    | Power (3.3V)      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 3   | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 4   | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5   | A0M    | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 6   | A0P    | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 7   | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 8   | A1M    | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 9   | A1P    | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 10  | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 11  | A2M    | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 12  | A2P    | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 13  | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 14  | CLKM   | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 15  | CLKP   | Difference Signal |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 16  | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 17  | NC     | No Connection     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 18  | NC     | No Connection     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 19  | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 20  | GND    | Ground            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

The backlight interface connector is a model BHSR-02VS-1, manufactured by JST. The mating connector part number is SM02B-BHSS-1 or equivalent. The pin configuration for the connector is shown in the table below.

**Table 4 BACKLIGHT CONNECTOR PIN CONFIGURATION [CN2]**

| Pin | Symbol | Description        | Notes |
|-----|--------|--------------------|-------|
| 1   | HV     | High voltage input | 1     |
| 2   | LV     | Low voltage input  | 2     |

Notes: 1. The high voltage input terminal is colored pink.  
2. The low voltage input terminal is colored white.

**Product Specification**
**Table 5 REQUIRED SIGNAL ASSIGNMENT FOR FlatLink Transmitter**

| Pin # | Pin Name | Require Signals | Pin # | Pin Name | Require Signals |
|-------|----------|-----------------|-------|----------|-----------------|
| 1     | D4       | R4              | 48    | D3       | R3              |
| 2     | Vcc      | Vcc             | 47    | D2       | R2              |
| 3     | D5       | R5              | 46    | GND      | GND             |
| 4     | D6       | G0              | 45    | D1       | R1              |
| 5     | GND      | GND             | 44    | D0       | R0              |
| 6     | D7       | G1              | 43    | NC       | NC              |
| 7     | D8       | G2              | 42    | LVDS GND | LVDS GND        |
| 8     | Vcc      | Vcc             | 41    | Y0M      | A0M             |
| 9     | D9       | G3              | 40    | Y0P      | A0P             |
| 10    | D10      | G4              | 39    | Y1M      | A1M             |
| 11    | GND      | GND             | 38    | Y1P      | A1P             |
| 12    | D11      | G5              | 37    | LVDS Vcc | LVDS Vcc        |
| 13    | D12      | B0              | 36    | LVDS GND | LVDS GND        |
| 14    | NC       | NC              | 35    | Y2M      | A2M             |
| 15    | D13      | B1              | 34    | Y2P      | A2P             |
| 16    | D14      | B2              | 33    | CLKOUTM  | CLKM            |
| 17    | GND      | GND             | 32    | CLKOUTP  | CLKP            |
| 18    | D15      | B3              | 31    | LVDS GND | LVDS GND        |
| 19    | D16      | B4              | 30    | PLL GND  | PLL GND         |
| 20    | D17      | B5              | 29    | PLL Vcc  | PLL Vcc         |
| 21    | Vcc      | Vcc             | 28    | PLL GND  | PLL GND         |
| 22    | D18      | HSYNC           | 27    | SHDN     | SHDN            |
| 23    | D19      | VSYNC           | 26    | CLKIN    | Dclk            |
| 24    | GND      | GND             | 25    | D20      | DE(Data Enable) |

Notes : Refer to LVDS Transmitter Data Sheet for detail descriptions.




**Product Specification**
**3-3. Signal Timing Specifications**

This is the signal timing required at the input of the LVDS Transmitter. All of the interface signal timing should be satisfied with the following specifications for it proper operation.

**Table 6 Timing Table**

|                 | ITEM                   | SYMBOL    | MIN. | TYP. | MAX.              | UNIT      | NOTES                        |
|-----------------|------------------------|-----------|------|------|-------------------|-----------|------------------------------|
| Dclk            | Period                 | $t_{CLK}$ | 14.7 | 15.4 | 16.7              | ns        | 65MHz(Typ.)                  |
| Hsync           | Period                 | $t_{HP}$  | 1206 | 1344 | 1364              | $t_{CLK}$ |                              |
|                 | Width                  | $t_{WH}$  | 16   | 136  | 240               |           |                              |
| Vsync           | Period                 | $t_{VP}$  | 780  | 806  | 830               | $t_{HP}$  |                              |
|                 | Frequency              | $f_V$     | 60   | 60   | 60                | Hz        |                              |
|                 | Width                  | $t_{WV}$  | 1    | 6    | 24                | $t_{HP}$  |                              |
| ( Data Enable ) | Horizontal Valid       | $t_{HV}$  | 1024 | 1024 | 1024              | $t_{CLK}$ |                              |
|                 | Horizontal Back Porch  | $t_{HBP}$ | 8    | -    | -                 |           |                              |
|                 | Horizontal Front Porch | $t_{HFP}$ | 8    | -    | -                 |           |                              |
|                 | Horizontal Blank       | -         | 24   | ~    | $t_{HP} ? t_{HV}$ |           | $t_{WH} + t_{HBP} + t_{HFP}$ |
|                 | Vertical Valid         | $t_{VV}$  | 768  | 768  | 768               | $t_{HP}$  |                              |
|                 | Vertical Back Porch    | $t_{VBP}$ | 2    | -    | -                 |           |                              |
|                 | Vertical Front Porch   | $t_{VFP}$ | 1    | -    | -                 |           |                              |
|                 | Vertical Blank         | -         | 4    | ~    | $t_{VP} ? t_{VV}$ |           | $t_{WV} + t_{VBP} + t_{VFP}$ |

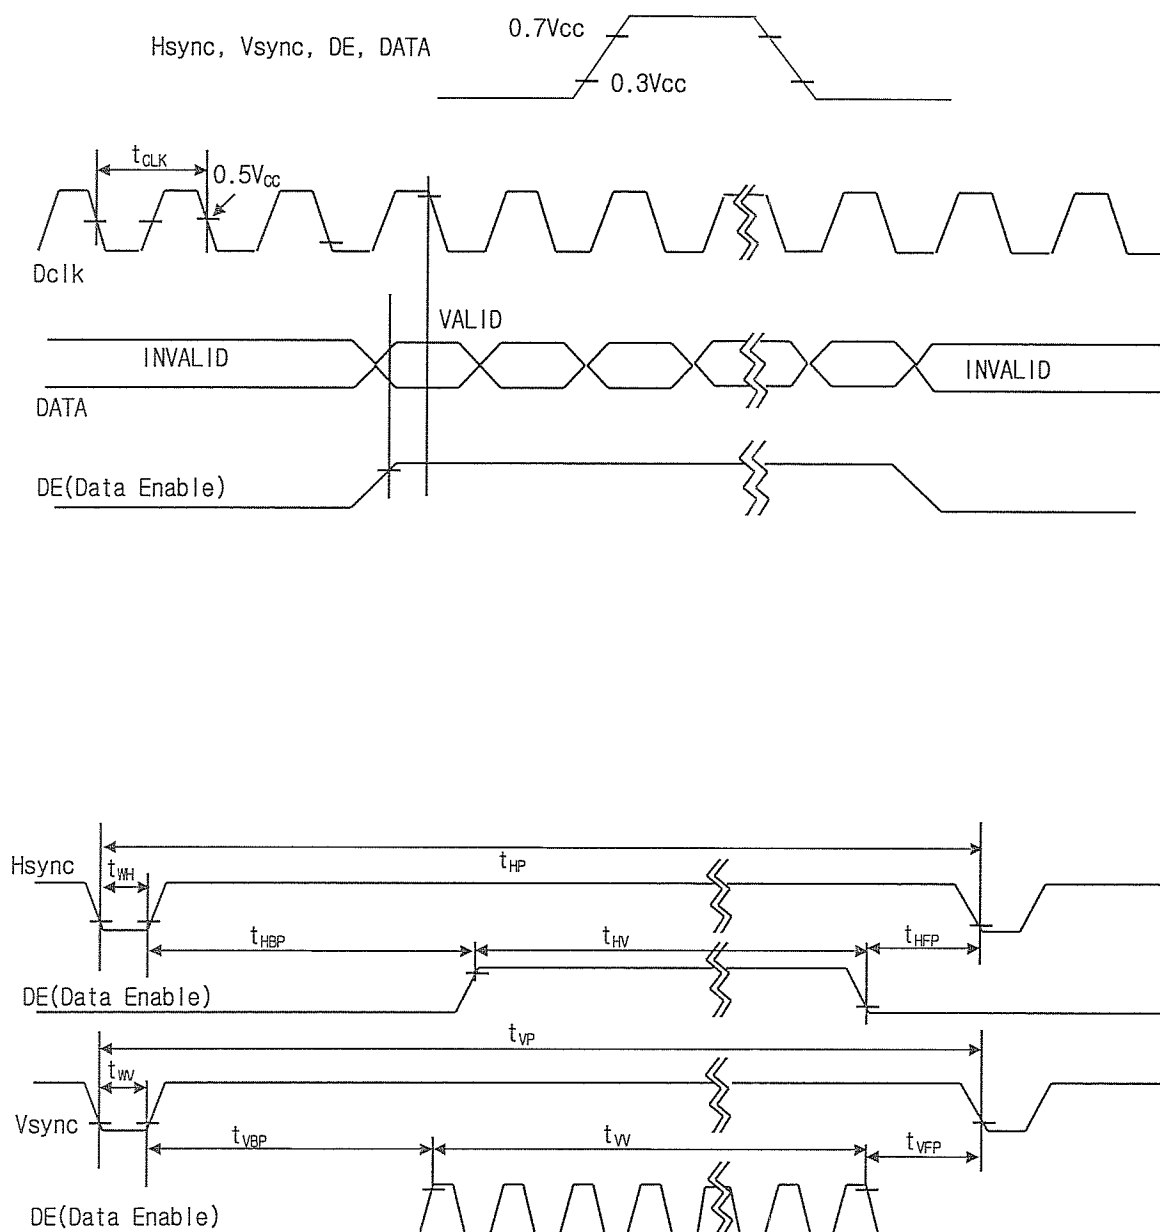**Product Specification**
**3-4. Signal Timing Wave forms**


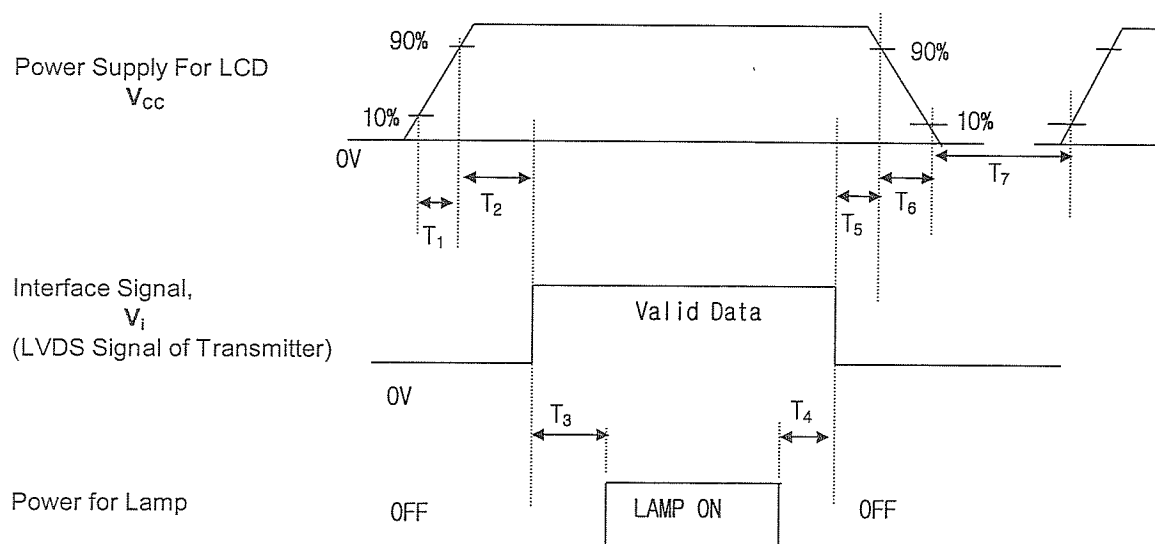
**Product Specification**
**3-5. Color Input Data Reference**

The brightness of each primary color(red, green and blue) is based on the 6-bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

**Table 7 COLOR DATA REFERENCE**

| Color        |                 | Input Color Data |    |    |     |    |    |       |    |    |     |    |    |      |    |    |     |    |    |
|--------------|-----------------|------------------|----|----|-----|----|----|-------|----|----|-----|----|----|------|----|----|-----|----|----|
|              |                 | Red              |    |    |     |    |    | Green |    |    |     |    |    | Blue |    |    |     |    |    |
|              |                 | MSB              |    |    | LSB |    |    | MSB   |    |    | LSB |    |    | MSB  |    |    | LSB |    |    |
|              |                 | R5               | R4 | R3 | R2  | R1 | R0 | G5    | G4 | G3 | G2  | G1 | G0 | B5   | B4 | B3 | B2  | B1 | B0 |
| Basic Colors | Black           | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Red(63)         | 1                | 1  | 1  | 1   | 1  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Green(63)       | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Blue(63)        | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 1  |
|              | Cyan            | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 1  | 1    | 1  | 1  | 1   | 1  | 1  |
|              | Magenta         | 1                | 1  | 1  | 1   | 1  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 1  |
|              | Yellow          | 1                | 1  | 1  | 1   | 1  | 1  | 1     | 1  | 1  | 1   | 1  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | White           | 1                | 1  | 1  | 1   | 1  | 1  | 1     | 1  | 1  | 1   | 1  | 1  | 1    | 1  | 1  | 1   | 1  | 1  |
| Red          | Red(00) Dark    | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Red(01)         | 0                | 0  | 0  | 0   | 0  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Red(02)         | 0                | 0  | 0  | 0   | 1  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | :               | :                | :  | :  | :   | :  | :  | :     | :  | :  | :   | :  | :  | :    | :  | :  | :   | :  | :  |
|              | Red(61)         | 1                | 1  | 1  | 1   | 0  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Red(62)         | 1                | 1  | 1  | 1   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Red(63) Bright  | 1                | 1  | 1  | 1   | 1  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
| Green        | Green(00)Dark   | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Green(01)       | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Green(02)       | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 1  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | :               | :                | :  | :  | :   | :  | :  | :     | :  | :  | :   | :  | :  | :    | :  | :  | :   | :  | :  |
|              | Green(61)       | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 0  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Green(62)       | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Green(63)Bright | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
| Blue         | Blue(00) Dark   | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|              | Blue(01)        | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 1  |
|              | Blue(02)        | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 1  | 0  |
|              | :               | :                | :  | :  | :   | :  | :  | :     | :  | :  | :   | :  | :  | :    | :  | :  | :   | :  | :  |
|              | Blue(61)        | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 0  | 1  |
|              | Blue(62)        | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 0  |
|              | Blue(63) Bright | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 1  |

**3-6. Power Sequence**

**Product Specification**


| Parameter      | Values |      |      | Units |
|----------------|--------|------|------|-------|
|                | Min.   | Typ. | Max. |       |
| T <sub>1</sub> | 0.01   | -    | 10   | ms    |
| T <sub>2</sub> | 0.01   | -    | 50   | ms    |
| T <sub>3</sub> | 200    | -    | -    | ms    |
| T <sub>4</sub> | 200    | -    | -    | ms    |
| T <sub>5</sub> | 0.01   | -    | 50   | ms    |
| T <sub>6</sub> | 0.01   | -    | 50   | ms    |
| T <sub>7</sub> | 1      | -    | -    | s     |

- Notes:
1. Please avoid floating state of interface signal at invalid period.
  2. When the interface signal is invalid, be sure to pull down the power supply for LCD  $V_{cc}$  to 0V.
  3. Lamp power must be turn on after power supply for LCD and interface signal are valid.

**Product Specification**
**4. Optical Specifications**

Optical characteristics are determined after the unit has been N?and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\theta$  equal to 0°.

Appendix A -1 presents additional information concerning the measurement equipment and method..

**Table 8 OPTICAL CHARACTERISTICS** ( Ta=25°C, Vcc=3.3V, f<sub>V</sub>=60Hz, Dclk=65MHz, I<sub>BL</sub>=5.5mA)

| Parameter                         | Symbol          | Values |       |       | Units             | Notes |
|-----------------------------------|-----------------|--------|-------|-------|-------------------|-------|
|                                   |                 | Min.   | Typ.  | Max.  |                   |       |
| Contrast Ratio                    | CR              | 150    | 200   | -     |                   | 1     |
| Surface Luminance, white          | L <sub>WH</sub> | 100    | 120   | -     | cd/m <sup>2</sup> | 2     |
| Luminance Variation               | $\delta$ WHITE  | -      | 1.25  | 1.45  |                   | 3     |
| Response Time                     | Tr              |        |       |       | msec              | 4     |
| Rise Time                         | Tr <sub>R</sub> | -      | 30    | 50    |                   |       |
| Decay Time                        | Tr <sub>D</sub> | -      | 30    | 50    |                   |       |
| CIE Color Coordinates             |                 |        |       |       |                   |       |
| Red                               | x <sub>R</sub>  | 0.558  | 0.588 | 0.618 |                   |       |
|                                   | y <sub>R</sub>  | 0.320  | 0.350 | 0.380 |                   |       |
| Green                             | x <sub>G</sub>  | 0.288  | 0.318 | 0.348 |                   |       |
|                                   | y <sub>G</sub>  | 0.527  | 0.557 | 0.587 |                   |       |
| Blue                              | x <sub>B</sub>  | 0.123  | 0.153 | 0.183 |                   |       |
|                                   | y <sub>B</sub>  | 0.122  | 0.152 | 0.182 |                   |       |
| White                             | x <sub>W</sub>  | 0.295  | 0.325 | 0.355 |                   |       |
|                                   | y <sub>W</sub>  | 0.333  | 0.363 | 0.393 |                   |       |
| Viewing Angle                     |                 |        |       |       |                   |       |
| x axis, right ( $\Phi=0^\circ$ )  | $\theta_x$      | 45     | 50    | -     | degree            | 5     |
| x axis, left ( $\Phi=180^\circ$ ) | $\theta_x$      | 30     | 35    | -     |                   |       |
| y axis, up ( $\Phi=90^\circ$ )    | $\theta_y$      | 50     | 55    | -     |                   |       |
| y axis, down ( $\Phi=270^\circ$ ) | $\theta_y$      | 50     | 55    | -     |                   |       |
| Gray Scale                        |                 | -      | -     | -     |                   | 6     |

- Notes
1. Contrast Ratio (CR) is defined mathematically as :  

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$
  2. Surface luminance is the center points across the LCD surface 50cm from the surface with all pixels displaying white. For more information see Appendix A - 2.
  3. The variation in surface Luminance,  $\delta$  WHITE is determined by measuring L<sub>ON</sub> at each test position 1 through 5, and then dividing the maximum L<sub>ON</sub> of 5 points luminance by minimum L<sub>ON</sub> of 5 points luminance. For more information see Appendix A - 2.  

$$\delta \text{ WHITE} = \text{Maximum (L}_{ON1}, \text{L}_{ON2}, \dots, \text{L}_{ON5}) \div \text{Minimum (L}_{ON1}, \text{L}_{ON2}, \dots, \text{L}_{ON5})$$
  4. Response time is the time required for the display to transition from white to black (Rise Time, Tr<sub>R</sub>) and from black to white (Decay Time, Tr<sub>D</sub>). For additional information see Appendix A - 3.
  5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see Appendix A - 4

**Product Specification**
**6. Gray scale specification.**

| Gray Level | Luminance<br>(%)(typ) |
|------------|-----------------------|
| L0         | 0.31                  |
| L7         | 1.66                  |
| L15        | 4.29                  |
| L23        | 9.6                   |
| L31        | 21.2                  |
| L39        | 40.5                  |
| L47        | 65.4                  |
| L55        | 89.1                  |
| L63        | 100                   |

**5. Mechanical Characteristics**

The contents provide general mechanical characteristics for the model **LP133X7-K2QT** LCD. In addition, the figures in the next page are detailed mechanical drawings of the LCD.

Outside dimensions :

|            |                    |
|------------|--------------------|
| Horizontal | $284 \pm 0.5$ mm   |
| Vertical   | $214.5 \pm 0.5$ mm |
| Depth      | $5.8 \pm 0.3$ mm   |

Bezel area :

|            |                    |
|------------|--------------------|
| Horizontal | $273.4 \pm 0.5$ mm |
| Vertical   | $205.8 \pm 0.5$ mm |

Active Display area :

|            |           |
|------------|-----------|
| Horizontal | 270.34 mm |
| Vertical   | 202.75 mm |

Weight (approximate) : 490g (typ), 500g(max)


Surface Treatment : Hard coating 3H.

Anti-glare treatment of the front polarizer

## Product Specification


< FRONT VIEW >

Notes 1. Unspecified dimensional tolerance are  $\pm 0.5\text{mm}$

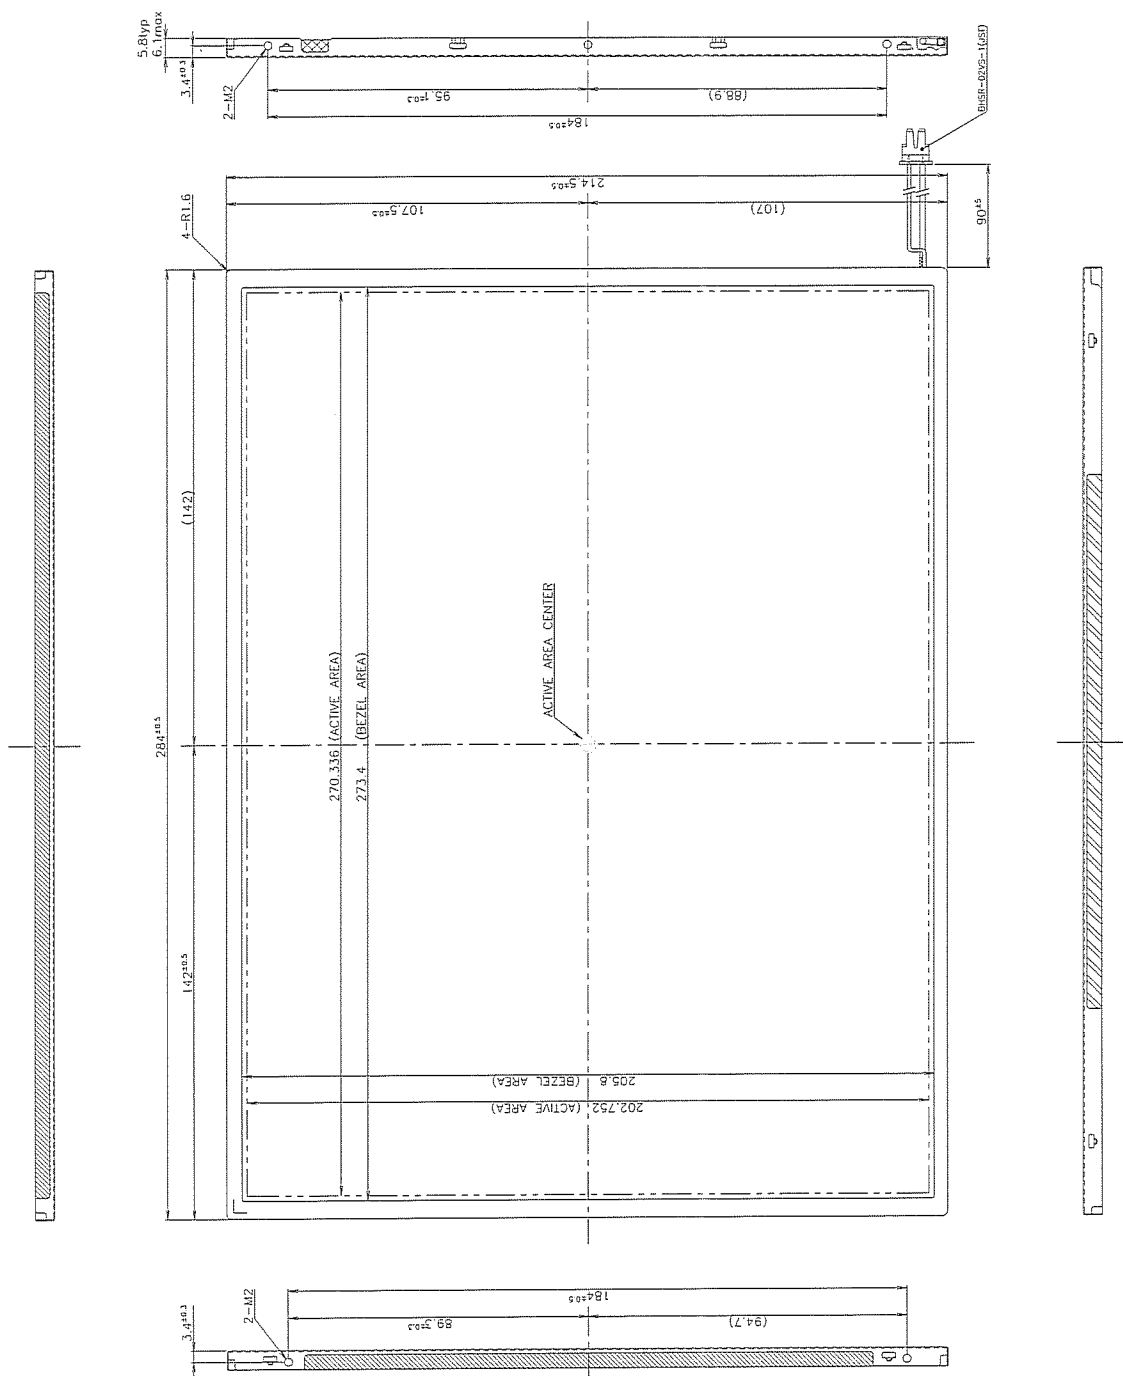

Product Specification

< REAR VIEW >

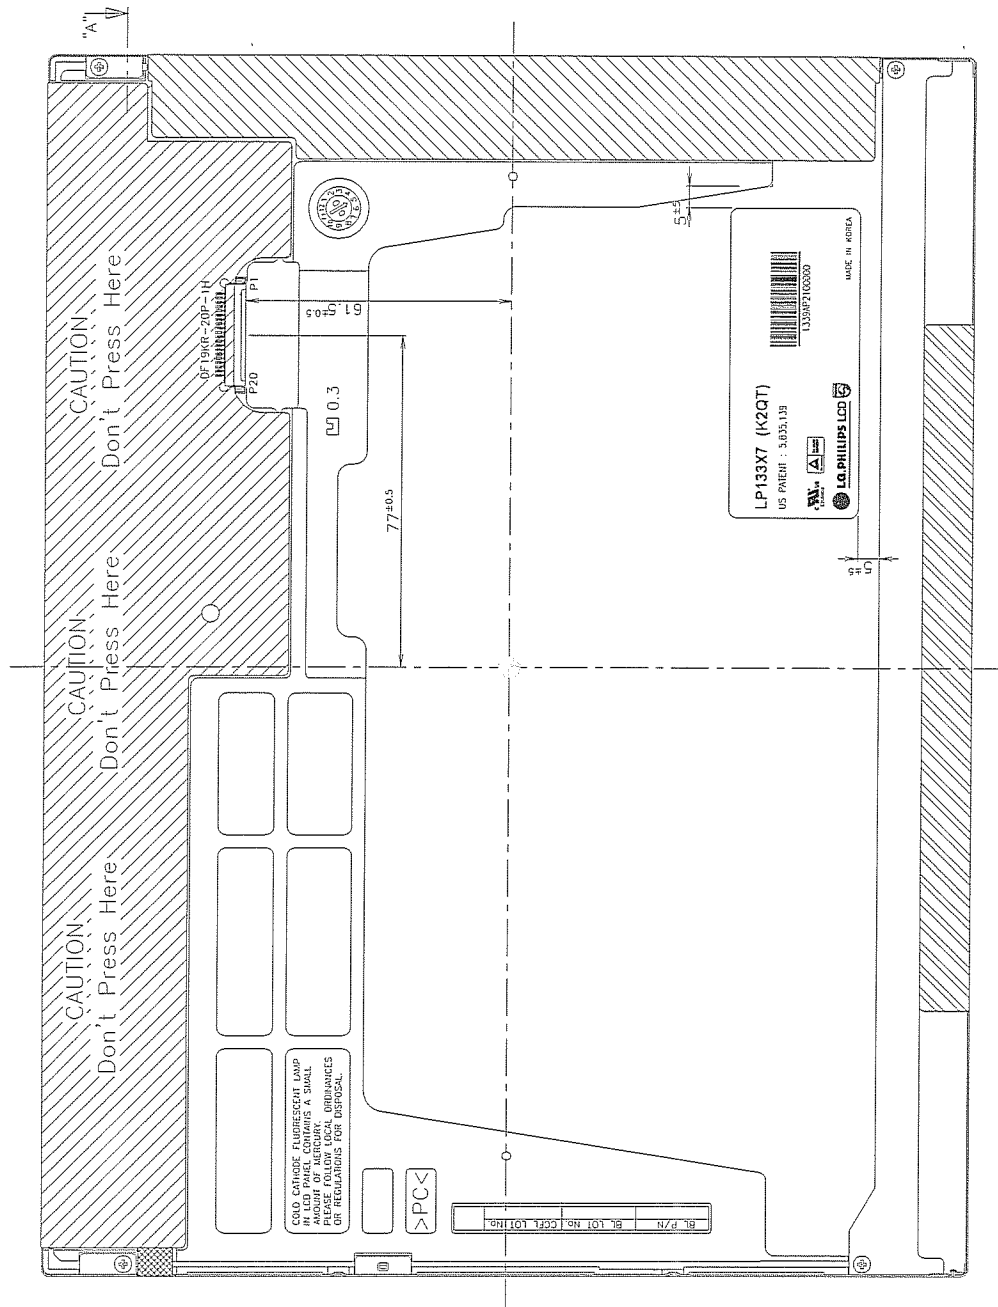




Product Specification

<Detail description of side mounting screw>

SEC."A"(S:5/1)

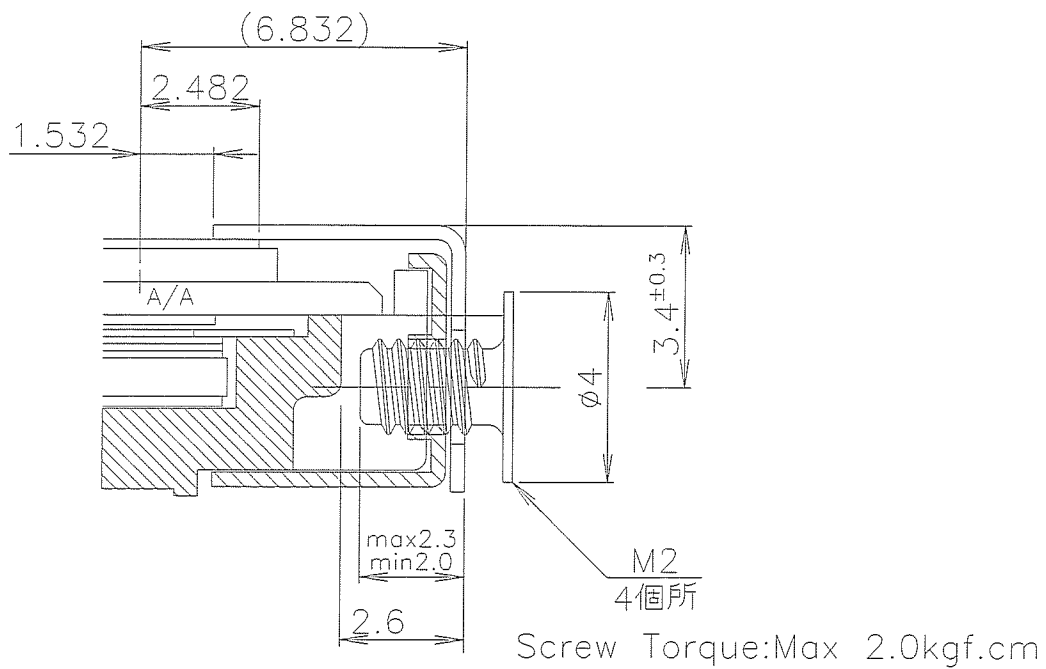

Notes

1. Screw Torque : 1.3-1.5kgf.cm

**Product Specification**
**6. Reliability**

## - Environment test condition

| No. | Test Item                         | Conditions                                                                                          |
|-----|-----------------------------------|-----------------------------------------------------------------------------------------------------|
| 1   | High temperature storage test     | Ta = 60 °C 240h                                                                                     |
| 2   | Low temperature storage test      | Ta = -20 °C 240h                                                                                    |
| 3   | High temperature operation test   | Ta = 50 °C 50%RH 240h                                                                               |
| 4   | Low temperature operation test    | Ta = 0 °C 240h                                                                                      |
| 5   | Vibration test<br>(non-operating) | Sine wave, 10~500~10Hz, 1.5G, 0.37oct/min,<br>3 axis, 1 hour/axis                                   |
| 6   | Shock test<br>(non-operating)     | Half sine wave, 180G, 2ms,<br>one shock of each six faces (i.e. run 180G 2ms for<br>all six faces.) |
| 7   | Altitude                          |                                                                                                     |
|     | operating                         | 0 - 10,000 feet (3048m)                                                                             |
|     | storage/shipment                  | 0 - 40,000 feet (12192m)                                                                            |

{Result Evaluation Criteria}

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

## - ON/OFF Cycle

: The display module will be capable of being operated over 24,000 ON/OFF cycles (Lamp power & Vcc ON/OFF)

## - Mean Time Between Failure

: The LCD Panel and interface board assembly (excluding the CCFT's) have a mean time between failures of 30,000 hours with a confidence level 90%.

**Product Specification****7. International Standards****7-1. Safety**

- a) UL 1950 Third Edition, Underwriters Laboratories, Inc. Jan. 28, 1995.  
Standard for Safety of Information Technology Equipment Including Electrical Business Equipment.
- b) CAN/CSA C22.2 No. 950-95 Third Edition, Canadian Standards Association, Jan. 28, 1995.  
Standard for Safety of Information Technology Equipment Including Electrical Business Equipment.
- c) EN 60950 : 1992 + A1 : 1993 + A2 : 1993 + A3 : 1995 + A4 : 1997 + A11 : 1997  
IEC 950 : 1991 + A1 : 1992 + A2 : 1993 + A3 : 1995 + A4 : 1996  
European Committee for Electrotechnical Standardization (CENELEC)  
EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

**7-2. EMC**

- a) ANSI C63.4 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz. American National Standards Institute(ANSI),1992.
- b) C.I.S.P.R Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment. International Special Committee on Radio Interference
- c) EN 55022 Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment. European Committee for Electrotechnical Standardization (CENELEC),1988

**Product Specification**
**8. Packing**
**8-1. Designation of Lot Mark**

a) Lot Mark

|   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | B | C | D | E | F | G | H | I | J | K | L | M |
|---|---|---|---|---|---|---|---|---|---|---|---|---|

A, B, C : INCH CODE

D : YEAR

E : MONTH

F, G : PANEL CODE

H : ASSEMBLY CODE

I, J, K, L, M : SERIAL NO

Note 1. YEAR(D)

| YEAR | 95 | 96 | 97 | 98 | 99 | 00 | 01 | 02 | 03 | 04 | 05 |
|------|----|----|----|----|----|----|----|----|----|----|----|
| Mark | 5  | 6  | 7  | 8  | 9  | 0  | 1  | 2  | 3  | 4  | 5  |

2. MONTH(E)

| MONTH | Jan. | Feb. | Mar. | Apr. | May | Jun. | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
|-------|------|------|------|------|-----|------|------|------|------|------|------|------|
| Mark  | 1    | 2    | 3    | 4    | 5   | 6    | 7    | 8    | 9    | A    | B    | C    |

b) Location of Lot Mark

Serial NO. Is printed on the label. The label is attached to the backside of the LCD module.  
This is subject to change without prior notice.

**8-2. Packing Form**

a) Package quantity in one box : 10 PCS

b) Box Size : 374mm X 329mm X 311mm

**9. PRECAUTIONS**

**Product Specification**

Please pay attention to the followings when you use this TFT LCD module.

**9.1 MOUNTING PRECAUTIONS**

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to the module.  
And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach a transparent protective plate to the surface in order to protect the polarizer.  
Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And Please do not rub with dust clothes with chemical treatment.  
Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaked with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluen and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

**9.2 OPERATING PRECAUTIONS**

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  
 $V = \pm 200\text{mV}$  (Over and under shoot voltage).
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)  
And in lower temperature, response time (required time that brightness is stable after turned on ) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) A module has high frequency circuit. If you need to shield the electromagnetic noise, please do in yours. When a Back-light unit is operating, it sounds. If you need to shield the noise, please do in yours.

**9.3 ELECTROSTATIC DISCHARGE CONTROL**

**Product Specification**

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

**9.4 PRECAUTIONS FOR STRONG LIGHT EXPOSURE**

Strong light exposure causes degradation of polarizer and color filter.

**9.5 STORAGE**

When storing modules as spares for a long time, the following precautions are necessary.

(1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.

(2) The polarizer surface should not come in contact with any other object.

It is recommended that they be stored in the container in which they were shipped.

**9.6 HANDLING PRECAUTIONS FOR PROTECTION FILM**

(1) When the protection film is peeled off, static electricity is generated between the film and polarizer.

This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc..

(2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.


Please carefully peel off the protection film without rubbing it against the polarizer.

(3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.

(4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.


**A-1 Optical Characteristic Measurement Equipment and Method**

Product Specification

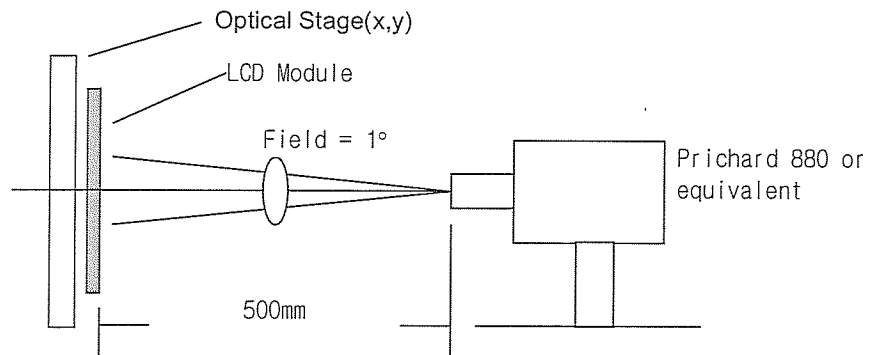


**A-2 Luminance**

<measuring points for luminance variation>

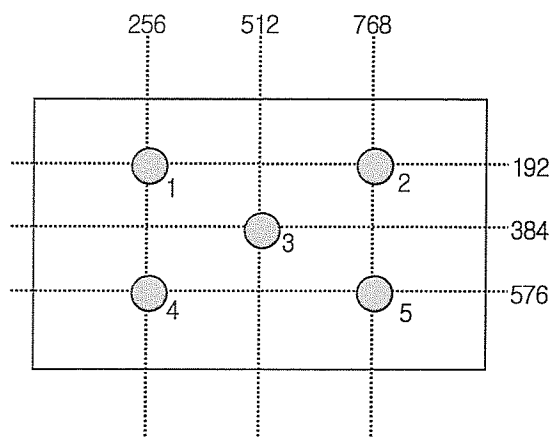


<measuring point for surface luminance >

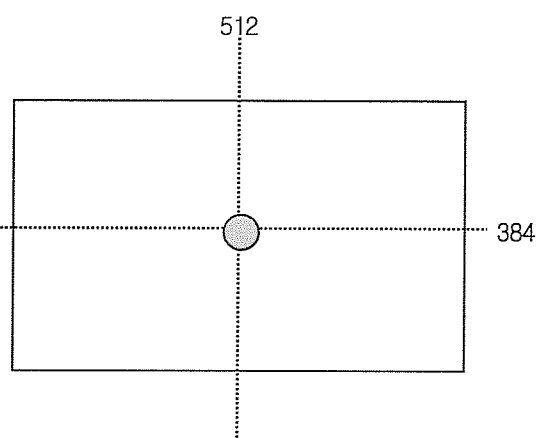

**A-3 Response Time**

The response time is defined as the following figure and shall be measured by switching the input signal for black and white.

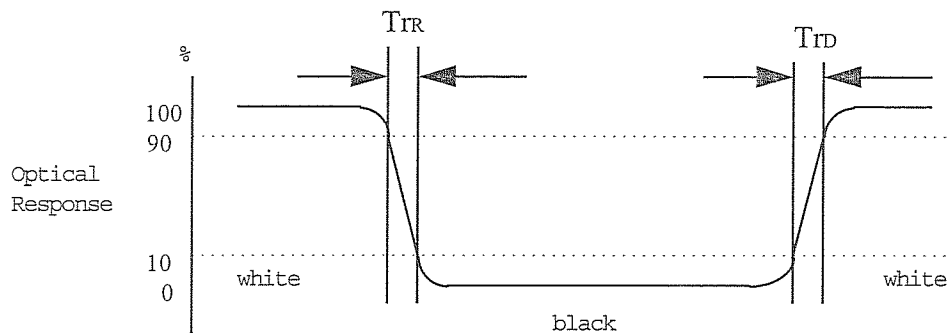

Product Specification

**A-4 Viewing angle**

<Definition of viewing angle range>

