



LP140WH6  
Liquid Crystal Display

Product Specification

## SPECIFICATION FOR APPROVAL

( ◆ ) Preliminary Specification

(   ) Final Specification

Title	14.0" HD TFT LCD
-------	------------------

Customer	
MODEL	

SUPPLIER	LG Display Co., Ltd.
*MODEL	LP140WH6
Suffix	TJA3

\*When you obtain standard approval,  
please use the above model name without suffix

APPROVED BY	SIGNATURE
/	_____
/	_____
/	_____

Please return 1 copy for your confirmation with your signature and comments.

APPROVED BY	SIGNATURE
J. W Park / Manager	_____
<b>REVIEWED BY</b>	
N. D Son / Engineer	_____
<b>PREPARED BY</b>	
D. Y. Kim / Engineer	
S. W. Kim / Engineer	_____

**Products Engineering Dept.  
LG Display Co., Ltd**

## Product Specification

Contents


No	ITEM	Page
	COVER	1
	CONTENTS	2
	RECORD OF REVISIONS	3
1	GENERAL DESCRIPTION	4
2	ABSOLUTE MAXIMUM RATINGS	5
3	ELECTRICAL SPECIFICATIONS	
3-1	ELECTRICAL CHARACTREISTICS	6-7
3-2	INTERFACE CONNECTIONS	8-9
3-3	LVDS SIGNAL TIMING SPECIFICATION	10-11
3-4	SIGNAL TIMING SPECIFICATIONS	12
3-5	SIGNAL TIMING WAVEFORMS	12
3-6	COLOR INPUT DATA REFERNECE	13
3-7	POWER SEQUENCE	14-15
4	OPTICAL SFECIFICATIONS	16-18
5	MECHANICAL CHARACTERISTICS	19-21
6	RELIABLITY	22
7	INTERNATIONAL STANDARDS	
7-1	ENVIRONMENT	22
8	PACKING	
8-1	PACKING FORM	23
9	PRECAUTIONS	24-25
A	APPENDIX. Enhanced Extended Display Identification Data	26-28



## Product Specification

## 1. General Description

The LP140WH6 is a Color Active Matrix Liquid Crystal Display. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 14.0 inches diagonally measured active display area with HD resolution (1366 horizontal by 768 vertical pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors. The LP140WH6 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP140WH6 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP140WH6 characteristics provide an excellent flat display for office automation products such as Notebook PC.

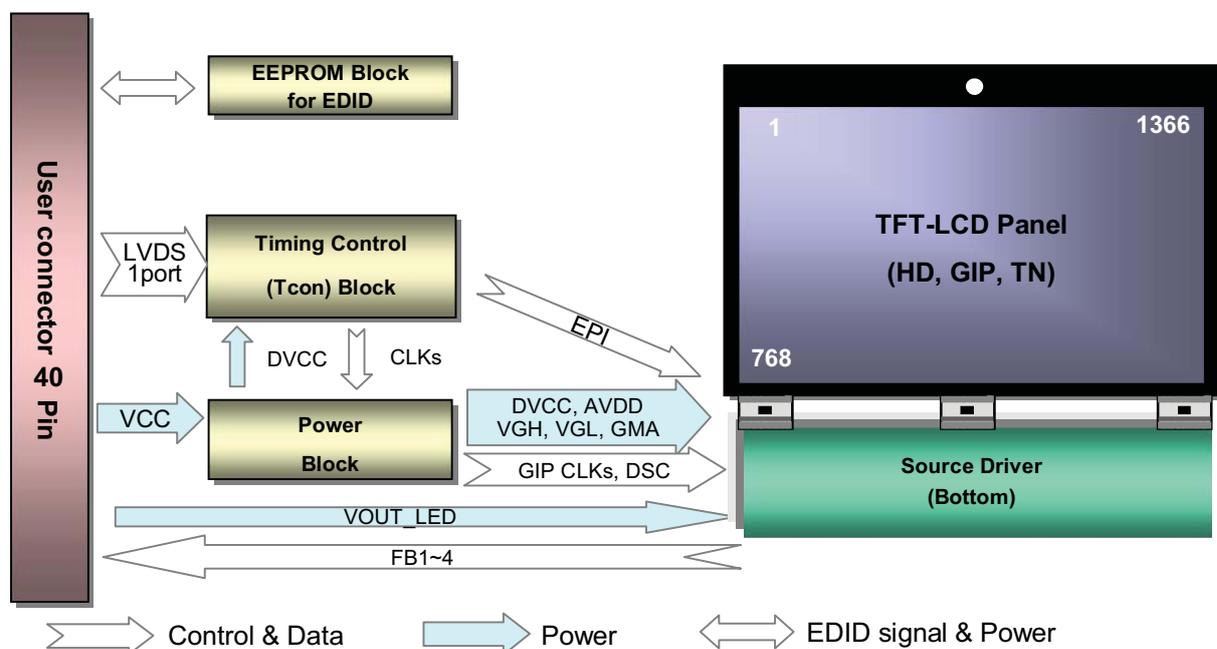

## General Features

Active Screen Size	14.0 inches diagonal
Outline Dimension	1) Panel (W/O PCB) : 322.0(H, Typ.) × 198.68(V, Typ.) [mm] 2) Panel (With PCB) : 322.0(H, Typ.) × 211.18(V, Typ.) [mm]
Pixel Pitch	0.2265mm × 0.2265 mm
Pixel Format	1366 horiz. by 768 vert. Pixels RGB strip arrangement
Color Depth	6-bit, 262,144 colors
Transmittance (With POL)	6.1% (Typ.)
Power Consumption	Logic : 0.9W (Typ.@ Mosaic)
Weight	190 g (Max.)
Display Operating Mode	Transmissive mode, normally white
Surface Treatment	Glare treatment (3H) of the front Polarizer
RoHS Compliance	Yes
BFR / PVC / As Free	Yes for all

## Product Specification


## 2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

**Table 1. ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Values		Units	Notes
		Min	Max		
Power Input Voltage	VCC	-0.3	4.0	Vdc	at 25 ± 5°C
Operating Temperature	TOP	0	50	°C	1
Storage Temperature	HST	-20	60	°C	1
Operating Ambient Humidity	HOP	10	90	%RH	1
Storage Humidity	HST	10	90	%RH	1

Note : 1. Temperature and relative humidity range are shown in the figure below.  
 Wet bulb temperature should be 39°C Max, and no condensation of water.

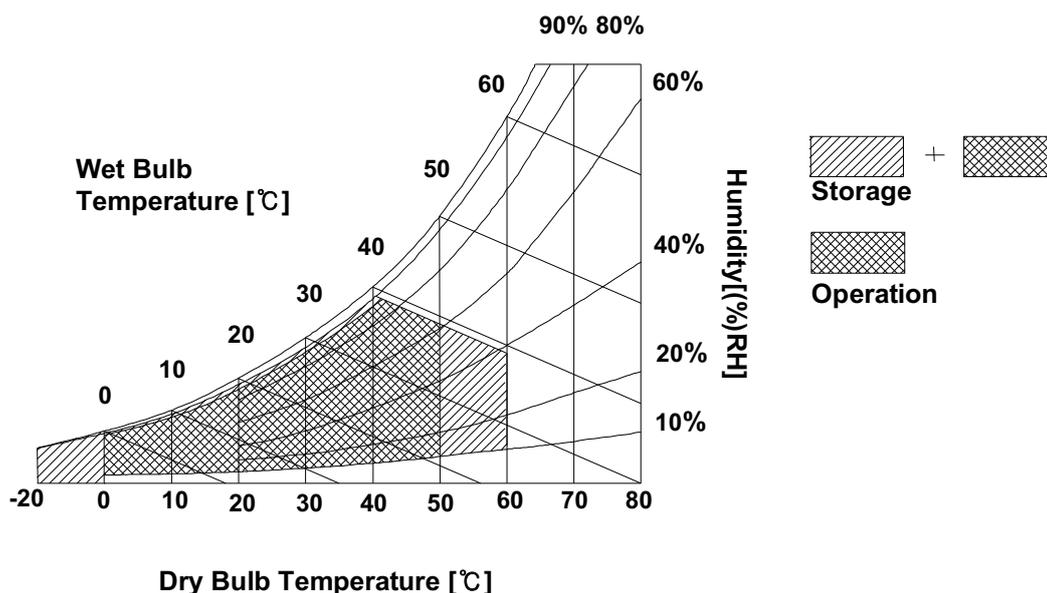



LP140WH6  
Liquid Crystal Display

Product Specification

### 3. Electrical Specifications

#### 3-1. Electrical Characteristics


The LP140WH6 requires one power inputs. The first logic is employed to power the LCD electronics and to drive the TFT array and liquid crystal.

Table 2. ELECTRICAL CHARACTERISTICS



Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
LOGIC :						
Power Supply Input Voltage	V <sub>CC</sub>	3.0	3.3	3.6	V	1
Power Supply Input Current	I <sub>CC</sub>	227	268	333	mA	2
Power Consumption	P <sub>CC</sub>	-	0.9	1.1	W	
Power Supply Inrush Current	I <sub>CC_P</sub>	-	-	1500	mA	3
LVDS Impedance	Z <sub>LVDS</sub>	90	100	110	Ω	4
LED : W/O LED Driver, 4string x 9ea						
LED Output Voltage	V <sub>OUT</sub>		28.8	30.6	V	
LED Output Current	I <sub>OUT</sub>		76	78	mA	
LED Power Consumption	P <sub>OUT</sub>		2.2	2.39	W	

Note)

- The measuring position is the connector of Board Ass'y and the test conditions are under 25°C, f<sub>v</sub> = 60Hz, Black pattern.
  - The specified I<sub>CC</sub> current and power consumption are under the V<sub>CC</sub> = 3.3V, 25°C, f<sub>v</sub> = 60Hz condition.
  - This Spec. is the max load condition for the cable impedance designing.
  - This impedance value is needed for proper display and measured from LVDS Tx to the mating connector.
- \*\* The below figures are the measuring V<sub>CC</sub> condition and the V<sub>CC</sub> control block LGD used.  
The V<sub>CC</sub> condition is same as the minimum of T1 at Power on sequence.

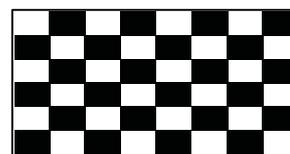

Mosaic Pattern

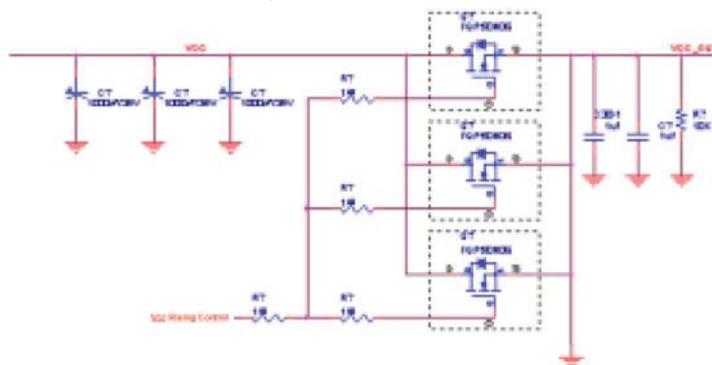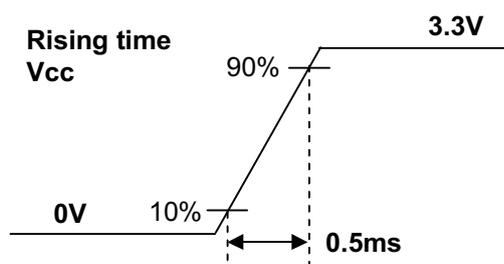



LP140WH6  
Liquid Crystal Display


Product Specification

※ LGD recommend below Electrical Characteristics of LED Driver.

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
BACKLIGHT : ( with LED Driver)						
LED Power Inrush Current	I <sub>LED_P</sub>	-	500	1000	mA	7
PWM Duty Ratio		1	-	100	%	8
PWM Jitter	-	0	-	0.2	%	9
PWM Impedance	Z <sub>PWM</sub>	20	40	60	kΩ	
PWM Frequency	F <sub>PWM</sub>	200	340	1000	Hz	10
PWM High Level Voltage	V <sub>PWM_H</sub>	2.2	-	5.3	V	
PWM Low Level Voltage	V <sub>PWM_L</sub>	0	-	0.3	V	
LED_EN Impedance	Z <sub>PWM</sub>	20	40	60	kΩ	
LED_EN High Voltage	V <sub>LED_EN_H</sub>	2.2	-	5.3	V	
LED_EN Low Voltage	V <sub>LED_EN_L</sub>	0	-	0.3	V	

7. The current and power consumption with LED Driver are under the V<sub>led</sub> = 12.0V , 25°C , Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).

8. The below figures are the measuring V<sub>led</sub> condition and the V<sub>led</sub> control block LGD used.  
V<sub>LED</sub> control block is same with V<sub>cc</sub> control block.

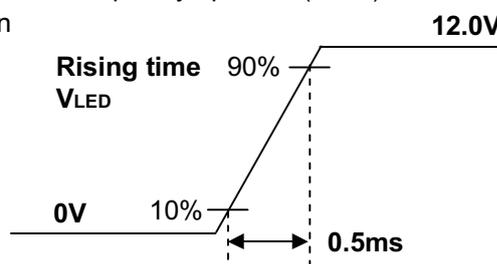

9. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.  
If Jitter of PWM is bigger than maximum, it may induce flickering.

10. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.



LP140WH6  
Liquid Crystal Display

## Product Specification

### 3-2. Interface Connections


This Board Ass'y employs two interface connections, a 40 pin connector used for the module electronics interface and the other connector used for the integral backlight system.

**Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)**

Pin	Symbol	Description	Notes
1	NC	No Connection	<b>[Interface Chip]</b> 1. LCD : <b>TLi, TL2343EP (LCD Controller)</b> Including LVDS Receiver.  2. System : LVDSRx or equivalent * Pin to Pin compatible with LVDS  <b>[Connector]</b> JAE HD1S040HA1 LSMtron GT05Q-40S-H10 or equivalent  <b>[Mating Connector]</b> 20345-#40E-## series or equivalent  <b>[LED Block]</b> LED block move to system set base  <b>[Connector pin arrangement]</b> Check B/Ass'y drawing (Page 20)
2	VCC	LCD Logic and driver power (3.3V Typ.)	
3	VCC	LCD Logic and driver power (3.3V Typ.)	
4	V EEDID	DDC Power (3.3V)	
5	BIST	BIST	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	ORX0-	Negative LVDS differential data input	
9	ORX0+	Positive LVDS differential data input	
10	GND	LCM Ground	
11	ORX1-	Negative LVDS differential data input	
12	ORX1+	Positive LVDS differential data input	
13	GND	LCM Ground	
14	ORX2-	Negative LVDS differential data input	
15	ORX2+	Positive LVDS differential data input	
16	GND	LCM Ground	
17	ORXC-	Negative LVDS differential clock input	
18	ORXC+	Positive LVDS differential clock input	
19	NC	No Connection	
20	NC	No Connection	
21	NC	No Connection	
22	GND	LCM Ground	
23	NC	No Connection	
24	NC	No Connection	
25	GND	LCM Ground	
26	NC	No Connection	
27	NC	No Connection	
28	GND	LCM Ground	
29	NC	No Connection	
30	NC	No Connection	
31	FB4	Regulated Current sink	
32	FB3	Regulated Current sink	
33	FB2	Regulated Current sink	
34	FB1	Regulated Current sink	
35	NC	No Connection	
36	NC	No Connection	
37	NC	No Connection	
38	VOUT	Boost output voltage	
39	VOUT	Boost output voltage	
40	VOUT	Boost output voltage	

## Product Specification

**Table 3-1. FPC CONNECTOR PIN CONFIGURATION (CN2)**

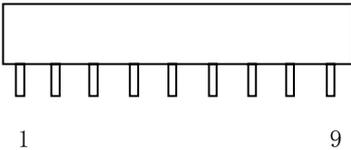Pin	Symbol	Description	Notes
1	VOUT_LED	LED Anode(Positive)	
2	FB1	LED Cathode (Negative)	
3	VOUT_LED	LED Anode(Positive)	
4	FB2	LED Cathode (Negative)	
5	VOUT_LED	LED Anode(Positive)	
6	FB3	LED Cathode (Negative)	
7	VOUT_LED	LED Anode(Positive)	
8	FB4	LED Cathode (Negative)	
9	N.C	No Connection	





## Product Specification

### 3-4. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

**Table 4. TIMING TABLE**

ITEM	Symbol	Min	Typ	Max	Unit	Note
DCLK	Frequency	$f_{CLK}$	68.1	70.0	73.0	MHz
Hsync	Period	$t_{HP}$	1462	1492	1536	tCLK
	Width	$t_{WH}$	32	48	62	
	Width-Active	$t_{WHA}$	1366	1366	1366	
Vsync	Period	$t_{VP}$	776	782	792	tHP
	Width	$t_{WV}$	2	5	8	
	Width-Active	$t_{WVA}$	768	768	768	
Data Enable	Horizontal back porch	$t_{HBP}$	34	42	60	tCLK
	Horizontal front porch	$t_{HFP}$	32	36	40	
	Vertical back porch	$t_{VBP}$	4	6	12	tHP
	Vertical front porch	$t_{VFP}$	2	3	4	

### 3-5. Signal Timing Waveforms

Condition : VCC = 3.3V

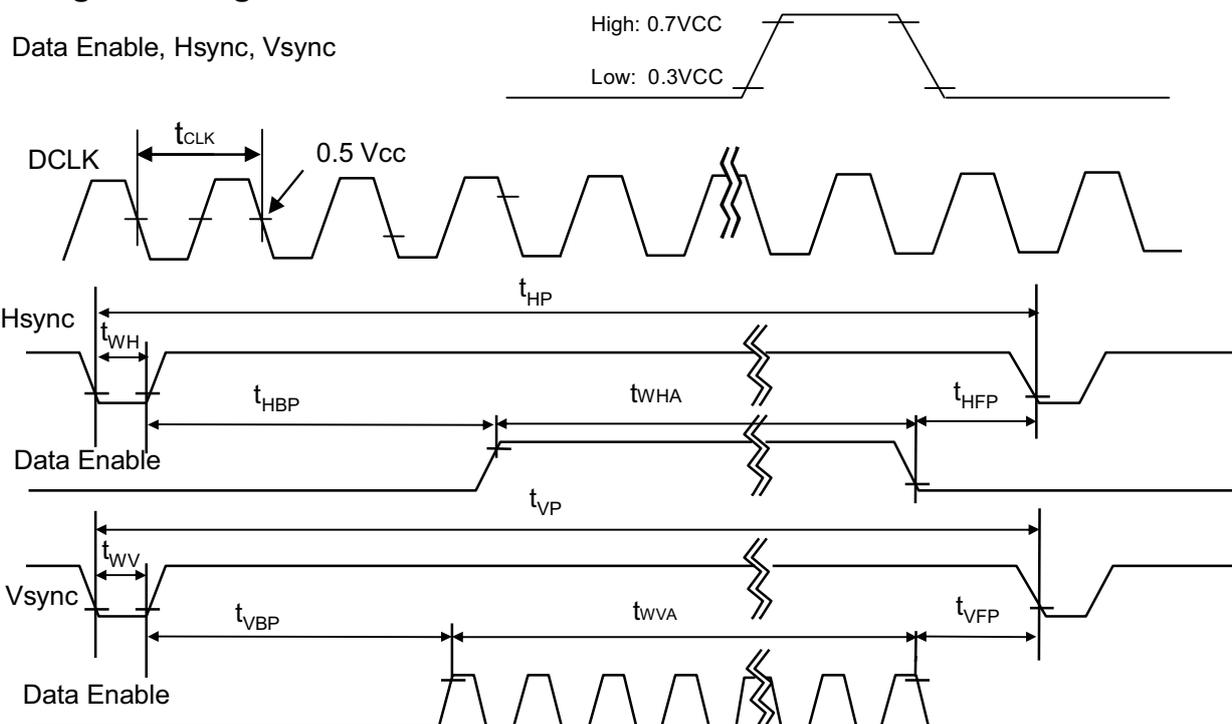



LP140WH6  
Liquid Crystal Display

Product Specification


### 3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

**Table 5. COLOR DATA REFERENCE**

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB		R3		LSB		MSB		G3		LSB		MSB		LSB			
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	...	...						...						...					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...	...						...						...					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...	...						...						...					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

### 3-7. Power Sequence

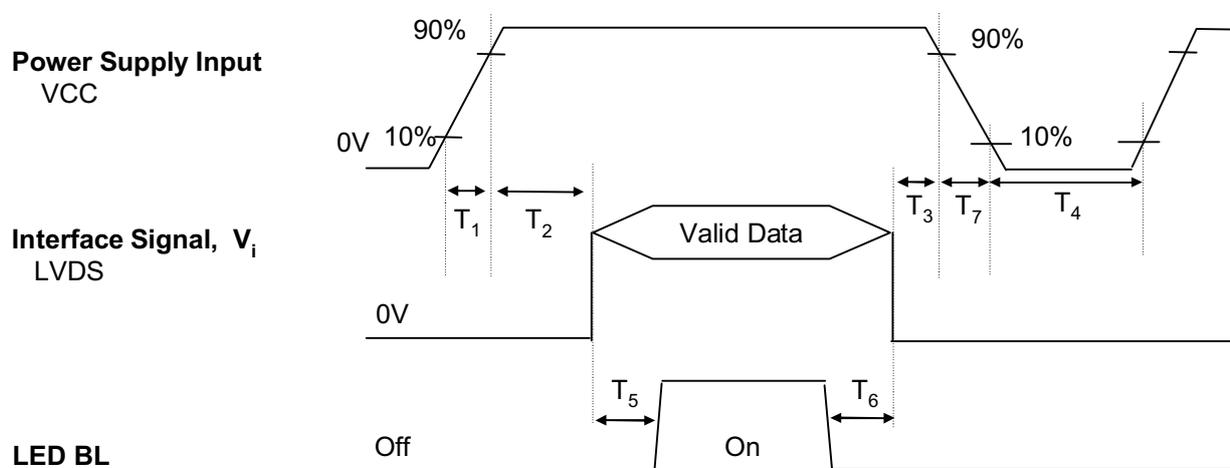
**Table 6. POWER SEQUENCE TABLE**

Logic Parameter	Value			Units
	Min.	Typ.	Max.	
T <sub>1</sub>	0.5	-	10	ms
T <sub>2</sub>	0	-	50	ms
T <sub>3</sub>	0	-	50	ms
T <sub>4</sub>	400	-	-	ms
T <sub>5</sub>	200	-	-	ms
T <sub>6</sub>	200	-	-	ms
T <sub>7</sub>	0.5	-	10	ms

Note)

1. Do not insert the mating cable when system turn on.
2. Valid Data have to meet "3-3. LVDS Signal Timing Specifications"
3. LGD recommend the rising sequence of LED after the Vcc and valid status of LVDS turn on.



LP140WH6  
Liquid Crystal Display

Product Specification

※ LGD recommend below sequence of LED Driver inputs.

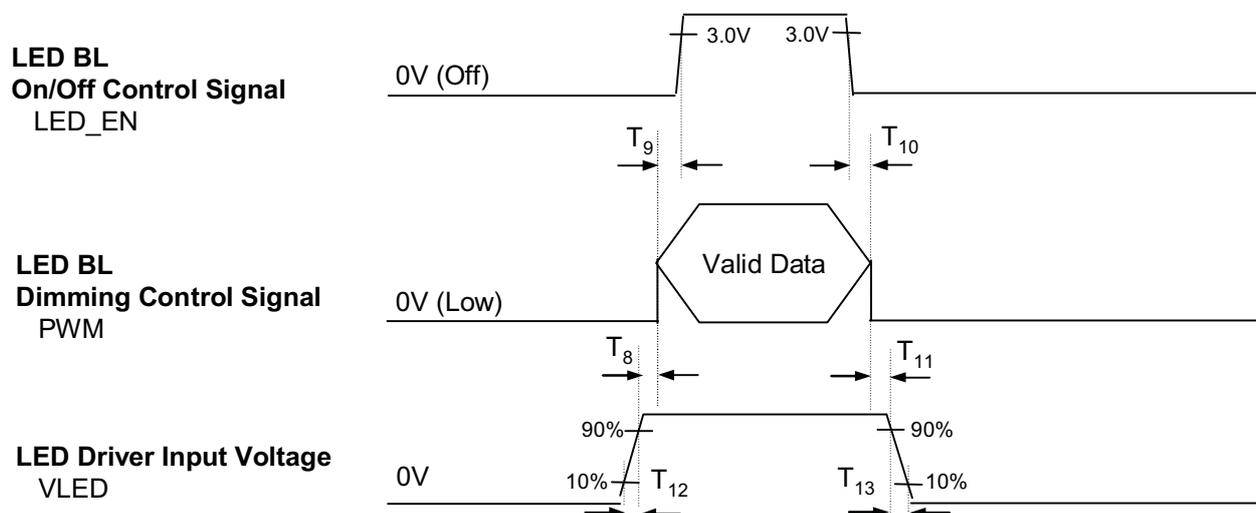


Table 6-1. POWER SEQUENCE TABLE

LED Parameter	Value			Units
	Min.	Typ.	Max.	
$T_8$	10	-	-	ms
$T_9$	0	-	-	ms
$T_{10}$	0	-	-	ms
$T_{11}$	10	-	-	ms
$T_{12}$	0.5	-	-	ms
$T_{13}$	0	-	5000	ms

Note)

1. LVDS, LED\_EN and PWM need to be on pull-down condition on invalid status.


## Product Specification

#### 4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 20 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\Theta$  equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

**FIG. 1 Optical Characteristic Measurement Equipment and Method**

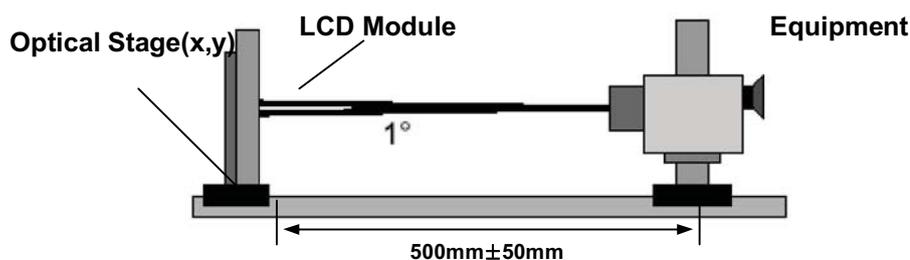

**Table 7. OPTICAL CHARACTERISTICS**

Ta=25°C, VCC=3.3V, fv=60Hz, f<sub>CLK</sub>= 70.0 MHz,  
 Backlight : LGD Standard

Parameter	Symbol	Values			Units	Notes
		Min	Typ	Max		
Transmittance (With POL)	%	-	6.1%			
Surface Luminance, white	L <sub>WH</sub>	170	200			
Contrast Ratio	CR	400	500	-		1
Response Time	Tr <sub>R</sub> + Tr <sub>D</sub>	-	16	25	ms	2
Color Coordinates						
RED	RX	0.556	0.586	0.616		
	RY	0.317	0.347	0.377		
GREEN	GX	0.311	0.341	0.371		
	GY	0.528	0.558	0.588		
BLUE	BX	0.127	0.157	0.187		
	BY	0.087	0.117	0.147		
WHITE	WX	0.283	0.313	0.343		
	WY	0.299	0.329	0.359		
Viewing Angle						
x axis, right( $\Phi=0^\circ$ )	$\Theta_r$	40	45	-	degree	3
x axis, left ( $\Phi=180^\circ$ )	$\Theta_l$	40	45	-	degree	
y axis, up ( $\Phi=90^\circ$ )	$\Theta_u$	10	15	-	degree	
y axis, down ( $\Phi=270^\circ$ )	$\Theta_d$	30	35	-	degree	
Gray Scale						
Color Gamut	C/G	-	45	-	%	4

※ It can be guaranteed only when B/L have sheets that LGD recommended. ( Prism & Diffuser sheet )



LP140WH6  
Liquid Crystal Display

### Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Response time is the time required for the display to transition from white to black (rise time, TrR) and from black to white(Decay Time, TrD). For additional information see FIG 2.

3. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 3.



4. Gray scale specification

\* fV = 60Hz

Gray Level	Luminance [%] (Typ)
L0	0.2
L7	1.2
L15	4.8
L23	10.9
L31	21.0
L39	34.8
L47	52.5
L55	74.2
L63	100.0

**FIG. 2 Response Time**

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

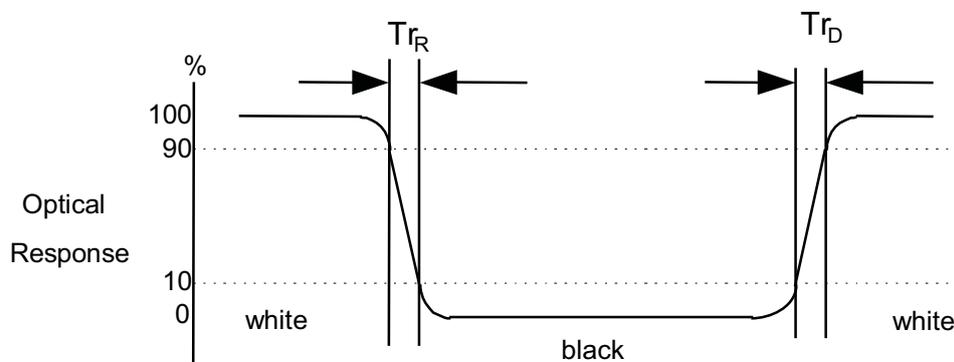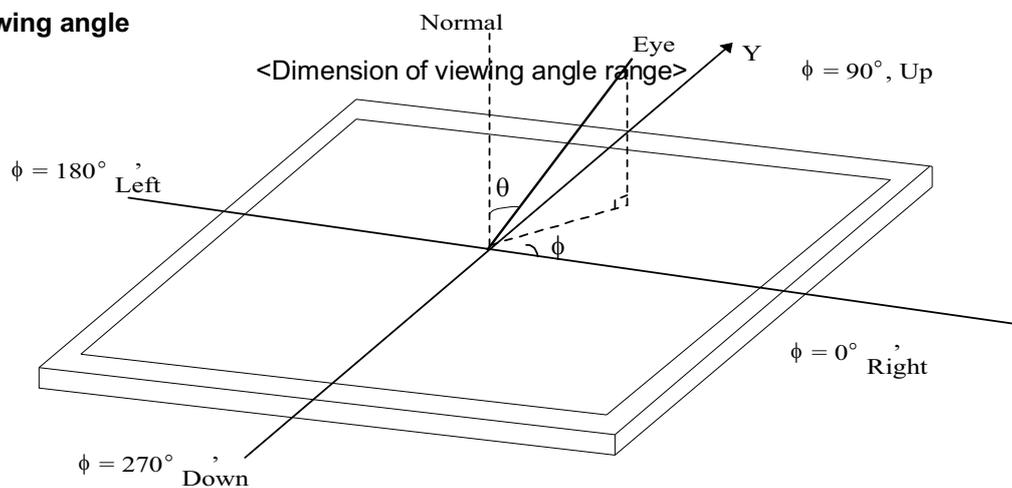**FIG. 3 Viewing angle**

## Product Specification

## 5. Mechanical Characteristics

The contents provide general mechanical characteristics for the model LP140WH6. In addition the figures in the next page are detailed mechanical drawing of the Board Ass'y.

Outline Dimension (Without PCB)	Horizontal (A)	322 ± 0.2mm
	Vertical (B)	198.68 ± 0.2mm
	Thickness	1.27mm (Typ.)
Active Display Area	Horizontal	309.40 mm
	Vertical	173.95 mm
Weight	190 g (Max.)	
Surface Treatment	Hard Coating(3H), Glare treatment of the front polarizer	







LP140WH6  
Liquid Crystal Display

## Product Specification

### 6. Reliability

Environment test condition

No.	Test Item	Conditions
1	High temperature storage test	Ta= 60°C, 240h
2	Low temperature storage test	Ta= -20°C, 240h
3	High temperature operation test	Ta= 50°C, 50%RH, 240h
4	Low temperature operation test	Ta= 0°C, 240h
5	Altitude operating storage / shipment	0 ~ 10,000 feet (3,048m) 24Hr 0 ~ 40,000 feet (12,192m) 24Hr

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

### 7. International Standards

#### 7-1. Environment

a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003



LP140WH6  
Liquid Crystal Display

## Product Specification

### 8. Packing

#### 8-1. Designation of Lot Mark

a) Lot Mark

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)  
E : MONTH

D : YEAR  
F ~ M : SERIAL NO.

Note

1. YEAR

Year	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Mark	A	B	C	D	E	F	G	H	J	K

2. MONTH

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.  
This is subject to change without prior notice.

#### 8-2. Packing Form

a) Package quantity in one box : 20pcs

b) Box Size : 445 mm X 373 mm X 165 mm

LP140WH6  
Liquid Crystal Display

## Product Specification

## 9. PRECAUTIONS

Please pay attention to the followings when you use this Board ass'y.

### 9-1. Assembly PRECAUTIONS

- (1) Please attach the surface transparent protective plate to the surface in order to protect the polarizer.  
Transparent protective plate should have sufficient strength in order to resist external force.
- (2) You should adopt radiation structure to satisfy the temperature specification.
- (3) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (4) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment.  
Do not touch the surface of polarizer for bare hand or greasy cloth.(Some cosmetics are detrimental to the polarizer.)
- (5) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (6) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (7) Do not open the case because inside circuits do not have sufficient strength.
- (8) Mechanical structure for backlight system should be designed for sustaining board ass'y safely.

### 9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  
 $V = \pm 200\text{mV}$ (Over and under shoot voltage)
- (2) Response time depends on the temperature.(In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)  
And in lower temperature, response time(required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (7) Please do not give any mechanical and/or electrical impact to board assy. Otherwise, it can't be operated its full characteristics perfectly.

LP140WH6  
Liquid Crystal Display

## Product Specification

**9-3. ELECTROSTATIC DISCHARGE CONTROL**

Board ass'y is composed of electronic circuits, so it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch drive IC directly. Panel ground path should be connected to metal ground.

**9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE**

Strong light exposure causes degradation of polarizer and color filter.

**9-5. STORAGE**

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.  
It is recommended that they be stored in the container in which they were shipped.

**9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM**

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.  
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the Board ass'y with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



LP140WH6  
Liquid Crystal Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
<b>Header</b>	0	00	Header	00	00000000
	1	01	Header	FF	11111111
	2	02	Header	FF	11111111
	3	03	Header	FF	11111111
	4	04	Header	FF	11111111
	5	05	Header	FF	11111111
	6	06	Header	FF	11111111
<b>Vendor / Product</b>	7	07	Header	00	00000000
	8	08	ID Manufacture Name LGD	30	00110000
	9	09	ID Manufacture Name	E4	11100100
	10	0A	ID Product Code 0327h	27	00100111
	11	0B	( Hex. LSB first)	03	00000011
	12	0C	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	13	0D	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	14	0E	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	15	0F	ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)	00	00000000
	16	10	Week of Manufacture - Optinal October 1th week : 40 weeks	28	00101000
	17	11	Year of Manufacture 2011 years	15	00010101
<b>Display</b>	18	12	EDID structure version # = 1	01	00000001
	19	13	EDID revision # = 4	04	00000100
	20	14	Video input Definition = Input is a Digital Video signal Interface , Colo Bit Depth : 6 Bits per Primary Color , Digital Video Interface Standard Supported: Digital Interface is not defined	90	10010000
	21	15	Horizontal Screen Size (Rounded cm) = 31 cm	1F	00011111
	22	16	Vertical Screen Size (Rounded cm) = 17 cm	11	00010001
	23	17	Display Transfer Characteristic (Gamma) = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
	24	18	Feature Support [ Display Power Management(DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported ,Supported Color Encoding Formats : RGB 4:4:4 & YCrCb 4:4:4 ,Other Feature Support Flags : No_sRGB, Preferred Timing Mode, No_Display is continuous frequency (Multi-mode_Base EDID and Extension Block).]	0A	00001010
<b>Vendor / Product</b>	25	19	Red/Green Low Bits (RxRy/GxGy)	37	00110111
	26	1A	Blue/White Low Bits (BxBY/WxWy)	45	01000101
	27	1B	Red X Rx = 0.586	96	10010110
	28	1C	Red Y Ry = 0.347	58	01011000
	29	1D	Green X Gx = 0.341	57	01010111
	30	1E	Green Y Gy = 0.558	8E	10001110
	31	1F	Blue X Bx = 0.157	28	00101000
	32	20	Blue Y By = 0.117	1E	00011110
	33	21	White X Wx = 0.313	50	01010000
	34	22	White Y Wy = 0.329	54	01010100
<b>Established</b>	35	23	Established timing 1 ( Optional_00h if not used)	00	00000000
	36	24	Established timing 2 ( Optional_00h if not used)	00	00000000
	37	25	Manufacturer's timings ( Optional_00h if not used)	00	00000000
<b>Standard Timing ID</b>	38	26	Standard timing ID1 ( Optional_01h if not used)	01	00000001
	39	27	Standard timing ID1 ( Optional_01h if not used)	01	00000001
	40	28	Standard timing ID2 ( Optional_01h if not used)	01	00000001
	41	29	Standard timing ID2 ( Optional_01h if not used)	01	00000001
	42	2A	Standard timing ID3 ( Optional_01h if not used)	01	00000001
	43	2B	Standard timing ID3 ( Optional_01h if not used)	01	00000001
	44	2C	Standard timing ID4 ( Optional_01h if not used)	01	00000001
	45	2D	Standard timing ID4 ( Optional_01h if not used)	01	00000001
	46	2E	Standard timing ID5 ( Optional_01h if not used)	01	00000001
	47	2F	Standard timing ID5 ( Optional_01h if not used)	01	00000001
	48	30	Standard timing ID6 ( Optional_01h if not used)	01	00000001
	49	31	Standard timing ID6 ( Optional_01h if not used)	01	00000001
	50	32	Standard timing ID7 ( Optional_01h if not used)	01	00000001
	51	33	Standard timing ID7 ( Optional_01h if not used)	01	00000001
	52	34	Standard timing ID8 ( Optional_01h if not used)	01	00000001
	53	35	Standard timing ID8 ( Optional_01h if not used)	01	00000001



LP140WH6  
Liquid Crystal Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #1	54	36	Pixel Clock/10,000 (LSB) 70 MHz @ 60Hz	58	01011000
	55	37	Pixel Clock/10,000 (MSB)	1B	00011011
	56	38	Horizontal Active (HA) (lower 8 bits) 1366 Pixels	56	01010110
	57	39	Horizontal Blanking (HB) (lower 8 bits) 126 Pixels	7E	01111110
	58	3A	Horizontal Active / Horizontal Blanking(HA HB) (upper 4:4bits)	50	01010000
	59	3B	Vertical Active (VA) 768 Lines	00	00000000
	60	3C	Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 14 Lines	0E	00001110
	61	3D	Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)	30	00110000
	62	3E	Horizontal Front Porch in pixels (HF) (lower 8 bits)36 Pixels	24	00100100
	63	3F	Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 48 Pixels	30	00110000
	64	40	Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Pluse Width in lines (VS) (lower 4 bits) 3 Line	35	00110101
	65	41	Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000
	66	42	Horizontal Vedio Image Size (mm) (lower 8 bits) 309 mm	35	00110101
	67	43	Vertical Vedio Image Size (mm) (lower 8 bits) 174 mm	AE	10101110
68	44	Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000	
69	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000	
70	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000	
71	47	Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_NEG (outside of V-sync) ]	19	00011001	
Timing Descriptor #2	72	48	Pixel Clock/10,000 (LSB) 48.3 MHz @ 40Hz	DE	11011110
	73	49	Pixel Clock/10,000 (MSB)	12	00010010
	74	4A	Horizontal Active (HA) (lower 8 bits) 1366 Pixels	56	01010110
	75	4B	Horizontal Blanking (HB) (lower 8 bits) 154 Pixels	9A	10011010
	76	4C	Horizontal Active / Horizontal Blanking(HA HB) (upper 4:4bits)	50	01010000
	77	4D	Vertical Active (VA) 768 Lines	00	00000000
	78	4E	Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 26 Lines	1A	00011010
	79	4F	Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)	30	00110000
	80	50	Horizontal Front Porch in pixels (HF) (lower 8 bits)36 Pixels	24	00100100
	81	51	Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 48 Pixels	30	00110000
	82	52	Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Pluse Width in lines (VS) (lower 4 bits) 3 Line	35	00110101
	83	53	Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)	00	00000000
	84	54	Horizontal Vedio Image Size (mm) (lower 8 bits) 309 mm	35	00110101
	85	55	Vertical Vedio Image Size (mm) (lower 8 bits) 174 mm	AE	10101110
86	56	Horizontal Image Size / Vertical Image Size (upper 4 bits)	10	00010000	
87	57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000	
88	58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000	
89	59	Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_NEG (outside of V-sync) ]	19	00011001	
Timing Descriptor #3	90	5A	Flag	00	00000000
	91	5B	Flag	00	00000000
	92	5C	Flag	00	00000000
	93	5D	Data Type Tag : Alphanumeric Data String (ASCII String)	FE	11111110
	94	5E	Flag	00	00000000
	95	5F	Dell P/N 1st Character = D	44	01000100
	96	60	Dell P/N 2nd Character = 7	37	00110111
	97	61	Dell P/N 3rd Character = 0	30	00110000
	98	62	Dell P/N 4th Character = P	50	01010000
	99	63	Dell P/N 5th Character = V	56	01010110
	100	64	EDID Revision Build Name = PT (ES) , Revision # = X10	0A	00001010
	101	65	Manufacturer P/N = 1	31	00110001
	102	66	Manufacturer P/N = 4	34	00110100
	103	67	Manufacturer P/N = 0	30	00110000
104	68	Manufacturer P/N = W	57	01010111	
105	69	Manufacturer P/N = H	48	01001000	
106	6A	Manufacturer P/N = 6	36	00110110	
107	6B	Manufacturer P/N (If < 13 char, then terminate with ASC II code 0Ah,set remaining char = 20h)	0A	00001010	



LP140WH6  
Liquid Crystal Display

Product Specification

APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
<b>Timing Descriptor #4</b>	108	6C	Flag	00	00000000
	109	6D	Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag : Descriptor Defined by manufacturer	00	00000000
	112	70	Flag	00	00000000
	113	71	Color Management [ No +2 FRC Support, True Color Depth : 6 bit ]	00	00000000
	114	72	Panel Type [ WLED] , Configuration [ Single light bar ], Number Lamp or LED Light Bar [ one ]	41	01000001
	115	73	Frame Rate Details [ Minimum Frame Rate : 40Hz, Maximum Frame Rate : 65Hz , Tcon provides native Intel DRRS / sDRRS support ]	31	00110001
	116	74	Controller Interface and Maximum Luminance [ PWM type, 200 nit ]	94	10010100
	117	75	Front Surface / Polarizer [ Glossy/True-life, No Transflective ], Pixel Structure [ RGB v-stripe ]	01	00000001
	118	76	Multi-Media Features [ Color Management : NTSC, Dynamic Backlight Control : No ]	00	00000000
	119	77	Multi-Media Features [ Motion Blur : No support , Active Gamma Control : No support ]	00	00000000
	120	78	Special Features [ Wireless Enhancement Hardware : No support , In-Cell Scanner : No support ]	00	00000000
	121	79	Special Features [ Number of LVDS channels or eDP lanes : one , Overdrive : No , Interface : LVDS , In-Cell Touch Support : No ]	01	00000001
	122	7A	Special Features [ BIST Support : yes , Electronic Privacy : No electronic privacy hardware support , 3-D Support : No ]	01	00000001
123	7B	(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	0A	00001010	
124	7C	(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000	
125	7D	(If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)	20	00100000	
<b>Checksum</b>	126	7E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	127	7F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	62	01100010