



Specification Rev. 0.0

1 / 54

TO: TOSHIBA CORPORATION

DATE: '09.09.22

Specification of 15.6" TFT/LCD
MODEL: LP156WD1 (TLB3)

Prepared	Checked	Approved	
C.J.PARK /Eng. Dept. /Engineer	S.R.KIM /Eng. Dept. /Manager	G.J.Kwon /Eng. Dept. /Senior Mgr	Brian Yoon /CS. Dept. /Senior Mgr

NOTICE of RECEIPTWe accepted this specification. **OME Operations, TOSHIBA Corp.**

Purchasing Dept.	Eng.	Senr. Eng.	Senr. Mgr
PC Hardware Dept.	Eng.	Senr. Eng.	Senr. Mgr

LG Display Co., Ltd.

Date: 2009. 09. 22

**- CONTENTS -**

Record of Revision	4
1. Scope	4
2. General Specifications	4
2.1. Features	
2.2. Dimensional Outline	
3. Absolute Maximum Ratings	9
3.1. Absolute Ratings of Environment	
3.2. Electrical Absolute Maximum	
3.3. Mechanical ratings	
3.4. The others	
4. Optical Characteristics	16
4.1 Test Conditions	
4.2 Optical Specifications	
5. Electrical Characteristics	21
5.1. TFT LCD module	
5.2. Backlight Unit	
5.3. Regulation	
6. Block Diagram	25
7. Input Terminal Pin Assignment	26
7.1 TFT LCD module	
7.2 Backlight Unit	
7.3 LVDS Transmitter	
7.4 Timing Diagrams of LVDS for Transmission	
7.5 Input Signal, Basic Display Colors and Gray Scale of Each Colors	
8. Interface timing	31
8.1 Timing Parameters	
8.2 Timing diagrams of interface signal	
8.3 Power On / Off Sequence	
9. Cosmetic Specification	33
9.1 Sampling	
9.2 Conditions of Inspections	
9.3 Defect modes	
9.4 Mechanical inspection	
9.5 Visual Inspection	
9.6 Electrical inspection	
10. Packing	37
11. Labels and Other parts Exchange	39
12. General Precaution	47
Appendix	49



Specification Rev. 0.0

3 / 54

Record of Revision

Date	Rev. No.	Sheet(New)	Item	Old	New	Reason
09'.09.22	0.0	All	-	-	-	First Edition
09'11.06	1.0					Final CAS

LG Display Co., Ltd.

Date: 2009. 09. 22

1. Scope


This specification is applicable to LCD manufacturer's 15.6" diagonal size TFT-LCD module "LP156WD1(TLB3)" designed for Personal Computer.

2. General Specification

2.1. Features

Item	Specifications
Display area (Active area)	344.16(H, typ.) × 193.59 (V, typ.) (15.6 inches diagonal)
Driving Method	TFT active matrix
Number of Pixels	1600 (W) × 900 (H) × R,G,B (WXGA) (pixels) ¹⁾
Pixel pitch	0.2151 mm x 0.2151 mm ¹⁾
Pixel Arrangement	RGB vertical stripes ¹⁾
Display color	262,144 (colors)
Display Mode	Transmissive mode, Normally white
Viewing Direction	6 o'clock (in direction of maximum contrast)
Surface Treatment	Anti-Glare treatment of the front polarizer (3H)
Interface	LVDS
Backlight	Single light emitting diode for side-lighting
Dimensional Outline	359.3±0.5 (W) × 209.5 ±0.5 (H) / 5.7(Max) (D) (mm)
Bezel Opening	349.8±0.5 (W) × 197.1±0.5 (H) (mm)
Weight	450g (Typ.) / 470g (Max.)

Note 1)

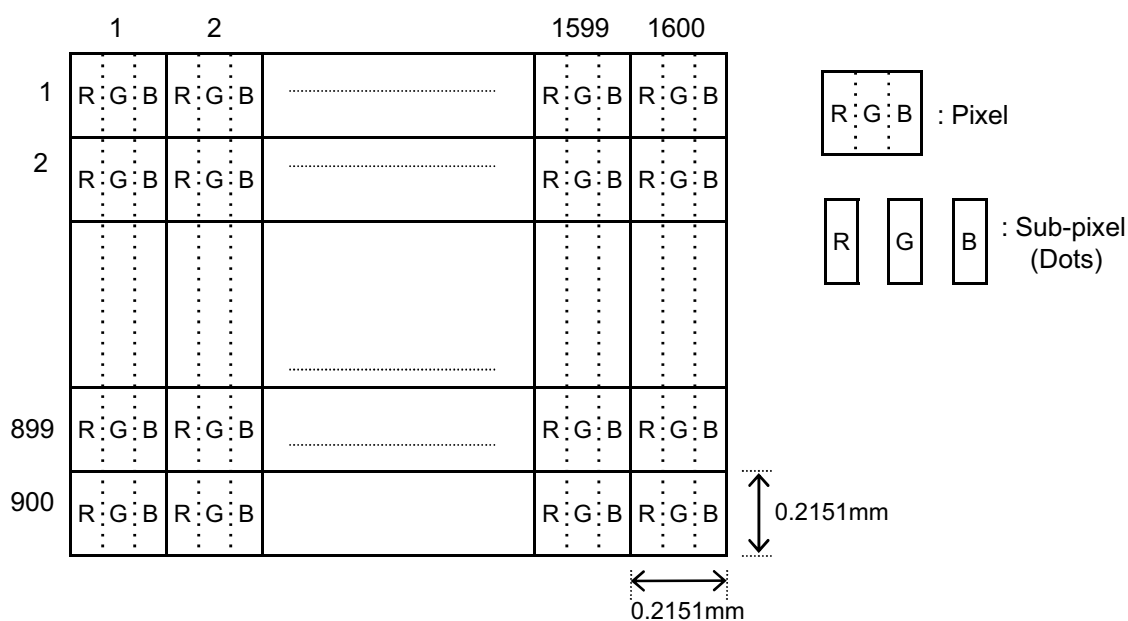


LG Display Co., Ltd.

Date: 2009. 09. 22

2.2. Dimensional Outline

(Front figure)

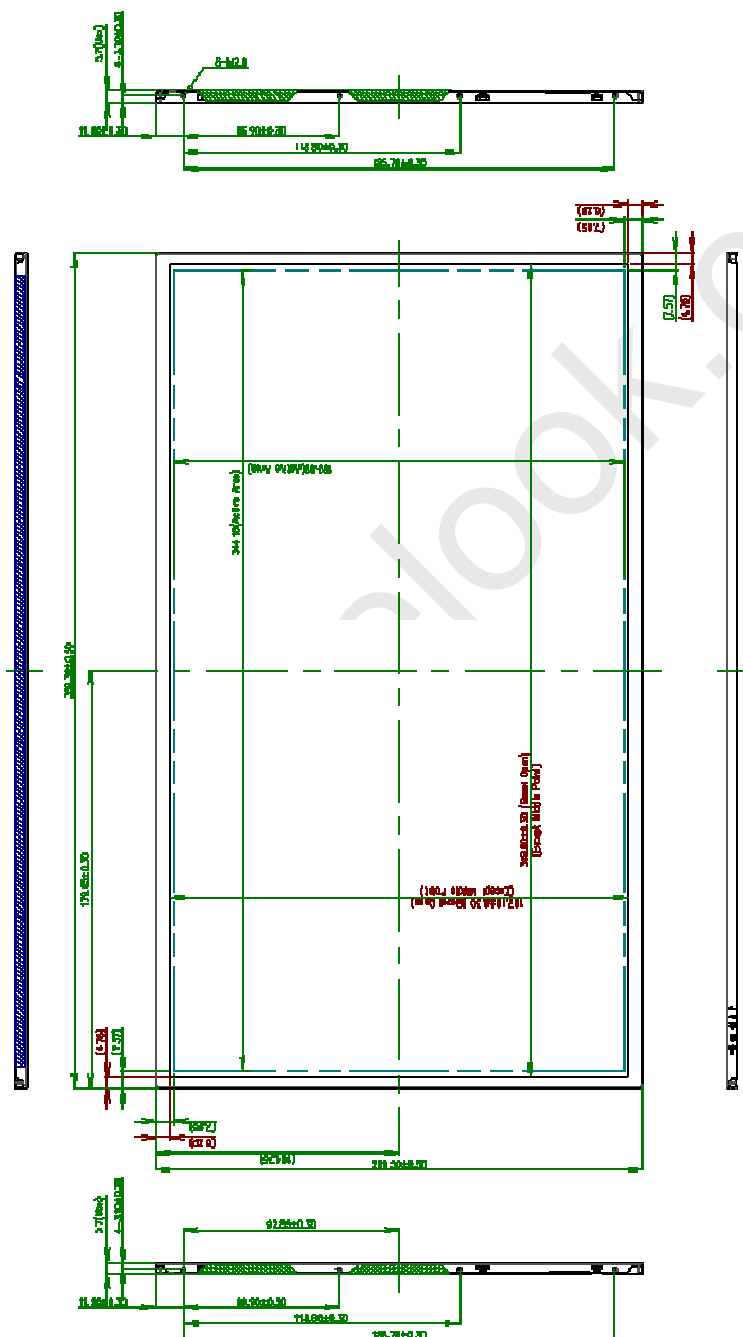


* The size that related with metal bezel includes tape thickness (0.05mm)


LG Display Co., Ltd.

Date: 2009. 09. 22

(Rear figure)

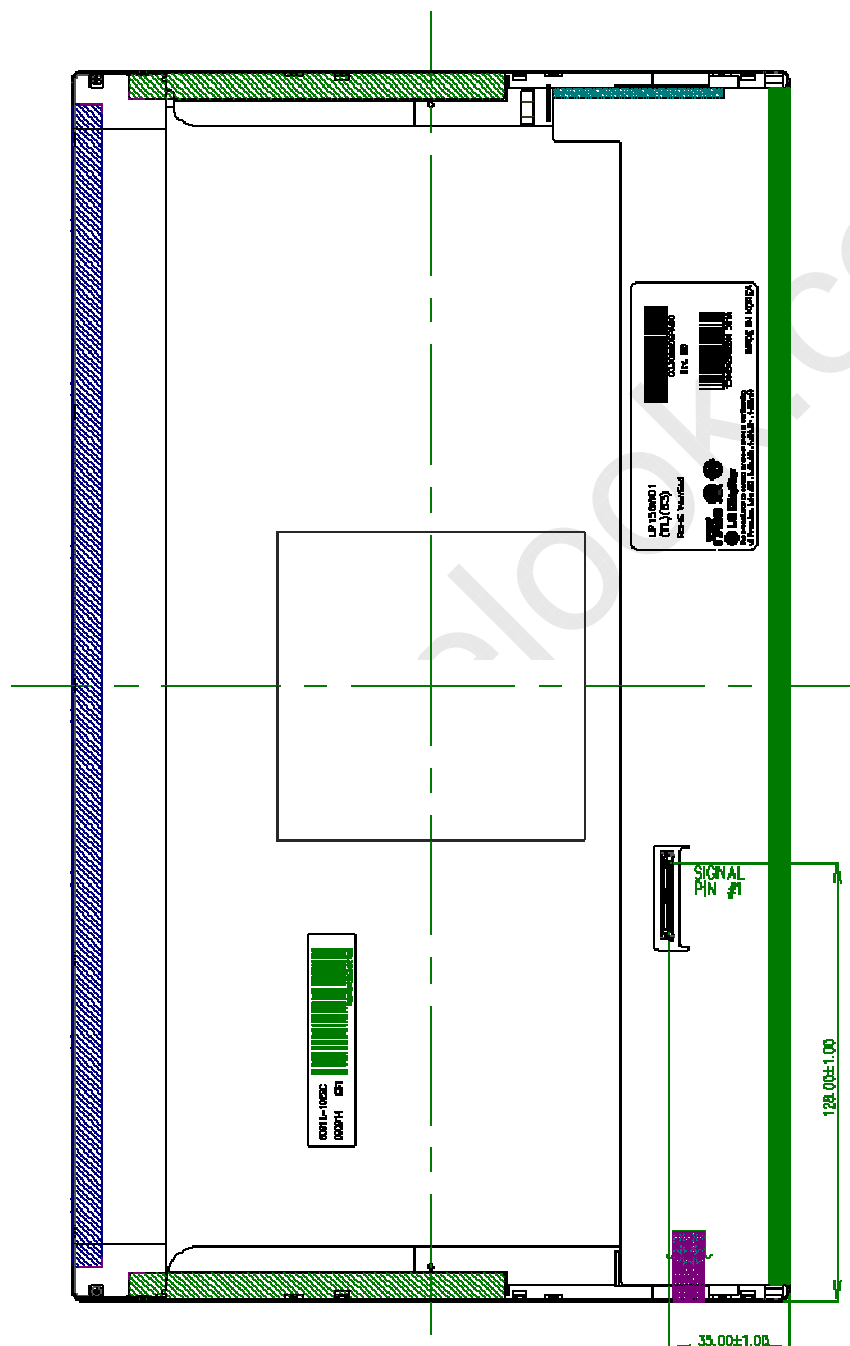


(Detail description of side mounting screw)

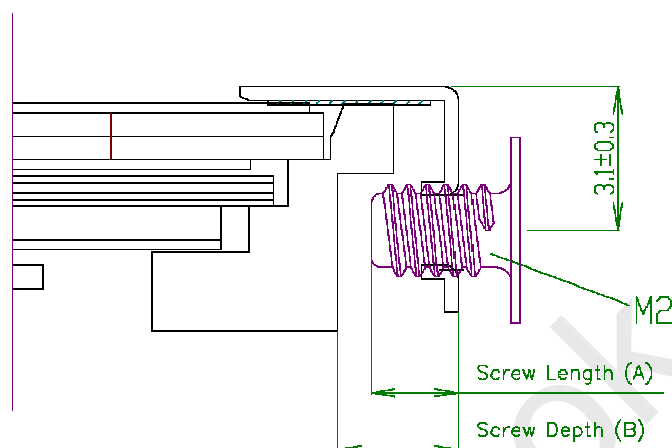

- * Mounting Screw Length (A)
= 2.0(Min) / 2.5(Max)
- * Mounting Screw Hole Depth (B)
= 2.5(Min)
- * Mounting hole location : 3.7(typ.)
- * Torque : 2.0 kgf.cm(Max)
(Measurement gauge : torque meter)

Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.

(Detail description of height of LCM back side & TAB Zone)

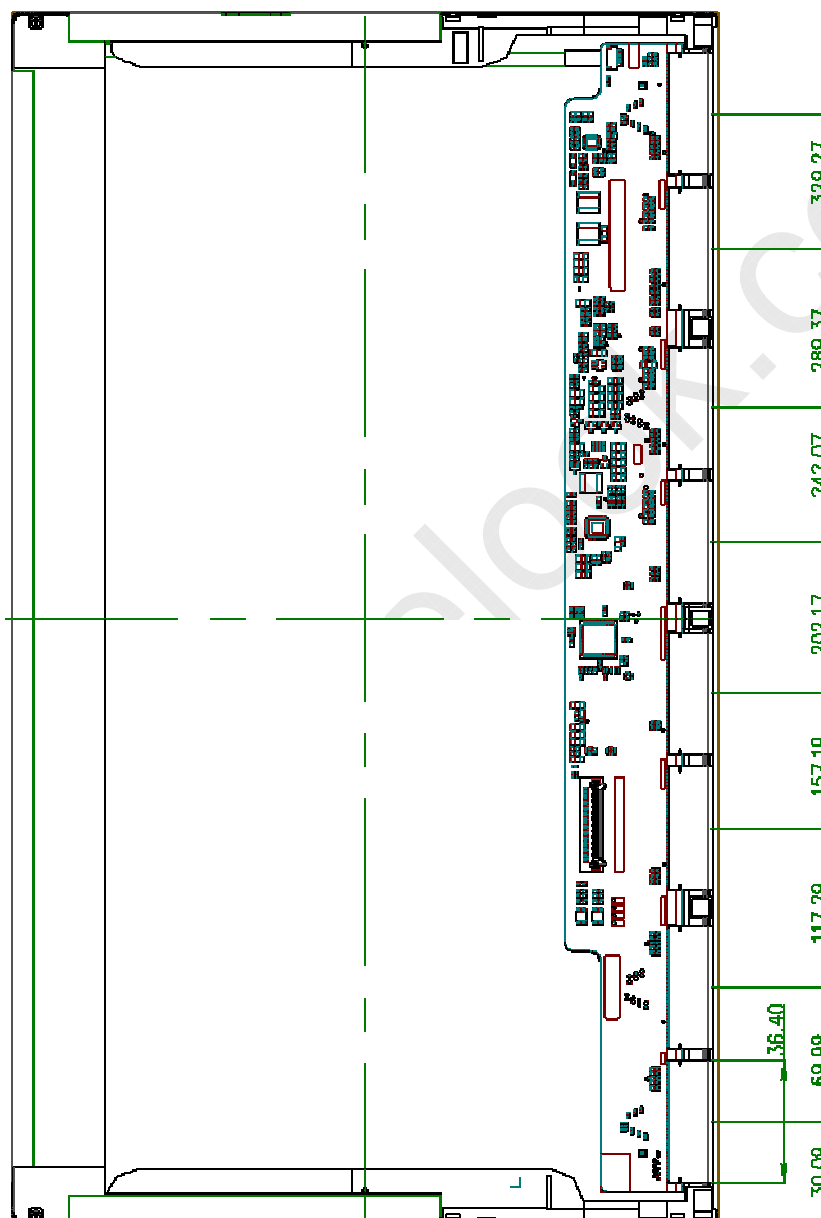


3. Absolute Maximum Ratings

3.1. Absolute Ratings of Environment

Item	Symbol	Min	Max	Unit	Note
Operating Ambient Temperature	T _{OP}	0	+50	°C	(1)
Operating Temperature for Panel	-	0	+50	°C	(2)
Storage Temperature	T _{STG}	-20	+60	°C	(1)
Operating Ambient Humidity	H _{OP}	10	90	%RH	(1)
Storage Humidity	H _{STG}	10	90	%RH	(1)
Air Pressure	-	57	101.3	kPa	Operation
Air Pressure	-	12	101.3	kPa	Non-operation
Altitude	-	-	3	Km	Operation
Altitude	-	-	12	Km	Non-operation

Note 1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39°C Max, and no condensation of water.

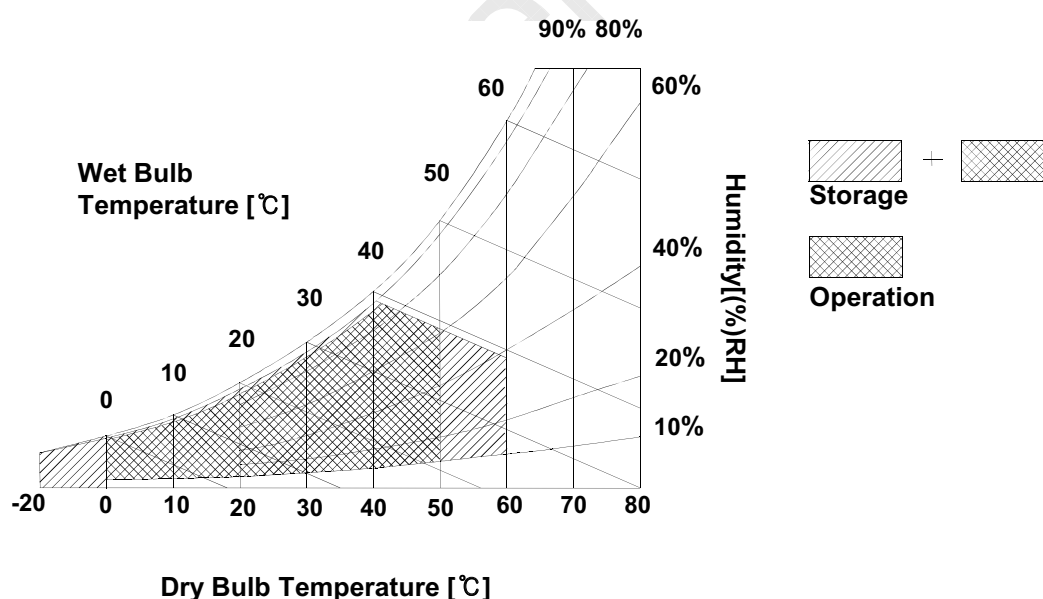

Note 2) The surface temperature caused by self heat radiation of cell itself is specified on this item.



3.2. Electrical Absolute Maximum

(1) TFT LCD Module

Item	Symbol	Min	Max	Unit	Note
Power Supply Voltage	V _{DD}	-0.3	+4.0	V	at 25 ± 5°C
Logic Input Voltage	V _{IN}	-0.3	V _{DD} +0.3	V	LVDS interface

(2) Back Light Unit

Item	Symbol	Min	Max	Unit	Note
LED Driver Supply Voltage	V _L	-0.3	23	V	damage to the device
LED PWM / LED_EN Voltage	V _{PWM} V _{LED_EN}	-0.3	6.0	V	



3.3. Mechanical Ratings

Test Item	Test Conditions	Note
Mechanical Vibration	Frequency Range 5 - 500 Hz, 14.7m/s ² 1.5G) constant, 0.5Hrs each axis (X, Y, Z direction).	Non Operation
	Frequency Range 5 - 500 Hz, 4.9m/s ² (0.5G) constant, 0.5Hrs each axis (X, Y, Z direction).	Operation
Mechanical Shock	* 240G, Pulse width 2 ms, Sine Wave, $\pm X$, $\pm Y$, $\pm Z$ direction. 70G, Pulse width 11ms, Sine Wave $\pm X$, $\pm Y$, $\pm Z$ direction. * Note) Normal function is only checking points.	Non Operation
LCD fix condition -> See Note (2)	98 m/s ² (10G), Pulse width 11 ms, Sine Wave, $\pm X$, $\pm Y$, $\pm Z$ direction.	Operation
Pressure Resistanace -> See Note (1)	No Destruction with the force 196 N (20 kgf, 16 mm in diameter) to the display surface at the vertical direction. No Destruction with the force 294.2 N (30 kgf, 30 mm in diameter) to the back of the display surface at the vertical direction. Only the breakage of below items will not happen after test. (Glass.LED & Circuit parts)	Non Operation Fig 1-1 Fig 1-2 Fig 1-3
Connector tension test	Input connector : With 50 times of connector trial there must be no damage to the shape and functionaly. Back light connector : With 50 times of connector trial there must be no damage to the shape and functionaly.	Non Operation
Assured torque value at side-mout part	M2 : Max 2.5 kgf	Non Operation
Rescrewed test	15 times under Max. torque	Non Operation
Tapping test	Tapping area : All bezel(Metal cover) side, LCD: Full-screen gray (L32). "Ripple (Pooling)" can not be seen in Active Area Tapping Force: Max 3kgf.cm	Operation

Definitions of failure for judgment shall be as follows:


- (1) Function of the module should be maintained.
- (2) Current consumption should be smaller than the specified value.
- (3) Appearance and display quality should not have distinguished degradation.
- (4) Luminance should be larger than the minimum value specified in optical specification.

Note 1)

(1) The compression condition of front side

(a) Compression point : 12 points (refer to Fig 1-1)

(b) Compression condition: 20kgf, 3 sec, Tool diameter: 16 mm in diameter (refer to Fig 1-3)

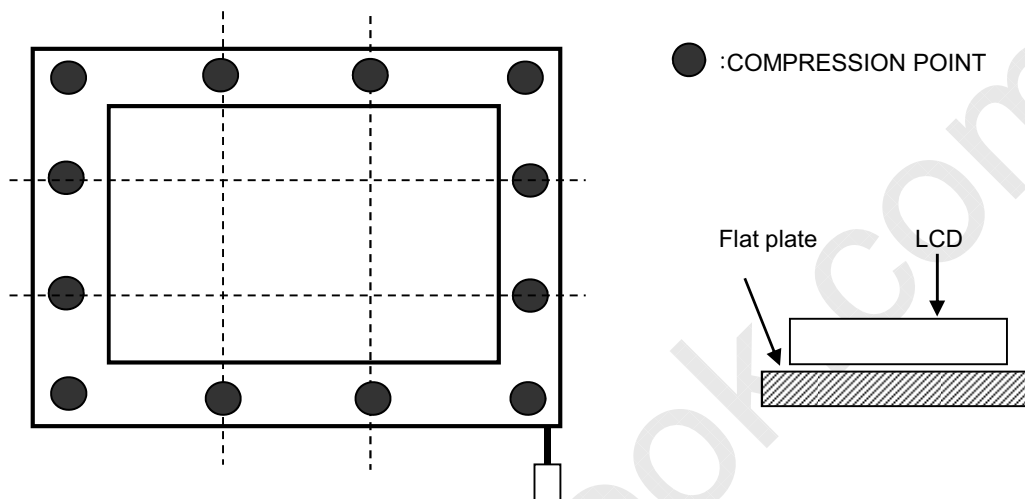


[Fig 1-1]


(2) The compression condition of rear side

(a) Compression point : 21 points (refer to Fig 1-2)

(b) Compression condition : 30kgf, 3 sec, Tool radius: 30 mm in diameter (refer to Fig 1-3)

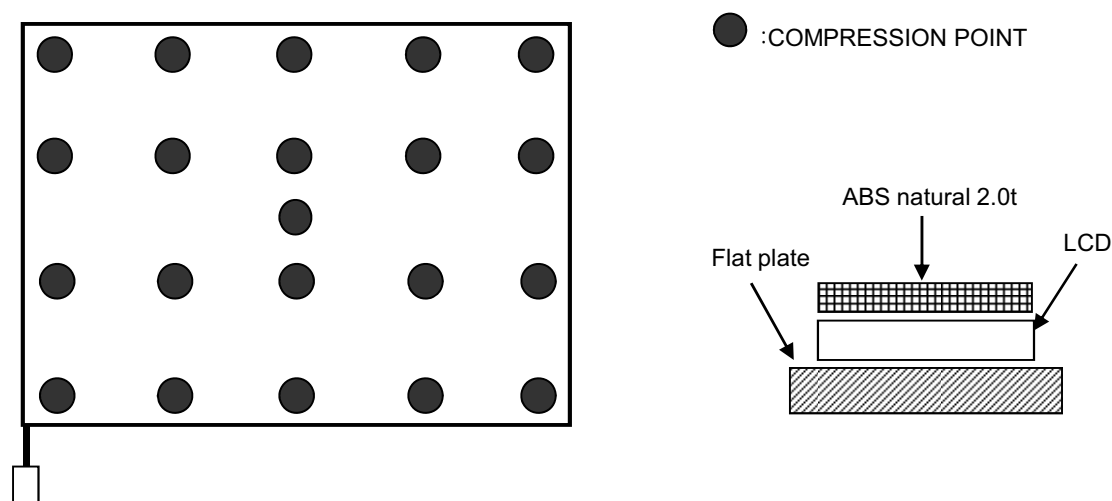

[Fig 1-2]

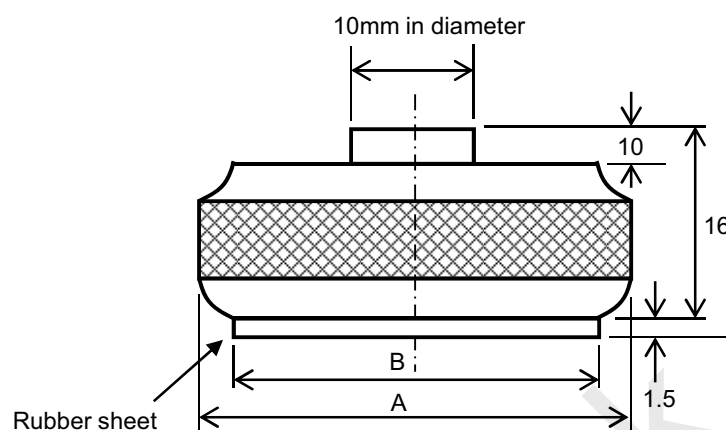


[Fig 1-3]

(3) Dimension of the compression jig

- (a) compression jig for front side A = 16 mm in diameter
B = 16 mm in diameter
- (b) compression jig for rear side A = 30 mm in diameter
B = 28 mm in diameter

Note 2) LCD fixing condition for z direction.

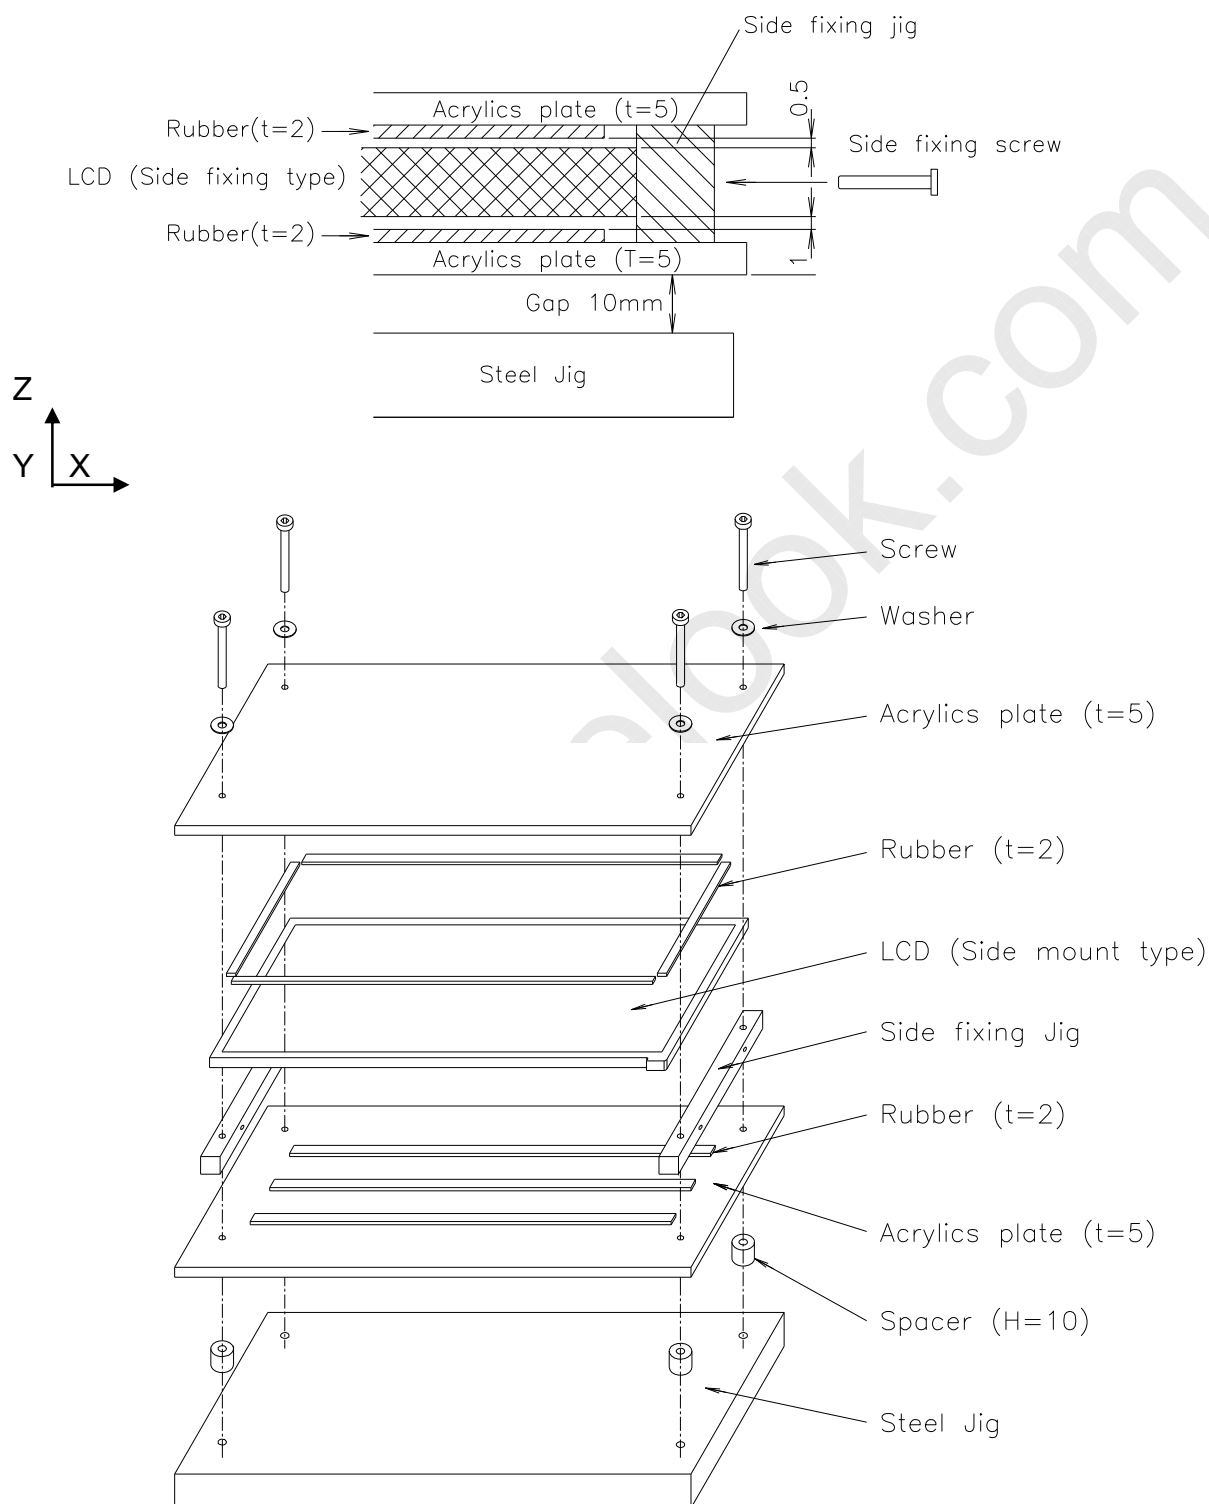



3.4. The Others

(1) Static electricity pressure resistance

Item	Testing conditions	Operation	Non Operation
Contact discharge	150pF, 330 ohm	± 8KV	± 10 kV
Air discharge	150pF, 330 ohm	± 15KV	± 20 KV

(2) Sound noise

There should be no uncomfortable noise.

Being used under whatever surrounds, when power on/off, the panel should not generate uncomfortable noise. And regarding specified values are negotiated if it is needed.

(3) Open / Short

No smoke, no fiery at any open/ short test

(4) MTBF : 50,000 Hr (except for backlight LED)



4. Optical Characteristics

4.1. Test Conditions

Ambient Temperature : Ta 25±5°C

Ambient Humidity : Ha 65±20%RH

Supply Voltage : VDD 3.3V

Input Signal : According to typical value in "Electrical Characteristics"

LED Driver Supply Voltage : VLED = 12V

LED PWM Duty : DPWM = 100%

The measuring method is shown in 4.2. The following items are measured under stable conditions. The optical characteristics should be measured in a dark room (Screen illuminance < 2 lx) or equivalent state with the methods shown in Note (6).

4.2. Optical Specifications

Item		Symbol	Conditions		Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center 1 Point)		CR	$\theta=0^{\circ}, \phi=0^{\circ}$		300	400	-	-	(2), (6)
Response Time		t_{TOTAL} ($t_{ON}+t_{OF}$.F)			8	16	ms ms	(3)	
Average luminance (5 Point Average)		Y_L			190	220	-	cd/m ²	*V _{LED} =12V D _{PWM} =100% Gray Scale Level = L63 (White)
Cross Modulation		D _{SHA}			-	-	2.0	%	(5)
Luminance Uniformity Chromaticity	Red	R _x	Viewing normal angle		0.587	0.617	0.647	-	(1), (6) PR650 Only for Color Coordinate
		R _y			0.319	0.349	0.379		
	Green	G _x			0.284	0.314	0.344		
		G _y			0.567	0.597	0.627		
	Blue	B _x			0.121	0.151	0.181		
		B _y			0.027	0.057	0.087		
White	W _x								
	W _y								
Viewing Angle	Hor.	θ_L	CR>=10	$\phi = 180$	60	65	-	deg.	(Color Coordinate of the R,G,B is based on LGD's equipment, and Color Coordinate of the W is based on LGD's equipment)
		θ_R		$\phi = 0^{\circ}$	60	65	-		
	Ver.	θ_{up}		$\phi = 90^{\circ}$	50	55	-		
		θ_{Low}		$\phi = -90^{\circ}$	50	55	-		
	Hor.	θ_L	CR>=5	$\phi = 180$	65	70	-		
		θ_R		$\phi = 0^{\circ}$	65	70	-		
Ver.	θ_{up}	$\phi = 90^{\circ}$		55	60	-			
	θ_{Low}	$\phi = -90^{\circ}$		55	60	-			
13 Points White Variation		δW	$\theta=0^{\circ}, \phi=0^{\circ}$		-	-	1.6		(7)
13 Points CR Variation		δC_R	Viewing		-	-	2.0		(7)
White Variation		dL	normal angle		-	-	2.0		(8)

LG Display Co., Ltd.

Date: 2009. 09. 22


Attach the LED current – Luminance characteristics. The range of LED current is shown in 3.2 (2)

A. Present CR Variation(13Point) Spec is based on PR-880 Equipment and can be changed by the measuring equipment.

Item	Gray level	Conditions	Min.	Typ.	Max.	Unit	Note
Normalized luminance at each gray level	63	$\theta=0^\circ, \phi=0^\circ$ Viewing normal angle	100.00	100.00	100.00	%	(1), (6) (Center 1 Point)
	55		58.10	74.17	87.00		
	47		38.50	52.49	66.50		
	39		21.60	34.82	48.30		
	31		11.50	21.01	33.20		
	23		3.00	10.90	21.40		
	15		0.50	4.25	12.70		
	7		0.10	1.00	5.80		
	0		0.00	0.13	1.20		

At normal viewing direction, during displaying the L0-L63 gray scale bar, luminance intensity inversion can not be seen.

Note 1) Definition of viewing angle θ and ϕ

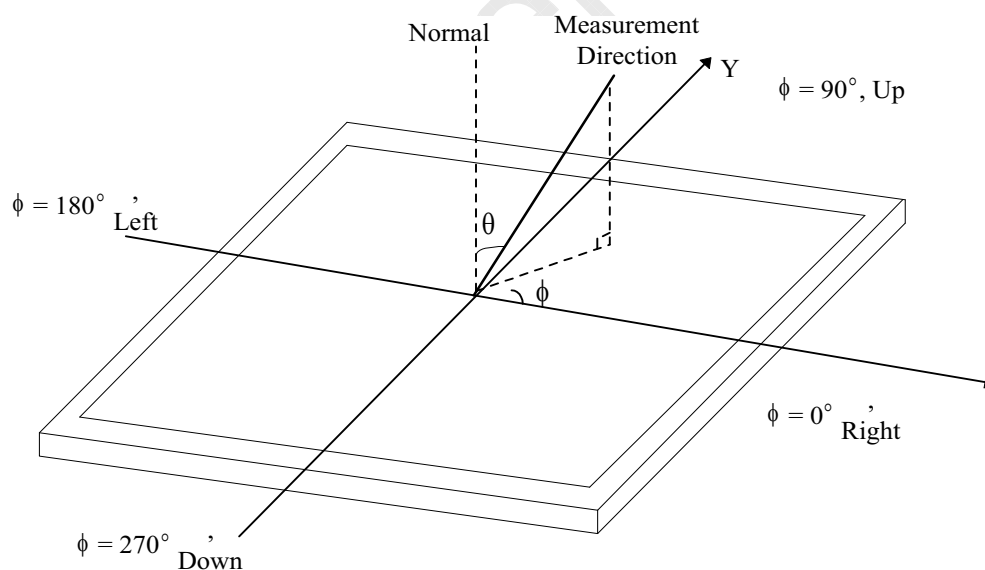

Note 2) LCD fixing condition for z direction.


The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L63 / L0$$

L63 : Luminance on the white raster (gray scale level L63)

L 0 : Luminance on the black raster (gray scale level L0)

Note 3) Definition of response time

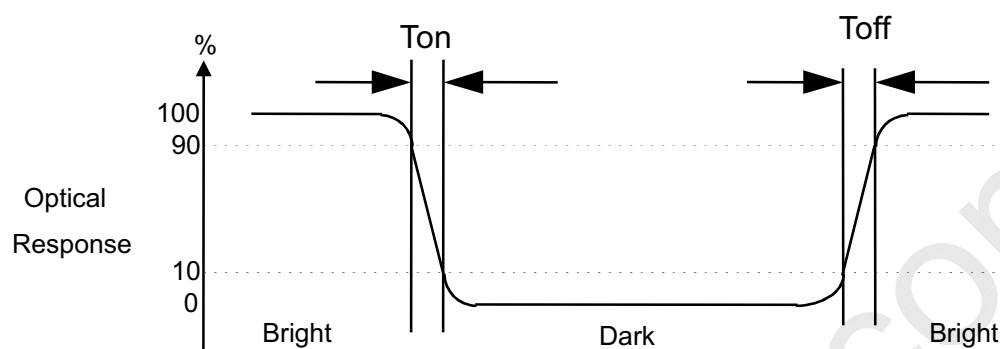

Note 4) Definition of surface luminance of white

Measure the luminance of white at Center point. Surface luminance of white Y_L


Note 5) Definition of Cross Modulation (D_{SHA})

$$D_{SHA} = |Y_B - Y_A| / Y_A \times 100 (\%)$$

Where:


Y_A = Luminance of measured location without darkest gray pattern (cd/m^2)

Y_B = Luminance of measured location with darkest gray pattern (cd/m^2)

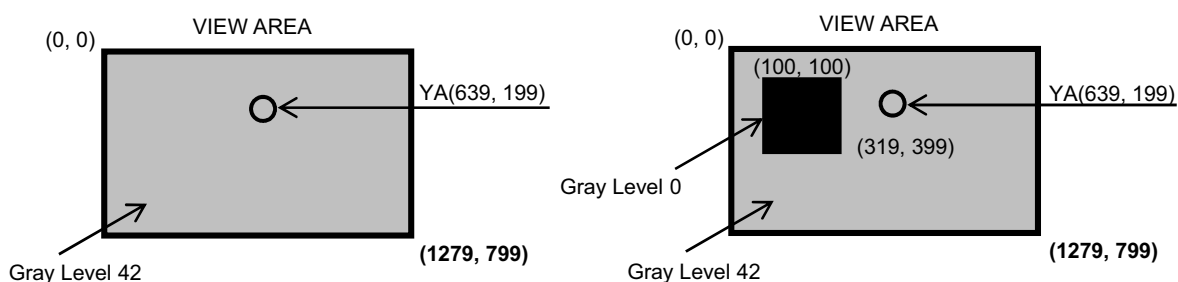


Note 6) Measuring setup

The measurement suppose to be executed after stabilized the panel at given temperature during 30 min. The measurement shall be executed 30 minutes after lighting at rating. The luminance of white should be typical luminance (Typical Condition IL=6.0mA). In order to stable the luminance, LCD s hall not be got winds.

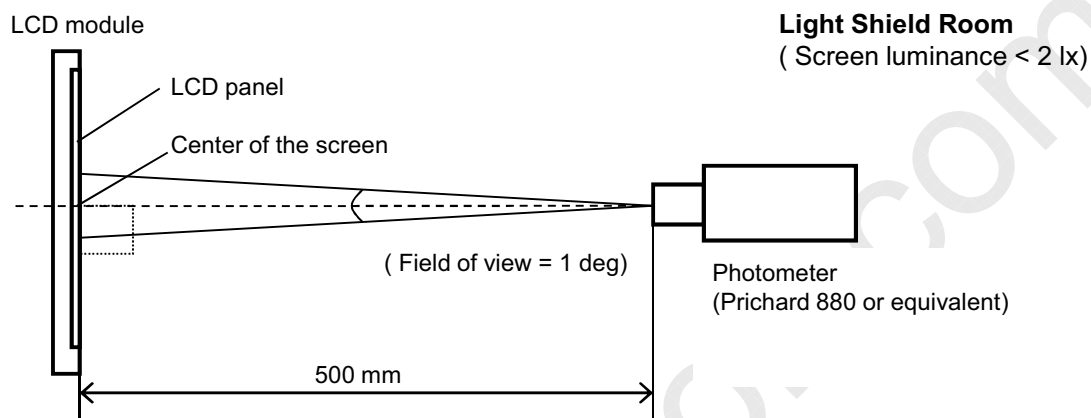Note 7) Definition of 13 points white variation δW , CR variation δC_R

δW = Maximum luminance of 13 points / Minimum luminance of 13 points


δC_R = Maximum CR 13 points / Minimum CR of 13 points

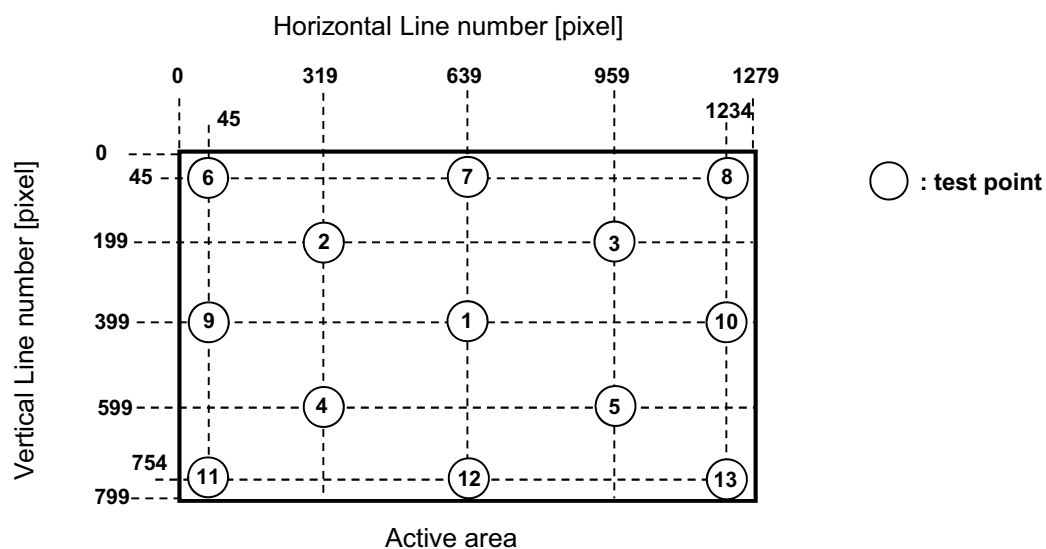


Note 8) Definition of White Variation dL : measure the luminance of white at 13 × 11 points.

$$dL = [| L(x,y) - L(x+l, y+j) | / (L(x,y) \times D(x+l, y+j))] \times 100 \text{ (%/mm)}$$

where $2 \leq x \leq 15, 2 \leq y \leq 11, l = \pm 1, j = \pm 1$

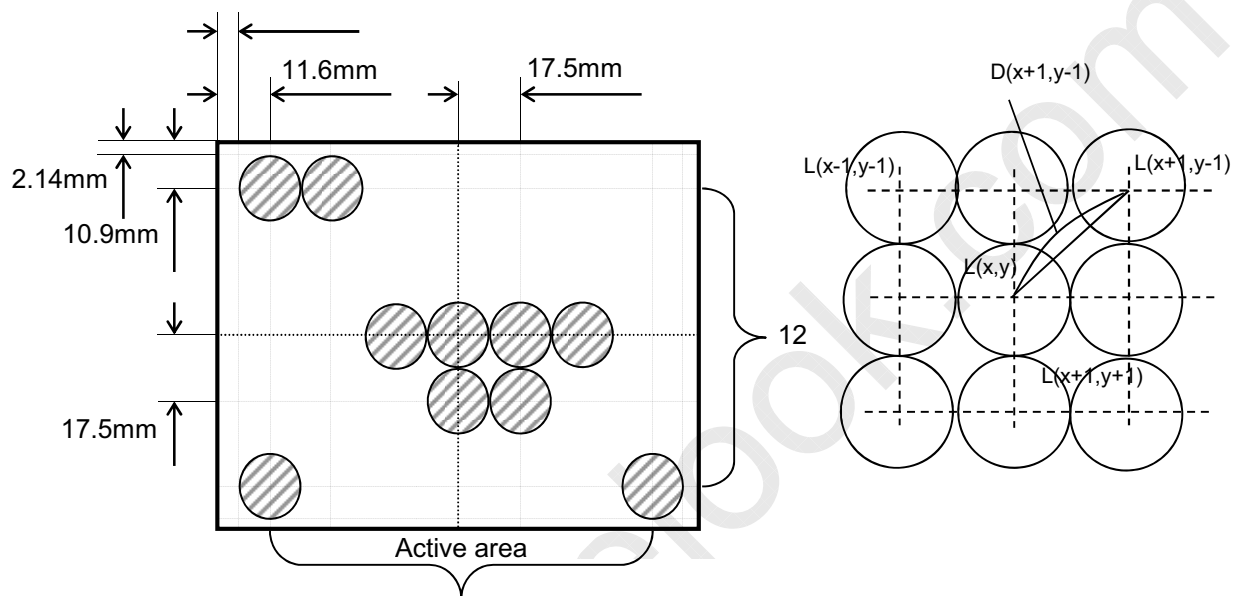

Measuring Spot 16
(Field of View : 2deg. Measuring Distance : 500 mm)

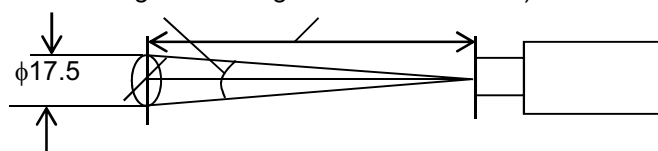

5. Electrical Characteristics

5.1. TFT LCD module

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	3.0	3.3	3.6	V	
Differential Input Threshold Voltage	High	V_{th}		-	+100	mV	
	Low	V_{tl}	-100	-	-	mV	
Rush Current		I_{RUSH}	-	-	1.5	A	(5)
Power Supply Current	White(L63)	I_{DD}	356	418	481	mA	(3), (4) (a)
	Mosaic		397	467	537		(3), (4) (b)
	Max. Pattern		442	520	598		(3), (4) (c)


Note 1) The module should be always operated within these ranges. The "Typ." shows the recommended value.

Note 2) Recommended LVDS transmitter : SN75LVDS84 (made by TI)
LVDS receiver included in this module is SW0617.(2 chip)


Note 3) Typical condition as follows. : fV= 60Hz, fDCLK = 48.875 MHz, V_{DD} = 3.3V, DC current.

Note 4) Power dissipation check pattern.



(a) White pattern

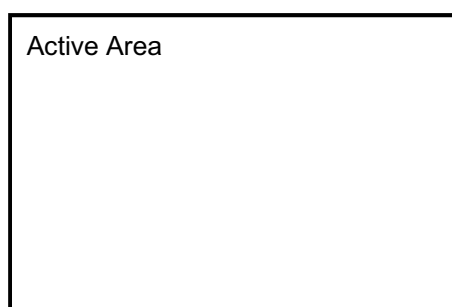


(b) Mosaic pattern

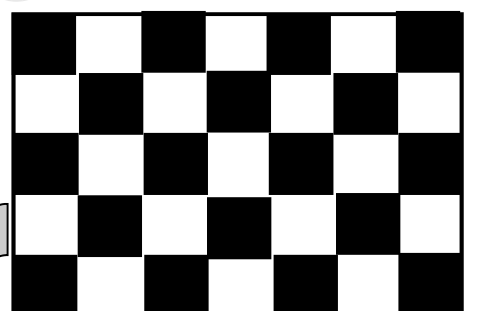


(C) Max. pattern

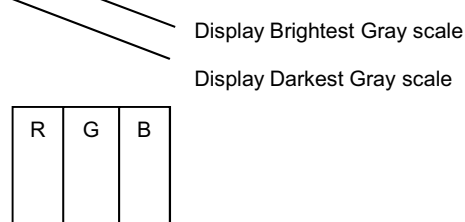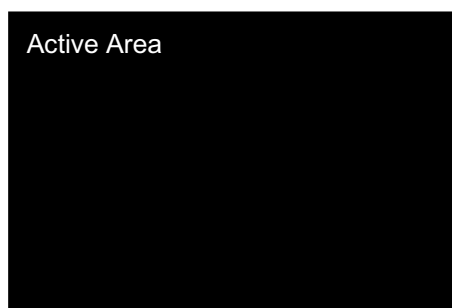

Note 5) Measuring condition of rush current.

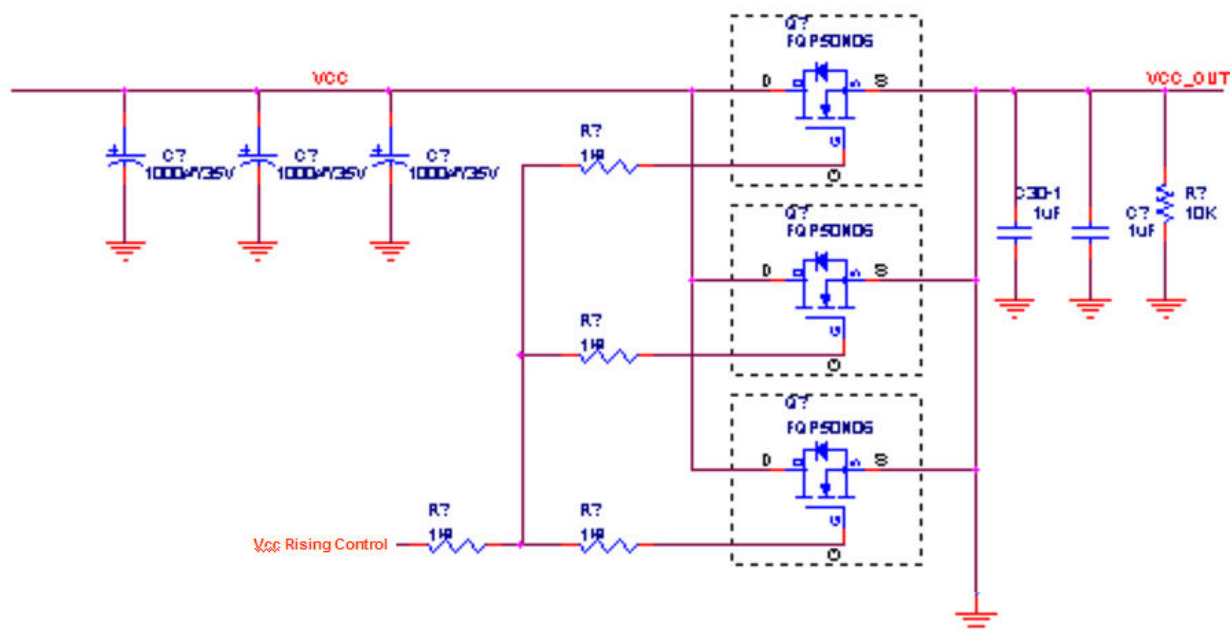


V_{DD} rising time is 500us

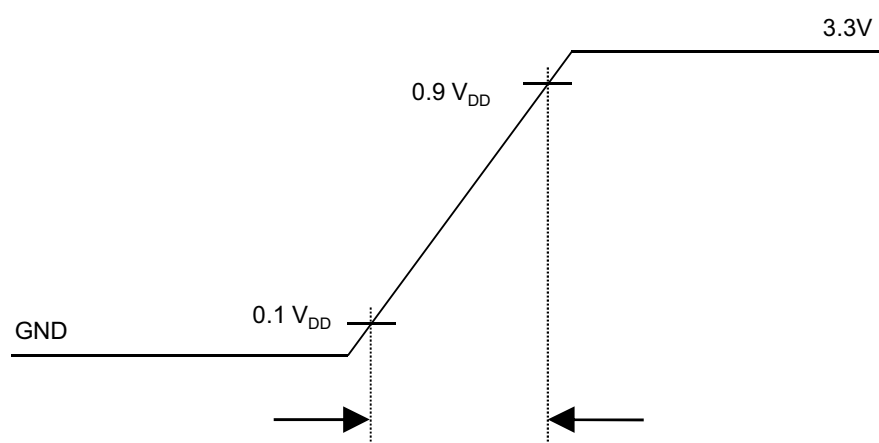

5.2. Backlight Unit

Parameter	Symbol	Values			Unit	Notes
		Min	Typ	Max		
BACKLIGHT : (with LED Driver)						
LED Power Input Voltage	V _{LED}	7.0	12.0	21.0	V	1
LED Power Input Current	I _{LED}	-	430	478	mA	2
LED Power Consumption	P _{LED}	-	5.16	5.73	W	3
LED Power Inrush Current	I _{LED_P}	-	-	1500	mA	4
PWM Duty Ratio		5	-	100	%	5
PWM Jitter	-	0	-	0.2	%	6
PWM Impedance	Z _{PWM}	20	40	60	kΩ	
PWM Frequency	F _{PWM}	190	-	1000	Hz	7
PWM High Level Voltage	V _{PWM_H}	3.0	-	5.3	V	
PWM Low Level Voltage	V _{PWM_L}	0	-	0.5	V	
LED_EN Impedance	Z _{PWM}	20	40	60	kΩ	
LED_EN High Voltage	V _{LED_EN_H}	3.0	-	5.3	V	
LED_EN Low Voltage	V _{LED_EN_L}	0	-	0.5	V	
Life Time		12,000	-	-	Hrs	8

1. This impedance value is needed for proper display and measured from LVDS Tx to the mating connector.
2. The measuring position is the connector of LCM and the test conditions are under 25℃.
3. The current and power consumption with LED Driver are under the V_{led} = 12.0V , 25℃, Dimming of Max luminance and White pattern with the normal frame frequency operated(60Hz).
4. The below figures are the measuring V_{led} condition and the V_{led} control block LGD used.
V_{LED} control block is same with V_{cc} control block.

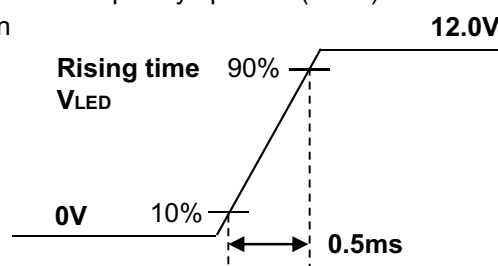

5. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
6. If Jitter of PWM is bigger than maximum, it may induce flickering.
7. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
8. The life time is determined as the time at which brightness of LCD is 50% compare to that of minimum value specified in optical table. under general user condition.



5.3. Regulation

The set (which LCD module is assembled into) should conform to the regulations below.

(1) EMC Regulations.

- a) ANSI C63.4
- b) CISPR 22
- c) CISPR 13

(2) Safety Regulations (Only LCD)

- a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.
- b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association.
- c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization (CENELEC).
- d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC).


(3) Environment

- a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003

(4) Material list concerning

Item		Silk	Product	Rating	Maker
TCON	TCON OUTPUT (Data Output)	R23, R24, R25, R28, R29, R30, R15, R16, R17, R20, R21, R22	Resistor	100Ω	ROHM, Samsung Elec., Walsin
	Power V_{cc} (2.5V)	UC1	TCON	2.5V	Siliconworks
DC/DC	Control IC for Power supply	US1	SM4003	SM4003, Silicon Mitus, NBPC, Boost+LDO+L/S+OP-Amp+PVcom+D/C, TQFN (6x6), R/TP, 48 pin DC/DC Switching frequency (330Khz ~ 1200Khz)	Siliconworks
	Switching Diode	D2,D4,D5,D6	BAV99-7-F		DIODES
	Schottky Barrier Diode	D3	BAT750-7-F	0.75A	DIODES
	Inductor	L1	NR6012T_100ME	10 uH ± 20% (Inductance) 0.235Ω ± 20% (DC Resistance) 1.0A Max (Rated DC Current)	KTY
LED Driver	Control IC for LED	US2	ADD5201	ADD5201, ANALOG DEVICE, 21V, 8CH, -, LFCSP, R/TP, 28, NBPC	Analog Device
	Inductor	L2	NR6012T_100ME	10 uH ± 20% (Inductance) 0.235Ω ± 20% (DC Resistance) 1.0A Max (Rated DC Current)	KTY

6. Block Diagram

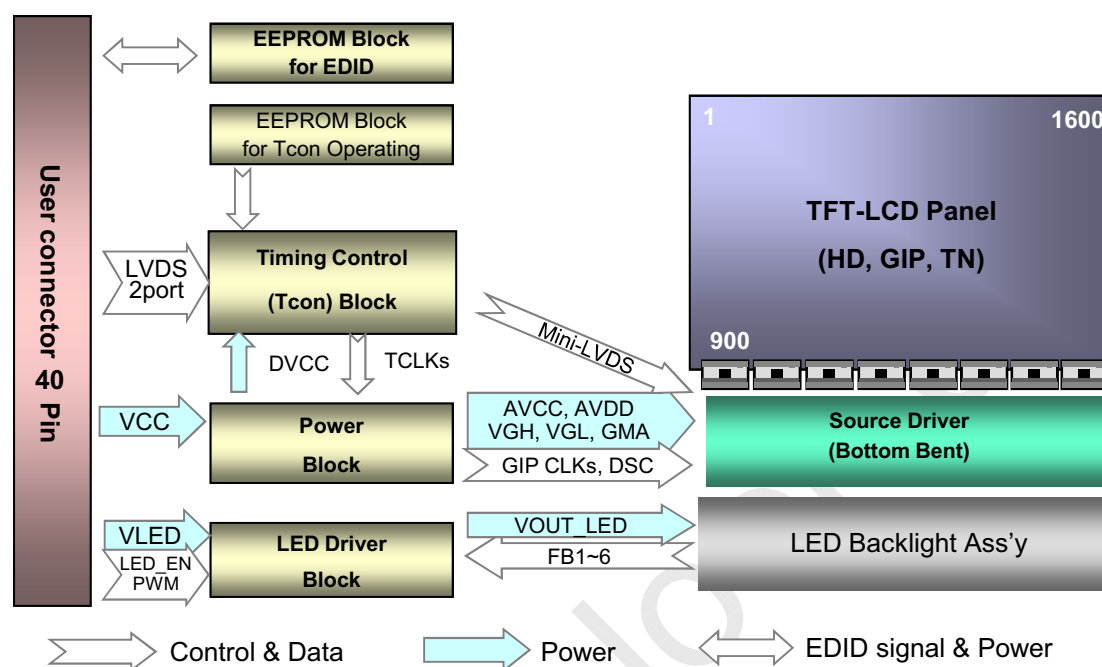


7. Input Terminal Pin Assignment

7.1. TFT LCD module

This LCD employs two interface connections, a 40 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.

The electronics interface connector is a model CABLINE-VS RECE ASS'Y manufactured by I-PEX.

Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)

Pin	Symbol	Description	Notes
1	NC	Reserved	1, Interface chips 1.1 LCD : SW, ST2_BS (LCD Controller) including LVDS Receiver 1.2 System : THC63LVDF823A or equivalent * Pin to Pin compatible with LVDS 2. Connector 2.1 LCD : CABLINE-VS RECE ASS'Y, I-PEX or its compatibles 2.2 Mating : CABLINE-VS PLUG CABLE ASS'Y or equivalent. 2.3 Connector pin arrangement  [LCD Module Rear View]
2	VCC	Power Supply, 3.3V Typ.	
3	VCC	Power Supply, 3.3V Typ.	
4	V EEDID	DDC 3.3V power	
5	BIST	Built-In Self Test	
6	Clk EEDID	DDC Clock	
7	DATA EEDID	DDC Data	
8	Odd_Rin0-	Negative LVDS differential data input	
9	Odd_Rin0+	Positive LVDS differential data input	
10	VSS1	Ground	
11	Odd_Rin1-	Negative LVDS differential data input	
12	Odd_Rin1+	Positive LVDS differential data input	
13	VSS2	Ground	
14	Odd_Rin2-	Negative LVDS differential data input	
15	Odd_Rin2+	Positive LVDS differential data input	
16	VSS3	Ground	
17	Odd_ClkIN-	Negative LVDS differential clock input	
18	Odd_ClkIN+	Positive LVDS differential clock input	
19	VSS4	Ground	
20	Even_Rin0-	Negative LVDS differential data input	
21	Even_Rin0+	Positive LVDS differential data input	
22	VSS5	Ground	
23	Even_Rin1-	Negative LVDS differential data input	
24	Even_Rin1+	Positive LVDS differential data input	
25	VSS6	Ground	
26	Even_Rin2-	Negative LVDS differential data input	
27	Even_Rin2+	Positive LVDS differential data input	
28	VSS7	Ground	
29	Even_ClkIN-	Negative LVDS differential clock input	
30	Even_ClkIN+	Positive LVDS differential clock input	
31	VLED_GND	LED Ground	
32	VLED_GND	LED Ground	
33	VLED_GND	LED Ground	
34	NC	Reserved	
35	BLIM	PWM for Luminance control	
36	BL_On	Backlight On/Off Control	
37	NC	No Connection	
38	VLED	LED Power Supply (7V-20V)	
39	VLED	LED Power Supply (7V-20V)	
40	VLED	LED Power Supply (7V-20V)	



7.3. LVDS Transmitter

LVDS Transmitter : SN75LVDS84 (made by TI) or compatible.

Pin #	Pin Name	Require Signals	Pin #	Pin Name	Require Signals
1	D4	R4	48	D3	R3
2	Vcc	Vcc	47	D2	R2
3	D5	R5	46	GND	GND
4	D6	G0	45	D1	R1
5	DND	GND	44	D0	R0
6	D7	G1	43	NC	NC
7	D8	G2	42	LVDS GND	LVDS GND
8	Vcc	Vcc	41	Y0M	A0M
9	D9	G3	40	Y0P	A0P
10	D10	G4	39	Y1M	A1M
11	GND	GND	38	Y1P	A1P
12	D11	G5	37	LVDS Vcc	LVDS Vcc
13	D12	B0	36	LVDS GND	LVDS GND
14	NC	NC	35	Y2M	A2M
15	D13	B1	34	Y2P	A2P
16	D14	B2	33	CLKOUTM	CLKM
17	GND	GND	32	CLKOUTP	CLKP
18	D15	B3	31	LVDS GND	LVDS GND
19	D16	B4	30	PLL GND	PLL GND
20	D17	B5	29	PLL Vcc	PLL Vcc
21	Vcc	Vcc	28	PLL GND	PLL GND
22	D18	HSYNC	27	SHDN	SHDN
23	D19	VSYNC	26	CLKIN	Dclk
24	GND	GND	25	D20	DE(Data Enable)


7.4. Timing Diagrams of LVDS Transmission

Switching Characteristic

VCC = 3.0 ~ 3.6V, Ta = -10 ~ +70℃

Transmitter

Symbol	Parameter	Min.	Typ.	Max.	Unit
tTCIT	CLK IN Transition Time	-	-	5	ns
tTCP	CLK IN Period	14.7	T	32.4	ns
tTCH	CLK IN High Time	0.4T	0.5T	0.6T	ns
tTCL	CLK IN Low Time	0.4T	0.5T	0.6T	ns
tTCD	CLK IN to TCLK +/- Delay	-	14.2	-	ns
tTS	TTL Data Setup to CLK IN	3.0	-	-	ns
tTH	TTL Data Hold from CLK IN	1.5	-	-	ns
tLVT	LVDS Transition Time	0.26	0.7	1.5	ns
tTOP1	Output Data Position 0 (T= 15.38ns)	-0.2	0	0.2	ns
tTOP0	Output Data Position 1 (T= 15.38ns)	T/7 - 0.2	T/7	T/7 + 0.2	ns
tTOP2	Output Data Position 2 (T= 15.38ns)	2T/7 - 0.2	2T/7	2T/7 + 0.2	ns
tTOP3	Output Data Position 3 (T= 15.38ns)	3T/7 - 0.2	3T/7	3T/7 + 0.2	ns
tTOP4	Output Data Position 4 (T= 15.38ns)	4T/7 - 0.2	4T/7	4T/7 + 0.2	ns
tTOP5	Output Data Position 5 (T= 15.38ns)	5T/7 - 0.2	5T/7	5T/7 + 0.2	ns
tTOP6	Output Data Position 6 (T= 15.38ns)	6T/7 - 0.2	6T/7	6T/7 + 0.2	ns
tTPLL	Phase Lock Loop Set	-	-	10	ns

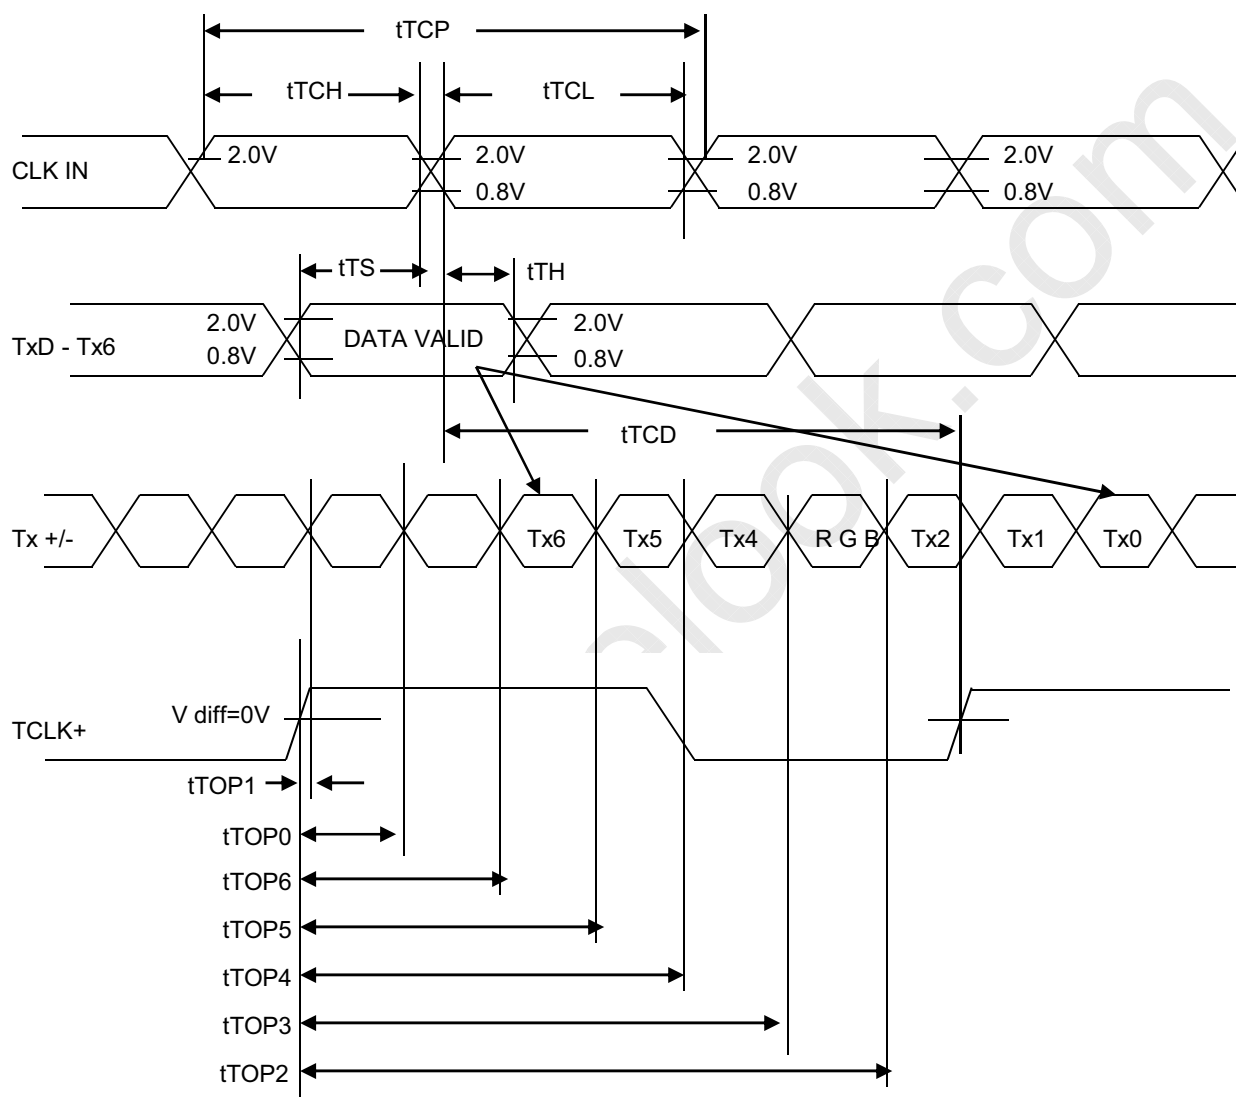AC Timing Diagrams
Transmitter Device



7.5. Input Signal, Basic Display Colors and Gray Scale of each Color

Color		Input Color Data																	
		RED						GREEN						BLUE					
		MSB			LSB			MSB			LSB			MSB			LSB		
		R 5	R 4	R 3	R 2	R 1	R 0	G 5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
Basic Color	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
RED	RED (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (01)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	...	...						...						...					
	RED (62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED (63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
GREEN	GREEN (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN (01)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	...	...						...						...					
	GREEN (62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	GREEN (63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
BLUE	BLUE (00)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE (01)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	...	...						...						...					
	BLUE (62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	BLUE (63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Note 1) 0: Low level voltage, 1: High level voltage

8. Interface Timing


8.1. Timing Parameters

This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

ITEM	Symbol		Min	Typ	Max	Unit	Note
DCLK	Frequency	f_{CLK}	-	48.875	-	MHz	2port
Hsync	Period	t_{HP}	840	880	918	tCLK	
	Width	t_{WH}	16	16	16		
	Width-Active	t_{WHA}	800	800	800		
Vsync	Period	t_{VP}	910	926	960	tHP	
	Width	t_{WV}	5	5	5		
	Width-Active	t_{WVA}	900	900	900		
Data Enable	Horizontal back porch	t_{HBP}	16	40	62	tCLK	
	Horizontal front porch	t_{HFP}	8	24	40		
	Vertical back porch	t_{VBP}	4	18	34	tHP	
	Vertical front porch	t_{VFP}	1	3	21		

Condition : VCC =3.3V

Data Enable, Hsync, Vsync

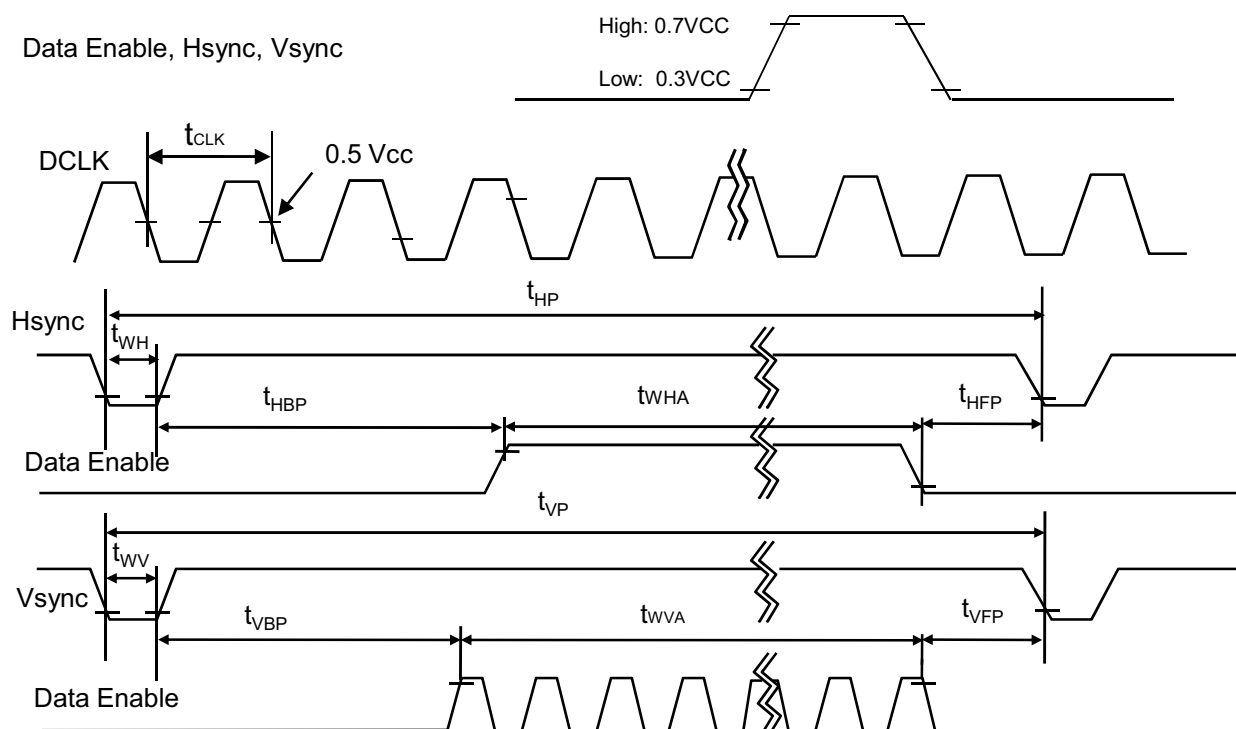

8.3. Power On/Off Sequence

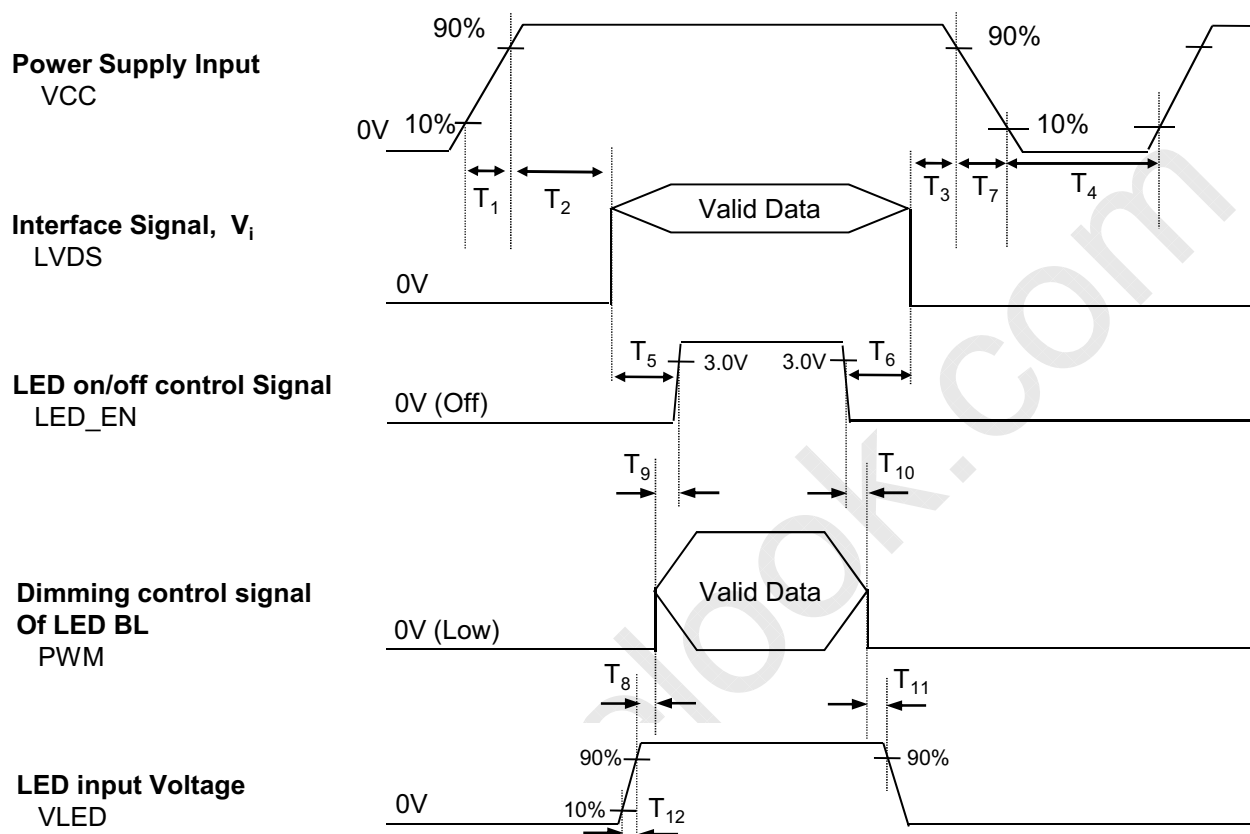


Table 6. POWER SEQUENCE TABLE

Logic Parameter	Value			Units	LED Parameter	Value			Units
	Min.	Typ.	Max.			Min.	Typ.	Max.	
T ₁	0.5	-	10	ms	T ₈	10	-	-	ms
T ₂	0	-	50	ms	T ₉	0	-	-	ms
T ₃	0	-	50	ms	T ₁₀	0	-	-	ms
T ₄	400	-	-	ms	T ₁₁	10	-	-	ms
T ₅	200	-	-	ms	T ₁₂	0.5	-	-	ms
T ₆	200	-	-	ms					
T ₇	3	-	10	ms					

Note)

1. Do not insert the mating cable when system turn on.
2. Valid Data have to meet "3-3. LVDS Signal Timing Specifications"
3. LVDS, LED_EN and PWM need to pull-down condition on invalid status.
4. LGD recommend the rising sequence of VLED after the Vcc and valid status of LVDS turn on.



9. Cosmetic Specification

9.1. Sampling

A.Q.L (Acceptable Quality Level): MIL-STD, 105E Level II,
Major: 0.65 , Minor: 1.5

9.2. Conditions of Inspections

- (1) Ambient Temperature : $25\pm 5^{\circ}\text{C}$
- (2) Ambient Humidity : $65\pm 20\%\text{RH}$
- (3) Illumination : 200 – 500 Lux (nominal 350 Lux) under the fluorescent Lamp.
- (4) Viewing Distance: Approximately 30cm by the eyes of the inspector from the module
- (5) Viewing angle : The surface of the module and the inspector's line shall be at 90 ± 45 degrees.
- (6) Display pattern: Pure Red, Green, Blue, Black, White, Gray level 0 - 63




9.3. Defect modes

Defect Mode	Description
Dark / Bright spots	Points on the display which appear dark / bright and remain unchanged in size
Dark / Bright lines	Lines on the display which appear dark / bright and remain unchanged in size
Polarizer scratch	When the unit is lit a light , line is seen across a darker background; line does not vary in size
Polarizer dent	When the unit is lit a light, light (white) spots appear against a darker background, and do not vary in size
Bright / dark dot	A sub-pixel (R,G,B dot) stuck off / on
Rubbing line	Diagonal lines that appear gray with the display patterns dark and vary in size
Dim line	When the unit lights, lines in the minor (Vertical) or major (Horizontal) axis appear dim
Cross line	When the unit lights, lines in the both minor and major axis do not appear
Interference	Interference can not be seen with any bright plane display at any viewing angle
Flicker	When displaying sub-pixel checker(gray level and darkest gray), flicker can not be seen
Ripple (Pooling)	Tapping Test, Tapping area : All bezel(Metal cover) side, LCD: Full-screen gray (L32) "Ripple (Pooling)" can not be seen in Active Area

9.4. Mechanical Inspection

- (1) Light leakage: No light leakage between metal chassis (bezel) and glass
- (2) No sharp edge
- (3) The mounting holes: No Changed (Side fixed type)
- (4) PCB Appearance: No pattern peeling snapping / No electrically short
If there are repair portions, the repair portions on PCB is covered by epoxy resign
- (5) Soldering: No cold solder joint, lead move when pulled
- (6) Bezel, Frame, Connectors: No distinct stain, rust or scratch, no pin bending

9.5. Visual Inspection

Defect type	Count (mm)	Reject (mm)
Dark / bright spot 	$0.2 < D \leq 0.5$ $N \leq 3$	$D > 0.5$
Dark / Bright lines 	$0.05 < W \leq 0.1$ $0.3 < L \leq 3.0$ $N \leq 3$	$W > 0.1$ $L > 3.0$
Polarizer scratch 	$0.01 < W \leq 0.1$ $0.3 < L \leq 0.5$ $N \leq 3$	$W > 0.1$ $L > 0.5$
Polarizer dent / bubble 	$0.2 \leq D \leq 0.5$ $N \leq 3$	$D > 0.5$
Maximum allowable number of defects	$N \leq 7$	$N > 7$
Rubbing defect	Not allowed	
Dim line	Not allowed	


[D : diameter, W : width, L : length, N : count]

Note 1) Inspection area should be within bezel opening.

Note 2) Dusts which are bigger not less than 0.10mm ($0.1 \leq W$) shall be judged by "Average Diameter".

Note 3) Scratches which are bigger not less than 0.05mm ($0.05 \leq W$) shall be judged by "Average Diameter".

Average Diameter $D = (a+b)/2$ (mm)



9.6. Electrical Inspection


(1) Dot defect

Defect type		Count	Reject
Bright dots	Random	$N \leq 2$	$N > 3$
	Two adjacent	Not allowed	
	Three or more adjacent	Not allowed	
Dark dots	Random	$N \leq 4$	$N > 5$
	Two adjacent	$N \leq 1$	$N > 2$
	Three or more adjacent	Not allowed	
Maximum allowable number of dot defect		$N \leq 5$	$N > 6$
Maximum distance between defects	Bright - to - bright dot	$L \leq 15\text{mm}$	$L > 15.1\text{mm}$
	Dark - to - dark dot	$L \leq 10\text{mm}$	$L > 10.1\text{mm}$

1) Inspection patterns for dot defect are Pure Red, Green, Blue, Black, and White.


2) Adjacent two dots will be counted as two dots.

3) The distribution of dot defects should be below. Average value of dot defects should be less than 1.

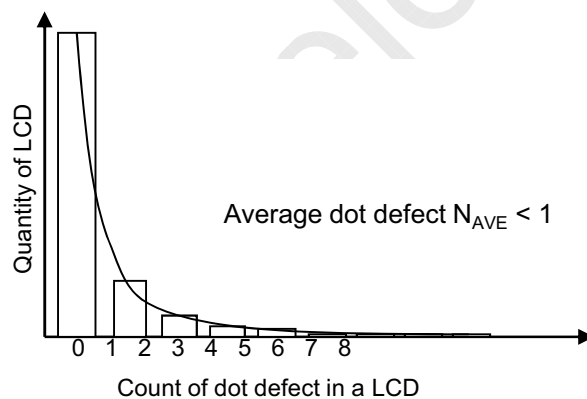

Required distribution of dot defect

4) The definition of 2 adjacent dots.

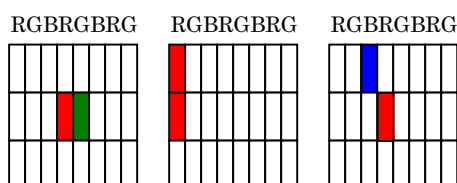


(2) Light leakage

Light leakage can not be seen between metal chassis (bezel) and glass when displaying black plane.

(3) Image sticking

Image sticking pattern shall not be to persist longer than 1second after displaying following pattern 8 hours in the room temperature condition.

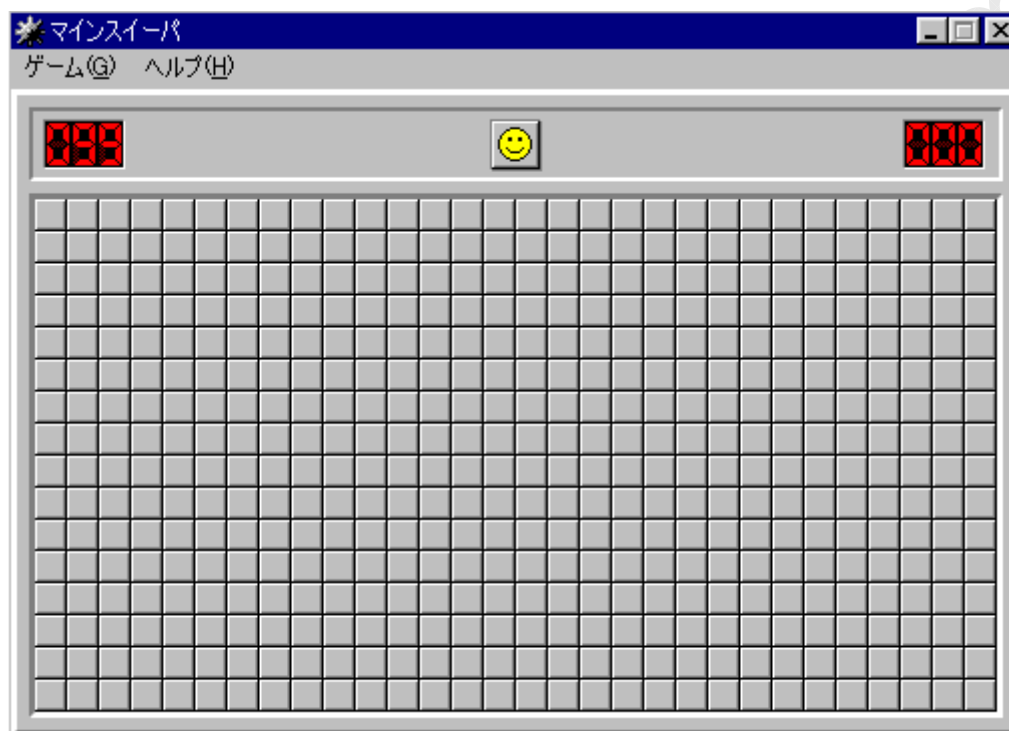

(4) Glue/stain/dirt

Glue, non-removable stain and dirt which are visible in the inspection area are not acceptable.

10. Packing

10.1. Carton

(1) Packing Form

Corrugated cardboard box and EPS Packing


(2) Packing Method

Packing Material : EPS (Expanded Polystyrene)

Packing Weight: : 1.3Kg

(1Box/20Module)

Packing weight, 20 pcs modules included :13kg

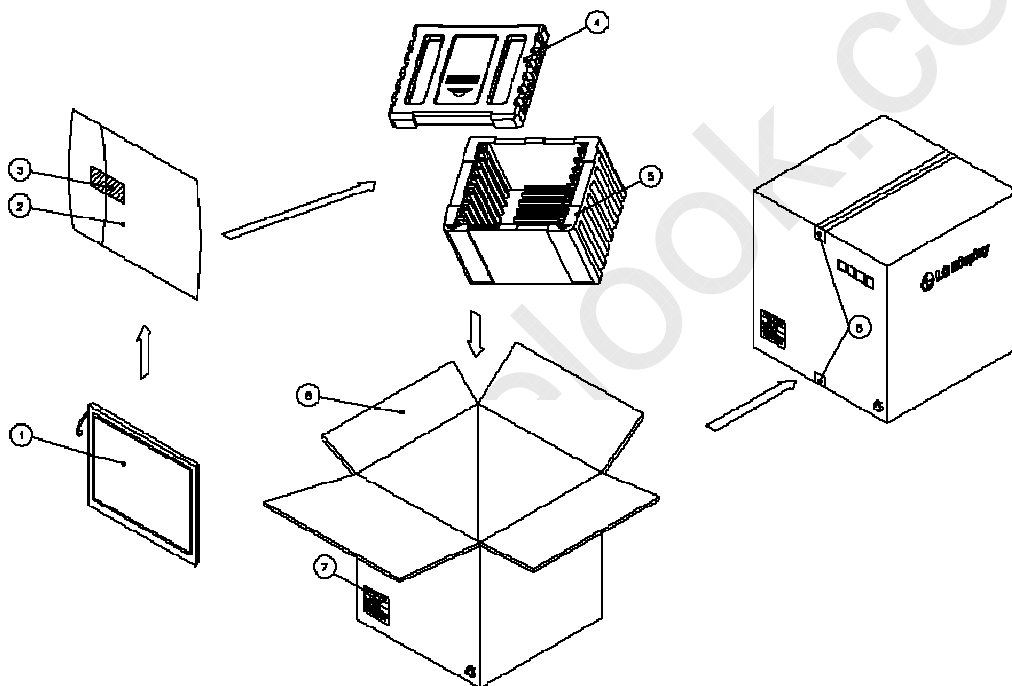

NO.	Description	Material
1	Module	LP156WD1-TLB3
2	Bag	LDPE 360x225
3	Tape	Masking 20mmx100M
4	Packing Bottom	EPS(Gravity0.0185)
5	Packing Top	EPS(Gravity0.0185)
6	Box	SWR4 482x358x275
7	Label	Art paper 80g
8	Tape	OPP 70mmx300M

LG Display Co., Ltd.

Date: 2009. 09. 22

(3) Packing Specification

Item	Conditions
Packing Vibration	Random=1.50Grms, Non-Operating LCM, To driving way / 1hr
Packing Drop Test	Refer to below table

Vibration frequency

Hz	G ² /Hz(PSD)
3	0.0001
10	0.0024
18	0.0024
27	0.02
54	0.02
100	0.0015
150	0.0015
200	0.01
250	0.01
300	0.01

Drop Height


		Mass [kg]	Height [cm]	Mass [kg]	Height [cm]
Bottom side	drop test, repeat 3x. Drop height according table.	1	70	15	43
		2	70	16	42
		3	67	17	41
Left side	drop test from 0.30 m	4	63	18	40
		5	60	19	39
		6	57	20	38
Front side	drop test from 0.30 m	7	55	21	38
		8	53	22	37
		9	51	23	37
Right side	drop test from 0.30 m	10	49	24	36
		11	48	25	36
		12	46	26	36
Rear side	drop test from 0.30 m	13	45	27	36
		14	44	28 - 50	35
Top side	drop test from 0.30 m				

(4) Package Label

Package label should be at least shown the following information.

- TOSHIBA code name(G33C0005PA10) which will be numbered by Toshiba
- Revision number which be numbered by LCD maker
- Quantity
- LCD maker
- Model number which be numbered by LCD maker
- Production Year / Month

(5) Location of Package label : 1 points (Side)

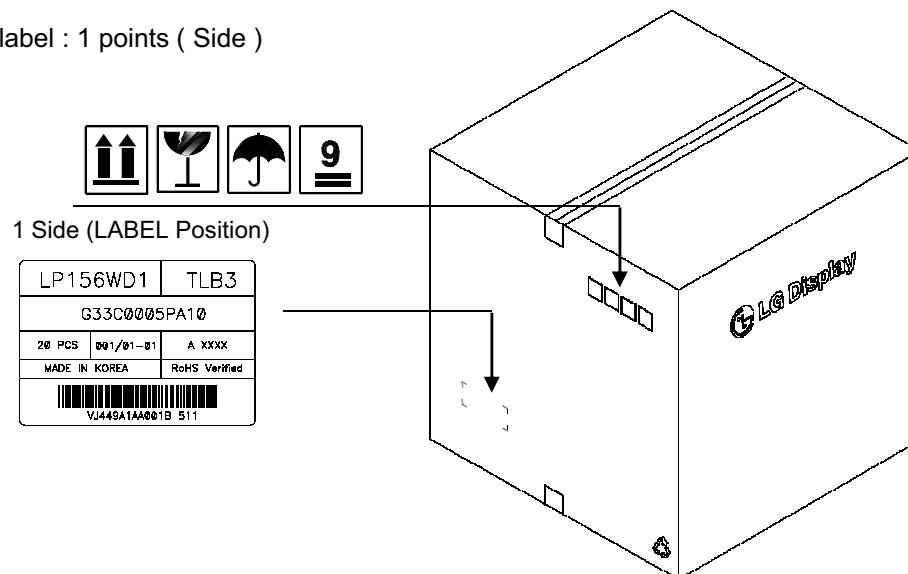

11. Labels and Other parts Exchange

11.1. LCD code Label on LCD

LCD code label should be at least shown the following information.

- (1) TOSHIBA code name (G33C0005PA10) which will be numbered by Toshiba & Bar code
(Bar code : CODE-39 High-density)
- (2) LGPL Serial number CODE (numbered by LCD maker , less than equal 13 digits)

A	B	C	D	E	F	G	H	I	J	K	L	M
---	---	---	---	---	---	---	---	---	---	---	---	---

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

Note

1. YEAR

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010
Mark	1	2	3	4	5	6	7	8	9	0

2. MONTH


Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Mark	1	2	3	4	5	6	7	8	9	A	B	C

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.
This is subject to change without prior notice.


Example >

LABEL : 78mm X 37mm

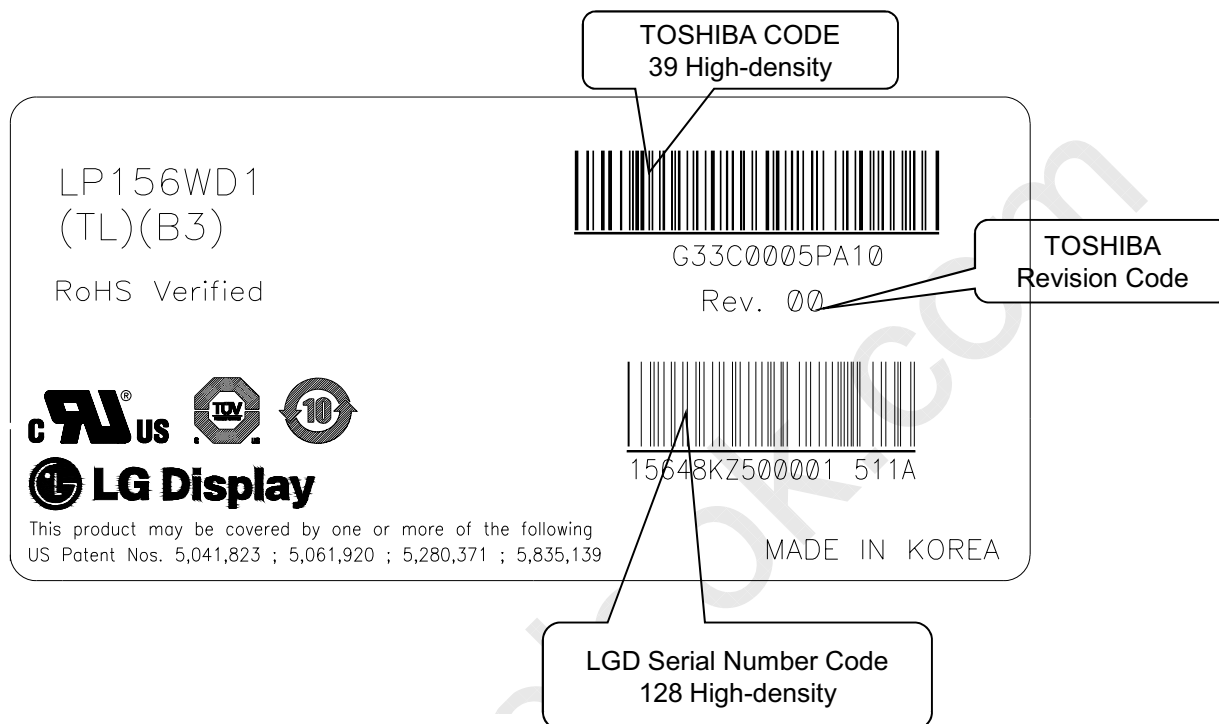

The revision code is inserted in the label by Toshiba request. If the contents of the specification need to be change under mass-production, the code can be revised after Toshiba's approval. Although there is not items in the contents of the specification, Toshiba can requests LGD to change the revision code.

11.2. Caution Texture and Labels on LCD

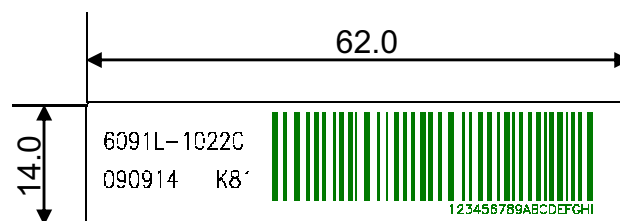


[Disposal of BL label]

LG Display Co., Ltd.

Date: 2009. 09. 22

11.3. Label Locations on LCD

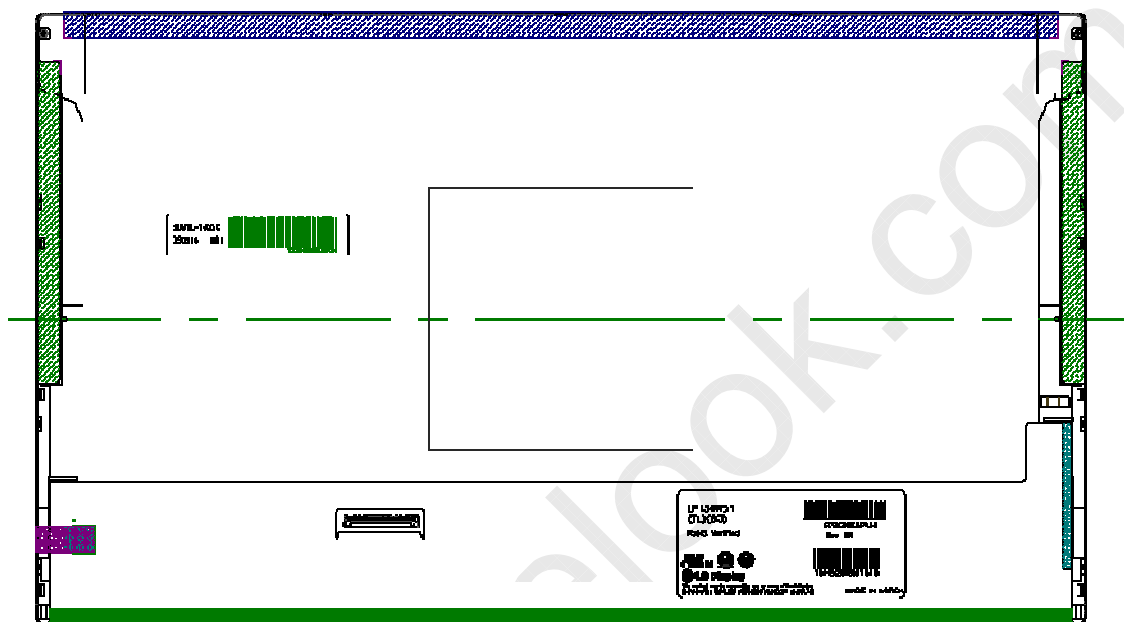

11.4. Others

(1) Backlight repair parts kit : 6916L-0117A


No.	Part	Product Code	Maker	Qt'y	Note
1	Cover Ass'y Bottom	3550B-0427A	Han sung	1	
2	Cover Shield(S)	3550S-0715B	Geo rim	1	
3	Tape Adhesive	7250L-0116J	Geo rim	1	
4	Tape Adhesive	7250L-0080M	Geo rim	2	
5	Tape Adhesive	7250L-0082C	Hwa sung	2	
6	LED	6915L-0071A	Toyota Gosei	1	

LG Display Co., Ltd.


Date: 2009. 09. 22

(2) Package specification of Backlight repair parts kit


a) Individual packing

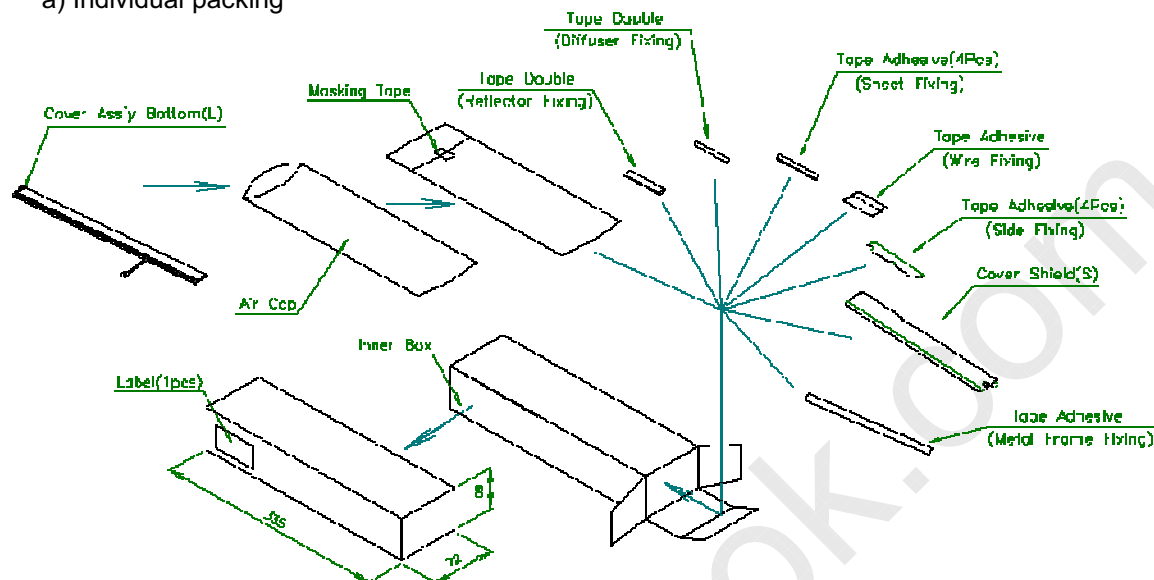

b) Master carton Packing method

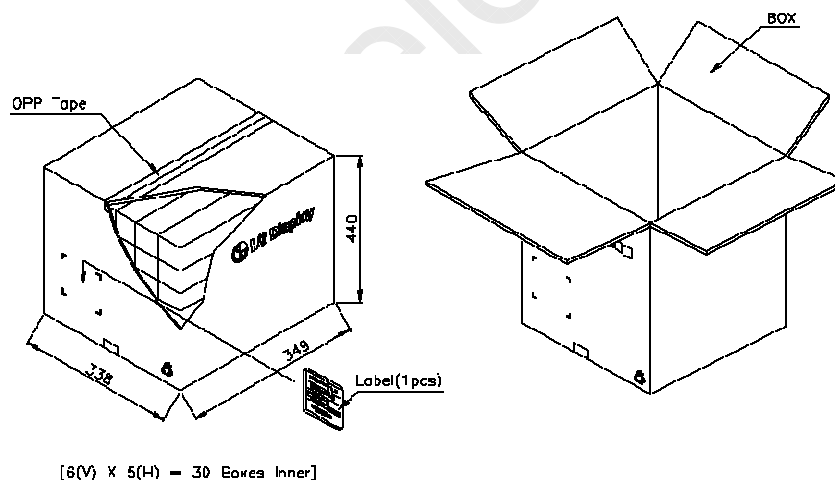

c) Label




11.5. Instruction of changing the parts

11.5.1. Disassembly of Top Case

(1) ① Disassembly of Top Case


Caution: Pressure or stress should not be given on Source COF.

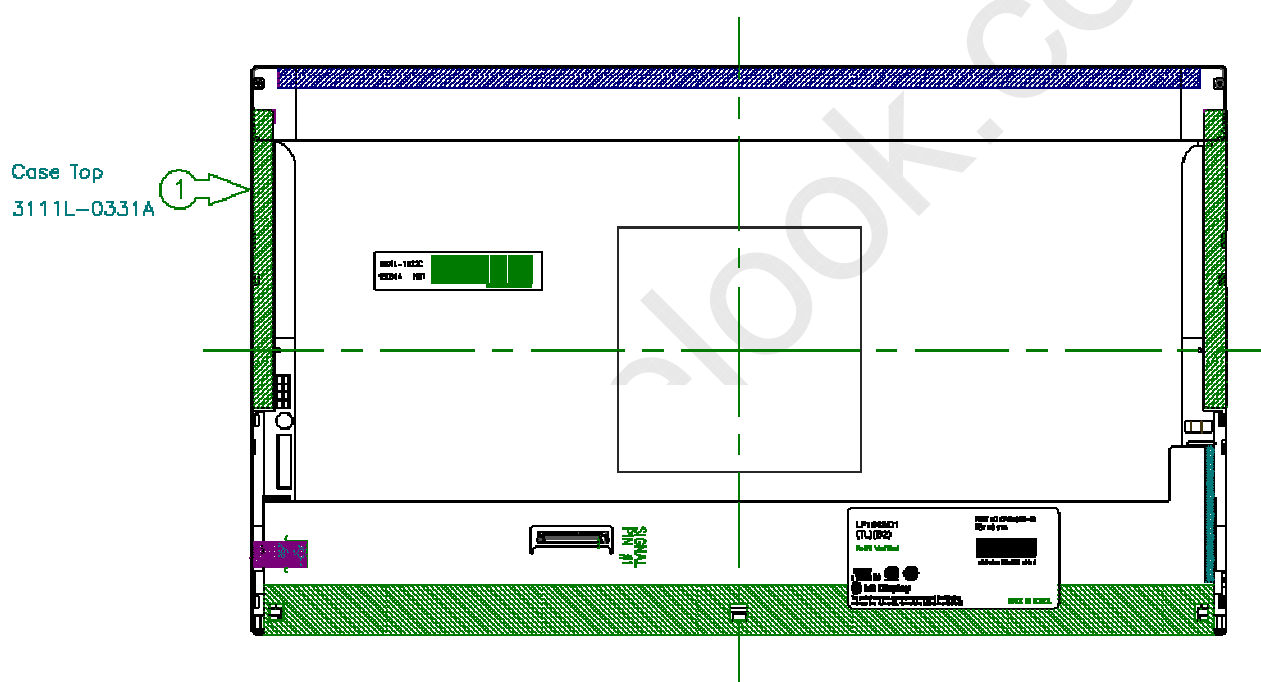

11.5.2. Disassembly of Source PCB

(1) ① Disassembly of Source PCB.

Caution: Pressure or stress should not be given on PCB and COF.

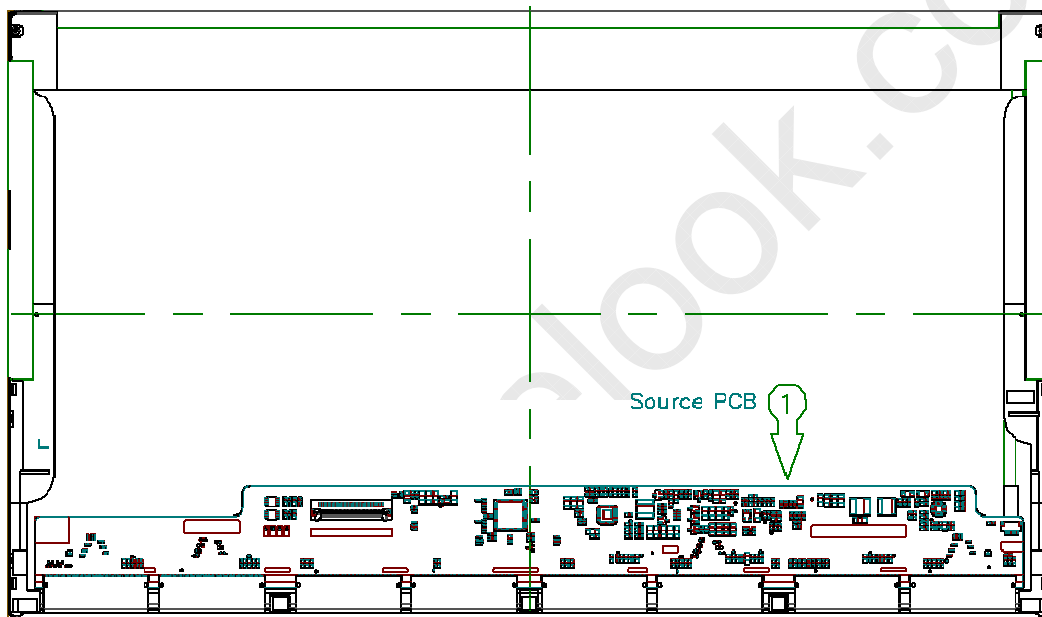

11.5.3. Disassembly of Case top, Board Ass'y, Tape Adhesive, Light guide, Cover Ass'y

(1) ① Disassembly of Case top

(2) ② Disassembly of Board Ass'y.

Caution: This process should be made in Clean room with no scratch nor particle on Polarizer and B/L Ass'y.


(3) ③ Disassembly of Tape Adhesive used for Sheets fixing (4Point).

(4) ④ Disassembly of Sheets, Light guide.

Caution: No penetration of foreign body is indispensable with no scratch on the surface of each Sheets.

(5) ⑤ Disassembly of Screw(2Point) and Cover Ass'y

Caution: Maximum value of torque with Screw should be below 1.5kg.

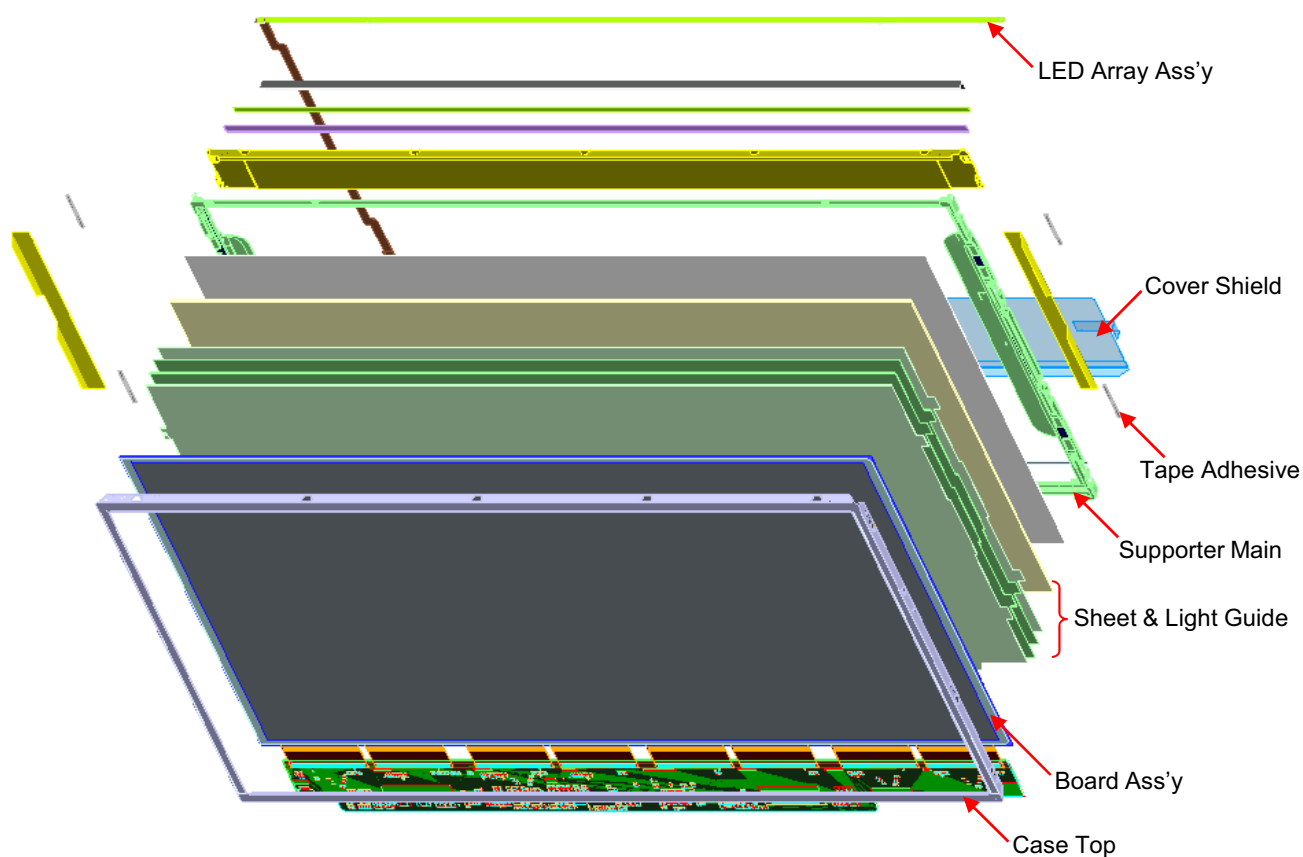

11.5.4. Assembly of Cover Ass'y, Sheets, Light guide, Tape Adhesive, Board Ass'y and Case top.

- (1) ① Assembly of Cover Ass'y and Screw(2Point).

Caution: Maximum value of torque with Screw should be below 2.0kgf.cm

- (2) ② Assembly of Light Guide and Sheets.(Reflector Sheet fixing with one Double Tape)


Caution: No penetration of foreign body is indispensable with no scratch on the surface of each Sheet and Light guide.

- (3) ③ Assembly of Tape adhesive used for Sheets fixing(4Point)

- (4) ④ Assembly of Board Ass'y.

Caution: Pressure or stress should not be given on PCB and COF.

- (5) ⑤ Assembly of Case top

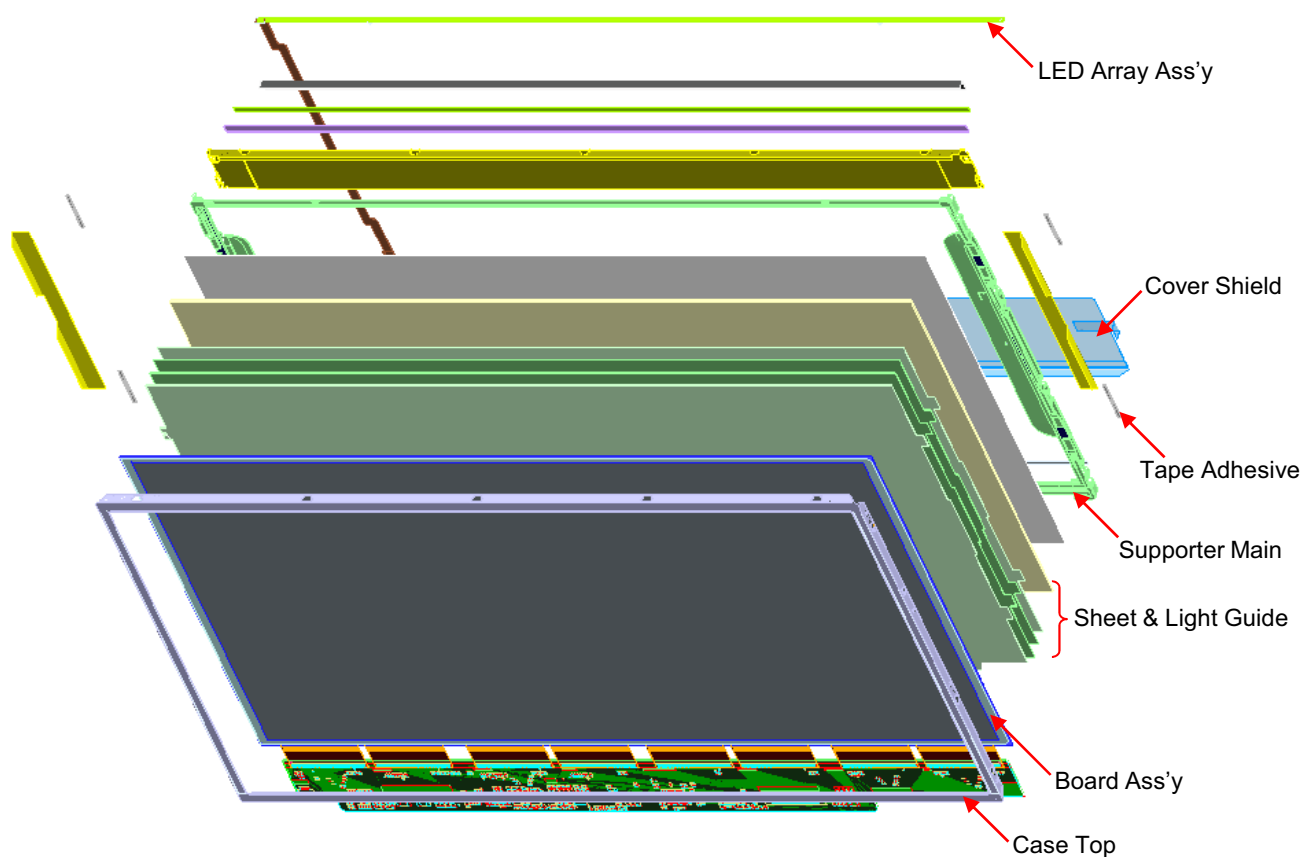



12. General Precaution

Please pay attention to the followings when you use this TFT LCD module.

12.1. Mounting Precautions

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach a transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case aren't desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaked with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

12.2. Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage
: $V = \pm 200\text{mV}$ (Over and under shoot voltage).
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) A module has high frequency circuit. If you need to shield the electromagnetic noise, please co-work. When a Back-light unit is operating, it sounds. If you need to shield the noise, please co-work.

12.3. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc . And don't touch interface pin directly.



12.4. Precautions for Strong Light Exposure

Strong light exposure causes degradation of polarizer and color filter.

12.5. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5℃ and 35℃ at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.

12.6. Handling Precautions for Protection Film

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion- blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer. Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

**APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3****EDID Data for Toshiba_LP156WD1-TLB3_ver. 0.0**

2009.09.04

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Header	0	00	Header	00	00000000
	1	01	Header	FF	11111111
	2	02	Header	FF	11111111
	3	03	Header	FF	11111111
	4	04	Header	FF	11111111
	5	05	Header	FF	11111111
	6	06	Header	FF	11111111
EDID Vendor / Product Version	7	07	Header	00	00000000
	8	08	EISA manufacture code (3 Character ID) LEN	30	00110000
	9	09	EISA manufacture code (Compressed ASCII)	AE	10101110
	10	0A	Panel Supplier Reserved - Product Code 40B1h	B1	10110001
	11	0B	(Hex. LSB first) (15.6 HD+ 1600x900 , LED B/L)	40	01000000
	12	0C	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	13	0D	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	14	0E	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	15	0F	LCD Module Serial No - Preferred but Optional ("0" If not used)	00	00000000
	16	10	Week of Manufacture 00 weeks	00	00000000
Display Parameters	17	11	Year of Manufacture 2009 years	13	00010011
	18	12	EDID structure version # = 1	01	00000001
	19	13	EDID revision # = 3	03	00000011
	20	14	Video input Definition = Digital signal	80	10000000
Panel Color Coordinates	21	15	Max H image size (Rounded cm) = 35 cm	23	00100011
	22	16	Max V image size (Rounded cm) = 19 cm	13	00010011
	23	17	Display gamma = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma	78	01111000
	24	18	Feature Support (Standby, Suspend, Active Off/Very Low Power, RGB color display, Timing BLK 1,no. GTF)	EA	11101010
	25	19	Red/Green Low Bits (RxRy/GxGy)	43	01000011
	26	1A	Blue/White Low Bits (BxBY/WxWy)	C5	11000101
	27	1B	Red X Rx = 0.610	9C	10011100
	28	1C	Red Y Ry = 0.348	59	01011001
	29	1D	Green X Gx = 0.316	51	01010001
	30	1E	Green Y Gy = 0.589	96	10010110
	31	1F	Blue X Bx = 0.151	26	00100110
	32	20	Blue Y By = 0.066	11	00010001
	33	21	White X Wx = 0.313	50	01010000
	34	22	White Y Wy = 0.329	54	01010100
Standard Timing ID	35	23	Established timing 1 (00h if not used)	00	00000000
	36	24	Established timing 2 (00h if not used)	00	00000000
	37	25	Manufacturer's timings (00h if not used)	00	00000000
	38	26	Standard timing ID1 (01h if not used)	01	00000001
	39	27	Standard timing ID1 (01h if not used)	01	00000001
	40	28	Standard timing ID2 (01h if not used)	01	00000001
	41	29	Standard timing ID2 (01h if not used)	01	00000001
	42	2A	Standard timing ID3 (01h if not used)	01	00000001
	43	2B	Standard timing ID3 (01h if not used)	01	00000001
	44	2C	Standard timing ID4 (01h if not used)	01	00000001
	45	2D	Standard timing ID4 (01h if not used)	01	00000001
	46	2E	Standard timing ID5 (01h if not used)	01	00000001
	47	2F	Standard timing ID5 (01h if not used)	01	00000001
	48	30	Standard timing ID6 (01h if not used)	01	00000001
	49	31	Standard timing ID6 (01h if not used)	01	00000001
	50	32	Standard timing ID7 (01h if not used)	01	00000001
	51	33	Standard timing ID7 (01h if not used)	01	00000001
	52	34	Standard timing ID8 (01h if not used)	01	00000001
	53	35	Standard timing ID8 (01h if not used)	01	00000001

LG Display Co., Ltd.

Date: 2009. 09. 22

**APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3**

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #1	54	36	Pixel Clock/10,000 (LSB) 97.75 MHz @ 60Hz	2F	00101111
	55	37	Pixel Clock/10,000 (MSB)	26	00100110
	56	38	Horizontal Active (lower 8 bits) 1600 Pixels	40	01000000
	57	39	Horizontal Blanking(Thp-HA) (lower 8 bits) 160 Pixels	A0	10100000
	58	3A	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	60	01100000
	59	3B	Vertical Active 900 Lines	84	10000100
	60	3C	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 26 Lines	1A	00011010
	61	3D	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	30	00110000
	62	3E	Horizontal Sync. Offset (Thfp) 48 Pixels	30	00110000
	63	3F	Horizontal Sync Pulse Width (HSPW) 32 Pixels	20	00100000
	64	40	Vertical Sync Offset(Tvfp) : Sync Width (VSPW) 3 Lines : 5 Lines	35	00110101
	65	41	Horizontal Vertical Sync Offset/Width (upper 2bits)	00	00000000
	66	42	Horizontal Image Size (mm) 345 mm	59	01011001
	67	43	Vertical Image Size (mm) 194 mm	C2	11000010
	68	44	Horizontal Image Size / Vertical Image Size	10	00010000
	69	45	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	70	46	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	71	47	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_NEG), DE only note : LSB is set to '1' if panel is DE-timing only. H/V can be ignored.	19	00011001
Timing Descriptor #2	72	48	Pixel Clock/10,000 (LSB) 81.49 MHz @ 50Hz	D5	11010101
	73	49	Pixel Clock/10,000 (MSB)	1F	00011111
	74	4A	Horizontal Active (lower 8 bits) 1600 Pixels	40	01000000
	75	4B	Horizontal Blanking(Thp-HA) (lower 8 bits) 160 Pixels	A0	10100000
	76	4C	Horizontal Active / Horizontal Blanking(Thp-HA) (upper 4:4bits)	60	01100000
	77	4D	Vertical Active 900 Lines	84	10000100
	78	4E	Vertical Blanking (Tvp-HA) (DE Blanking typ.for DE only panels) 26 Lines	1A	00011010
	79	4F	Vertical Active : Vertical Blanking (Tvp-HA) (upper 4:4bits)	30	00110000
	80	50	Horizontal Sync. Offset (Thfp) 48 Pixels	30	00110000
	81	51	Horizontal Sync Pulse Width (HSPW) 32 Pixels	20	00100000
	82	52	Vertical Sync Offset(Tvfp) : Sync Width (VSPW) 3 Lines : 5 Lines	35	00110101
	83	53	Horizontal Vertical Sync Offset/Width (upper 2bits)	00	00000000
	84	54	Horizontal Image Size (mm) 345 mm	59	01011001
	85	55	Vertical Image Size (mm) 194 mm	C2	11000010
	86	56	Horizontal Image Size / Vertical Image Size	10	00010000
	87	57	Horizontal Border = 0 (Zero for Notebook LCD)	00	00000000
	88	58	Vertical Border = 0 (Zero for Notebook LCD)	00	00000000
	89	59	Non-Interlace, Normal display, no stereo, Digital Separate (Vsync_NEG, Hsync_NEG), DE only note : LSB is set to '1' if panel is DE-timing only. H/V can be ignored.	19	00011001
Timing Descriptor #3	90	5A	Flag	00	00000000
	91	5B	Flag	00	00000000
	92	5C	Flag	00	00000000
	93	5D	Data Type Tag : Descriptor Defined by manufacturer	0F	00001111
	94	5E	Flag	00	00000000
	95	5F	(Horizontal active pixel /8)-31 169 (1600 pixels)	A9	10101001
	96	60	Image Aspect Ratio(16:9) 16:9	09	00001001
	97	61	Low Refresh Rate #1(50Hz) 50 Hz	32	00110010
	98	62	(Horizontal active pixel /8)-31 169 (1600 pixels)	A9	10101001
	99	63	Image Aspect Ratio(16:9) 16:9	09	00001001
	100	64	Low Refresh Rate #2(40Hz) 40 Hz	28	00101000
	101	65	Brightness(1/10nit) 220 nits	16	00010110
	102	66	Feature flag (TN Technology ,LED Backlight)	09	00001001
	103	67	Reserved 00h	00	00000000
	104	68	EISA manufacturer code(3 Character ID) LGD	30	00110000
	105	69	Compressed ASCII	E4	11100100
	106	6A	Panel Supplier Reserved - Product code 0200	00	00000000
	107	6B	(Hex, LSB first)	02	00000010

**APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3**

	Byte (Dec)	Byte (Hex)	Field Name and Comments	Value (Hex)	Value (Bin)
Timing Descriptor #4	108	6C	Flag	00	00000000
	109	6D	Flag	00	00000000
	110	6E	Flag	00	00000000
	111	6F	Data Type Tag : Data String (ASCII String)	FE	11111110
	112	70	Flag	00	00000000
	113	71	Panel supplier P/N #1 = L	4C	01001100
	114	72	Panel supplier P/N #2 = P	50	01010000
	115	73	Panel supplier P/N #3 = 1	31	00110001
	116	74	Panel supplier P/N #4 = 5	35	00110101
	117	75	Panel supplier P/N #5 = 6	36	00110110
	118	76	Panel supplier P/N #6 = W	57	01010111
	119	77	Panel supplier P/N #7 = D	44	01000100
	120	78	Panel supplier P/N #8 = 1	31	00110001
	121	79	Panel supplier P/N #9 = -	2D	00101101
	122	7A	Panel supplier P/N #10 = T	54	01010100
	123	7B	Panel supplier P/N #11 = L	4C	01001100
	124	7C	Panel supplier P/N #12 = B	42	01000010
	125	7D	Panel supplier P/N #13 = 3	33	00110011
Checksum	126	7E	Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)	00	00000000
	127	7F	Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)	FC	11111100

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

I

J

K

L

M

N

O

P

Q

R

S

T

U

V

W

X

Y

Z

AA

AB

AC

AD

AE

AF

AG

AH

AI

AJ

AK

AL

AM

AN

AO

AP

AQ

AR

AS

AT

AU

AV

AW

AX

AY

AZ

BA

BB

BC

BD

BE

BF

BG

BH

BI

BJ

BK

BL

BM

BN

BO

BP

BQ

BR

BS

BT

BU

BV

BW

BX

BY

BZ

CA

CB

CC

CD

CE

CF

CG

CH

CI

CJ

CK

CL

CM

CN

CO

CP

CQ

CR

CS

CT

CU

CV

CW

CX

CY

CZ

DA

DB

DC

DD

DE

DF

DG

DH

DI

DJ

DK

DL

DM

DN

DO

DP

DQ

DR

DS

DT

DU

DV

DW

DX

DY

DZ

EA

EB

EC

ED

EE

EF

EG

EH

EI

EJ

EK

EL

EM

EN

EO

EP

EQ

ER

ES

ET

EU

EV

EW

EX

EY

EZ

FA

FB

FC

FD

FE

FF

FG

FH

FI

FJ

FK

FL

FM

FN

FO

FP

FQ

FR

FS

FT

FU

FV

FW

FX

FY

FZ

GA

GB

GC

GD

GE

GF

GG

GH

GI

GJ

GK

GL

GM

GN

GO

GP

GQ

GR

GS

GT

GU

GV

GW

GX

GY

GZ

HA

HB

HC

HD

HE

HF

HG

HH

HI

HJ

HK

HL

HM

HN

HO

HP

HQ

HR

HS

HT

HU

HV

HW

HX

HY

HZ

IA

IB

IC

ID

IE

IF

IG

IH

II

IJ

IK

IL

IM

IN

IO

IP

IQ

IR

IS

IT

IU

IV

IW

IX

IY

IZ

JA

JB

JC

JD

JE

JF

JG

JH

JI

JJ

JK

JL

JM

JN

JO

JP

JQ

JR

JS

JT

JU

JV

JW

JX

JY

JZ

KA

KB

KC

KD

KE

KF

KG

KH

KI

KJ

KL

KM

KN

KO

KP

KQ

KR

KS

KT

KU

KV

KW

KX

KY

KZ

LA

LB

LC

LD

LE

LF

LG

LH

LI

LJ

LK

LL

LM

LN

LO

LP

LQ

LR

LS

LT

LU

LV

LW

LX

LY

LZ

MA

MB

MC

MD

ME

MF

MG

MH

MI

MJ

MK

ML

MM

MN

MO

MP

MQ

MR

MS

MT

MU

MV

MW

MX

MY

MZ

NA

NB

NC

ND

NE

NF

NG

NH

NI

NJ

NK

NL

NM

NN

NO

NP

NQ

NR

NS

NT

NU

NV

NW

NX

NY

NZ

OA

OB

OC

OD

OE

OF

OG

OH

OI

OJ

OK

OL

OM

ON

OO

OP

OQ

OR

OS

OT

OU

OV

OW

OX

OY

OZ

PA

PB

PC

PD

PE

PF

PG

PH

PI

PJ

PK

PL

PM

PN

PO

PP

PQ

PR

PS

PT

PU

PV

PW

PX

PY

PZ

QA

QB

QC

QD

QE

QF

QG

QH

QI

QJ

QK

QL

QM

QN

QO

QP

QQ

QR

QS

QT

QU

QV

QW

QX

QY

QZ

RA

RB

RC

RD

RE

RF

RG

RH

RI

RJ

RK

RL

RM

RN

RO

RP

RQ

RR

RS

RT

RU

RV

RW

RX

RY

RZ

SA

SB

SC

SD

SE

SF

SG

SH

SI

SJ

SK

SL

SM

SN

SO

SP

SQ

SR

SS

ST

SU

SV

SW

SX

SY

SZ

TA

TB

TC

TD

TE

TF

TG

TH

TI

TJ

TK

TL

TM

TN

TO

TP

TQ

TR

TS

TT

TU

TV

TW

TX

TY

TZ

UA

UB

UC

UD

UE

UF

UG

UH

UI

UJ

UK

UL

UM

UN

UO

UP

UQ

UR

US

UT

UU

UV

UW

UX

UY

UZ

VA

VB

VC

VD

VE

VF

VG

VH

VI

VJ

VK

VL

VM

VN

VO

VP

VQ

VR

VS

VT

VU

VV

VW

VX

VY

VZ

WA

WB

WC

WD

WE

WF

WG

WH

WI

WJ

WK

WL

WM

WN

WO

WP

WQ

WR

WS

WT

WU

WV

WW

WX

WY

WZ

XA

XB

XC

XD

XE

XF

XG

XH

XI

XJ

XK

XL

XM

XN

XO

XP

XQ

XR

XS

XT

XU

XV

XW

XX

XY

XZ

YA

YB

YC

YD

YE

YF

YG

YH

YI

YJ

YK

YL

YM

YN

YO

YP

YQ

YR

YS

YT

YU

YV

YW

YX

YZ


ZA

ZB

ZC

ZD</

Date: 2009. 09. 22



1 2 3 4 5 6 7 8

A

B

C

D

E

F

CHANGES

REV. NO. YY.MM.DD SIGNATURE CHANGES NO CHANGES CONTENTS

ITEM NO. A

ITEM NO. 1

DESCRIPTION

MATERIAL

COLOR/FINISH

WLED

VLED

F2 43 1.5

R20 10K

R21 10K

R22 10K

R23 10K

R24 10K

R25 10K

R26 10K

R27 10K

R28 10K

R29 10K

R30 10K

R31 10K

R32 10K

R33 10K

R34 10K

R35 10K

R36 10K

R37 10K

R38 10K

R39 10K

R40 10K

R41 10K

R42 10K

R43 10K

R44 10K

R45 10K

R46 10K

R47 10K

R48 10K

R49 10K

R50 10K

R51 10K

R52 10K

R53 10K

R54 10K

R55 10K

R56 10K

R57 10K

R58 10K

R59 10K

R60 10K

R61 10K

R62 10K

R63 10K

R64 10K

R65 10K

R66 10K

R67 10K

R68 10K

R69 10K

R70 10K

R71 10K

R72 10K

R73 10K

R74 10K

R75 10K

R76 10K

R77 10K

R78 10K

R79 10K

R80 10K

R81 10K

R82 10K

R83 10K

R84 10K

R85 10K

R86 10K

R87 10K

R88 10K

R89 10K

R90 10K

R91 10K

R92 10K

R93 10K

R94 10K

R95 10K

R96 10K

R97 10K

R98 10K

R99 10K

R100 10K

R101 10K

R102 10K

R103 10K

R104 10K

R105 10K

R106 10K

R107 10K

R108 10K

R109 10K

R110 10K

R111 10K

R112 10K

R113 10K

R114 10K

R115 10K

R116 10K

R117 10K

R118 10K

R119 10K

R120 10K

R121 10K

R122 10K

R123 10K

R124 10K

R125 10K

R126 10K

R127 10K

R128 10K

R129 10K

R130 10K

R131 10K

R132 10K

R133 10K

R134 10K

R135 10K

R136 10K

R137 10K

R138 10K

R139 10K

R140 10K

R141 10K

R142 10K

R143 10K

R144 10K

R145 10K

R146 10K

R147 10K

R148 10K

R149 10K

R150 10K

R151 10K

R152 10K

R153 10K

R154 10K

R155 10K

R156 10K

R157 10K

R158 10K

R159 10K

R160 10K

R161 10K

R162 10K

R163 10K

R164 10K

R165 10K

R166 10K

R167 10K

R168 10K

R169 10K

R170 10K

R171 10K

R172 10K

R173 10K

R174 10K

R175 10K

R176 10K

R177 10K

R178 10K

R179 10K

R180 10K

R181 10K

R182 10K

R183 10K

R184 10K

R185 10K

R186 10K

R187 10K

R188 10K

R189 10K

R190 10K

R191 10K

R192 10K

R193 10K

R194 10K

R195 10K

R196 10K

R197 10K

R198 10K

R199 10K

R200 10K

R201 10K

R202 10K

R203 10K

R204 10K

R205 10K

R206 10K

R207 10K

R208 10K

R209 10K

R210 10K

R211 10K

R212 10K

R213 10K

R214 10K

R215 10K

R216 10K

R217 10K

R218 10K

R219 10K

R220 10K

R221 10K

R222 10K

R223 10K

R224 10K

R225 10K

R226 10K

R227 10K

R228 10K

R229 10K

R230 10K

R231 10K

R232 10K

R233 10K

R234 10K

R235 10K

R236 10K

R237 10K

R238 10K

R239 10K

R240 10K

R241 10K

R242 10K

R243 10K

R244 10K

R245 10K

R246 10K

R247 10K

R248 10K

R249 10K

R250 10K

R251 10K

R252 10K

R253 10K

R254 10K

R255 10K

R256 10K

R257 10K

R258 10K

R259 10K

R260 10K

R261 10K

R262 10K

R263 10K

R264 10K

R265 10K

R266 10K

R267 10K

R268 10K

R269 10K

R270 10K

R271 10K

R272 10K

R273 10K

R274 10K

R275 10K

R276 10K

R277 10K

R278 10K

R279 10K

R280 10K

R281 10K

R282 10K

R283 10K

R284 10K

R285 10K

R286 10K

R287 10K

R288 10K

R289 10K

R290 10K

R291 10K

R292 10K

R293 10K

R294 10K

R295 10K

R296 10K

R297 10K

R298 10K

R299 10K

R300 10K

R301 10K

R302 10K

R303 10K

R304 10K

R305 10K

R306 10K

R307 10K

R308 10K

R309 10K

R310 10K

R311 10K

R312 10K

R313 10K

R314 10K

R315 10K

R316 10K

R317 10K

R318 10K

R319 10K

R320 10K

R321 10K

R322 10K




R323 10K

R324 10K

R325 10K

R326 10K

Date: 2009. 09. 22

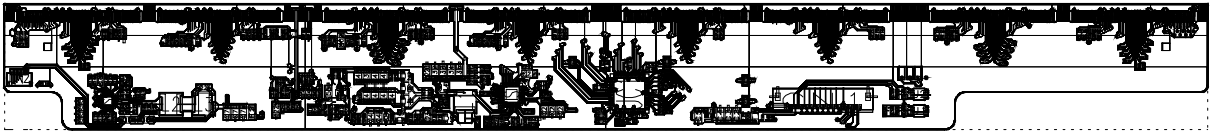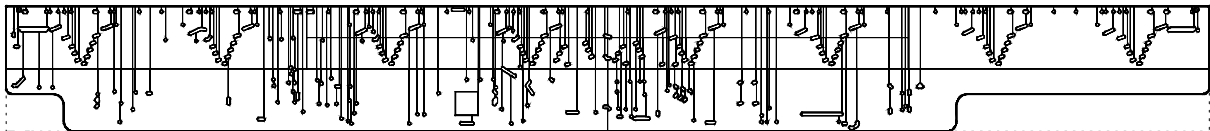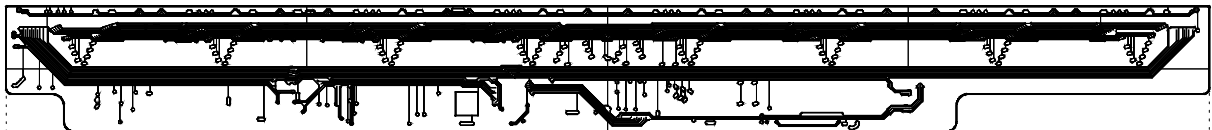APPENDIX C. PCB layout of Circuit**-1 Layer****-2 Layer****-3 Layer****-4 Layer**