

LP15MHz-1553

Inquiry

Application


for studio digital equipment

Characteristics

LP15MHz-1553	
Zin/Zout	75 ohm (Unbaranced)
Insertion Loss	3.5dB max (at 500KHz)
Pass Band Ripple	0.1dBp-p max (0.1 up to 15MHz)
Attnuation	6.0dB min (at 18.5652MHz)
	40dB min (22.125 up to 27.125MHz)
	50dB min (27.125 up to 50MHz)
Group Deray	279+/-5ns max (at 500KHz)
	2.0nsp-p max (0.1 up to 10MHz)
	3.0nsp-p max (0.1 up to 15MHz)

Dimensions

Dimension (Unit : mm)

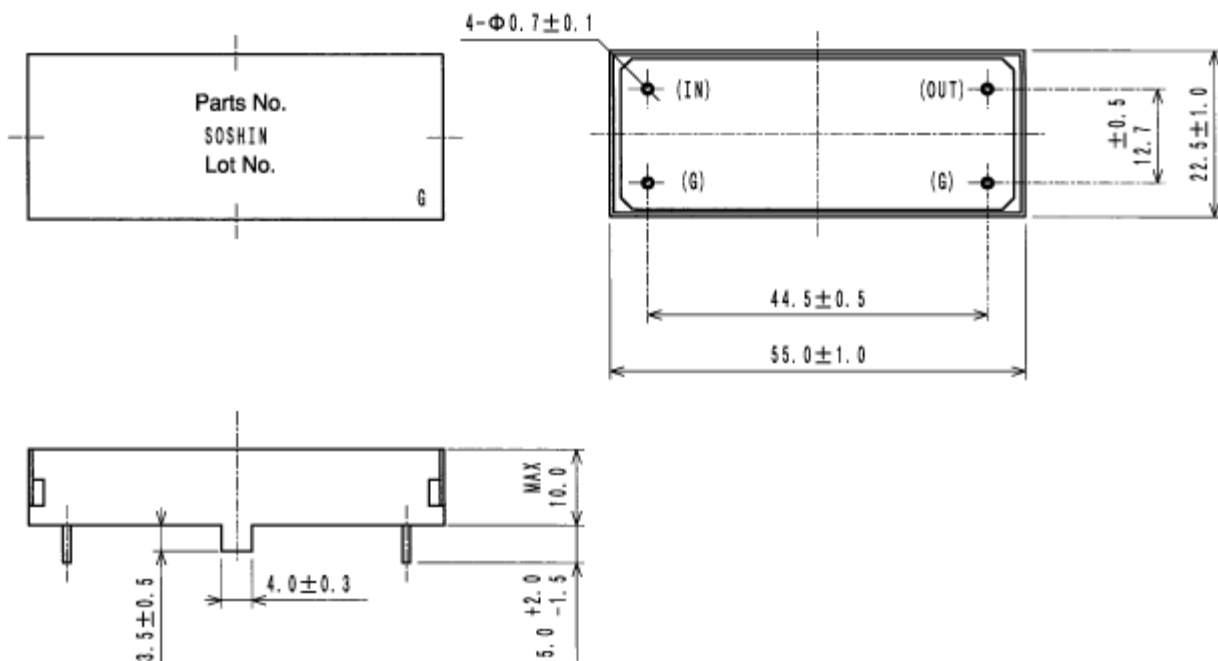

Frequency Data

LP15MHz-1553

