

# SPECIFICATION FOR APPROVAL

( ) Preliminary Specification

( ◆ ) Final Specification

|       |                   |
|-------|-------------------|
| Title | 17.3" FHD TFT LCD |
|-------|-------------------|

|          |      |
|----------|------|
| Customer | Dell |
| MODEL    |      |

|          |                      |
|----------|----------------------|
| SUPPLIER | LG Display Co., Ltd. |
| *MODEL   | LP173WF1             |
| Suffix   | TLB3                 |

\*When you obtain standard approval,  
please use the above model name without suffix

| APPROVED BY | SIGNATURE |
|-------------|-----------|
| /           |           |
| /           |           |
| /           |           |

Please return 1 copy for your confirmation with your signature and comments.

| APPROVED BY           | SIGNATURE |
|-----------------------|-----------|
| S. R. Kim / S.Manager |           |
| <b>REVIEWED BY</b>    |           |
| M. J. Lee / Manager   |           |
| <b>PREPARED BY</b>    |           |
| J. P. Lee / Engineer  |           |
| S. I. Joo / Engineer  |           |

**Products Engineering Dept.**  
**LG Display Co., Ltd**

## Product Specification


## Contents

| No  | ITEM                                                    | Page  |
|-----|---------------------------------------------------------|-------|
|     | COVER                                                   | 1     |
|     | CONTENTS                                                | 2     |
|     | RECORD OF REVISIONS                                     | 3     |
| 1   | GENERAL DESCRIPTION                                     | 4     |
| 2   | ABSOLUTE MAXIMUM RATINGS                                | 5     |
| 3   | ELECTRICAL SPECIFICATIONS                               |       |
| 3-1 | ELECTRICAL CHARACTREISTICS                              | 6     |
| 3-2 | INTERFACE CONNECTIONS                                   | 8     |
| 3-3 | LVDS SIGNAL TIMING SPECIFICATION                        | 9     |
| 3-4 | SIGNAL TIMING SPECIFICATIONS                            | 11    |
| 3-5 | SIGNAL TIMING WAVEFORMS                                 | 11    |
| 3-6 | COLOR INPUT DATA REFERNECE                              | 12    |
| 3-7 | POWER SEQUENCE                                          | 13    |
| 4   | OPTICAL SFECIFICATIONS                                  | 14    |
| 5   | MECHANICAL CHARACTERISTICS                              | 17    |
| 6   | RELIABLITY                                              | 24    |
| 7   | INTERNATIONAL STANDARDS                                 |       |
| 7-1 | SAFETY                                                  | 25    |
| 7-2 | EMC                                                     | 25    |
| 7-3 | Environment                                             | 25    |
| 8   | PACKING                                                 |       |
| 8-1 | DESIGNATION OF LOT MARK                                 | 26    |
| 8-2 | PACKING FORM                                            | 26    |
| 9   | PRECAUTIONS                                             | 27-28 |
| A   | APPENDIX. Enhanced Extended Display Identification Data | 29-31 |

3 / 31

## 1. General Description

The LP173WF1 is a Color Active Matrix Liquid Crystal Display with an integral LED backlight system. The matrix employs a-Si Thin Film Transistor as the active element. It is a transmissive type display operating in the normally white mode. This TFT-LCD has 17.3 inches diagonally measured active display area with FHD resolution (1080 vertical by 1920 horizontal pixel array). Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 6-bit gray scale signal for each dot, thus, presenting a palette of more than 262,144 colors. The LP173WF1 has been designed to apply the interface method that enables low power, high speed, low EMI. The LP173WF1 is intended to support applications where thin thickness, low power are critical factors and graphic displays are important. In combination with the vertical arrangement of the sub-pixels, the LP156WF1 characteristics provide an excellent flat display for office automation products such as Notebook PC.

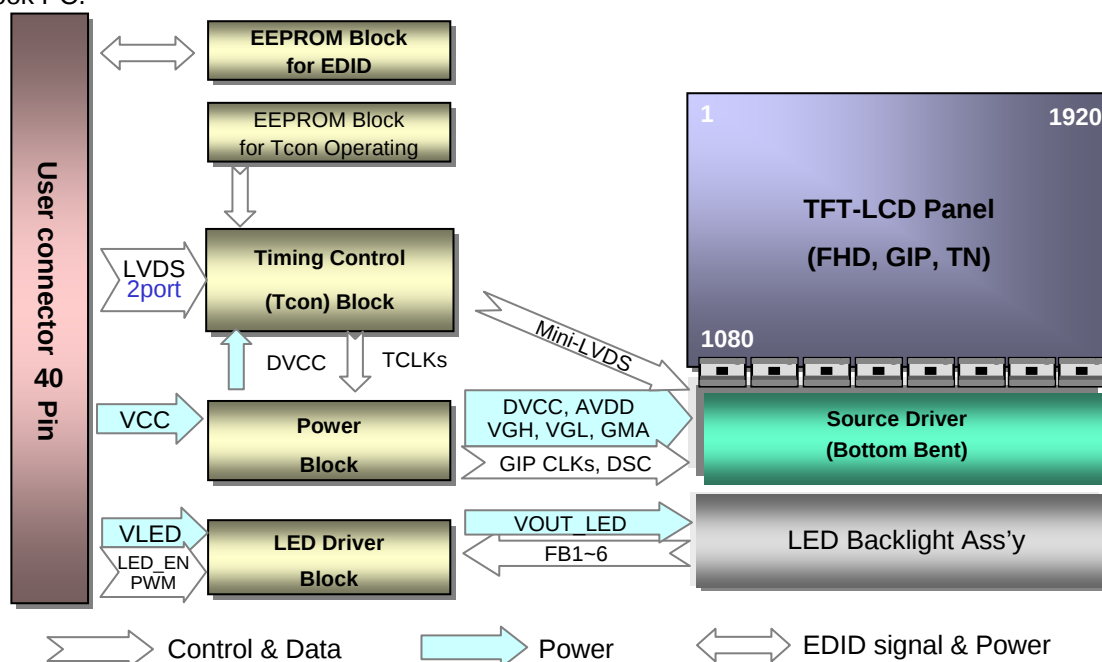

## General Features

|                        |                                                                                 |
|------------------------|---------------------------------------------------------------------------------|
| Active Screen Size     | 17.3 inches diagonal                                                            |
| Outline Dimension      | 398.1(H, Typ.) × 232.8(V, Typ.) × 6.0(D, Max.) mm                               |
| Pixel Pitch            | 0.1989 mm x 0.1989mm                                                            |
| Pixel Format           | 1920 horiz. By 1080 vert. Pixels RGB strip arrangement                          |
| Color Depth            | 6-bit, 262,144 colors                                                           |
| Luminance, White       | 300 cd/m <sup>2</sup> (Typ.5 point)                                             |
| Power Consumption      | Total 10.0 W (Typ.) Logic : 2.5 W (Typ.@ Mosaic), B/L : 7.5 W (Typ.@ VLED 12V ) |
| Weight                 | 630g (Max.)                                                                     |
| Display Operating Mode | Transmissive mode, normally white                                               |
| Surface Treatment      | Anti-Glare treatment of the front polarizer (3H)                                |
| RoHS Comply            | Yes                                                                             |
| BFR / PVC / As Free    | Yes all.                                                                        |


## 2. Absolute Maximum Ratings

The following are maximum values which, if exceeded, may cause faulty operation or damage to the unit.

**Table 1. ABSOLUTE MAXIMUM RATINGS**

| Parameter                  | Symbol | Values |     | Units | Notes       |
|----------------------------|--------|--------|-----|-------|-------------|
|                            |        | Min    | Max |       |             |
| Power Input Voltage        | VCC    | -0.3   | 4.0 | Vdc   | at 25 ± 5°C |
| Operating Temperature      | TOP    | 0      | 50  | °C    | 1           |
| Storage Temperature        | HST    | -20    | 60  | °C    | 1           |
| Operating Ambient Humidity | HOP    | 10     | 90  | %RH   | 1           |
| Storage Humidity           | HST    | 10     | 90  | %RH   | 1           |

Note : 1. Temperature and relative humidity range are shown in the figure below.  
Wet bulb temperature should be 39°C Max, and no condensation of water.

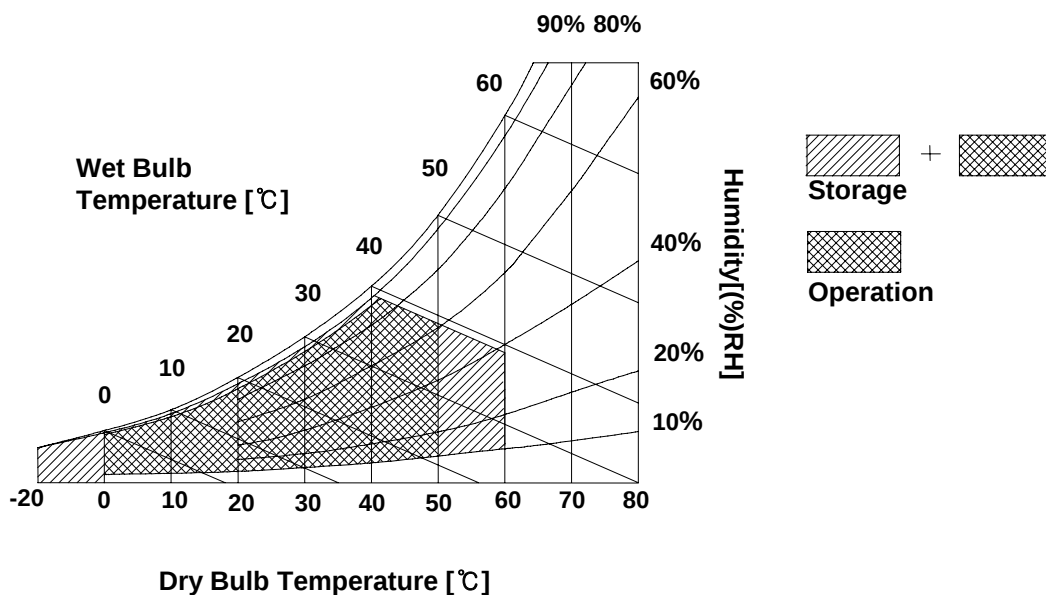

## Product Specification

### 3. Electrical Specifications

#### 3-1. Electrical Characteristics

The LP173WF1 requires two power inputs. The first logic is employed to power the LCD electronics and to drive the TFT array and liquid crystal. The second backlight is the input about LED BL with LED Driver.


**Table 2. ELECTRICAL CHARACTERISTICS**

| Parameter                      | Symbol                | Values |      |      | Unit | Notes |
|--------------------------------|-----------------------|--------|------|------|------|-------|
|                                |                       | Min    | Typ  | Max  |      |       |
| LOGIC :                        |                       |        |      |      |      |       |
| Power Supply Input Voltage     | V <sub>CC</sub>       | 3.0    | 3.3  | 3.6  | V    | 1     |
| Power Supply Input Current     | I <sub>CC</sub>       | -      | 760  | 900  | mA   | 2     |
| Power Consumption              | P <sub>CC</sub>       | -      | 2.5  | 3.0  | W    | 2     |
| Power Supply Inrush Current    | I <sub>CC_P</sub>     | -      | -    | 1500 | mA   | 3     |
| LVDS Impedance                 | Z <sub>LVDS</sub>     | 90     | 100  | 110  | Ω    | 4     |
| BACKLIGHT : ( with LED Driver) |                       |        |      |      |      |       |
| LED Power Input Voltage        | V <sub>LED</sub>      | 7.0    | 12.0 | 21.0 | V    | 5     |
| LED Power Input Current        | I <sub>LED</sub>      | -      | 625  | 730  | mA   | 6     |
| LED Power Consumption          | P <sub>LED</sub>      | -      | 7.5  | 8.8  | W    | 6     |
| LED Power Inrush Current       | I <sub>LED_P</sub>    | -      | -    | 1500 | mA   | 7     |
| PWM Duty Ratio                 |                       | 5      | -    | 100  | %    | 8     |
| PWM Jitter                     | -                     | 0      | -    | 0.2  | %    | 9     |
| PWM Impedance                  | Z <sub>PWM</sub>      | 20     | 40   | 60   | kΩ   |       |
| PWM Frequency                  | F <sub>PWM</sub>      | 200    | -    | 1000 | Hz   | 10    |
| PWM High Level Voltage         | V <sub>PWM_H</sub>    | 3.0    | -    | 5.3  | V    |       |
| PWM Low Level Voltage          | V <sub>PWM_L</sub>    | 0      | -    | 0.5  | V    |       |
| LED_EN Impedance               | Z <sub>PWM</sub>      | 20     | 40   | 60   | kΩ   |       |
| LED_EN High Voltage            | V <sub>LED_EN_H</sub> | 3.0    | -    | 5.3  | V    |       |
| LED_EN Low Voltage             | V <sub>LED_EN_L</sub> | 0      | -    | 0.5  | V    |       |
| Life Time                      |                       | 12,000 | -    | -    | Hrs  | 11    |


## Product Specification

Note)


1. The measuring position is the connector of LCM and the test conditions are under 25°C,  $f_v = 60\text{Hz}$ , Black pattern.
2. The specified  $I_{cc}$  current and power consumption are under the  $V_{cc} = 3.3\text{V}$ , 25°C,  $f_v = 60\text{Hz}$  condition and Mosaic pattern.

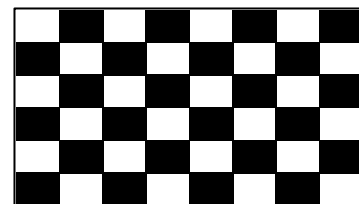

3. The below figures are the measuring  $V_{cc}$  condition and the  $V_{cc}$  control block LGD used.  
The  $V_{cc}$  condition is same as the minimum of T1 at Power on sequence.

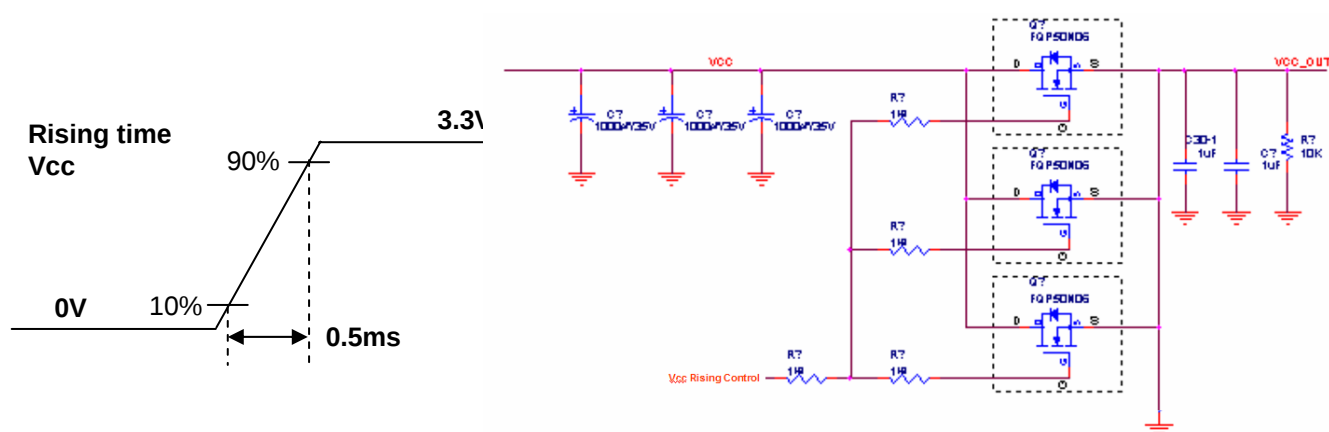

5. This impedance value is needed for proper display and measured from LVDS Tx to the mating connector.
6. The measuring position is the connector of LCM and the test conditions are under 25°C.
7. The current and power consumption with LED Driver are under the  $V_{led} = 12.0\text{V}$ , 25°C, Dimming of Max luminance and White pattern with the normal frame frequency operated (60Hz).
8. The below figures are the measuring  $V_{led}$  condition and the  $V_{led}$  control block LGD used.  
 $V_{led}$  control block is same with  $V_{cc}$  control block.

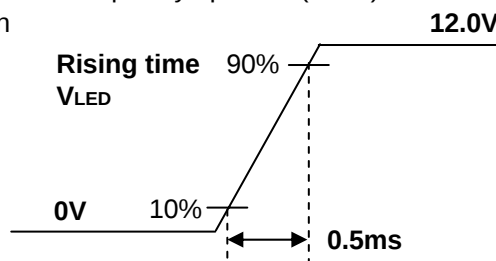


9. The operation of LED Driver below minimum dimming ratio may cause flickering or reliability issue.
10. If Jitter of PWM is bigger than maximum, it may induce flickering.
11. This Spec. is not effective at 100% dimming ratio as an exception because it has DC level equivalent to 0Hz. In spite of acceptable range as defined, the PWM Frequency should be fixed and stable for more consistent brightness control at any specific level desired.
12. The life time is determined as the time at which brightness of LCD is 50% compare to that of minimum value specified in table 7. under general user condition.

## Product Specification

### 3-2. Interface Connections

This LCD employs two interface connections, a 40 pin connector is used for the module electronics interface and the other connector is used for the integral backlight system.


**Table 3. MODULE CONNECTOR PIN CONFIGURATION (CN1)**

| Pin | Symbol     | Description                            | Notes                                                                                                                                                                        |
|-----|------------|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | NC         | No Connection (Reserved)               | <b>[Interface Chip]</b><br>1. LCD :<br>SiW, SW0646 (LCD Controller)<br>Including LVDS Receiver.<br>2. System : SiW LVDSRx or equivalent<br>* Pin to Pin compatible with LVDS |
| 2   | VCC        | LCD Logic and driver power (3.3V Typ.) |                                                                                                                                                                              |
| 3   | VCC        | LCD Logic and driver power (3.3V Typ.) |                                                                                                                                                                              |
| 4   | V EEDID    | DDC Power (3.3V)                       |                                                                                                                                                                              |
| 5   | Bist       | LCD Panel Self Test Enable             |                                                                                                                                                                              |
| 6   | Clk EEDID  | DDC Clock                              |                                                                                                                                                                              |
| 7   | DATA EEDID | DDC Data                               |                                                                                                                                                                              |
| 8   | ORX0-      | Negative LVDS differential data input  | <b>[Connector]</b><br>UJU IS050-L40B-C10 or equivalent                                                                                                                       |
| 9   | ORX0+      | Positive LVDS differential data input  |                                                                                                                                                                              |
| 10  | GND        | High Speed Ground                      | <b>[Mating Connector]</b><br>20345-#40E-## series or equivalent                                                                                                              |
| 11  | ORX1-      | Negative LVDS differential data input  |                                                                                                                                                                              |
| 12  | ORX1+      | Positive LVDS differential data input  | <b>[Connector pin arrangement]</b><br>                                                    |
| 13  | GND        | High Speed Ground                      |                                                                                                                                                                              |
| 14  | ORX2-      | Negative LVDS differential data input  | <b>[LCD Module Rear View]</b>                                                                                                                                                |
| 15  | ORX2+      | Positive LVDS differential data input  |                                                                                                                                                                              |
| 16  | GND        | High Speed Ground                      |                                                                                                                                                                              |
| 17  | ORXC-      | Negative LVDS differential clock input |                                                                                                                                                                              |
| 18  | ORXC+      | Positive LVDS differential clock input |                                                                                                                                                                              |
| 19  | GND        | High Speed Ground                      |                                                                                                                                                                              |
| 20  | ERX0-      | Negative LVDS differential data input  |                                                                                                                                                                              |
| 21  | ERX0+      | Positive LVDS differential data input  |                                                                                                                                                                              |
| 22  | GND        | High Speed Ground                      |                                                                                                                                                                              |
| 23  | ERX1-      | Negative LVDS differential data input  |                                                                                                                                                                              |
| 24  | ERX1+      | Positive LVDS differential data input  |                                                                                                                                                                              |
| 25  | GND        | High Speed Ground                      |                                                                                                                                                                              |
| 26  | ERX2-      | Negative LVDS differential data input  |                                                                                                                                                                              |
| 27  | ERX2+      | Positive LVDS differential data input  |                                                                                                                                                                              |
| 28  | GND        | High Speed Ground                      |                                                                                                                                                                              |
| 29  | ERXC-      | Negative LVDS differential clock input |                                                                                                                                                                              |
| 30  | ERXC+      | Positive LVDS differential clock input |                                                                                                                                                                              |
| 31  | GND        | LED Backlight Ground                   |                                                                                                                                                                              |
| 32  | GND        | LED Backlight Ground                   |                                                                                                                                                                              |
| 33  | GND        | LED Backlight Ground                   |                                                                                                                                                                              |
| 34  | NC         | No Connection (Reserved)               |                                                                                                                                                                              |
| 35  | PWM        | System PWM Signal input for dimming    |                                                                                                                                                                              |
| 36  | LED_EN     | LED Backlight On/Off                   |                                                                                                                                                                              |
| 37  | NC         | No Connection                          |                                                                                                                                                                              |
| 38  | VLED       | LED Backlight Power (7V-21V)           |                                                                                                                                                                              |
| 39  | VLED       | LED Backlight Power (7V-21V)           |                                                                                                                                                                              |
| 40  | VLED       | LED Backlight Power (7V-21V)           |                                                                                                                                                                              |

## Product Specification

### 3-3. LVDS Signal Timing Specifications


#### 3-3-1. DC Specification

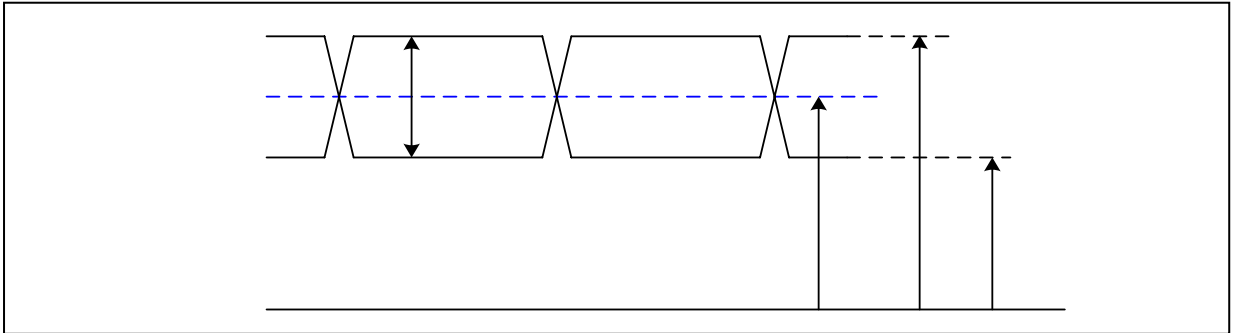

| Description               | Symbol     | Min | Max | Unit | Notes |
|---------------------------|------------|-----|-----|------|-------|
| LVDS Differential Voltage | $ V_{ID} $ | 100 | 600 | mV   | -     |
| LVDS Common mode Voltage  | $V_{CM}$   | 0.6 | 1.8 | V    | -     |
| LVDS Input Voltage Range  | $V_{IN}$   | 0.3 | 2.1 | V    | -     |


 $|V_{ID}|$ 

#### 3-3-2. AC Specification

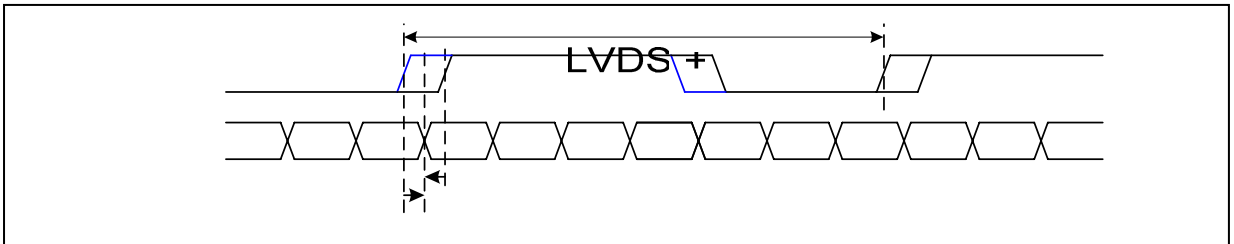


| Description                                            | Symbol           | Min   | Max   | Unit             | Notes                |
|--------------------------------------------------------|------------------|-------|-------|------------------|----------------------|
| LVDS Clock to Data Skew Margin                         | $t_{SKEW}$       | - 400 | + 400 | ps               | 85MHz > Fclk ≥ 65MHz |
|                                                        | $t_{SKEW}$       | - 600 | + 600 | ps               | 65MHz > Fclk ≥ 25MHz |
| LVDS Clock to Clock Skew Margin (Even to Odd)          | $t_{SKEW\_EO}$   | - 1/7 | + 1/7 | T <sub>clk</sub> | -                    |
| Maximum deviation of input clock frequency during SSC  | F <sub>DEV</sub> | -     | ± 3   | %                | -                    |
| Maximum modulation frequency of input clock during SSC | F <sub>MOD</sub> | -     | 200   | KHz              | -                    |

## Product Specification

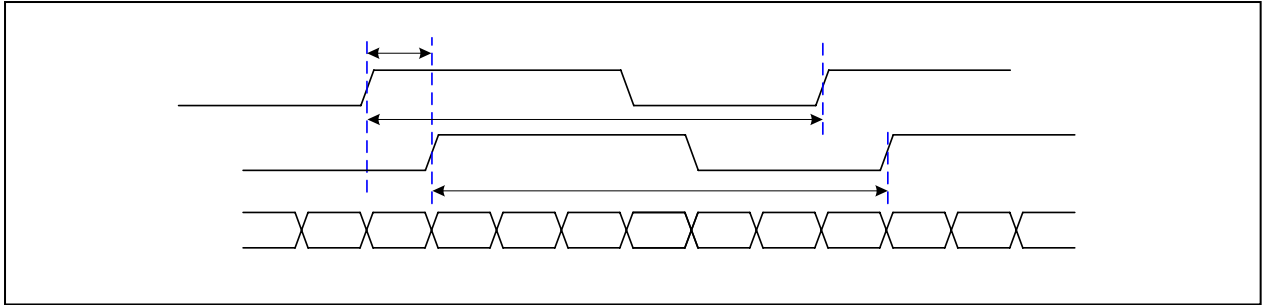


&lt; Clock skew margin between channel &gt;

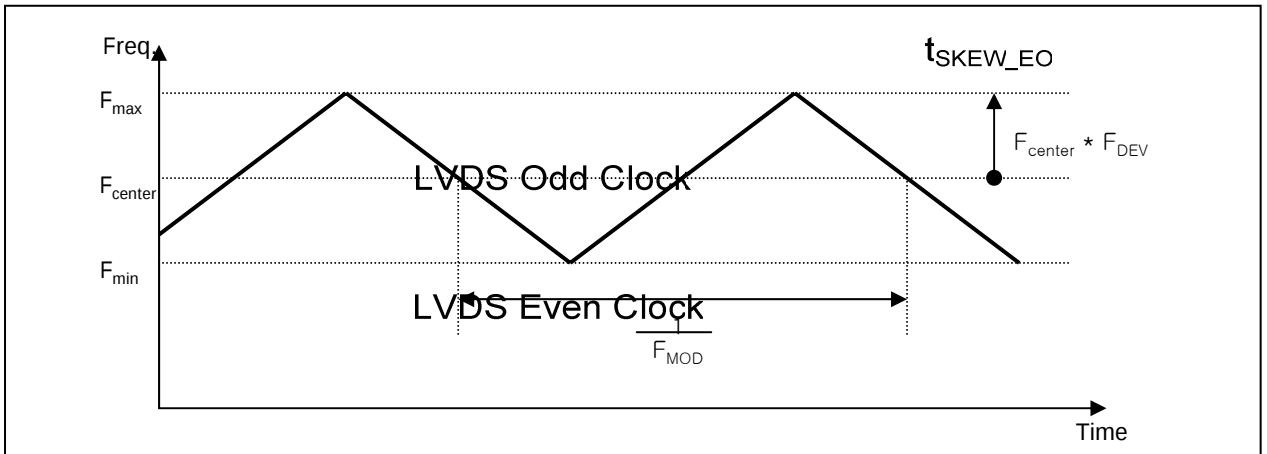

&lt; Spread Spectrum &gt;

**3-3-3. Data Format**

## 1) LVDS 2 Port

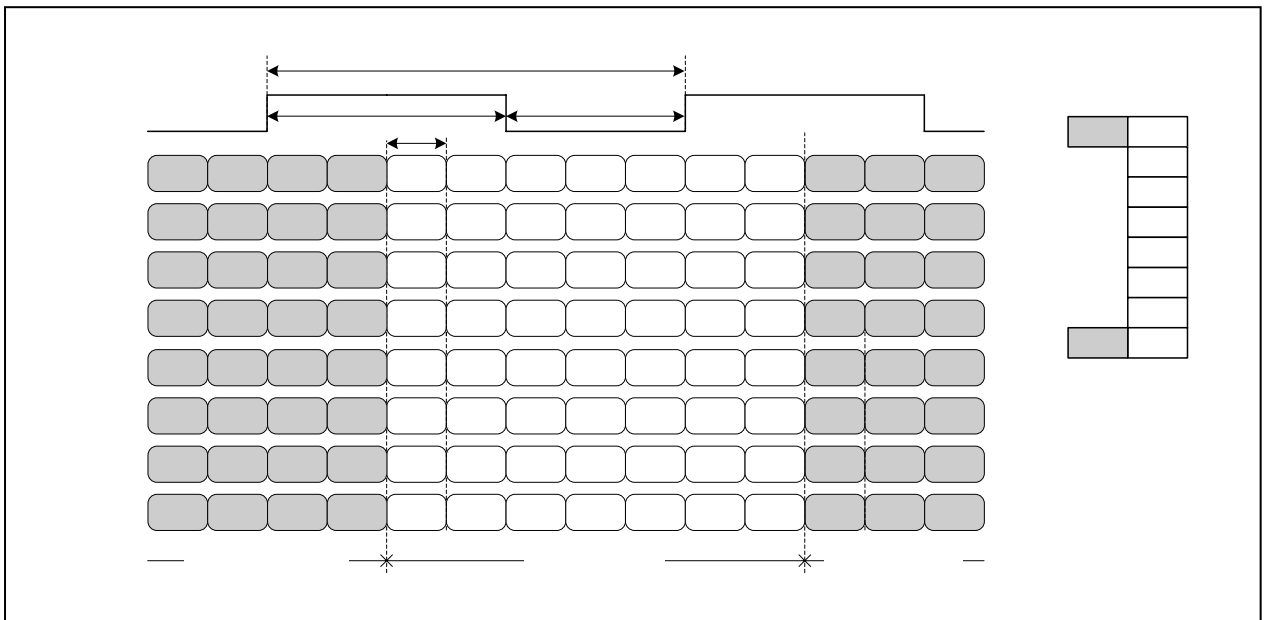

&lt; LVDS Data Format &gt;

### 3-4. Signal Timing Specifications


This is the signal timing required at the input of the User connector. All of the interface signal timing should be satisfied with the following specifications and specifications of LVDS Tx/Rx for its proper operation.

**Table 4. TIMING TABLE**

| ITEM        | Symbol                 | Min       | Typ  | Max   | Unit | Note |
|-------------|------------------------|-----------|------|-------|------|------|
| DCLK        | Frequency              | $f_{CLK}$ | -    | 140.0 | -    | MHz  |
| Hsync       | Period                 | $t_{HP}$  | 2020 | 2096  | 2156 | tCLK |
|             | Width                  | $t_{WH}$  | 32   | 32    | 32   |      |
|             | Width-Active           | $t_{WHA}$ | 1920 | 1920  | 1920 |      |
| Vsync       | Period                 | $t_{VP}$  | 1096 | 1113  | 1122 | tHP  |
|             | Width                  | $t_{WV}$  | 5    | 5     | 5    |      |
|             | Width-Active           | $t_{WVA}$ | 1080 | 1080  | 1080 |      |
| Data Enable | Horizontal back porch  | $t_{HBP}$ | 48   | 96    | 100  | tCLK |
|             | Horizontal front porch | $t_{HFP}$ | 20   | 48    | 104  |      |
|             | Vertical back porch    | $t_{VBP}$ | 10   | 25    | 28   | tHP  |
|             | Vertical front porch   | $t_{VFP}$ | 1    | 3     | 9    |      |

### 3-5. Signal Timing Waveforms

Condition : VCC =3.3V

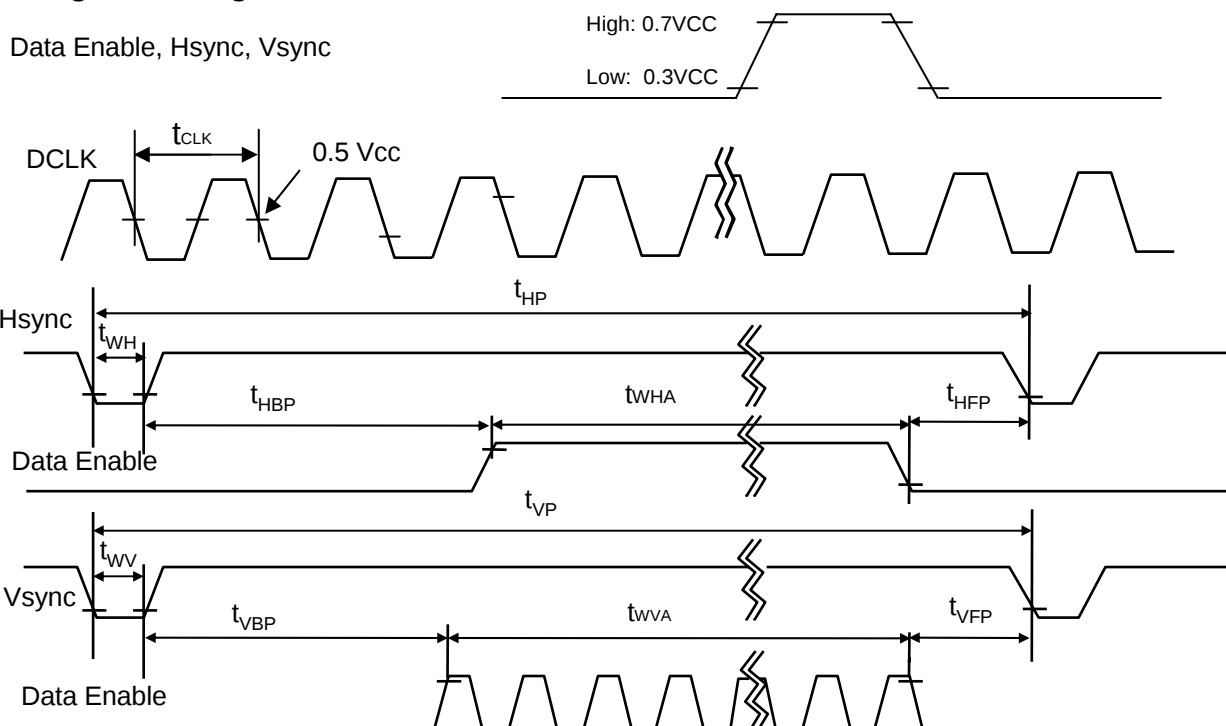

## Product Specification


### 3-6. Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color ; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

**Table 5. COLOR DATA REFERENCE**

| Color       |            | Input Color Data |    |    |     |    |    |       |    |    |     |    |    |      |    |    |     |    |    |
|-------------|------------|------------------|----|----|-----|----|----|-------|----|----|-----|----|----|------|----|----|-----|----|----|
|             |            | RED              |    |    |     |    |    | GREEN |    |    |     |    |    | BLUE |    |    |     |    |    |
|             |            | MSB              |    |    | LSB |    |    | MSB   |    |    | LSB |    |    | MSB  |    |    | LSB |    |    |
|             |            | R5               | R4 | R3 | R2  | R1 | R0 | G5    | G4 | G3 | G2  | G1 | G0 | B5   | B4 | B3 | B2  | B1 | B0 |
| Basic Color | Black      | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | Red        | 1                | 1  | 1  | 1   | 1  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | Green      | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | Blue       | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 1  |
|             | Cyan       | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 1  | 1    | 1  | 1  | 1   | 1  | 1  |
|             | Magenta    | 1                | 1  | 1  | 1   | 1  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 1  |
|             | Yellow     | 1                | 1  | 1  | 1   | 1  | 1  | 1     | 1  | 1  | 1   | 1  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | White      | 1                | 1  | 1  | 1   | 1  | 1  | 1     | 1  | 1  | 1   | 1  | 1  | 1    | 1  | 1  | 1   | 1  | 1  |
| RED         | RED (00)   | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | RED (01)   | 0                | 0  | 0  | 0   | 0  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | ...        | ...              |    |    |     |    |    | ...   |    |    |     |    |    | ...  |    |    |     |    |    |
|             | RED (62)   | 1                | 1  | 1  | 1   | 1  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | RED (63)   | 1                | 1  | 1  | 1   | 1  | 1  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
| GREEN       | GREEN (00) | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | GREEN (01) | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | ...        | ...              |    |    |     |    |    | ...   |    |    |     |    |    | ...  |    |    |     |    |    |
|             | GREEN (62) | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | GREEN (63) | 0                | 0  | 0  | 0   | 0  | 0  | 1     | 1  | 1  | 1   | 1  | 1  | 0    | 0  | 0  | 0   | 0  | 0  |
| BLUE        | BLUE (00)  | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 0  |
|             | BLUE (01)  | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 0    | 0  | 0  | 0   | 0  | 1  |
|             | ...        | ...              |    |    |     |    |    | ...   |    |    |     |    |    | ...  |    |    |     |    |    |
|             | BLUE (62)  | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 0  |
|             | BLUE (63)  | 0                | 0  | 0  | 0   | 0  | 0  | 0     | 0  | 0  | 0   | 0  | 0  | 1    | 1  | 1  | 1   | 1  | 1  |

### 3-7. Power Sequence

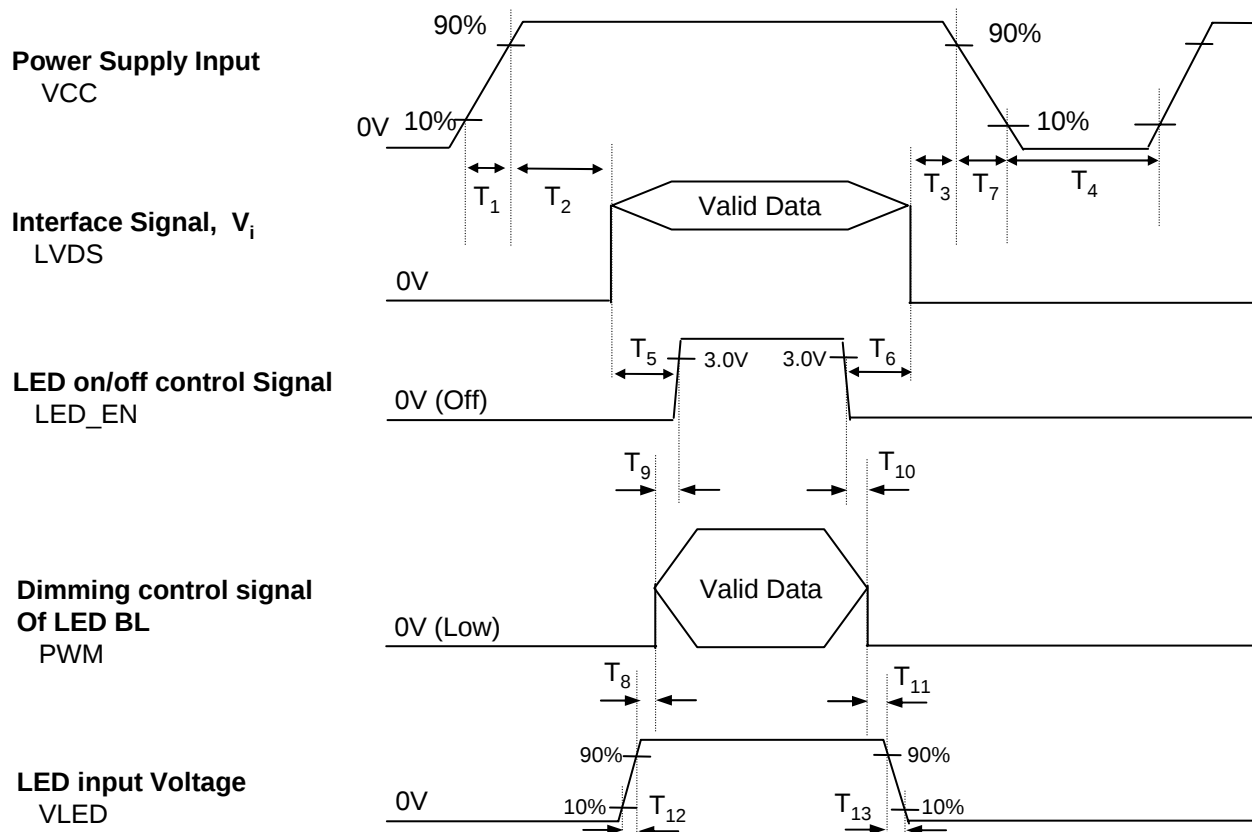
**Table 6. POWER SEQUENCE TABLE**

| Logic Parameter | Value |      |      | Units | LED Parameter   | Value |      |      | Units |
|-----------------|-------|------|------|-------|-----------------|-------|------|------|-------|
|                 | Min.  | Typ. | Max. |       |                 | Min.  | Typ. | Max. |       |
| T <sub>1</sub>  | 0.5   | -    | 10   | ms    | T <sub>8</sub>  | 10    | -    | -    | ms    |
| T <sub>2</sub>  | 0     | -    | 50   | ms    | T <sub>9</sub>  | 0     | -    | -    | ms    |
| T <sub>3</sub>  | 0     | -    | 50   | ms    | T <sub>10</sub> | 0     | -    | -    | ms    |
| T <sub>4</sub>  | 400   | -    | -    | ms    | T <sub>11</sub> | 10    | -    | -    | ms    |
| T <sub>5</sub>  | 200   | -    | -    | ms    | T <sub>12</sub> | 0.5   | -    | -    | ms    |
| T <sub>6</sub>  | 200   | -    | -    | ms    | T <sub>13</sub> | 0     | -    | 5000 | ms    |
| T <sub>7</sub>  | 3     | -    | 10   | ms    |                 |       |      |      |       |

Note)


1. Do not insert the mating cable when system turn on.
2. Valid Data have to meet "3-3. LVDS Signal Timing Specifications"
3. LVDS, LED\_EN and PWM need to be on pull-down condition on invalid status.
4. LGD recommend the rising sequence of VLED after the Vcc and valid status of LVDS turn on.

## 4. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 30 minutes in a dark environment at 25°C. The values specified are at an approximate distance 50cm from the LCD surface at a viewing angle of  $\Phi$  and  $\Theta$  equal to 0°.

FIG. 1 presents additional information concerning the measurement equipment and method.

**FIG. 1 Optical Characteristic Measurement Equipment and Method**

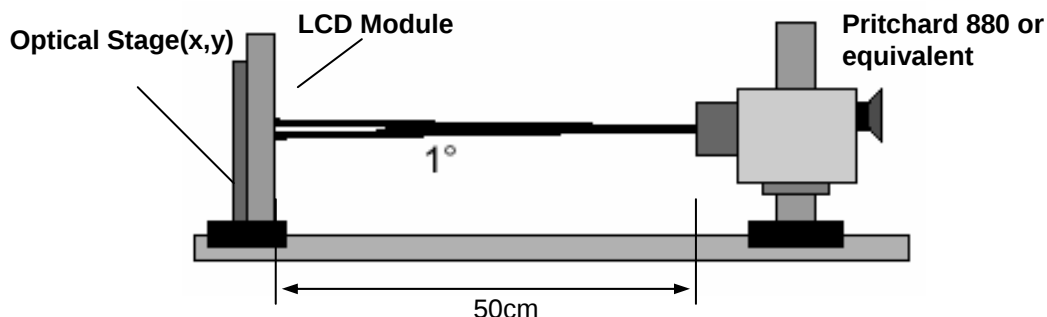

**Table 8. OPTICAL CHARACTERISTICS**

Ta=25°C, VCC=3.3V, fv=60Hz, fCLK= 140.0MHz

| Parameter                                                                                                                                   | Symbol                            | Values |       |       | Units             | Notes |
|---------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|--------|-------|-------|-------------------|-------|
|                                                                                                                                             |                                   | Min    | Typ   | Max   |                   |       |
| Contrast Ratio                                                                                                                              | CR                                | 500    | -     | -     |                   | 1     |
| Surface Luminance, white                                                                                                                    | L <sub>WH</sub>                   | 255    | 300   | -     | cd/m <sup>2</sup> | 2     |
| Luminance Variation                                                                                                                         | $\delta_{\text{WHITE}}$           | -      | 1.4   | 1.6   |                   | 3     |
| Response Time                                                                                                                               | Tr <sub>R</sub> + Tr <sub>D</sub> | -      | 8     | 16    | ms                | 4     |
| Color Coordinates                                                                                                                           |                                   |        |       |       |                   |       |
| RED                                                                                                                                         | RX                                | 0.610  | 0.640 | 0.670 |                   |       |
|                                                                                                                                             | RY                                | 0.305  | 0.335 | 0.365 |                   |       |
| GREEN                                                                                                                                       | GX                                | 0.290  | 0.320 | 0.350 |                   |       |
|                                                                                                                                             | GY                                | 0.580  | 0.630 | 0.660 |                   |       |
| BLUE                                                                                                                                        | BX                                | 0.120  | 0.150 | 0.180 |                   |       |
|                                                                                                                                             | BY                                | 0.030  | 0.060 | 0.090 |                   |       |
| WHITE                                                                                                                                       | WX                                | 0.283  | 0.313 | 0.343 |                   |       |
|                                                                                                                                             | WY                                | 0.299  | 0.329 | 0.359 |                   |       |
| Viewing Angle                                                                                                                               |                                   |        |       |       |                   |       |
| x axis, right( $\Phi=0^\circ$ )<br>x axis, left ( $\Phi=180^\circ$ )<br>y axis, up ( $\Phi=90^\circ$ )<br>y axis, down ( $\Phi=270^\circ$ ) | $\Theta_r$                        | 50     | -     | -     | degree            | 5     |
|                                                                                                                                             | $\Theta_l$                        | 50     | -     | -     | degree            |       |
|                                                                                                                                             | $\Theta_u$                        | 40     | -     | -     | degree            |       |
|                                                                                                                                             | $\Theta_d$                        | 40     | -     | -     | degree            |       |
| Color Gamut                                                                                                                                 | C/G                               | 65     | 72    | -     | %                 |       |
| Gray Scale                                                                                                                                  |                                   |        |       |       |                   | 6     |
| Gamma                                                                                                                                       |                                   | -      | 2.2   | -     |                   | 6     |

## Product Specification

Note)

1. Contrast Ratio(CR) is defined mathematically as

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

2. Surface luminance is the average of 5 point across the LCD surface 50cm from the surface with all pixels displaying white. For more information see FIG 1.

$$L_{WH} = \text{Average}(L_1, L_2, \dots L_5)$$

3. The variation in surface luminance , The panel total variation ( $\delta_{WHITE}$ ) is determined by measuring  $L_N$  at each test position 1 through 13 and then defined as followed numerical formula.  
For more information see FIG 2.

$$\delta_{WHITE} = \frac{\text{Maximum}(L_1, L_2, \dots L_{13})}{\text{Minimum}(L_1, L_2, \dots L_{13})}$$

4. Response time is the time required for the display to transition from white to black (rise time,  $Tr_R$ ) and from black to white(Decay Time,  $Tr_D$ ). For additional information see FIG 3.
5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 4.

6. Gray scale specification


\*  $f_V = 60\text{Hz}$

| Gray Level | Luminance [%] (Typ) |
|------------|---------------------|
| L0         | 0.11                |
| L7         | 1.20                |
| L15        | 5.23                |
| L23        | 11.8                |
| L31        | 20.6                |
| L39        | 34.6                |
| L47        | 53.3                |
| L55        | 75.8                |
| L63        | 100                 |


## Product Specification

**FIG. 2 Luminance**

<measuring point for surface luminance & measuring point for luminance variation>

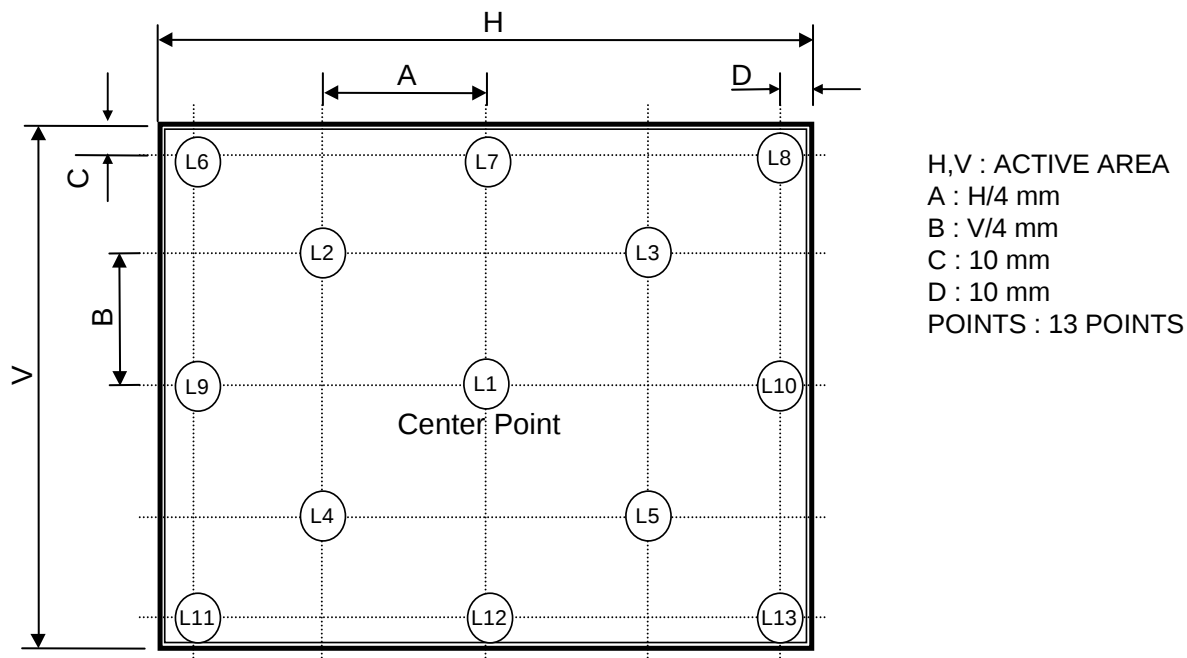
**FIG. 3 Response Time**

The response time is defined as the following figure and shall be measured by switching the input signal for "black" and "white".

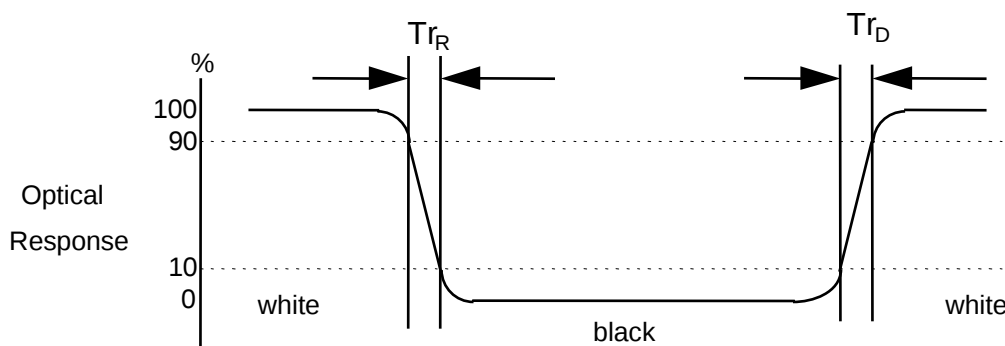


## Product Specification

**5. Mechanical Characteristics**

The contents provide general mechanical characteristics for the model LP173WF1.  
In addition the figures in the next page are detailed mechanical drawing of the LCD.

|                     |                                                  |                                               |
|---------------------|--------------------------------------------------|-----------------------------------------------|
| Outline Dimension   | Horizontal                                       | 398.1 ± 0.50mm                                |
|                     | Vertical                                         | 232.8 ± 0.50mm                                |
|                     | Depth                                            | 6.0mm(Max.)                                   |
| Bezel Area          | Horizontal                                       | 1.5mm Min.( Larger than Active Display Area ) |
|                     | Vertical                                         | 1.5mm Min.( Larger than Active Display Area ) |
| Active Display Area | Horizontal                                       | 381.888mm                                     |
|                     | Vertical                                         | 214.812 mm                                    |
| Weight              | 630g (Max.)                                      |                                               |
| Surface Treatment   | Anti-Glare treatment of the front polarizer (3H) |                                               |


**Product Specification**
**<FRONT VIEW>**

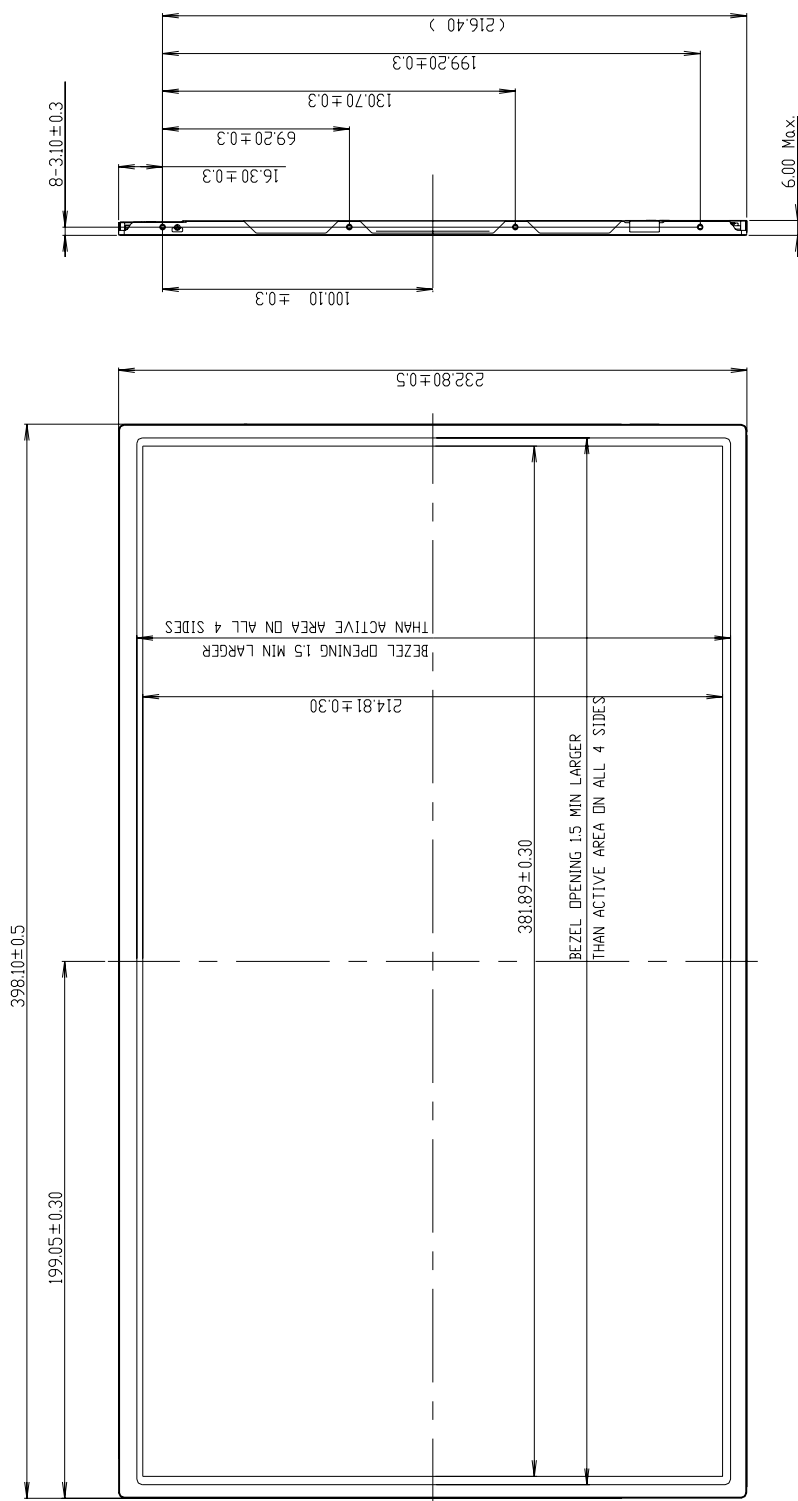 Note) Unit:[mm], General tolerance:  $\pm 0.5\text{mm}$ 


Product Specification


<REAR VIEW>

Note) Unit:[mm], General tolerance:  $\pm 0.5\text{mm}$

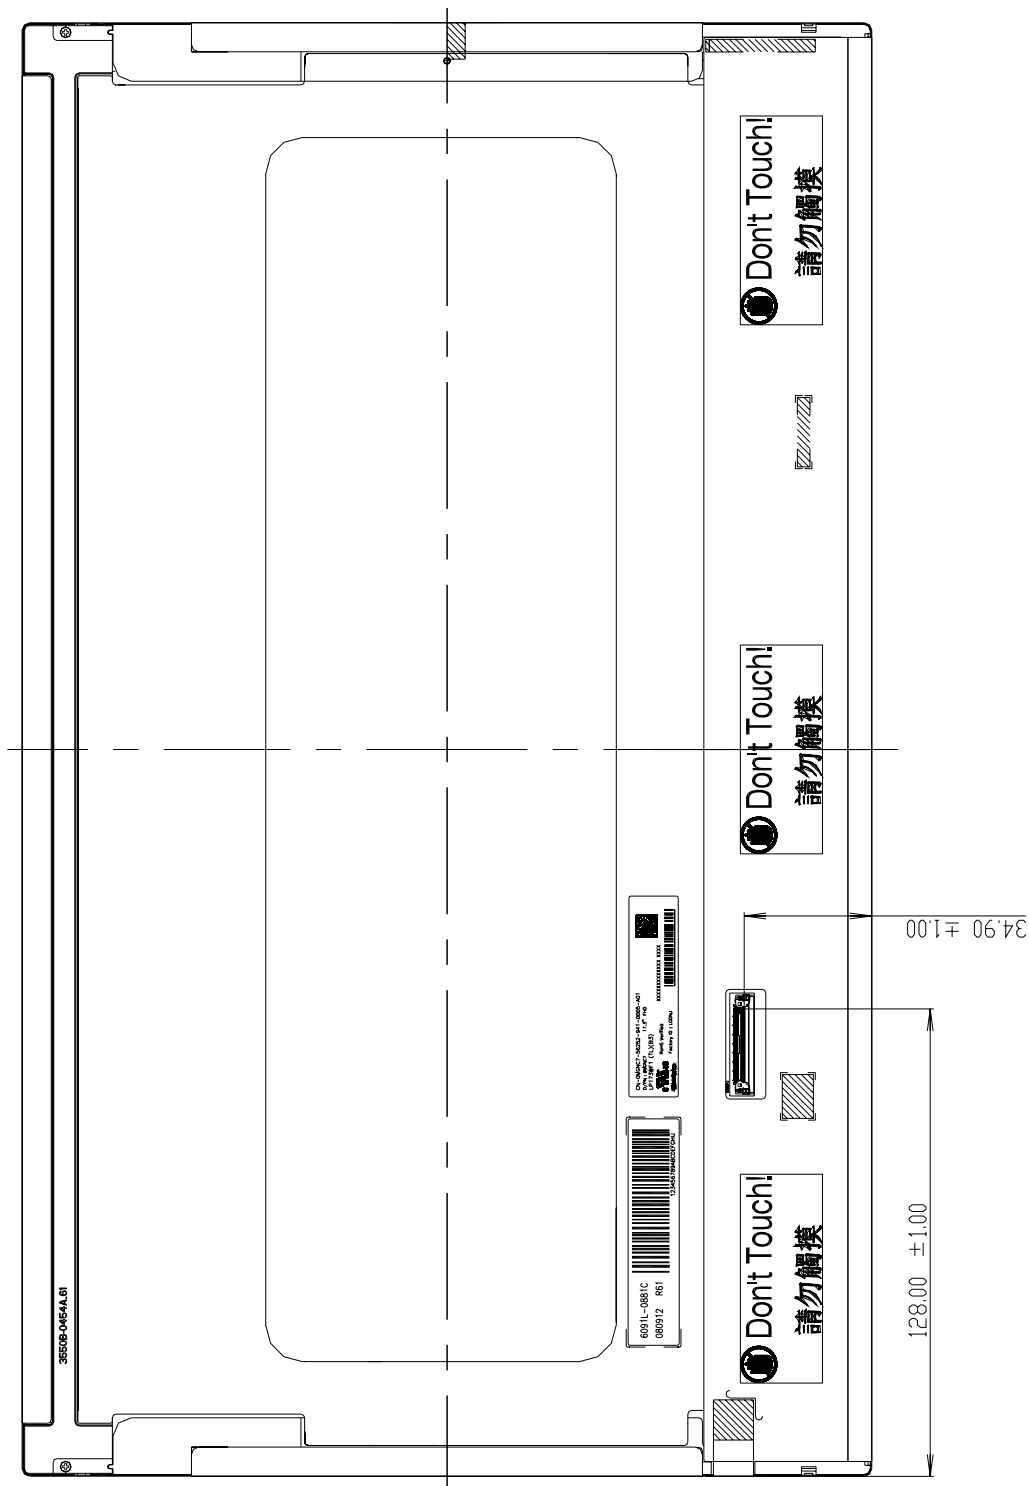

## Product Specification

### [ DETAIL DESCRIPTION OF SIDE MOUNTING SCREW ]

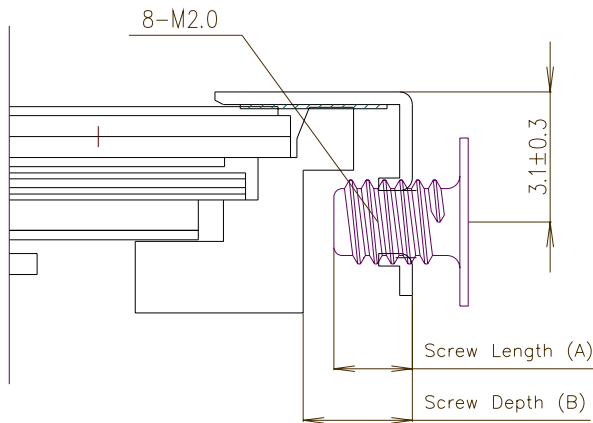

- \* Mounting Screw Length (A)  
= 2.0(Min) / 2.5(Max)
- \* Mounting Screw Hole Depth (B)  
= 2.5(Min)
- \* Mounting hole location : 3.10(typ.)
- \* Torque : 2.0 kgf.cm(Max)  
(Measurement gauge : torque meter)

Notes : 1. Screw plated through the method of non-electrolytic nickel plating is preferred to reduce possibility that results in vertical and/or horizontal line defect due to the conductive particles from screw surface.

### [ DETAIL INFORMATION OF PPID LABEL AND REVISION CODE ]





\* PPID Label Revision :




It is subject to change with Dell event. Please refer to the below table for detail.

| Classification | No Change | 1st Revision | 2nd Revision | ... | 9th Revision | ... |
|----------------|-----------|--------------|--------------|-----|--------------|-----|
| SST(WS)        | X00       | X01          | X02          | ... | A09          | ... |
| PT(ES)         | X10       | X11          | X12          | ... | A19          | ... |
| ST(CS)         | X20       | X21          | X22          | ... | A29          | ... |
| XB(MP)         | A00       | A01          | A02          | ... | A09          | ... |




**LGD Proposal for system cover design.(Appendix)**
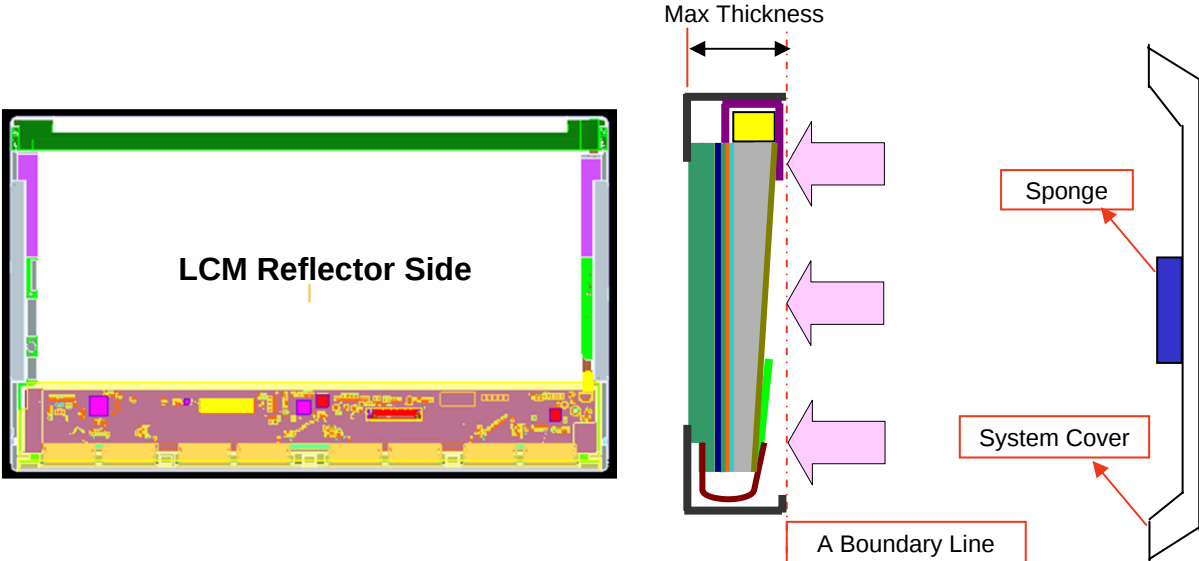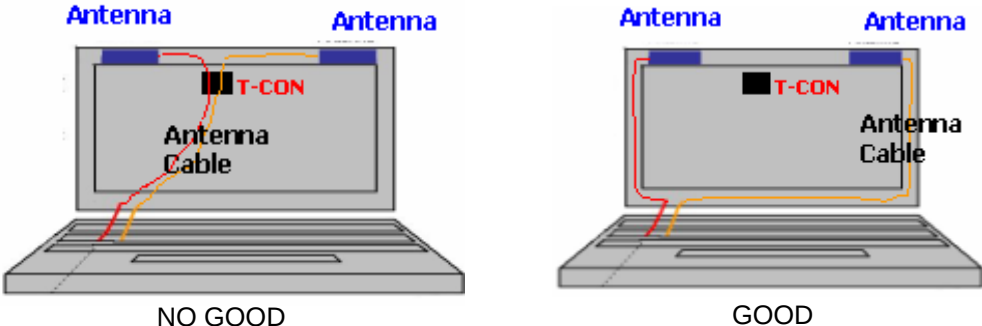
|        |                                                                                                                                                                                                                                                                                |  |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 1      | Gap check for securing the enough gap between LCM and System cover.                                                                                                                                                                                                            |  |
|        |  <p>LCM Reflector Side</p> <p>Max Thickness</p> <p>A Boundary Line</p> <p>Sponge</p> <p>System Cover</p>                                                                                     |  |
| Define | 1.Rear side of LCM is sensitive against external stress,and previous check about interference is highly needed.<br>2.In case there is something from system cover comes into the boundary above,mechanical interference may cause the FOS defects.<br>(Eg:Ripple,White spot..) |  |
| 2      | Check if antenna cable is sufficiently apart from T-CON of LCD Module.                                                                                                                                                                                                         |  |
| Define |  <p>Antenna</p> <p>Antenna</p> <p>T-CON</p> <p>Antenna Cable</p> <p>Antenna</p> <p>Antenna</p> <p>T-CON</p> <p>Antenna Cable</p> <p>NO GOOD</p> <p>GOOD</p>                                |  |
|        | 1.If system antenna is overlapped with T-CON,it might be cause the noise.                                                                                                                                                                                                      |  |

**LGD Proposal for system cover design.**
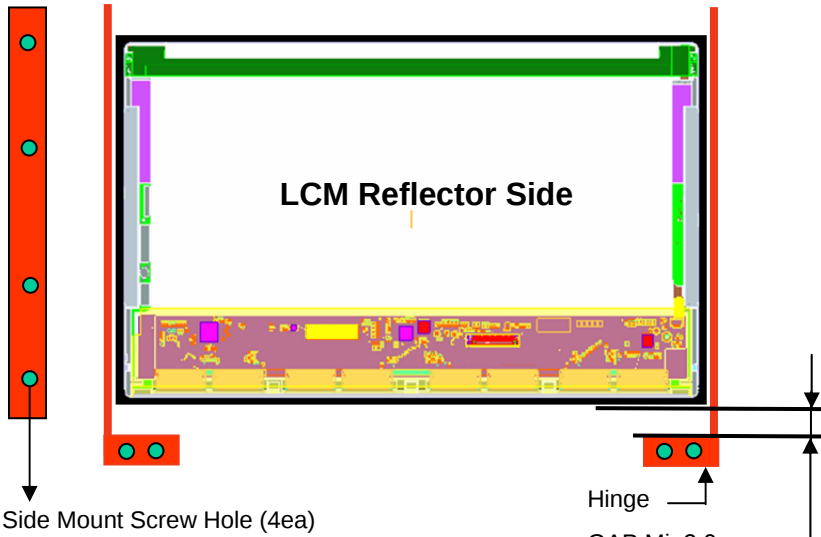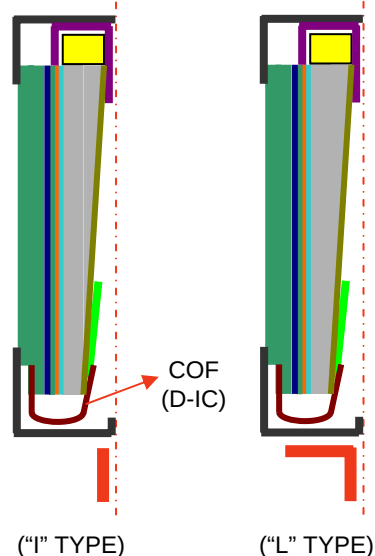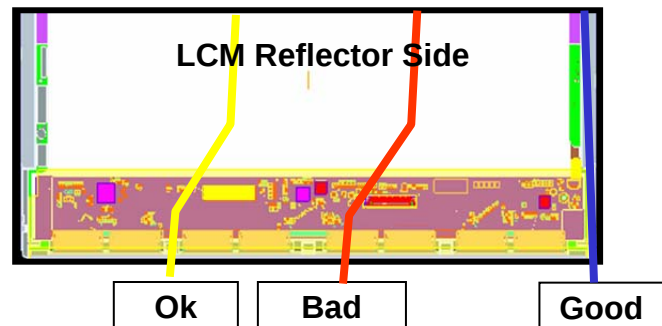
|                                                                                                                                                                                 |                                                                                                                                                                                |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 3                                                                                                                                                                               | Gap check for securing the enough gap between LCM and System hinge.                                                                                                            |  |
|  <p>LCM Reflector Side</p> <p>Side Mount Screw Hole (4ea)</p> <p>Hinge</p> <p>GAP:Min2.0mm</p> |  <p>COF (D-IC)</p> <p>("I" TYPE)</p> <p>("L" TYPE)</p>                                       |  |
| Define                                                                                                                                                                          | 1.At least 2.0mm of gap needs to be secured to prevent the shock related defects.<br>2."L" type of hinge is recommended than "I" type under shock test.                        |  |
| 4                                                                                                                                                                               | Checking the path of the System wire.                                                                                                                                          |  |
|                                                                                                                                                                                 |  <p>LCM Reflector Side</p> <p>Ok</p> <p>Bad</p> <p>Good</p>                                |  |
| Define                                                                                                                                                                          | 1.COF area needs to be handled with care.<br>2.GOOD → Wire path design to system side.<br>OK → Wire path is located between COFs.<br>BAD → Wire path overlapped with COF area. |  |

**LGD Proposal for system cover design.**
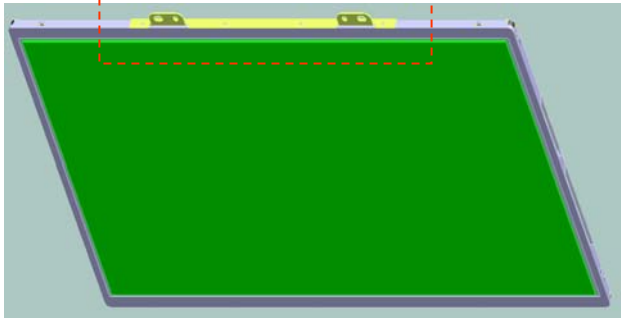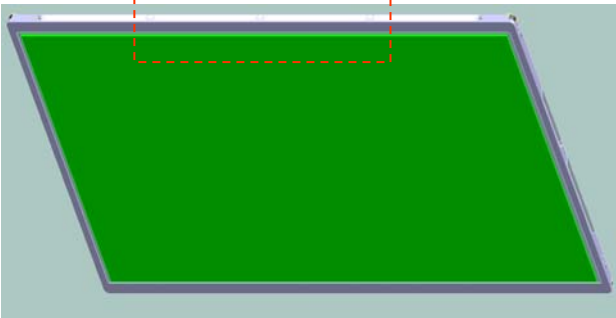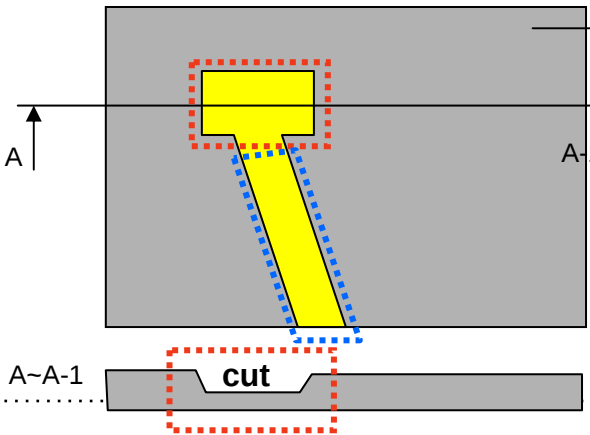
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                            |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Using a bracket on the top of LCM is not recommended.                                                                                                                                                                      |  |
| <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>bracket</p> </div> <div style="display: flex; justify-content: space-around; width: 100%;"> <div style="text-align: center;">  <p>With bracket</p> </div> <div style="text-align: center;">  <p>Without bracket</p> </div> </div> </div> |                                                                                                                                                                                                                            |  |
| Define                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1.Condition without bracket is good for mechanical noise,and can minimize the light leakage from deformation of bracket.<br>2.The results shows that there is no difference between the condition with or without bracket. |  |
| 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Securing additional gap on CNT area..                                                                                                                                                                                      |  |
| <div style="display: flex; align-items: center;"> <div style="flex: 1;">  <p>A~A-1</p> <p>cut</p> </div> <div style="flex: 1; padding-left: 20px;"> <p>System cover inner side.</p> <div style="border: 2px dashed red; width: 50px; height: 30px; margin-bottom: 10px;"></div> <p>User connector area.</p> <div style="border: 2px dashed blue; width: 80px; height: 60px; margin-bottom: 10px;"></div> <p>User connector Cable pathway.</p> <p>FPC:Flexible Printed Circuit.</p> </div> </div>                                    |                                                                                                                                                                                                                            |  |
| Define                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1.CNT area is specially sensitive against external stress,and additional gap by cutting on system cover will be helpful on removing the Ripple.<br>2.Using a thinner CNT will be better. (eg: FPC type)                    |  |

## Product Specification

## 6. Reliability

Environment test condition

| No. | Test Item                                   | Conditions                                                                                       |
|-----|---------------------------------------------|--------------------------------------------------------------------------------------------------|
| 1   | High temperature storage test               | Ta= 60°C, 240h                                                                                   |
| 2   | Low temperature storage test                | Ta= -20°C, 240h                                                                                  |
| 3   | High temperature operation test             | Ta= 50°C, 50%RH, 240h                                                                            |
| 4   | Low temperature operation test              | Ta= 0°C, 240h                                                                                    |
| 5   | Vibration test (non-operating)              | Sine wave, 10 ~ 500 ~ 10Hz, 1.5G, 0.37oct/min<br>3 axis, 1hour/axis                              |
| 6   | Shock test (non-operating)                  | Half sine wave, 180G, 2ms<br>one shock of each six faces(I.e. run 180G 2ms<br>for all six faces) |
| 7   | Altitude<br>operating<br>storage / shipment | 0 ~ 10,000 feet (3,048m) 24Hr<br>0 ~ 40,000 feet (12,192m) 24Hr                                  |

{ Result Evaluation Criteria }

There should be no change which might affect the practical display function when the display quality test is conducted under normal operating condition.

## 7. International Standards

### 7-1. Safety

- a) UL 60950-1, Second Edition, Underwriters Laboratories Inc.  
Information Technology Equipment - Safety - Part 1 : General Requirements.
- b) CAN/CSA C22.2 No.60950-1-07, Second Edition, Canadian Standards Association.  
Information Technology Equipment - Safety - Part 1 : General Requirements.
- c) EN 60950-1:2006 + A11:2009, European Committee for Electrotechnical Standardization (CENELEC).  
Information Technology Equipment - Safety - Part 1 : General Requirements.
- d) IEC 60950-1:2005, Second Edition, The International Electrotechnical Commission (IEC).  
Information Technology Equipment - Safety - Part 1 : General Requirements.

### 7-2. EMC

- a) ANSI C63.4 "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz." American National Standards Institute (ANSI), 2003.
- b) CISPR 22 "Information technology equipment – Radio disturbance characteristics – Limit and methods of measurement." International Special Committee on Radio Interference (CISPR), 2005.
- c) CISPR 13 "Sound and television broadcast receivers and associated equipment – Radio disturbance characteristics – Limits and method of measurement." International Special Committee on Radio Interference (CISPR), 2006.

### 7-3. Environment

- a) RoHS, Directive 2002/95/EC of the European Parliament and of the council of 27 January 2003

## Product Specification

## 8. Packing

### 8-1. Designation of Lot Mark

a) Lot Mark

|   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A | B | C | D | E | F | G | H | I | J | K | L | M |
|---|---|---|---|---|---|---|---|---|---|---|---|---|

A,B,C : SIZE(INCH)

E : MONTH

D : YEAR

F ~ M : SERIAL NO.

Note

1. YEAR

|      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|
| Year | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 |
| Mark | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 0    |

2. MONTH

|       |     |     |     |     |     |     |     |     |     |     |     |     |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
| Mark  | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   | 9   | A   | B   | C   |

b) Location of Lot Mark

Serial No. is printed on the label. The label is attached to the backside of the LCD module.  
This is subject to change without prior notice.

### 8-2. Packing Form

a) Package quantity in one box : 20 pcs

b) Box Size : 482 x 390 x 275

## 9. PRECAUTIONS

Please pay attention to the followings when you use this TFT LCD module.

### 9-1. MOUNTING PRECAUTIONS

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. Twisted stress) is not applied to the module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter causes circuit break by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizers with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front / rear polarizers. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

### 9-2. OPERATING PRECAUTIONS

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage :  
 $V = \pm 200\text{mV}$  (Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it becomes lower.)  
And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.

### 9-3. ELECTROSTATIC DISCHARGE CONTROL

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc. And don't touch interface pin directly.

### 9-4. PRECAUTIONS FOR STRONG LIGHT EXPOSURE

Strong light exposure causes degradation of polarizer and color filter.

### 9-5. STORAGE

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object.  
It is recommended that they be stored in the container in which they were shipped.

### 9-6. HANDLING PRECAUTIONS FOR PROTECTION FILM

- (1) When the protection film is peeled off, static electricity is generated between the film and polarizer.  
This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) The protection film is attached to the polarizer with a small amount of glue. If some stress is applied to rub the protection film against the polarizer during the time you peel off the film, the glue is apt to remain on the polarizer.  
Please carefully peel off the protection film without rubbing it against the polarizer.
- (3) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the polarizer after the protection film is peeled off.
- (4) You can remove the glue easily. When the glue remains on the polarizer surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.

**Product Specification**
**APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 1/3**

|                           | Byte<br>(Dec) | Byte<br>(Hex) | Field Name and Comments                                                                                                                                                                                                                                                                                                                                                 | Value<br>(Hex) | Value<br>(Bin) |
|---------------------------|---------------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|
| <b>Header</b>             | 0             | 00            | Header                                                                                                                                                                                                                                                                                                                                                                  | 00             | 00000000       |
|                           | 1             | 01            | Header                                                                                                                                                                                                                                                                                                                                                                  | FF             | 11111111       |
|                           | 2             | 02            | Header                                                                                                                                                                                                                                                                                                                                                                  | FF             | 11111111       |
|                           | 3             | 03            | Header                                                                                                                                                                                                                                                                                                                                                                  | FF             | 11111111       |
|                           | 4             | 04            | Header                                                                                                                                                                                                                                                                                                                                                                  | FF             | 11111111       |
|                           | 5             | 05            | Header                                                                                                                                                                                                                                                                                                                                                                  | FF             | 11111111       |
|                           | 6             | 06            | Header                                                                                                                                                                                                                                                                                                                                                                  | FF             | 11111111       |
| <b>Vendor / Product</b>   | 7             | 07            | Header                                                                                                                                                                                                                                                                                                                                                                  | 00             | 00000000       |
|                           | 8             | 08            | ID Manufacture Name LGD                                                                                                                                                                                                                                                                                                                                                 | 30             | 00110000       |
|                           | 9             | 09            | ID Manufacture Name                                                                                                                                                                                                                                                                                                                                                     | E4             | 11100100       |
|                           | 10            | 0A            | ID Product Code 02DAh                                                                                                                                                                                                                                                                                                                                                   | DA             | 11011010       |
|                           | 11            | 0B            | ( Hex. LSB first )                                                                                                                                                                                                                                                                                                                                                      | 02             | 00000010       |
|                           | 12            | 0C            | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)                                                                                                                                                                                                                                                                                                 | 00             | 00000000       |
|                           | 13            | 0D            | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)                                                                                                                                                                                                                                                                                                 | 00             | 00000000       |
|                           | 14            | 0E            | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)                                                                                                                                                                                                                                                                                                 | 00             | 00000000       |
|                           | 15            | 0F            | ID Serial No. - Optional ("00h" If not used, Number Only and LSB First)                                                                                                                                                                                                                                                                                                 | 00             | 00000000       |
|                           | 16            | 10            | Week of Manufacture - Optinal 00 weeks                                                                                                                                                                                                                                                                                                                                  | 00             | 00000000       |
| <b>Display</b>            | 17            | 11            | Year of Manufacture 2010 years                                                                                                                                                                                                                                                                                                                                          | 14             | 00010100       |
|                           | 18            | 12            | EDID structure version # = 1                                                                                                                                                                                                                                                                                                                                            | 01             | 00000001       |
|                           | 19            | 13            | EDID revision # = 4                                                                                                                                                                                                                                                                                                                                                     | 04             | 00000100       |
|                           | 20            | 14            | Video input Definition = Input is a Digital Video signal Interface , Colo Bit Depth : 6 Bits per Primary Color , Digital Video Interface Standard Supported: Digital Interface is not defined                                                                                                                                                                           | 90             | 10010000       |
|                           | 21            | 15            | Horizontal Screen Size (Rounded cm) = 38 cm                                                                                                                                                                                                                                                                                                                             | 26             | 00100110       |
| <b>Vendor / Product</b>   | 22            | 16            | Vertical Screen Size (Rounded cm) = 22 cm                                                                                                                                                                                                                                                                                                                               | 16             | 00010110       |
|                           | 23            | 17            | Display Transfer Characteristic (Gamma) = (gamma*100)-100 = Example:(2.2*100)-100=120 = 2.2 Gamma                                                                                                                                                                                                                                                                       | 78             | 01111000       |
|                           | 24            | 18            | Feature Support [ Display Power Management(DPM) : Standby Mode is not supported, Suspend Mode is not supported, Active Off = Very Low Power is not supported ,Supported Color Encoding Formats : RGB 4:4:4 & YCrCb 4:4:4 ,Other Feature Support Flags : No_sRGB, Preferred Timing Mode, No_Display is continuous frequency (Multi-mode_Base EDID and Extension Block).] | 0A             | 00001010       |
|                           | 25            | 19            | Red/Green Low Bits (RxRy/GxGy)                                                                                                                                                                                                                                                                                                                                          | 00             | 00000000       |
|                           | 26            | 1A            | Blue/White Low Bits (BxBY/WxWy)                                                                                                                                                                                                                                                                                                                                         | 05             | 00000101       |
|                           | 27            | 1B            | Red X Rx = 0.640                                                                                                                                                                                                                                                                                                                                                        | A3             | 10100011       |
|                           | 28            | 1C            | Red Y Ry = 0.335                                                                                                                                                                                                                                                                                                                                                        | 55             | 01010101       |
|                           | 29            | 1D            | Green X Gx = 0.320                                                                                                                                                                                                                                                                                                                                                      | 52             | 01010010       |
| <b>Established</b>        | 30            | 1E            | Green Y Gy = 0.630                                                                                                                                                                                                                                                                                                                                                      | A1             | 10100001       |
|                           | 31            | 1F            | Blue X Bx = 0.150                                                                                                                                                                                                                                                                                                                                                       | 26             | 00100110       |
|                           | 32            | 20            | Blue Y By = 0.060                                                                                                                                                                                                                                                                                                                                                       | 0F             | 00001111       |
|                           | 33            | 21            | White X Wx = 0.313                                                                                                                                                                                                                                                                                                                                                      | 50             | 01010000       |
|                           | 34            | 22            | White Y Wy = 0.329                                                                                                                                                                                                                                                                                                                                                      | 54             | 01010100       |
| <b>Standard Timing ID</b> | 35            | 23            | Established timing 1 ( Optional_00h if not used)                                                                                                                                                                                                                                                                                                                        | 00             | 00000000       |
|                           | 36            | 24            | Established timing 2 ( Optional_00h if not used)                                                                                                                                                                                                                                                                                                                        | 00             | 00000000       |
|                           | 37            | 25            | Manufacturer's timings ( Optional_00h if not used)                                                                                                                                                                                                                                                                                                                      | 00             | 00000000       |
|                           | 38            | 26            | Standard timing ID1 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 39            | 27            | Standard timing ID1 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 40            | 28            | Standard timing ID2 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 41            | 29            | Standard timing ID2 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 42            | 2A            | Standard timing ID3 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 43            | 2B            | Standard timing ID3 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 44            | 2C            | Standard timing ID4 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 45            | 2D            | Standard timing ID4 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 46            | 2E            | Standard timing ID5 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 47            | 2F            | Standard timing ID5 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 48            | 30            | Standard timing ID6 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 49            | 31            | Standard timing ID6 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 50            | 32            | Standard timing ID7 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 51            | 33            | Standard timing ID7 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 52            | 34            | Standard timing ID8 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |
|                           | 53            | 35            | Standard timing ID8 ( Optional_01h if not used)                                                                                                                                                                                                                                                                                                                         | 01             | 00000001       |

**Product Specification**
**APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 2/3**

|                             | Byte<br>(Dec) | Byte<br>(Hex) | Field Name and Comments                                                                                    | Value<br>(Hex) | Value<br>(Bin) |
|-----------------------------|---------------|---------------|------------------------------------------------------------------------------------------------------------|----------------|----------------|
| <b>Timing Descriptor #1</b> | 54            | 36            | Pixel Clock/10,000 (LSB) 140 MHz @ 60Hz                                                                    | <b>B0</b>      | 10110000       |
|                             | 55            | 37            | Pixel Clock/10,000 (MSB)                                                                                   | <b>36</b>      | 00110110       |
|                             | 56            | 38            | Horizontal Active (HA) (lower 8 bits) 1920 Pixels                                                          | <b>80</b>      | 10000000       |
|                             | 57            | 39            | Horizontal Blanking (HB) (lower 8 bits) 176 Pixels                                                         | <b>B0</b>      | 10110000       |
|                             | 58            | 3A            | Horizontal Active / Horizontal Blanking(HA HB) (upper 4:4bits)                                             | <b>70</b>      | 01110000       |
|                             | 59            | 3B            | Vertical Active (VA) 1080 Lines                                                                            | <b>38</b>      | 00111000       |
|                             | 60            | 3C            | Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 33 Lines                                       | <b>21</b>      | 00100001       |
|                             | 61            | 3D            | Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)                                                | <b>40</b>      | 01000000       |
|                             | 62            | 3E            | Horizontal Front Porch in pixels (HF) (lower 8 bits)48 Pixels                                              | <b>30</b>      | 00110000       |
|                             | 63            | 3F            | Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 32 Pixels                                        | <b>20</b>      | 00100000       |
|                             | 64            | 40            | Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Pluse Width in lines (VS) (lower 4 bits) | <b>35</b>      | 00110101       |
|                             | 65            | 41            | Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)             | <b>00</b>      | 00000000       |
|                             | 66            | 42            | Horizontal Vedio Image Size (mm) (lower 8 bits) 380 mm                                                     | <b>7C</b>      | 01111100       |
|                             | 67            | 43            | Vertical Vedio Image Size (mm) (lower 8 bits) 220 mm                                                       | <b>DC</b>      | 11011100       |
|                             | 68            | 44            | Horizontal Image Size / Vertical Image Size (upper 4 bits)                                                 | <b>10</b>      | 00010000       |
|                             | 69            | 45            | Horizontal Border = 0 (Zero for Notebook LCD)                                                              | <b>00</b>      | 00000000       |
|                             | 70            | 46            | Vertical Border = 0 (Zero for Notebook LCD)                                                                | <b>00</b>      | 00000000       |
|                             | 71            | 47            | Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_NEG (outside of V-sync) ]    | <b>18</b>      | 00011000       |
| <b>Timing Descriptor #2</b> | 72            | 48            | Pixel Clock/10,000 (LSB) 93.33 MHz @ 40Hz                                                                  | <b>75</b>      | 01110101       |
|                             | 73            | 49            | Pixel Clock/10,000 (MSB)                                                                                   | <b>24</b>      | 00100100       |
|                             | 74            | 4A            | Horizontal Active (HA) (lower 8 bits) 1920 Pixels                                                          | <b>80</b>      | 10000000       |
|                             | 75            | 4B            | Horizontal Blanking (HB) (lower 8 bits) 176 Pixels                                                         | <b>B0</b>      | 10110000       |
|                             | 76            | 4C            | Horizontal Active / Horizontal Blanking(HA HB) (upper 4:4bits)                                             | <b>70</b>      | 01110000       |
|                             | 77            | 4D            | Vertical Active (VA) 1080 Lines                                                                            | <b>38</b>      | 00111000       |
|                             | 78            | 4E            | Vertical Blanking (VB) (DE Blanking typ.for DE only panels) 33 Lines                                       | <b>21</b>      | 00100001       |
|                             | 79            | 4F            | Vertical Active / Vertical Blanking (VA VB) (upper 4:4bits)                                                | <b>40</b>      | 01000000       |
|                             | 80            | 50            | Horizontal Front Porch in pixels (HF) (lower 8 bits)48 Pixels                                              | <b>30</b>      | 00110000       |
|                             | 81            | 51            | Horizontal Sync Pulse Width in pixels (HS) (lower 8 bits) 32 Pixels                                        | <b>20</b>      | 00100000       |
|                             | 82            | 52            | Vertical Front Porch in lines (VF) (lower 4 bits) : Vertical Sync Pluse Width in lines (VS) (lower 4 bits) | <b>35</b>      | 00110101       |
|                             | 83            | 53            | Horizontal Front Porch/ Sync Pulse Width/ Vertical Front Porch/ Sync Pulse Width (upper 2bits)             | <b>00</b>      | 00000000       |
|                             | 84            | 54            | Horizontal Vedio Image Size (mm) (lower 8 bits) 380 mm                                                     | <b>7C</b>      | 01111100       |
|                             | 85            | 55            | Vertical Vedio Image Size (mm) (lower 8 bits) 220 mm                                                       | <b>DC</b>      | 11011100       |
|                             | 86            | 56            | Horizontal Image Size / Vertical Image Size (upper 4 bits)                                                 | <b>10</b>      | 00010000       |
|                             | 87            | 57            | Horizontal Border = 0 (Zero for Notebook LCD)                                                              | <b>00</b>      | 00000000       |
|                             | 88            | 58            | Vertical Border = 0 (Zero for Notebook LCD)                                                                | <b>00</b>      | 00000000       |
|                             | 89            | 59            | Non-Interlace, Normal display, no stereo, Digital Separate [ Vsync_NEG, Hsync_NEG (outside of V-sync) ]    | <b>18</b>      | 00011000       |
| <b>Timing Descriptor #3</b> | 90            | 5A            | Flag                                                                                                       | <b>00</b>      | 00000000       |
|                             | 91            | 5B            | Flag                                                                                                       | <b>00</b>      | 00000000       |
|                             | 92            | 5C            | Flag                                                                                                       | <b>00</b>      | 00000000       |
|                             | 93            | 5D            | Data Type Tag : Alphanumeric Data String (ASCII String)                                                    | <b>FE</b>      | 11111110       |
|                             | 94            | 5E            | Flag                                                                                                       | <b>00</b>      | 00000000       |
|                             | 95            | 5F            | Dell P/N 1st Character = M                                                                                 | <b>4D</b>      | 01001101       |
|                             | 96            | 60            | Dell P/N 2nd Character = G                                                                                 | <b>47</b>      | 01000111       |
|                             | 97            | 61            | Dell P/N 3rd Character = N                                                                                 | <b>4E</b>      | 01001110       |
|                             | 98            | 62            | Dell P/N 4th Character = C                                                                                 | <b>43</b>      | 01000011       |
|                             | 99            | 63            | Dell P/N 5th Character = 7                                                                                 | <b>37</b>      | 00110111       |
|                             | 100           | 64            | EDID Revision Build Name = MP(X-Build) , Revision # = A01                                                  | <b>81</b>      | 10000001       |
|                             | 101           | 65            | Manufacturer P/N = 1                                                                                       | <b>31</b>      | 00110001       |
|                             | 102           | 66            | Manufacturer P/N = 7                                                                                       | <b>37</b>      | 00110111       |
|                             | 103           | 67            | Manufacturer P/N = 3                                                                                       | <b>33</b>      | 00110011       |
|                             | 104           | 68            | Manufacturer P/N = W                                                                                       | <b>57</b>      | 01010111       |
|                             | 105           | 69            | Manufacturer P/N = F                                                                                       | <b>46</b>      | 01000110       |
|                             | 106           | 6A            | Manufacturer P/N = 1                                                                                       | <b>31</b>      | 00110001       |
|                             | 107           | 6B            | Manufacturer P/N (If < 13 char, then terminate with ASC II code 0Ah, so as to align the data to 128 bytes) | <b>0A</b>      | 00001010       |

## Product Specification

**APPENDIX A. Enhanced Extended Display Identification Data (EEDID™) 3/3**

|                             | Byte<br>(Dec) | Byte<br>(Hex) | Field Name and Comments                                                                                                         | Value<br>(Hex) | Value<br>(Bin) |
|-----------------------------|---------------|---------------|---------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|
| <b>Timing Descriptor #4</b> | 108           | 6C            | Flag                                                                                                                            | 00             | 00000000       |
|                             | 109           | 6D            | Flag                                                                                                                            | 00             | 00000000       |
|                             | 110           | 6E            | Flag                                                                                                                            | 00             | 00000000       |
|                             | 111           | 6F            | Data Type Tag : Descriptor Defined by manufacturer                                                                              | 00             | 00000000       |
|                             | 112           | 70            | Flag                                                                                                                            | 00             | 00000000       |
|                             | 113           | 71            | Color Management [ No +2 FRC Support, True Color Depth : 6 bit ]                                                                | 00             | 00000000       |
|                             | 114           | 72            | Panel Type [ WLED ] , Configuration [ Single light bar ], Number Lamp or LED Light Bar [ one ]                                  | 41             | 01000001       |
|                             | 115           | 73            | Frame Rate Details [ Minimum Frame Rate : 40Hz, Maximum Frame Rate : 65Hz , Tcon provides native Intel DRRS / sDRRS support ]   | 31             | 00110001       |
|                             | 116           | 74            | Controller Interface and Maximum Luminance [ PWM type, 300 nit ]                                                                | 9E             | 10011110       |
|                             | 117           | 75            | Front Surface / Polarizer [ Anti-Glare, No Transflective ], Pixel Structure [ RGB v-stripe ]                                    | 00             | 00000000       |
|                             | 118           | 76            | Multi-Media Features [ Color Management : NTSC, Dynamic Backlight Control : No ]                                                | 00             | 00000000       |
|                             | 119           | 77            | Multi-Media Features [ Motion Blur : No support , Active Gamma Control : No support ]                                           | 00             | 00000000       |
|                             | 120           | 78            | Special Features [ Wireless Enhancement Hardware : No support , In-Cell Scanner : No support ]                                  | 00             | 00000000       |
|                             | 121           | 79            | Special Features [ Number of LVDS channels or eDP lanes : two , Overdrive : No ,Interface : LVDS , In-Cell Touch Support : No ] | 02             | 00000010       |
|                             | 122           | 7A            | Special Features [ BIST Support : yes , Electronic Privacy : No electronic privacy hardware support , 3-D Support : No ]        | 01             | 00000001       |
|                             | 123           | 7B            | (If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)                                               | 0A             | 00001010       |
|                             | 124           | 7C            | (If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)                                               | 20             | 00100000       |
|                             | 125           | 7D            | (If<13 char--> 0Ah, then terminate with ASC II code 0Ah,set remaining char = 20h)                                               | 20             | 00100000       |
| <b>Checksum</b>             | 126           | 7E            | Extension flag (# of optional 128 panel ID extension block to follow, Typ = 0)                                                  | 00             | 00000000       |
|                             | 127           | 7F            | Check Sum (The 1-byte sum of all 128 bytes in this panel ID block shall = 0)                                                    | AF             | 10101111       |