

※For Alcatel Dynamite MTK20850 CO chipset and Tripath Line Driver

※For RoHS part add suffix NL

※RoHS NL peak solder rating 235°C








Electrical Specifications @25°C — Operating Temperature -40°C to +85°C

Part Number	Turns Ratio Ratio (Line:Chip)	OCL Primary (μH ±6%)	Leakage Inductance (μH MAX)	DCR Primary (1-4w/2-3tied) (Ω MAX)	DCR Secondary (8-5w/6-7tied) (Ω MAX)	Isolation Voltage (Vrms)	THD@20Khz 4.5Vp-p (dB MIN)
LPA2332	1. 41:1	900	10. 0	4. 4	3. 5	1500	-80

Mechanical

Schematic

LPA2332

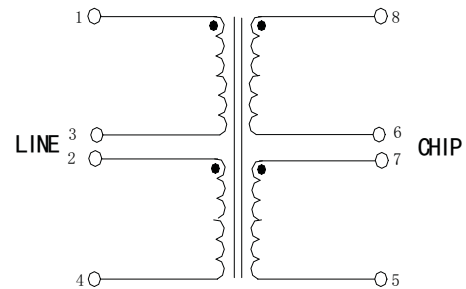

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$