


LQW03AW3N6C00#

" # " indicates a package specification code.

New
In Production
General
125 °C
Wound (No Shield)
Reflow OK
RoHS
REACH

< List of part numbers with package codes >
LQW03AW3N6C00D

Shape

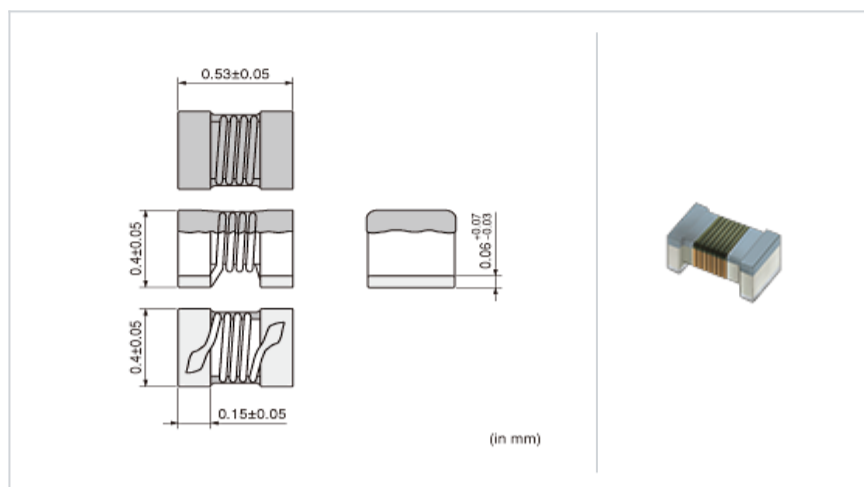

L size	0.53 ± 0.05mm
W size	0.4 ± 0.05mm
T size	0.4 ± 0.05mm
Size code in inch (mm)	0201 (0603)

Specifications

Inductance	3.6nH ± 0.2nH
Inductance test frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	340mA
Max. of DC resistance	0.23
Q (min.)	36(Typ.)
Q test frequency	900MHz
Self resonance frequency (min.)	11GHz
Operating temperature range (Self-temperature rise is included)	-55 ~ 125

References


Packaging code	Specifications	Minimum quantity
D	180mm Paper taping	10000

Mass (Typ.)	
1 piece	0.00023g


⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

▪ Inductance-Frequency characteristics (Typ.)

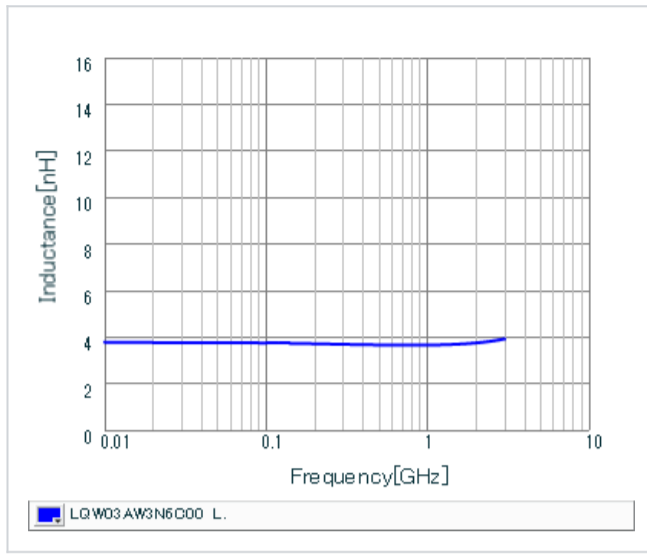

▪ Q-Frequency characteristics (Typ.)

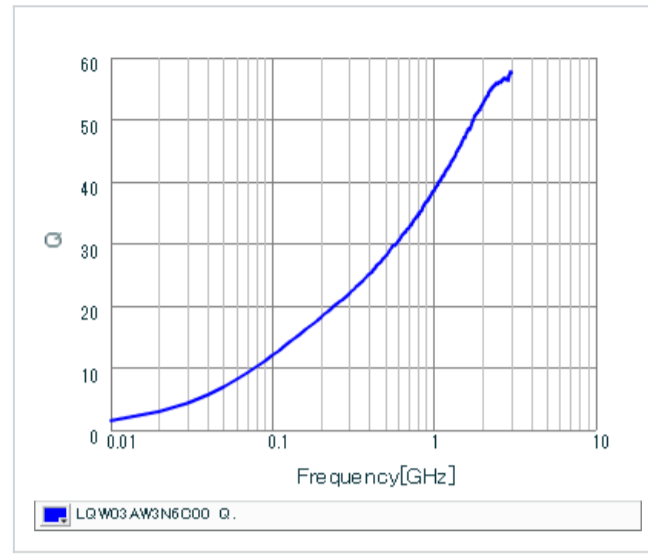

This PDF data has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.