



LR1108/E

CMOS IC

1A FAST ULTRA LOW DROPOUT LINEAR REGULATOR

DESCRIPTION

The UTC LR1108/E is an ultra low-dropout linear regulators. Wide output voltage range options are available. The fast response characteristic to make UTC LR1108/E suitable for low voltage microprocessor application. The low quiescent current operation and low dropout quality caused by the CMOS process.

The UTC LR1108/E has ultra low dropout voltage 300mV at 1A load current typically.


The ground pin current is typically 150uA at 1mA load current. **ERROR** Flag: When the output voltage drops 10% below nominal value Error flag goes low.

SET/ADJ Mode (for LR1108): Connect an external resistive voltage-divider from V_{OUT} to this pin to set the output voltage from 1.145V to 5V.

Output Voltage Precision: Multiple output voltage options are available and ranging from 1.2V ~ 5.0V at room temperature with a guaranteed accuracy of $\pm 1.5\%$, and $\pm 3.0\%$ when varying line, load and temperature.

FEATURES


- * Ultra Low Dropout Voltage
- * Low Ground Pin Current
- * 0.65% Load Regulation
- * The Guaranteed Output Current is 1A DC
- * Output Voltage Accuracy $\pm 1.5\%$
- * **ERROR** Flag Indicates Output Status
- * Sense option improves better load regulation
- * Low Output Capacitor Required
- * Over temperature Protection And Over current Protection

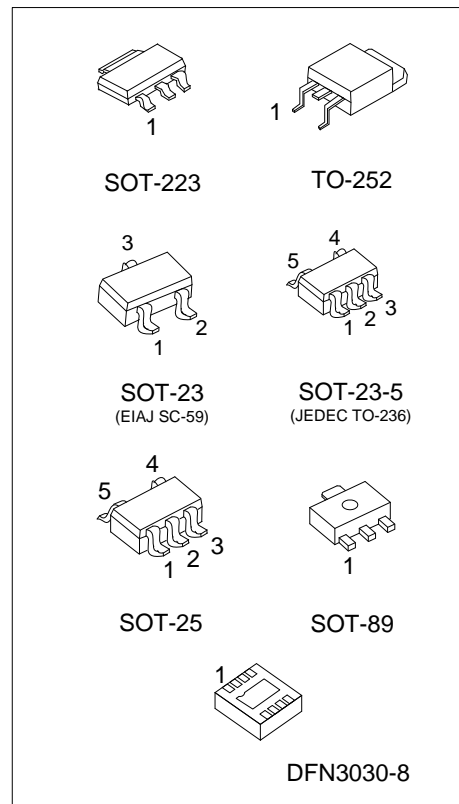

■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment ①									Packing
Lead Free	Halogen Free											
LR1108L-xx-AA3-①-R	LR1108G-xx-AA3-①-R	SOT-223	A: GOI B: OGI C: GIO D: IGO									Tape Reel
LR1108L-xx-AB3-①-R	LR1108G-xx-AB3-①-R	SOT-89										
LR1108L-xx-TN3-①-R	LR1108G-xx-TN3-①-R	TO-252										
LR1108L-xx-AE3-①-R	LR1108G-xx-AE3-①-R	SOT-23	1: GIO 3: GOI 5: OGI 6: IGO									Tape Reel
LR1108L-xx-AE5-R	LR1108G-xx-AE5-R	SOT-23-5	S	G	I	O	N	-	-	-	Tape Reel	
LR1108L-xx-AF5-R	LR1108G-xx-AF5-R	SOT-25	I	G	\overline{SD}	S	O	-	-	-	Tape Reel	
LR1108EL-xx-AF5-R	LR1108EG-xx-AF5-R	SOT-25	I	G	\overline{SD}	E	O	-	-	-	Tape Reel	
LR1108L-xx-K08-3030-R	LR1108G-xx-K08-3030-R	DFN3030-8	O	N	ADJ	G	\overline{SD}	N	N	I	Tape Reel	

Note: Pin Assignment: I:V_{IN} O:V_{OUT} G:GND SD: \overline{SD} E: \overline{ERROR} S: SET/ADJ

<p>LR1108EG-xx-AA3-A-R</p> 	<ul style="list-style-type: none"> (1) Packing Type (2) Pin Assignment (3) Package Type (4) Voltage Code (5) Green Package (6) Pin Situation 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) refer to Pin Assignment (3) AA3: SOT-223, AB3: SOT-89, AE3: SOT-23, AF5: SOT-25 AE5: SOT-23-5, TN3: TO-252, K08-3030: DFN3030-8 (4) xx: reference to Marking Information (5) G: Halogen Free and Lead Free, L: Lead Free (6) Refer to PIN CONFIGURATION
---------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-223		<p>LR1108 Pin Code Voltage Code L: Lead Free G: Halogen Free Date Code</p>
SOT-89		<p>LR1108 Date Code Voltage Code Pin Code L: Lead Free G: Halogen Free</p>
SOT-23		<p>SPXX L: Lead Free G: Halogen Free Voltage Code</p>
SOT-23-5	12: 1.2V 15: 1.5V 18: 1.8V 25: 2.5V	<p>VPXX L: Lead Free G: Halogen Free Voltage Code</p>
SOT-25 (LR1108E)	2J: 2.85V 33: 3.3V 50: 5.0V	<p>EPXX L: Lead Free G: Halogen Free Voltage Code</p>
SOT-25 (LR1108)		<p>SPXX L: Lead Free G: Halogen Free Voltage Code</p>
TO-252		<p>UTC LR1108 Pin Code Voltage Code Lot Code Date Code</p>
DFN3030-8		<p>LR 1108 Voltage Code Date Code</p>

■ PIN DESCRIPTION

For SOT-223/SOT-89/TO-252 Package

PIN CODE & NO				PIN NAME	I/O	DESCRIPTION
A	B	C	D			
2	1	3	3	V _{OUT}	O	Output Voltage
1	2	1	2	GND		Ground
3	3	2	1	V _{IN}		Input Supply

For SOT-23 Package

PIN CODE & NO				PIN NAME	I/O	DESCRIPTION
1	3	5	6			
1	1	2	2	GND		Ground
2	3	3	1	V _{IN}		Input Supply
3	2	1	3	V _{OUT}	O	Output Voltage

For SOT-23-5 Package

PIN NO	PIN NAME	I/O	DESCRIPTION
1	SD	I	Active low shutdown input.
2	GND		Ground
3	V _{IN}		Input supply
4	V _{OUT}	O	Output voltage
5	NC		


For SOT-25 Package

PIN NO	PIN NAME	I/O	DESCRIPTION
1	V _{IN}		Input supply
2	GND		Ground
3	SD	I	Active low shutdown input.
4	ERROR (For LR1108E)	O	ERROR flag, active low; when the output dropout of regulation due to low input voltage, the LR1108E produces a logic low signal at the ERROR pin.
	SET/ADJ (For LR1108)	I	Voltage-Setting Input. Connect an external resistive voltage-divider from V _{OUT} to this pin to set the output voltage. Connect to GND for Preset output
5	V _{OUT}	O	Output voltage


For DFN3030-8 Package

PIN NO	PIN NAME	I/O	DESCRIPTION
1	V _{OUT}	O	Output voltage
2, 6, 7	NC		
3	ADJ	I	Voltage-Setting Input. Connect an external resistive voltage-divider from V _{OUT} to this pin to set the output voltage.
4	GND		Ground
5	SD	I	Active high Enable input.
8	V _{IN}		Input supply

■ BLOCK DIAGRAM

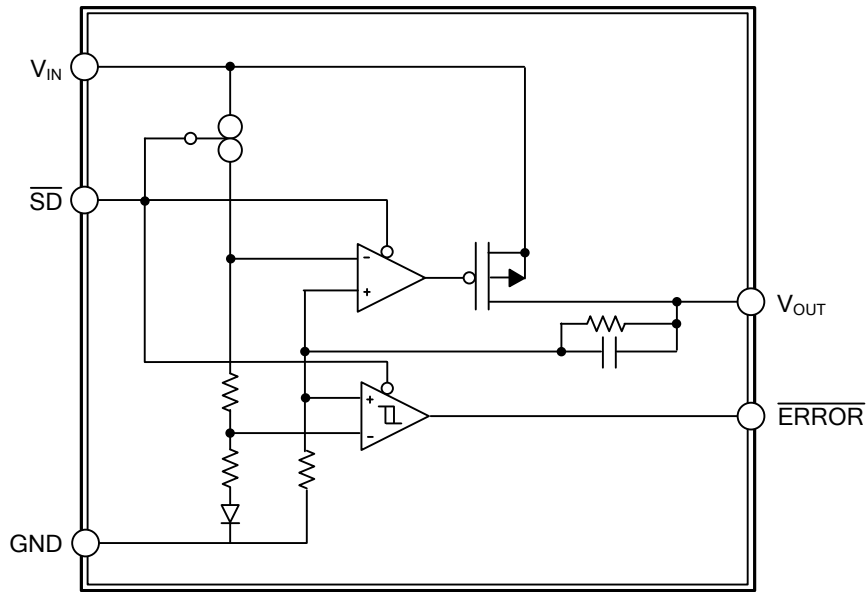

LR1108E

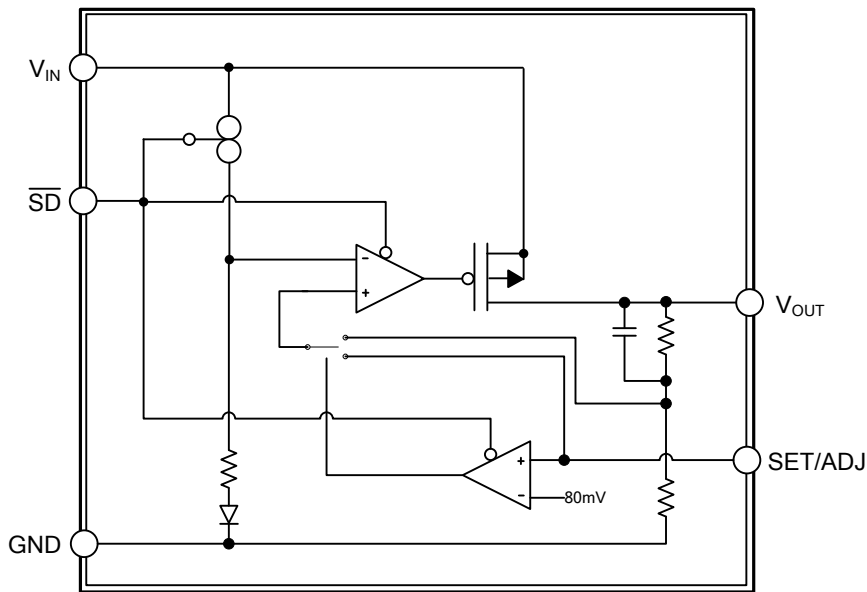

LR1108

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage (Operating) (Note 10)	V_{IN}	2.5 ~ 7.0	V
Shutdown Input Voltage	$V_{IN(SHDN)}$	-0.3 ~ $V_{IN}+0.3$	V
I_{OUT} (Survival)		Short Circuit Protected	
Maximum Voltage for \overline{ERROR} Pin		$V_{IN}+0.3$	V
Maximum Operating Current (DC)		1	A
Power Dissipation (Note 2)	P_D	Internally Limited	
Junction Temperature	T_J	+150	°C
Operating Temperature	T_{OPR}	-40 ~ +125	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT	
Junction to Ambient	θ_{JA}	SOT-223	165	°C/W
		SOT-89	179	
		SOT-23	325	
		SOT-23-5	260	
		SOT-25		
		TO-252	112	
		DFN3030-8	90	
Junction to Case	θ_{JC}	SOT-223	15	°C/W
		SOT-89	47	
		SOT-23	130	
		SOT-23-5	110	
		SOT-25		
		TO-252	12	
		DFN3030-8	16	

■ ELECTRICAL CHARACTERISTICS

Limits in standard typeface are for $T_J = 25^\circ\text{C}$, and limits in **boldface type** apply over the full operating temperature range. ($T_J = 25^\circ\text{C}$, $V_{IN} = V_{O(NOM)} + 1\text{V}$, $I_L = 10\text{mA}$, $C_{OUT} = 22\mu\text{F}$, $V_{SD} = V_{IN}-0.3\text{V}$, unless otherwise specified.)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Voltage Range	V_{IN}				6.0	V
Output Voltage Tolerance (Note 4)	V_{OUT}	$0\text{mA} \leq I_L \leq 1\text{A}$ $V_{OUT} + 1 \leq V_{IN} \leq 6.0\text{V}$	-1.5 -3	0	+1.5 +3	%
Output Voltage Line Regulation (Note 4)	ΔV_{OUT}	$V_{OUT} + 1\text{V} < V_{IN} < 6.0\text{V}$		0.6		%
Output Voltage Load Regulation (Note 4)	$\Delta V_{OUT}/\Delta I_{OUT}$	$10\text{mA} < I_L < 1\text{A}$		0.65		%
Dropout Voltage (Note 6)	V_D	$I_L = 1\text{A}$		325	500	mV
Ground Pin Current In Normal Operation Mode	I_{GND}	$I_L = 0\text{mA}$		150		uA
		$I_L = 1\text{A}$		300		
Peak Output Current	$I_{O(PEAK)}$	(Note 2)	1			A
SHORT CIRCUIT PROTECTION						
Short Circuit Current	I_{SC}			2		A
OVER TEMPERATURE PROTECTION						
Shutdown Threshold	$T_{SHDN(THR)}$			165		°C
Thermal Shutdown Hysteresis	$T_{SHDN(HYS)}$			10		°C

■ ELECTRICAL CHARACTERISTICS (Cont.)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
SHUTDOWN INPUT							
Shutdown Threshold	V_{SHDN}	Output=High	$V_{IN}-0.3$	V_{IN}		V	
		Output=Low		0	0.2		
Turn-off Delay	$t_{D(OFF)}$	$I_L=1A$		20		μs	
Turn-on Delay	$t_{D(ON)}$	$I_L=1A$		25		μs	
\overline{SD} Input Current	I_{SD}	$V_{SD}=V_{IN}$		1		nA	
ERROR FLAG COMPARATOR (LR1108E)							
\overline{ERROR} Flag Saturation	$V_{EF(SAT)}$	$I_{SINK}=100\mu A$		0.02	0.1	V	
\overline{ERROR} Flag Pin Leakage Current	$I_{I(LEAK)}$			1		nA	
Threshold	V_T	(Note 5)	5	10	16	%	
Threshold Hysteresis	V_{THR}	(Note 5)	2	5	8	%	
Flag Reset Delay	t_D			1		μs	
ADJ Voltages @ Set/ADJ Mode (connect to GND for Preset V_{OUT})							
ADJ Voltage	@ Preset $V_O=1.2 \sim 1.5V$	V_{ADJ}	Measured on ADJ, $I_{OUT}=10mA$	1.176	1.2	1.224	V
	@ Preset $V_O=3.4 \sim 5.0V$						
	@ Preset $V_O=1.8 \sim 3.3V$			1.122	1.145	1.168	V
AC PARAMETERS							
Ripple Rejection	PSRR	$V_{IN}=V_{OUT}+1.5V$ $C_{OUT}=100\mu F, V_{OUT}=3.3V$		60		dB	
		$V_{IN}=V_{OUT}+0.3V$ $C_{OUT}=100\mu F, V_{OUT}=3.3V$		40			
Output Noise Density	$\rho_{N(L/F)}$	$f=120Hz$		0.8		μV	
Output Noise Voltage	e_N	$BW=10Hz \sim 100kHz$		150		μV_{RMS}	
		$BW=300Hz \sim 300kHz$		100			

- Notes: 1. Conditions for which the device is intended to be functional is indicated by operating ratings, but specific performance limits isn't be guaranteed. To make sure of specifications and test conditions, read Electrical Characteristics. Only for the test conditions listed the guaranteed specifications can be applied. When the device is not operated under the listed test conditions some performance characteristics may degrade.
2. Devices must be derated based on package thermal resistance at elevated temperatures.
3. The most likely parametric norm represents at 25°C.
4. Output voltage line regulation is the change in output voltage from the nominal value which is due to change in the input line voltage. Which is defined as the change in output voltage from the nominal value due to change in load current is output voltage load regulation. The load regulation and line regulation specification include the typical number only. But, the limits for load and line regulation are included in the output voltage tolerance specification.
5. \overline{ERROR} Flag hysteresis and threshold are specified as regulated output voltage's percentage.
6. At which the output drops 2% below the normal value dropout voltage is defined as the minimum input to output differential voltage. Only to output voltages of 2.5V and above dropout voltage specification applies. For output voltages below 2.5V, since the minimum input voltage is 2.5V, the drop-out voltage is nothing but the input to output differential.
7. Specification has been tested at $-40^\circ C \leq T_J \leq +85^\circ C$ cause under shutdown conditions the temperature rise of the device is negligible.
8. The minimum operating V_{IN} value is equal to $[V_{OUT(NOM)} + V_{DROPOUT}]$ or 2.5V, just the greater.

■ TYPICAL APPLICATION CIRCUIT

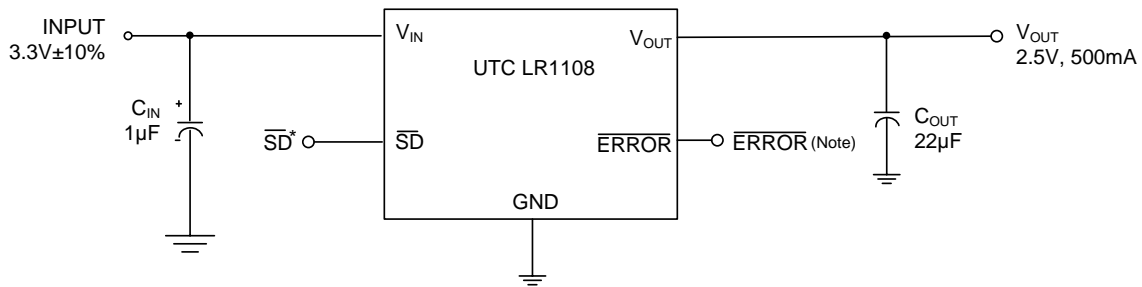


Note: \overline{SD} and \overline{ERROR} pins must be pulled high through a 10kΩ pull-up resistor. Connect the \overline{ERROR} pin to ground if this function is not used.

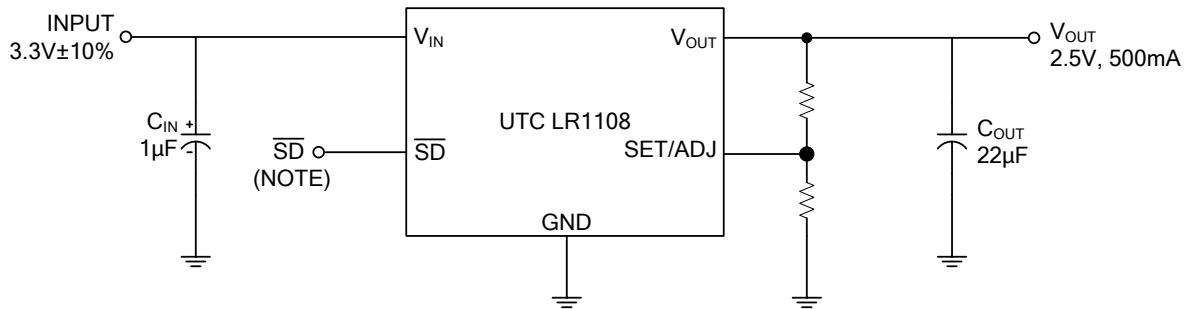

- Notes:
1. \overline{SD} pins must be pulled high through a 10kΩ pull-up resistor.
 2. Connect the SET/ADJ pin to ground if this function is not used.
 3. The output voltage is calculated by:

$$V_{OUT} = V_{REF} \left(1 + \frac{R_1}{R_2} \right)$$

■ TYPICAL CHARACTERISTICS

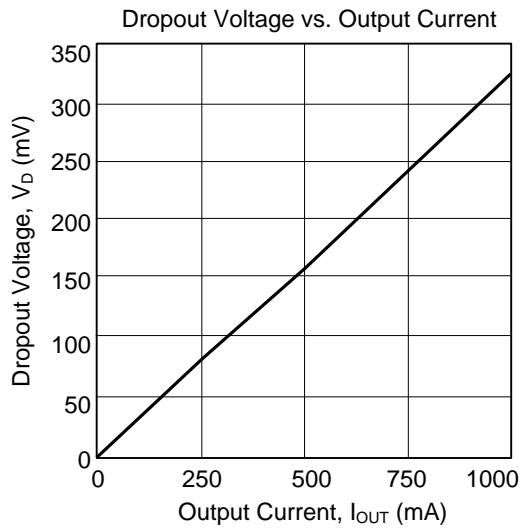

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.