

- > **Balanced valve design for optimum pressure control**
- > **Push to lock adjusting knob with tamper resistant accessory**
- > **Wide temperature range**
- > **Shock and vibration tested to EN 61373, Category 1, class A and B**



**Technical features**

**Medium:**  
Compressed air  
**Pressure range:**  
0,3 ... 10 bar (4,3 ... 145 psi)  
Other pressure ranges see option selector

**Maximum inlet pressure:**  
20 bar (290 psi)

**Ambient/Media temperature:**  
-25 ... +65°C max.  
(-13 ... +150°F max.)  
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).

**Material:**  
Body: anodized aluminium  
Bonnet: acetal  
Valve: brass  
Elastomers: NBR

**Technical data - Standard version; knob actuated**

Symbol	Operating pressure (bar)	Operating pressure (psi)	Flow (dm³/s)	Flow (scfm)	Diaphragm	Weight (kg)	Weight (lb)	Model
	0,3 ... 10	4,3 ... 145	23	49	Relieving	0,4	0,88	LR72Z-0GK-RMN

\* Typical flow at 10 bar (145 psi) inlet pressure, 6,3 bar (90 psi) set pressure and 0,5 bar (7 psi) droop from set.

**Option selector**


**LR72Z-0★★-★★N**

Version	Substitute
General purpose (standard)	G
Reverse full flow	R
Adjustment	Substitute
Knob (standard)	K
Screw	S
T-handle	T

Pressure range	Substitute
0,3 ... 2 bar (4,3 ... 29 psi)	C
0,3 ... 4 bar (4,3 ... 58 psi)	F
0,3 ... 10 bar (4,3 ... 145 psi)	M
Diaphragm	Substitute
Relieving	R
Non relieving	N

**Flow characteristics**

**Regulating range**  
0,3 ... 10 bar (4,3 ... 145 psi)

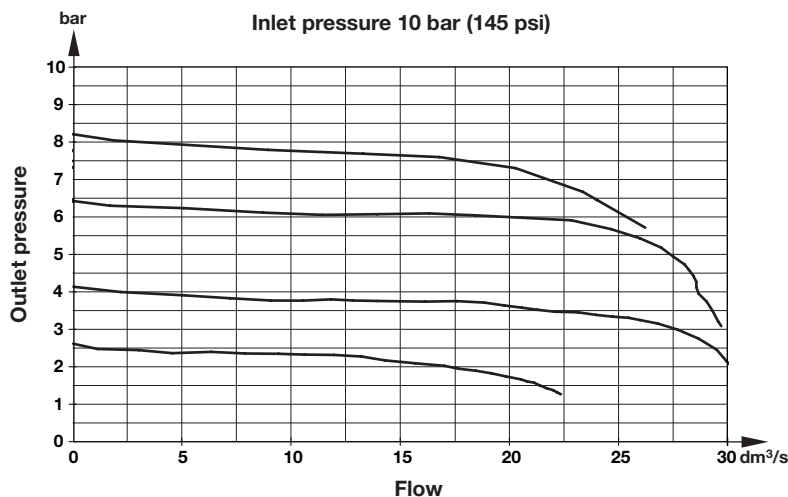

**Accessories**



**Dimensions**










Dimensions shown in mm  
Projection/First angle



**Knob adjustable**

**Screw adjustable**

**T-handle adjustable**

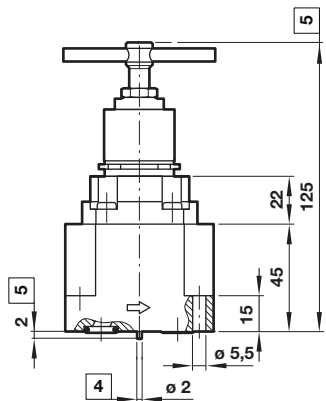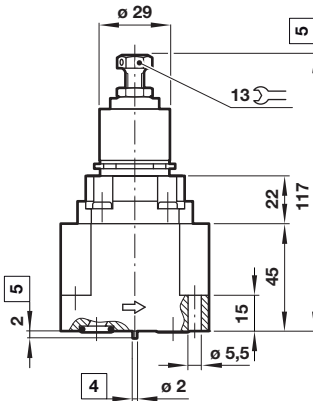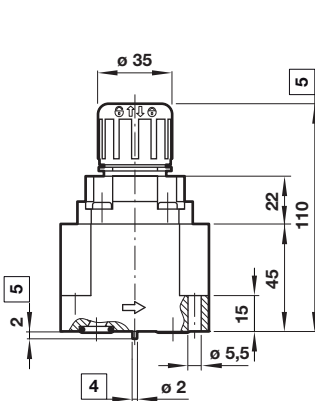

- 1 Inlet port
- 2 Outlet port
- 3 'O'-rings are in scope of delivery
- 4 Position pin
- 5 Reference

**Warning**

These products are intended for use in industrial compressed air and rail transport systems only. Do not use these products where pressures and temperatures can exceed those listed under »Technical features/data«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.