

# Schottky barrier diode

## LRB551V-30T1G

### ●Applications

High-frequency rectification  
Switching regulators

### ●Features

- 1) Small surface mounting type.
- 2) Ultra low  $V_F$  ( $V_F=0.45V$  Typ. at 0.5A)
- 3) High reliability.
- 4) We declare that the material of product compliance with RoHS requirements.
- 5) S- Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

### ●Construction

Silicon epitaxial planar

### ●Device Marking and Ordering Information

Device	Marking	Shipping
LRB551V-30T1G S-LRB551V-30T1G	D	3000/Tape&Reel
LRB551V-30T3G S-LRB551V-30T3G	D	10000/Tape&Reel

### ●Absolute maximum ratings ( $T_a = 25^\circ C$ )


Parameter	Symbol	Limits	Unit
Peak reverse voltage	$V_{RM}$	30	V
DC reverse voltage	$V_R$	20	V
Mean rectifying current	$I_o$	0.5	A
Peak forward surge current*	$I_{FSM}$	2	A
Junction temperature	$T_j$	+125	$^\circ C$
Storage temperature	$T_{stg}$	-40~+125	$^\circ C$

\* 60Hz for 1  $\mu s$

### ●Electrical characteristics ( $T_a = 25^\circ C$ )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	$V_{F1}$	-	-	0.36	V	$I_F = 100mA$
	$V_{F2}$	-	-	0.54	V	$I_F = 500mA$
Reverse current	$I_R$	-	-	100	$\mu A$	$V_R = 20V$

**LRB551V-30T1G**  
**S-LRB551V-30T1G**

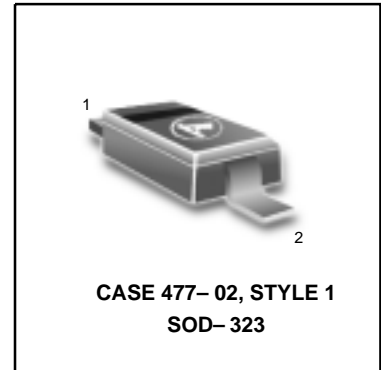

# LRB551V-30T1G , S-LRB551V-30T1G

● Electrical characteristic curves (Ta = 25°C)

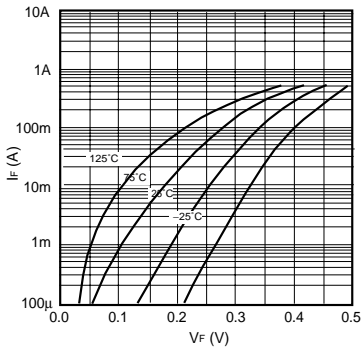


Fig.1 Forward characteristics

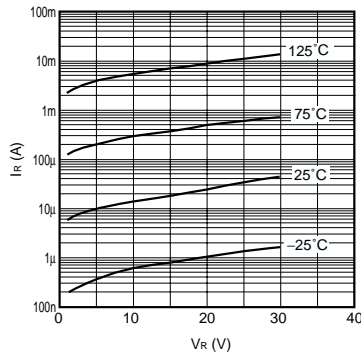


Fig.2 Reverse characteristics

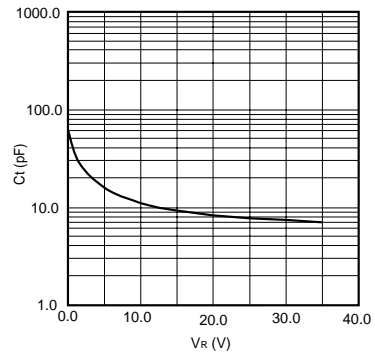


Fig.3 Capacitance between terminals characteristics

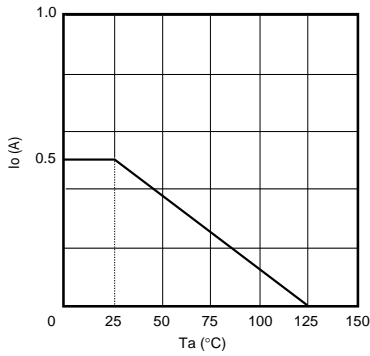
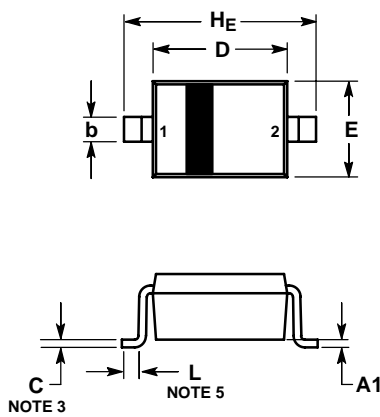


Fig.4 Derating curve

# LRB551V-30T1G , S-LRB551V-30T1G

## SOD-323


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DIMENSION L IS MEASURED FROM END OF RADIUS.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A3	0.15 REF			0.006 REF		
b	0.25	0.32	0.4	0.010	0.012	0.016
C	0.089	0.12	0.177	0.003	0.005	0.007
D	1.60	1.70	1.80	0.062	0.066	0.070
E	1.15	1.25	1.35	0.045	0.049	0.053
L	0.08			0.003		
HE	2.30	2.50	2.70	0.090	0.098	0.105

### SOLDERING FOOTPRINT\*

