

## LS Series



LS Series is the newest in open type ferrite wire wound chip inductors. The wire wound ferrite construction supports higher SRF, lower DCR and superior Q values than other ferrite chip inductors.


### Features

- RoHS compliant
- Very strong solderability by reflow soldering and soldering iron
- Highly accurate dimensions
- Can be mounted automatically
- Terminals are highly resistant to external forces
- Highly resistant to mechanical shocks and pressure
- Highly reliable in environments of sudden temperature change and humidity
- Low DCR & better Q value in ferrite series

### Applications


- Telecom and datacom applications such as xDSL
- Cable modem
- Set-top box
- CATV filter/tuner
- Wireless LAN, etc

### Product Identification

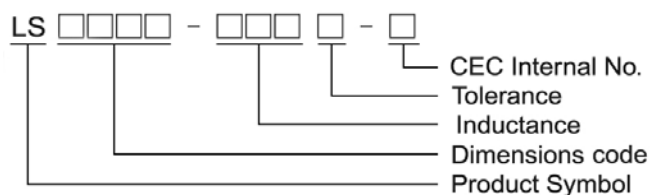

### Shape and Dimensions / Recommended Pattern

**LS0603/0805/1008**

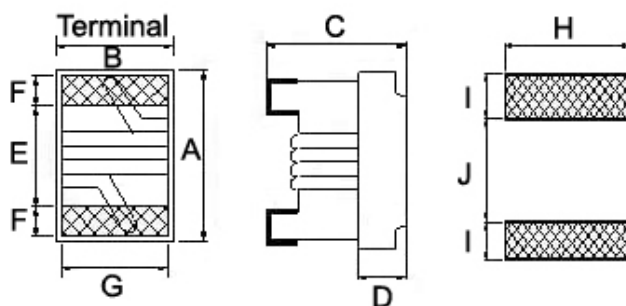

Dimensions in mm

TYPE	A Max	B Max	C Max	D	E	F	G	H	I	J
LS0603	1.8	1.25	1.02	0.38	0.86	0.33	0.76	1.02	0.64	0.64
LS0805	2.4	1.72	1.52	0.70	1.02	0.50	1.27	1.78	1.02	0.76
LS1008	2.99	2.50	2.20	0.70	1.52	0.51	2.03	2.54	1.02	1.27

# SMD Wire Wound Ferrite Chip Inductors – LS Series


## Electrical Characteristics

Part Number	Inductance (uH)	Test Frequency (MHz)	Tolerance (±%)	Q Typ.	SRF (MHz) Min	Rdc (Ω) Max	Idc (mA)	Color
LS0603-47N□-N	0.047	7.9	10 / 5	17	1700	0.075	1500	Black
LS0603-72N□-N	0.072	7.9	10 / 5	17	1700	0.12	1500	Brown
LS0603-R10□-N	0.10	7.9	10 / 5	17	1650	0.13	1500	Red
LS0603-R12□-N	0.12	7.9	10 / 5	17	1350	0.15	1500	Orange
LS0603-R15□-N	0.15	7.9	10 / 5	17	1350	0.15	1450	Yellow
LS0603-R18□-N	0.18	7.9	10 / 5	17	1150	0.15	1400	Green
LS0603-R22□-N	0.22	7.9	10 / 5	17	1050	0.16	1350	Blue
LS0603-R24□-N	0.24	7.9	10 / 5	17	1050	0.19	1300	Violet
LS0603-R27□-N	0.27	7.9	10 / 5	17	1050	0.30	1050	Gray
LS0603-R33□-N	0.33	7.9	10 / 5	17	850	0.46	1200	White
LS0603-R39□-N	0.39	7.9	10 / 5	17	810	0.51	1200	Black
LS0603-R47□-N	0.47	7.9	10 / 5	17	720	0.62	1050	Brown
LS0603-R56□-N	0.56	7.9	10 / 5	17	600	0.44	850	Red
LS0603-R68□-N	0.68	7.9	10 / 5	17	600	0.52	850	Orange
LS0603-R78□-N	0.78	7.9	10 / 5	17	460	0.83	850	Yellow
LS0603-R82□-N	0.82	7.9	10 / 5	17	480	0.69	750	Green
LS0603-1R0□-N	1.0	7.9	10 / 5	18	310	0.81	600	Blue
LS0603-1R2□-N	1.2	7.9	10 / 5	17	270	0.87	550	Violet
LS0603-1R5□-N	1.5	7.9	10 / 5	17	270	1.06	540	Gray
LS0603-1R8□-N	1.8	7.9	10 / 5	17	230	1.10	520	White
LS0603-2R2□-N	2.2	7.9	10 / 5	17	140	1.20	500	Black
LS0603-2R7□-N	2.7	7.9	10 / 5	17	105	1.50	480	Brown
LS0603-3R3□-N	3.3	7.9	10 / 5	17	84	1.50	440	Red
LS0603-3R9□-N	3.9	7.9	10 / 5	17	80	1.60	430	Orange
LS0603-4R7□-N	4.7	7.9	10 / 5	18	69	2.10	420	Yellow
LS0603-5R6□-N	5.6	7.9	10 / 5	18	65	2.60	400	Green
LS0603-6R8□-N	6.8	7.9	10 / 5	19	55	3.10	400	Blue
LS0603-7R8□-N	7.8	7.9	10 / 5	17	47	3.50	400	Violet
LS0603-8R2□-N	8.2	7.9	10 / 5	17	42	3.80	400	Gray
LS0603-100□-N	10	7.9	10 / 5	19	40	4.80	300	White


- When ordering, please specify tolerance and packaging codes.
- Tolerance : J = ±5% , K = ±10%
- L , Q : Agilent E4991A+ Agilent HP16197A
- SRF : Agilent E4991A
- Rdc : CH502BC/ HP4338B
- Idc for Inductance drop 10% from its value without current.
- Operating temperature range from -25°C to 105°C. (Including self - temperature rise)

## Test Instruments : Agilent E4991A Material/Impedance Analyzer

### Typical L vs. Frequency

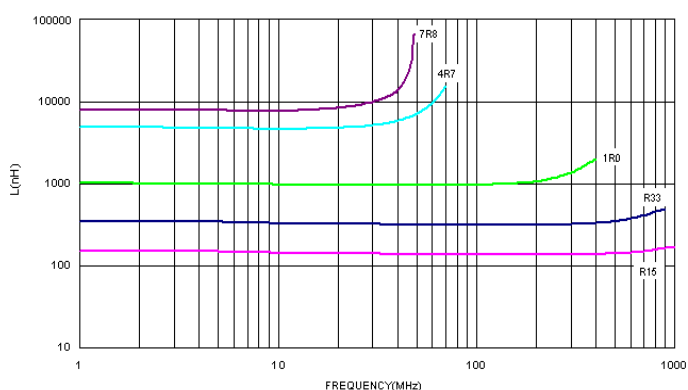

### Typical Q vs. Frequency

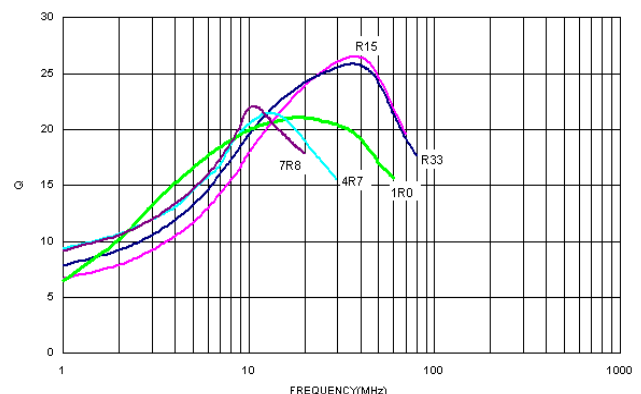


## Electrical Characteristics

Part Number	Inductance (uH)	Test Frequency (MHz)	Tolerance (±%)	Q Typ.	SRF (MHz) Min	Rdc (Ω) Max	Idc (mA)	Color
LS0805-78N□-N	0.078	7.9	10 / 5	19	1440	0.06	2000	Black
LS0805-R11□-N	0.11	7.9	10 / 5	19	1200	0.07	2000	Brown
LS0805-R47□-N	0.47	7.9	10 / 5	19	480	0.40	800	Red
LS0805-R56□-N	0.56	7.9	10 / 5	19	480	0.40	800	Yellow
LS0805-R68□-N	0.68	7.9	10 / 5	20	480	0.40	800	Orange
LS0805-1R0□-N	1.0	7.9	10 / 5	20	400	0.69	700	Yellow
LS0805-1R5□-N	1.5	7.9	10 / 5	20	330	0.83	700	Green
LS0805-1R8□-N	1.8	7.9	10 / 5	20	300	1.00	650	Blue
LS0805-2R2□-N	2.2	7.9	10 / 5	20	250	1.10	650	Violet
LS0805-2R7□-N	2.7	7.9	10 / 5	23	200	1.25	650	Gray
LS0805-3R3□-N	3.3	7.9	10 / 5	23	160	1.45	650	White
LS0805-3R9□-N	3.9	7.9	10 / 5	23	90	1.50	600	Black
LS0805-4R7□-N	4.7	7.9	10 / 5	20	70	1.60	530	Brown
LS0805-5R6□-N	5.6	7.9	10 / 5	20	65	1.70	500	Red
LS0805-6R8□-N	6.8	7.9	10 / 5	20	45	1.95	470	Orange
LS0805-8R2□-N	8.2	2.5	10 / 5	16	45	2.10	450	Yellow
LS0805-100□-N	10	2.5	10 / 5	16	40	2.40	400	Green
LS0805-120□-N	12	2.5	10 / 5	16	38	3.20	360	Red
LS0805-150□-N	15	2.5	10 / 5	16	30	3.55	350	Blue
LS0805-180□-N	18	2.5	10 / 5	16	25	4.90	300	Orange
LS0805-220□-N	22	2.5	10 / 5	16	20	5.45	270	Violet
LS0805-270□-N	27	2.5	10 / 5	16	19	7.80	240	Gray
LS0805-470□-N	47	2.5	10 / 5	16	15	14.50	180	Brown


- When ordering, please specify tolerance and packaging codes.
- Tolerance : J = ±5% , K = ±10%
- L , Q : Agilent E4991A + Agilent HP16197A
- SRF : Agilent E4991A
- Rdc : CH502BC/ HP4338B
- Idc for Inductance drop 10% from its value without current.
- Operating temperature range from -25°C to 105°C. (Including self - temperature rise)

### Test Instruments : Agilent E4991A Material/Impedance Analyzer

Typical **L** vs. **F**requency

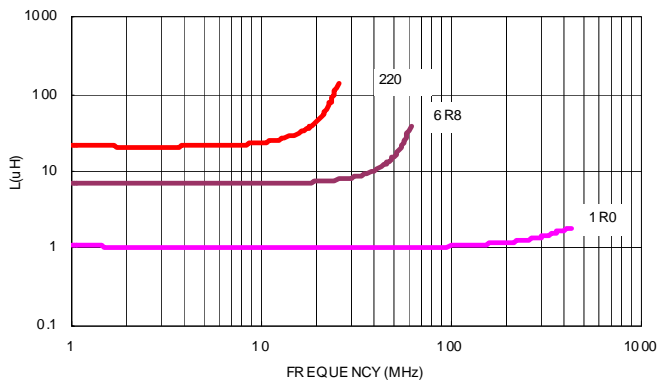

Typical **Q** vs. **F**requency

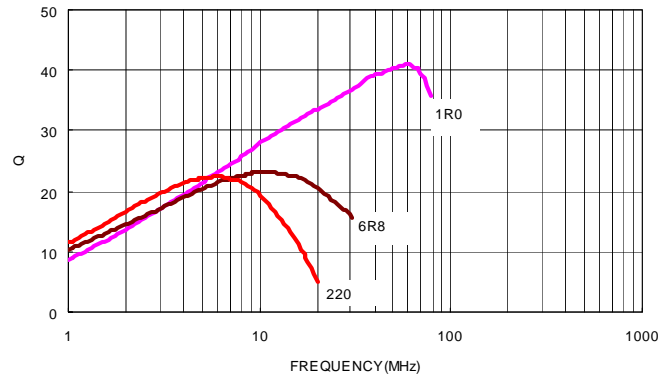


## Electrical Characteristics

Part Number	Inductance (uH)	Test Frequency (MHz)	Tolerance (±%)	Q Typ.			SRF (MHz) Min	Rdc (Ω) Max	Idc (mA)	Color Coding		
				7.9MHz	25MHz	50MHz				1 <sup>ST</sup>	2 <sup>ND</sup>	3 <sup>RD</sup>
LS1008-1R2□-N	1.2	7.9	10 / 5	35	47	55	350	0.50	1200	Brown	Red	Red
LS1008-1R5□-N	1.5	7.9	10 / 5	38	53	58	300	0.65	1200	Brown	Green	Red
LS1008-1R8□-N	1.8	7.9	10 / 5	34	47	54	280	0.75	1050	Brown	Gray	Red
LS1008-2R2□-N	2.2	7.9	10 / 5	34	43	48	250	0.90	950	Red	Red	Red
LS1008-2R7□-N	2.7	7.9	10 / 5	38	49	51	200	1.00	950	Red	Violet	Red
LS1008-3R3□-N	3.3	7.9	10 / 5	42	57	58	200	1.15	900	Orange	Orange	Red
LS1008-3R9□-N	3.9	7.9	10 / 5	37	46	47	170	1.25	850	Orange	White	Red
LS1008-4R7□-N	4.7	7.9	10 / 5	37	43	38	130	1.35	700	Yellow	Violet	Red
LS1008-5R6□-N	5.6	7.9	10 / 5	36	40	29	110	1.45	700	Green	Blue	Red
LS1008-6R8□-N	6.8	7.9	10 / 5	33	39	33	105	1.60	600	Blue	Gray	Red
LS1008-8R2□-N	8.2	7.9	10 / 5	40	43	28	90	1.80	550	Gray	Red	Red
LS1008-100□-N	10.0	7.9	10 / 5	40	41	25	85	2.40	500	Brown	Black	Orange


- When ordering, please specify tolerance and packaging codes.
- Tolerance : J = ±5% , K = ±10%
- L/Q: Agilent E4991A+ Agilent HP16197A
- SRF: Agilent E4991A
- Rdc: CH502BC/ HP4338B
- Idc for Inductance drop 10% from its value without current
- Operating temperature range from -25°C to 105°C. (Including self - temperature rise)

## Test Instruments : Agilent E4991A Material/Impedance Analyzer

### Typical L vs. Frequency

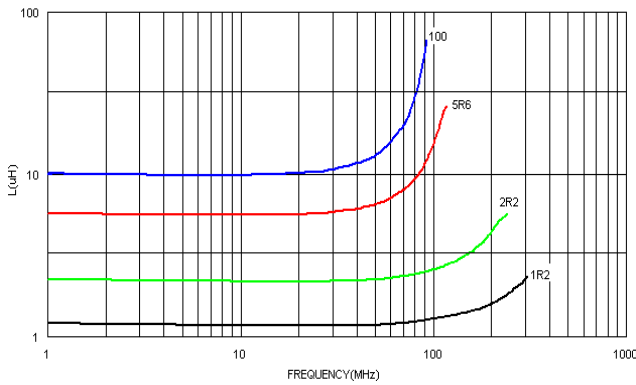

### Typical Q vs. Frequency

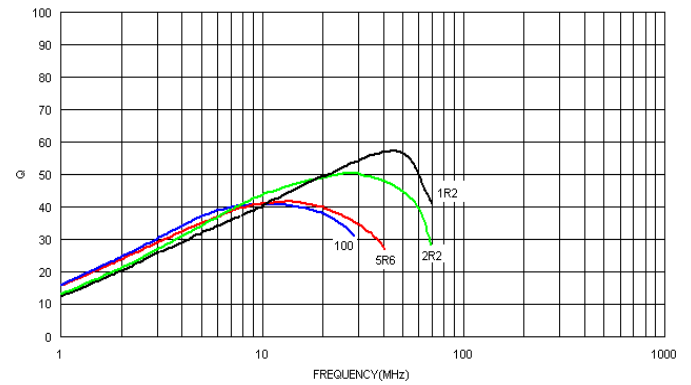

## Packaging Specifications

### Tape Dimensions

### Tape Material

Figure 1





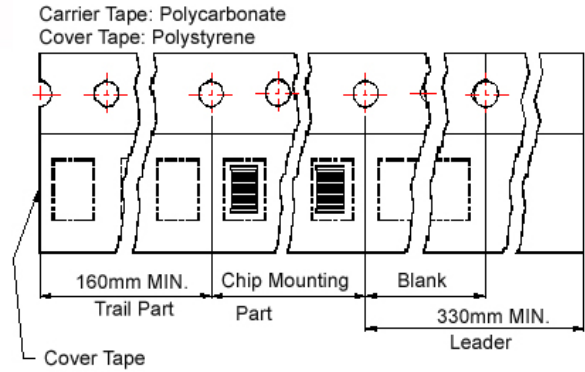


Figure 2

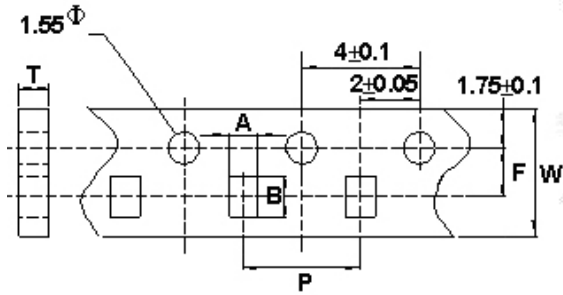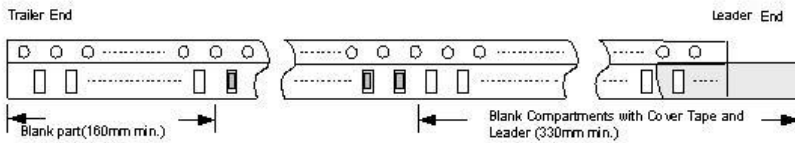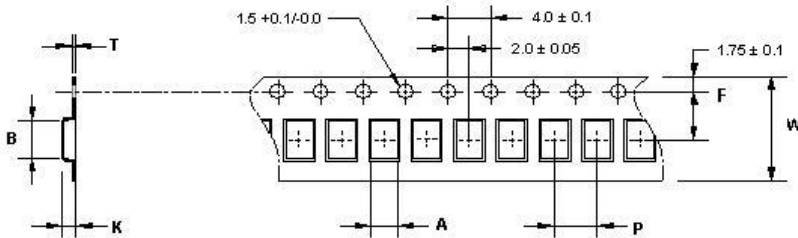

### Reel Dimensions

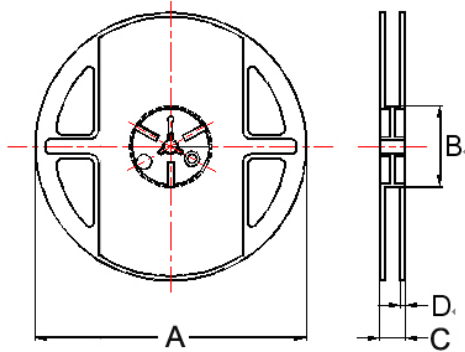

### Dimensions in mm

TYPE	Fig.	Tape Dimensions							Reel Dimensions				Quantity PCS / REEL
		A	B	T	W	P	F	K	A	B	C	D	
LS0603	1	1.30	2.00	0.97	8	4	3.5	-	178	60	12	1.5	4000
LS0805	2	1.60	2.42	0.22	8	4	3.5	1.45	178	60	12	1.5	2000
LS1008	2	2.61	2.93	0.26	8	4	3.5	2.25	178	60	12	1.5	2000