

*SAMSUNG TFT-LCD*

**MODEL: LSF400HJ01-A**

(LCD Panel + Driver Ass'y Kit)

The Information described in this specification is for the first draft and can be changed without prior notice

Samsung Display Co., LTD

MODEL	LSF400HJ01-A	Doc. No		Page	1 / 27
-------	--------------	---------	--	------	--------

## General Description

### Description

This model uses a liquid crystal display (LCD) of amorphous silicon TFT as switching components. This model is composed of a TFT LCD panel, a driver circuit, and an ass'y KIT of source PBA. This 40.0" model has a resolution of a 1920 x 1080 and can display up to 16.7 million colors with the wide viewing angle of 89° or a higher degree in all directions. This panel is designed to support applications by providing an excellent performance function of the flat panel display such as home-alone multimedia TFT-LCD TV and a high definition TV.

### General Information

#### Features

- RoHS compliance (Pb-free)
- High contrast ratio & aperture ratio with the wide color gamut
- SVA(Super vertical align) mode
- Wide viewing angle ( $\pm 178^\circ$ )
- High speed response
- FHD resolution (16:9)
- Low power consumption
- DE (Data enable) mode
- The interface (2pixel/clock) of 1ch LVDS (Low voltage differential signaling)

Items	Specification	Unit	Note
Active Display Area	885.6(H) x 498.15(V)	mm	
Switching Components	a-Si TFT Active matrix		
Glass Size	TFT : 902.6 (H) x 517.1 (V) CF : 902.6 (H) x 514.4 (V)	mm	$\pm 0.4$ mm
Panel Size	902.6 (H) x 517.1 (V)	mm	$\pm 0.4$ mm
	1.80(D)	mm	$\pm 0.1$ mm
Weight	1900 (max 2090)	g	$\pm 10\%$
Display Colors	16.7M (True Display) 1.07B (Dithered 10bit)	color	
Number of Pixels	1,920 × 1,080	pixel	16 : 9
Pixel Arrangement	RGB Vertical Stripe		
Display Mode	Normally Black		
Surface Treatment	AG-POL(Anti-Glare),		
Haze	Haze 2.3%		$\pm 2.1\%$
Hardness	Hard coating 2H		

# 1. Absolute Maximum Ratings

If the figures on measuring instruments exceed maximum ratings, it can cause the malfunction or the unrecoverable damage on the device.

Item	Symbol	Min.	Max.	Unit	Note
Power supply voltage	$V_{DD}$	10.8	13.2	V	(1)
Temperature for storage	$T_{STG}$	-20	65	°C	(2),(4)
Temperature of glass surface	$T_{OPR2}$	0	65	°C	(2)
Operating temperature	$T_{OPR}$	0	50	°C	(2),(5)
Humidity for storage	$H_{STG}$	5	95	%RH	(2),(4)
Operating humidity	$H_{OPR}$	20	95	%RG	(2),(5)
Endurance on static electricity			150	V	(3)

Note (1) The power supply voltage at  $T_a = 25 \pm 2 \text{ }^\circ\text{C}$

(2) Temperature and the range of relative humidity are shown in the figure below.

- a. 95 % RH Max. ( $T_a \leq 39 \text{ }^\circ\text{C}$ )
- b. The relative humidity is 95% or less. ( $T_a > 39 \text{ }^\circ\text{C}$ )
- c. No condensation
- d. Operating condition with SET

(3) Keep the static electricity under 150V in Polarizer attaching process.

(4) Operating condition with source PCB

(5) Storage temperature condition including glass

(6) Condition without packing. (Unpacking condition)

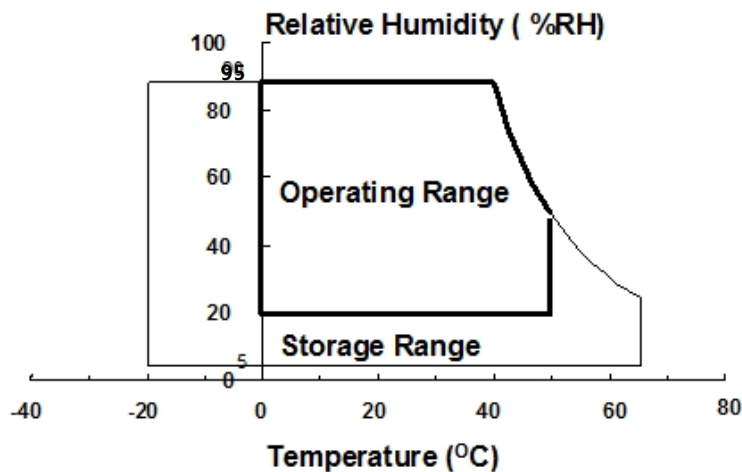


Fig. Range for temperature and relative humidity

## 2. Optical characteristics

The optical characteristics should be measured in the dark room or the space surrounded by the similar setting.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3 ,ELDIM EZ-Contrast

(Ta = 25 ± 2°C, VDD=12.0V, fv=60Hz, f<sub>CLK</sub>=148.5MHz, Light source: D65 Standard light)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Light Source	Note
Contrast ratio (At the center of screen)		C/R		-	5000	-		Standard	(1) SR-3
Response time	G-to-G	Tg	T <sub>PAN,SUR</sub> =29.9°C	-	6	15	msec	Standard or VD BLU	Response time
Luminance of white (At the center of screen)		Y <sub>L</sub>		250	300	-	cd/m <sup>2</sup>	VD BLU	(4) SR-3
Chromaticity (CIE 1931)	Red	Rx	Normal q <sub>L,R</sub> =0 q <sub>U,D</sub> =0  Viewing Angle	TYP. -0.03	0.640	TYP. +0.03		VD BLU	Chromaticity (CIE 1931)
		Ry			0.330				
	Green	Gx			0.300				
		Gy			0.600				
	Blue	Bx			0.150				
		By			0.060				
	White	Wx			0.280				
		Wy			0.290				
sRGB Concordance		-			99		%	VD BLU	(5) SR-3
Color gamut		-			72		%		
Color		-			10,000		K		
Viewing Angle	Hor.	q <sub>L</sub>	C/R≥10	75	89	-	Degree	Standard or VD BLU	Viewing Angle
		q <sub>R</sub>		75	89	-			
	Ver.	q <sub>U</sub>		75	89	-			
		q <sub>D</sub>		75	89	-			
Brightness uniformity (9 Points)		B <sub>uni</sub>		-	-	25	%	Standard	(2) SR-3
Transmissivity		T		4.93	5.3	-	%	Standard	(7) D65/SR3
Transmissivity Uniformity		T <sub>uni</sub>		-	-	10	%	Standard	(8) D65/SR3
Gamma Value		GMA	(@20G~200G)	2.0	2.2	2.4		Standard or VD BLU	(9) SR-3
Gamma variation		Gdiff	(@20G~128G)	-0.14	-	0.14			(11) SR-3
ACC Linearity		ACC_lin		-	-	0.015		Standard or VD BLU	(12) SR-3
5nit Uniformity		Buni_5nit		-	-	30	%	Standard (38G/255G)	(10) SR-3
White Color Coordinate Uniformity		Wx uni		-	-	0.005		Standard	(13) SR-3
		Wy uni		-	0.005	0.008			

**Notice**

(a) Setup for test equipment

The measurement should be executed in a stable, windless, and dark room for 40min and 60min after operating the panel at the given temperature for stabilization of the standard light. (SDC uses the standard luminance of the D65 media).

This measurement should be measured at the center of screen.


The environment condition:  $T_a = 25 \pm 2 \text{ } ^\circ\text{C}$

(b) D65 media has the general light source.

The temperature of color is 6847K. The coordinate of color is  $W_x 0.313, W_y 0.329$

The luminance of this product is  $7217\text{cd/m}^2$ .


Photo detector	Field
SR-3	2°/1°
RD-80S	1°

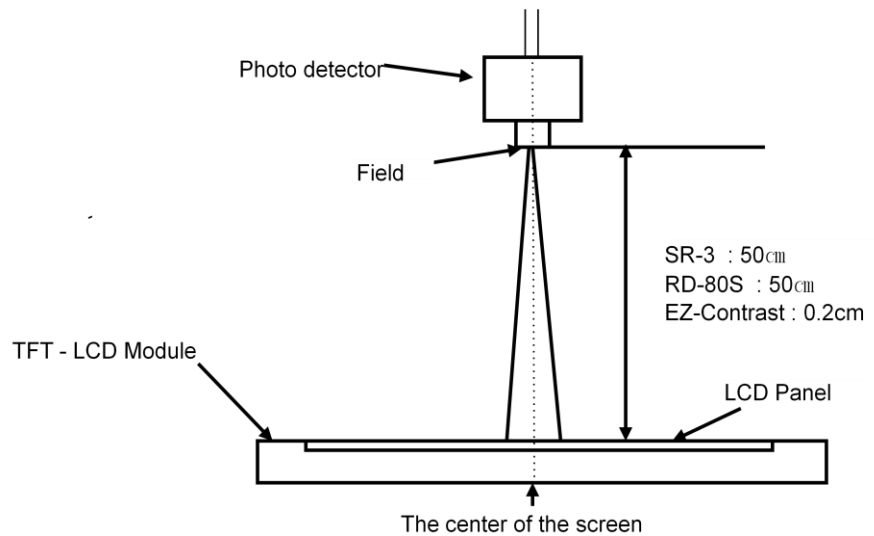

(c) The CIE positions D65 as the standard daylight illuminant:

[D65] is intended to represent average daylight and has a correlated color temperature of approximately 6500 K. CIE standard illuminant D65 should be used in all colorimetric calculations requiring representative daylight, unless there are specific reasons for using a different illuminant.

- Definition of the test point

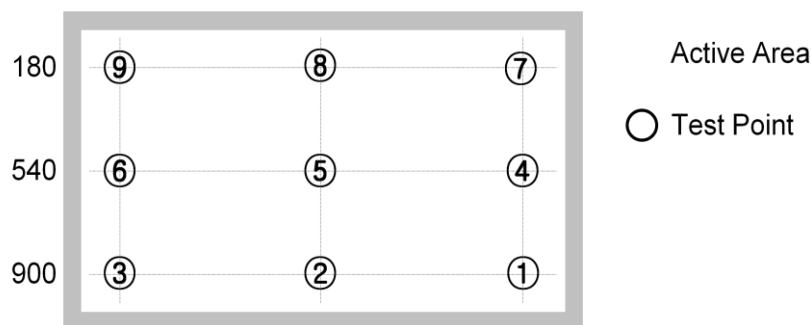

Note (1) Definition of contrast ratio (C/R)

: The ratio of gray max ( $G_{max}$ ) & gray min ( $G_{min}$ ) at the center point ⑤ of the panel  
The measurement goes in D65 Standard light source

$$C/R = \frac{G_{max}}{G_{min}}$$

$G_{max}$  : The luminance with all white pixels

Gmin : The luminance with all black pixels


Note (2) Definition of the brightness uniformity of 9 points (Test pattern : The full white)  
 The measurement shall be executed with the standard light source of D65 .

$$Buni = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : The maximum brightness

Bmin : The minimum brightness

Note (3) Definition of the response time : Sum of Tr, Tf

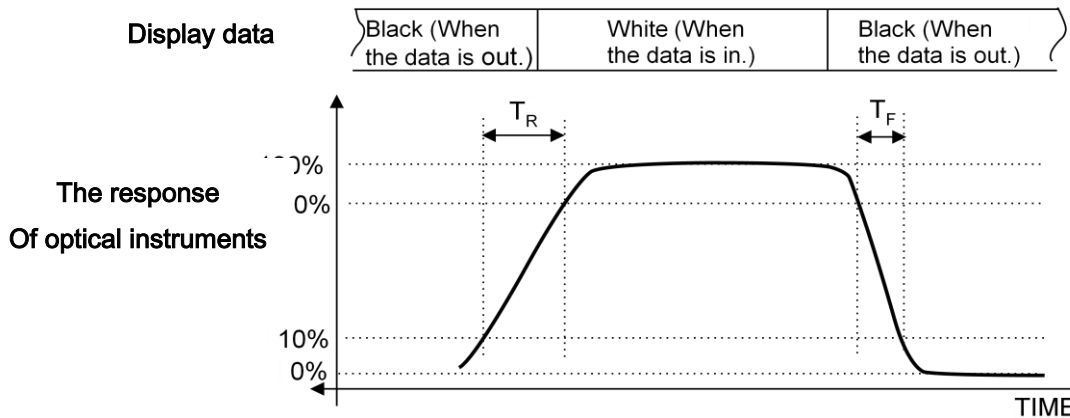


※ G-to-G : Average response time between whole gray scale to whole gray scale.

The response time is the value that was measured after it was operated in Samsung's standard BLU for one hour.( at room temperature)

Note (4) The definition of luminance of white: The luminance of white at the center point ⑤  
 The measurement shall be executed with the standard light source of D65.

Note (5) The definition of chromaticity (CIE 1931)  
 The color coordinate of red, green, blue and white at the center point ⑤  
 The measurement shall be executed with the standard light source of D65.

Note (6) Definition of viewing angle  
 : The range of viewing angle (C/R ≥10)  
 The measurement shall be executed with the standard light source of D65.

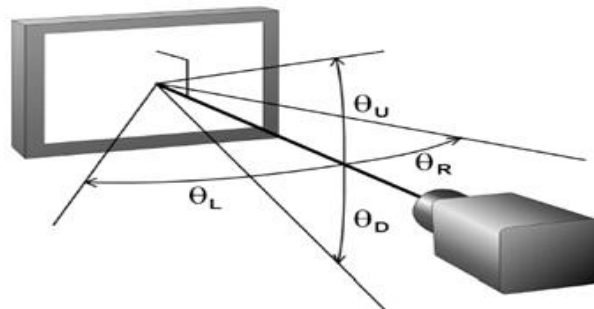

Note (7) Definition of transmissivity

The measurement shall be executed with the standard light source of D65.

Note (8) Definition of the Transmissivity uniformity of 9 points (Test pattern: The full white)


The measurement shall be executed with the standard light source of D65.

$$T_{uni} = 100 * \frac{(T_{max} - T_{min})}{T_{max}}$$

Tmax : The maximum Transmissivity

Tmin : The minimum Transmissivity


Note (9) Management Criteria of Gamma Value

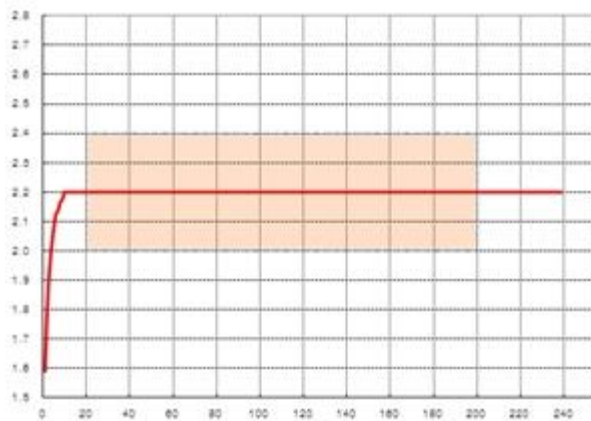

Gamma Value

- 20 ~ 200Gray: 2.2 ±0.2

Note (10) 5nit Low Gray Uniformity

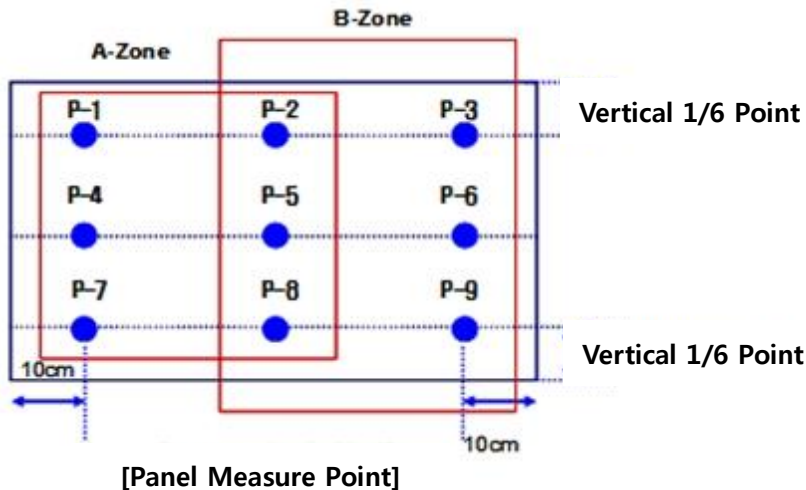

$$B_{uni\_5nit} = 100 * \frac{(B_{max\_5nit} - B_{min\_5nit})}{B_{max\_5nit}}$$

Bmax\_5nit : The maximum brightness at 5nit Gray


Bmin\_5nit : The minimum brightness at 5nit Gray

Note (11) Gamma Variation between Center and Left (or Right)

Gamma measured at 10cm point from the left & right side is more less than 0.1 than Gamma measured at Center

(Gamma measured at 10cm of the P-4 & P-6 is more less than 0.1 than Gamma measured at P-5)

Note (12) Management Criteria of ACC Linearity

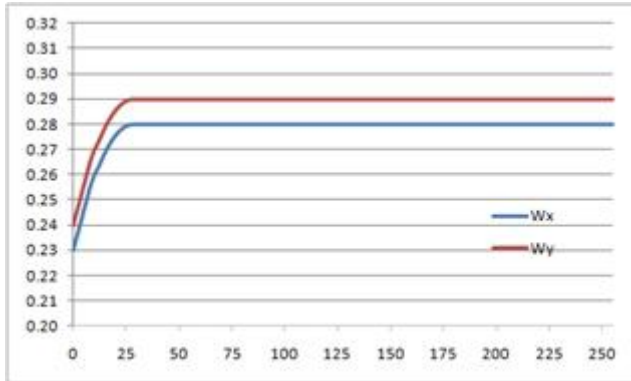

255Gray Wx/Wy value basis (a module unit basis)

a. Color coordinate differences are less than 15/1,000 at Any Point above 30Gray and 255Gray

b. When Wx/Wy coordinates reverse at 0Gray, it permits an once intersection under, 30Gray

Note (13) White Color Coordinate Uniformity of 9 points (Test pattern: The full white)

$$W_x, uni = W_x \text{ max} - W_x \text{ min}$$

Wx max : The maximum Wx

Wx min : The minimum Wx

$$W_y, uni = W_y \text{ max} - W_y \text{ min}$$

Wy max: The maximum Wy

Wy min: The minimum Wy



### 3. Electrical characteristics – Sony Model Attached Reference file

#### 3.1 TFT LCD Module

The connector for the display data & timing signal should be connected.


Ta = 25°C ± 2 °C

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of power supply	V <sub>DD</sub>	10.8	12.0	13.2	V	(1)
Current of power supply	(a) Black	-	820	997	mA	(2),(3)
	(b) White	-	770	936	mA	
	(c) Sub V-Stripe	-	1217	1460	mA	
Vsync frequency	f <sub>V</sub>	-	60	-	Hz	(4)
Hsync frequency	f <sub>H</sub>	44	48	53	kHz	
Main frequency	Fdclk	119	148.5	163	MHz	
Rush current	I <sub>RUSH</sub>	-	-	4	A	(5)

Note (1) The ripple voltage should be controlled fewer than 10% of V<sub>DD</sub> (Typ.) voltage.


(2) fV=60Hz, fDCLK =148.5MHz, V<sub>DD</sub> = 12.0V, DC Current.

(3) Power dissipation check pattern (LCD Module only)

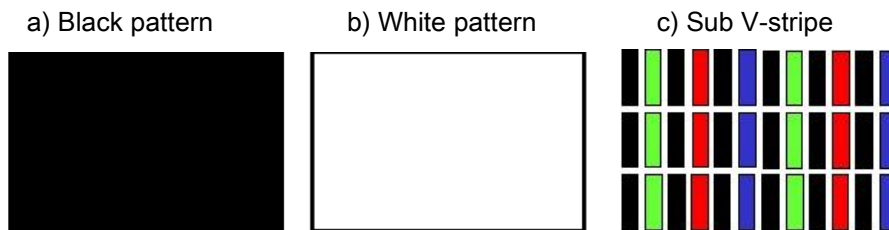


(4) FRC Chip must be inputted in this typical frequency.(fixed)

(5) Conditions for measurement

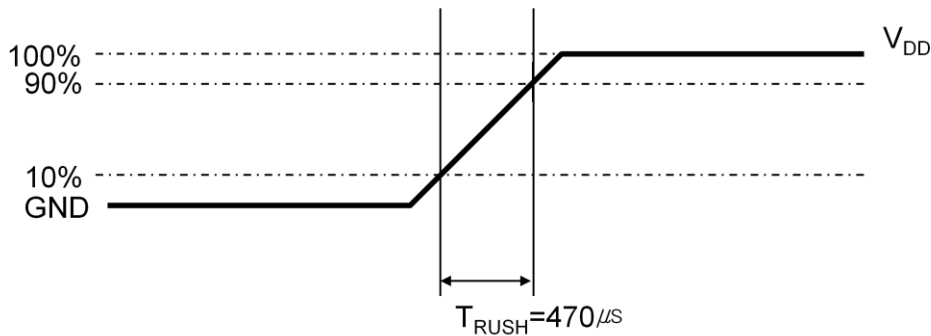

The rush current, I<sub>RUSH</sub> can be measured during T<sub>RUSH</sub> is 470us

4. Block diagram

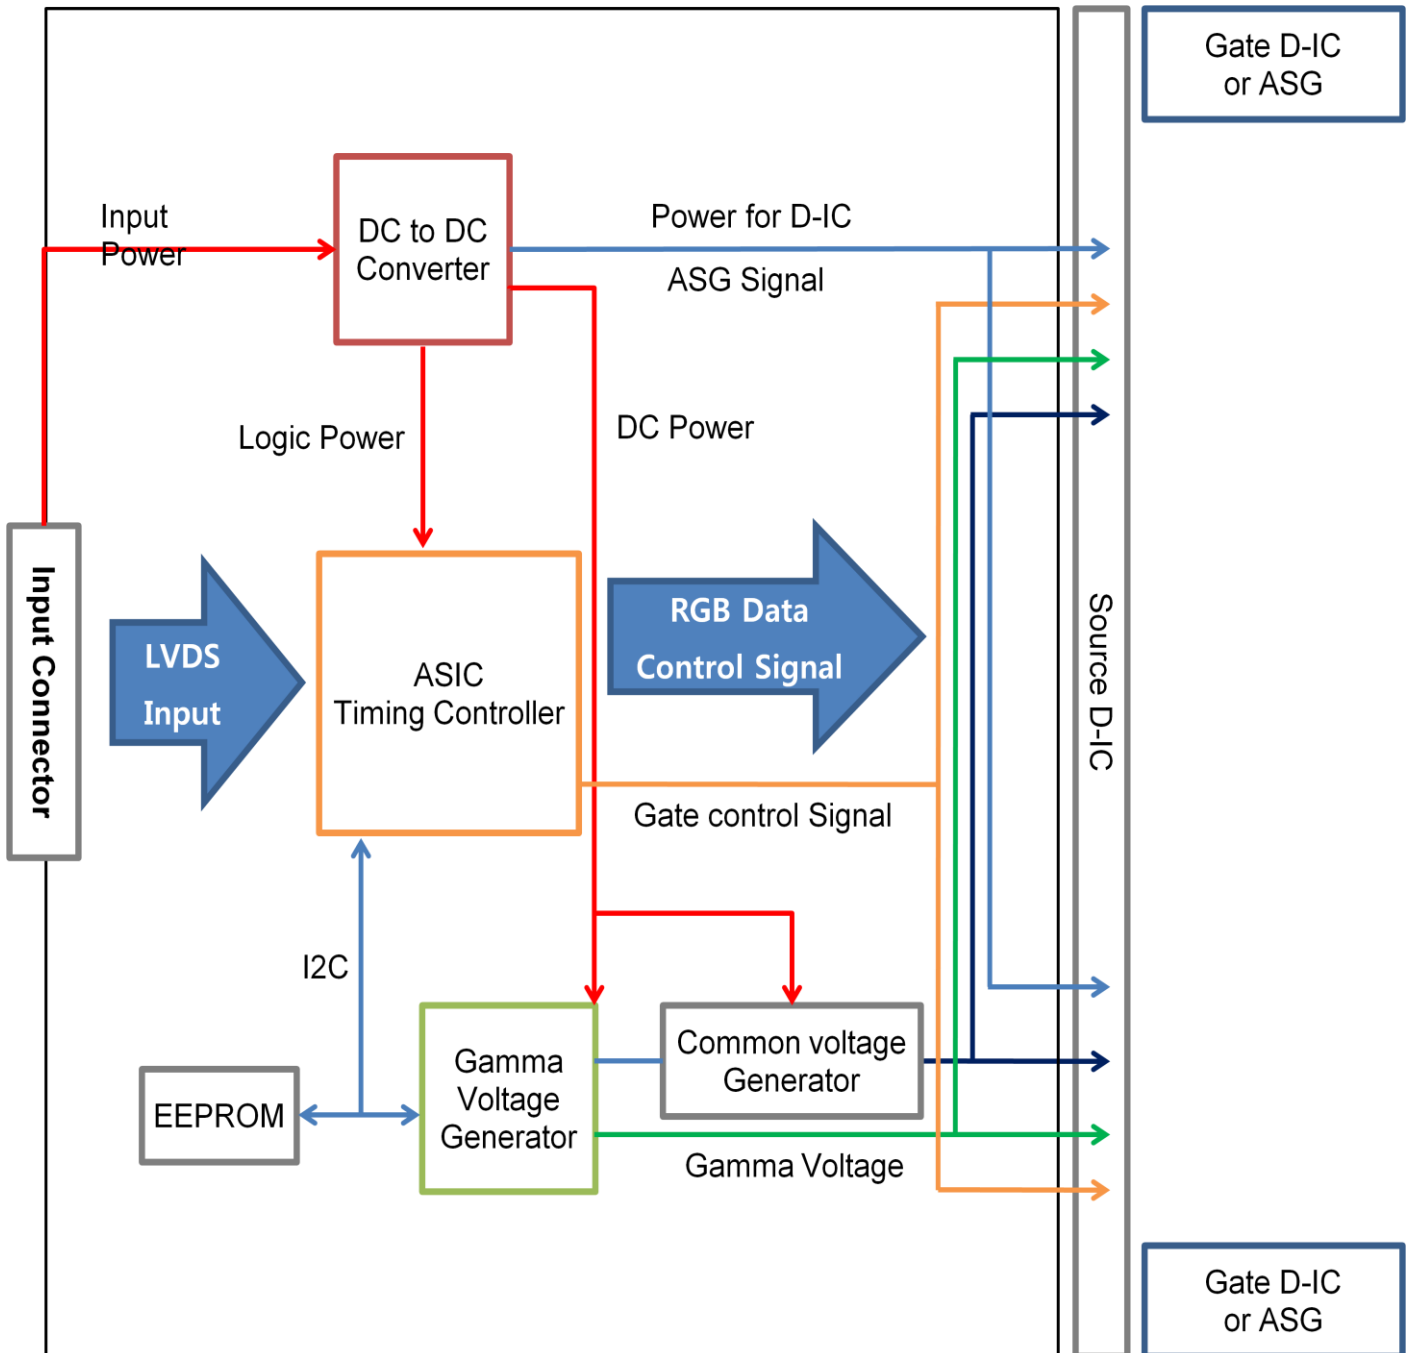

## 5. The Pin assignment in the input terminal

### 5.1. Input signal & power

Connector : FI-RE51S-HF (JAE/UJU)

Pin	Description		Pin	Description	
1	Vdd (12V)		26	Even LVDS Signal	RE[0]P
2	Vdd (12V)		27		RE[1]N
3	Vdd (12V)		28		RE[1]P
4	Vdd (12V)		29		RE[2]N
5	Vdd (12V)		30		RE[2]P
6	No connection		31		GND
7	GND		32		RECLK-
8	GND		33		RECLK+
9	GND		34		GND
10	Odd LVDS Signal	RO[0]N	35		RE[3]N
11		RO[0]P	36	RE[3]P	
12		RO[1]N	37	RE[4]N	
13		RO[1]P	38	RE[4]P	
14		RO[2]N	39	GND	
15		RO[2]P	40	No connection	NOTE1
16		GND	41	No connection	
17		ROCLK-	42	No connection	
18		ROCLK+	43	No connection	
19		GND	44	No connection	
20	RO[3]N	45	LVDS_SEL		
21	RO[3]P	46	No connection		
22	RO[4]N	47	No connection		
23	RO[4]P	48	No connection		
24	GND		49	No connection	
25	Even LVDS	RE[0]N	50	No connection	
			51	Aging EN	NOTE2

Note (1) Pin number which starts from the left side.

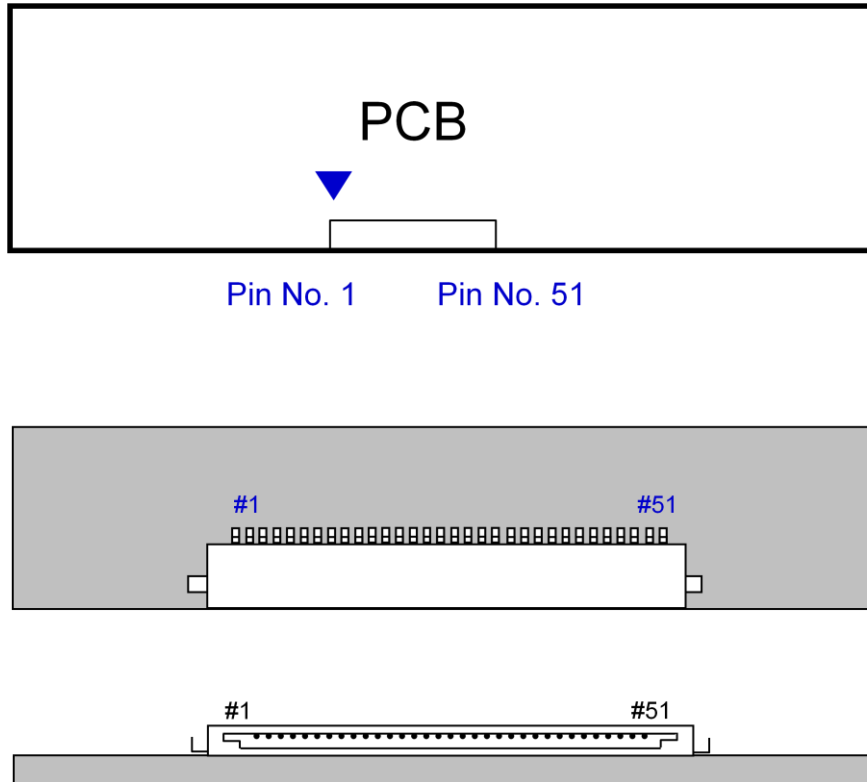


Fig . The diagram of connector

- a. Power GND pins should be connected to the LCD's metal chassis.
- b. All power input pins should be connected together.
- c. All NC pins should be separated from other signal or power.

Note(2) Aging Enable PIN / IF this Pin GND → BIST MODE (Rolling Pattern is operated)

**5.2 LVDS Interface**

- LVDS receiver : T-con (merged) ( 8Bit)

- Data format

	LVDS pin	JEIDA -DATA	Normal-DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DE
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED

**5.3 Input signals, basic display colors and the gray scale of each color. (8bit)**

COLOR	DISPLAY (8bit)	DATA SIGNAL																								GRAY SCALE LEVEL
		RED								GREEN								BLUE								
		R0	R1	R2	R3	R4	R5	R6	R7	G0	G1	G2	G3	G4	G5	G6	G7	B0	B1	B2	B3	B4	B5	B6	B7	
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	CYAN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-
	MAGENTA	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R252	
	↓ LIGHT	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R253	
		0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R254	
	RED	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R255	
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1	
		0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	G2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G252	
	↓ LIGHT	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	0	0	0	0	0	0	0	G253	
		0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	G254	
	GREEN	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	G255	
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	B1	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B252	
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	B253	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	B254	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	B255	

Note) The definition of gray :

Rn : Red gray, Gn : Green gray, Bn : Blue gray (n = Gray level)

Input signal : 0 = Low level voltage, 1 = High level voltage

**5.4 LVDS receiver : T-con (merged) ( 8Bit)**
**- Data format**

	LVDS pin	JEIDA -DATA	Normal -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R2	R0
	TxIN/RxOUT1	R3	R1
	TxIN/RxOUT2	R4	R2
	TxIN/RxOUT3	R5	R3
	TxIN/RxOUT4	R6	R4
	TxIN/RxOUT6	R7	R5
	TxIN/RxOUT7	G2	G0
TxOUT/RxIN1	TxIN/RxOUT8	G3	G1
	TxIN/RxOUT9	G4	G2
	TxIN/RxOUT12	G5	G3
	TxIN/RxOUT13	G6	G4
	TxIN/RxOUT14	G7	G5
	TxIN/RxOUT15	B2	B0
	TxIN/RxOUT18	B3	B1
TxOUT/RxIN2	TxIN/RxOUT19	B4	B2
	TxIN/RxOUT20	B5	B3
	TxIN/RxOUT21	B6	B4
	TxIN/RxOUT22	B7	B5
	TxIN/RxOUT24	HSYNC	HSYNC
	TxIN/RxOUT25	VSYNC	VSYNC
	TxIN/RxOUT26	DEN	DE
TxOUT/RxIN3	TxIN/RxOUT27	R0	R6
	TxIN/RxOUT5	R1	R7
	TxIN/RxOUT10	G0	G6
	TxIN/RxOUT11	G1	G7
	TxIN/RxOUT16	B0	B6
	TxIN/RxOUT17	B1	B7
	TxIN/RxOUT23	RESERVED	RESERVED
TxOUT/RxIN4(dithered10bit)	TxIN/RxOUT28	R0	R8
	TxIN/RxOUT29	R1	R9
	TxIN/RxOUT30	G0	G8
	TxIN/RxOUT31	G1	G9
	TxIN/RxOUT32	B0	B8
	TxIN/RxOUT33	B1	B9
	TxIN/RxOUT34	RESERVED	RESERVED

**5.5 Input signals, basic display colors and the gray scale of each color. (10bit)**

COLOR	DISPLAY	DATA SIGNAL																											GRAY SCALE LEVEL																							
		RED									GREEN									BLUE																																
		R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	B0	B1	B2	B3	B4	B5	B6		B7	B8	B9																				
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-												
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-						
	GREEN	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-						
	CYAN	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-						
	RED	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-					
	MAGENTA	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-					
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-					
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-					
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0				
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1					
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2					
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R1020				
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R1021				
	LIGHT ↓	1	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	R1022					
		0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	R1023				
	RED	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	R1023			
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0		
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1		
		0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2			
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G1020		
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G1021			
	LIGHT ↓	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	G1022			
		0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	G1023			
	GREEN	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	G1023		
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B1020	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B1021		
	LIGHT ↓	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B1022		
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B1023		
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B1023

Note) The definition of gray :

Rn : Red gray, Gn : Green gray, Bn : Blue gray (n = Gray level)

Input signal : 0 = Low level voltage, 1 = High level voltage



## 6. Interface timing

### 6.1 The parameters of timing ( Only DE mode )



SIGNAL	ITEM	SMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$		148.5		MHz	-
Hsync		$F_H$		67.5		KHz	-
Vsync		$F_V$		60		Hz	-
Term for the vertical display	Active display period	$T_{VD}$	-	1080	-	Lines	-
	Total vertical	$T_V$		1125		Lines	-
Term for the horizontal display	Active display period	$T_{HD}$	-	1920	-	Clocks	-
	Total Horizontal	$T_H$		2200		clocks	-

Note) These products don't have to receive the signal of Hsync & Vsync from the input device.

- (1) Key points when testing: TTL controls the signal and the CLK at the input terminal of LVDS Tx of the system.
  - (2) Internal VDD = 3.3V
  - (3) Spread spectrum
- The limit of spread spectrum's range of SET in which the LCD module is assembled should be within  $\pm 3\%$ .

TxOUT/RxIN4(dithered10bit)	TxIN/RxOUT28	R0	R8
	TxIN/RxOUT29	R1	R9
	TxIN/RxOUT30	G0	G8
	TxIN/RxOUT31	G1	G9
	TxIN/RxOUT32	B0	B8
	TxIN/RxOUT33	B1	B9
	TxIN/RxOUT34	RESERVED	RESERVED

6.2 Timing diagrams of interface signal (Only DE mode )

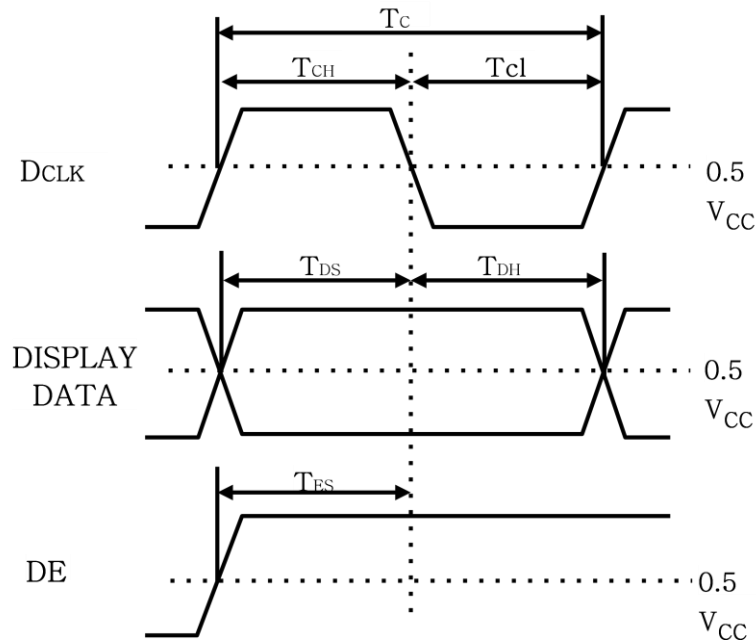
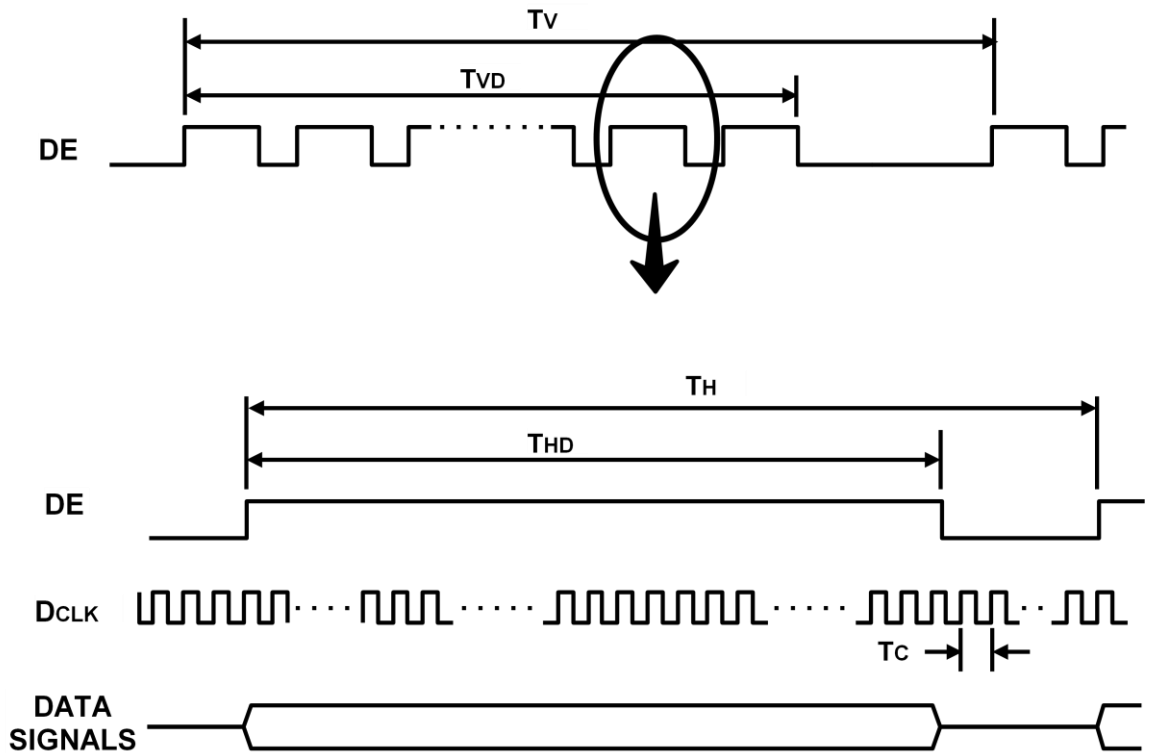


6.3 Characteristics of Input data of LVDS

ITEM	SYMBOL	Min.	Typ.	Max.	UNIT	NOTE	
Differential input high threshold voltage	V <sub>TH</sub>	-	-	+100	mV	V <sub>CM</sub> = 1.2V	
Differential input low threshold voltage	V <sub>TL</sub>	-100	-	-	mV		
Input common mode voltage	V <sub>CM</sub>	0.2	1.2	2.0	V	-	
Differential Input Voltage	V <sub>ID</sub>	100	-	600	mV	V <sub>ID</sub>   = 100mV	
Input data position	F <sub>IN</sub> = 80MHz	t <sub>RSRM</sub>	-	-	450	ps	
		t <sub>RSLM</sub>	-450	-		ps	


Notice The spread spectrum should be 0% when the skew is measured.

Position of a measurement is T-CON LVDS input pin

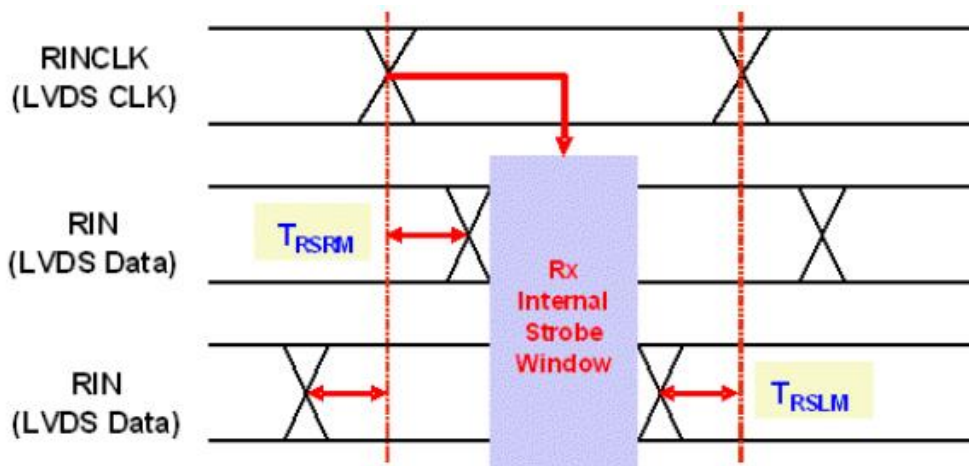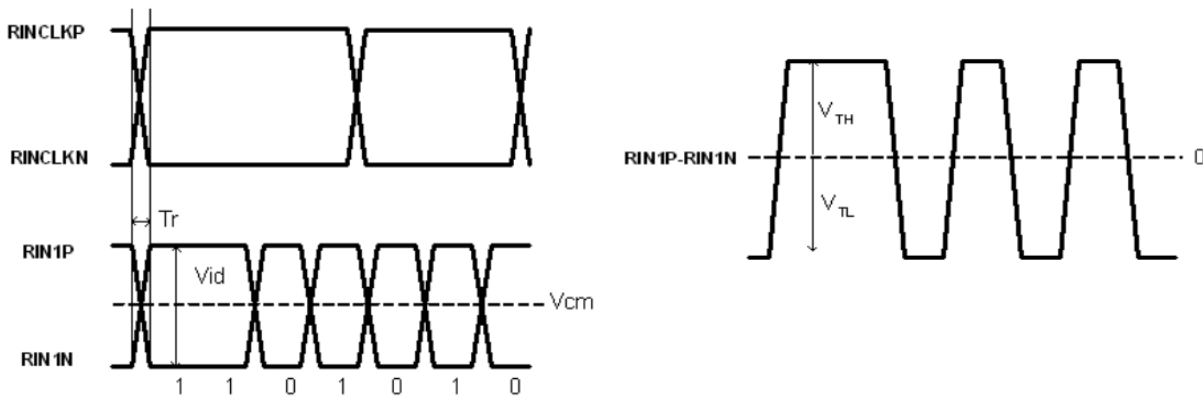

6.4 The sequence of power on and off – Sony Model attached Reference file

To prevent a latch-up phenomena or the DC operation of the LCD Module, the power on/off sequence should be accorded with the settings described in the diagram below.

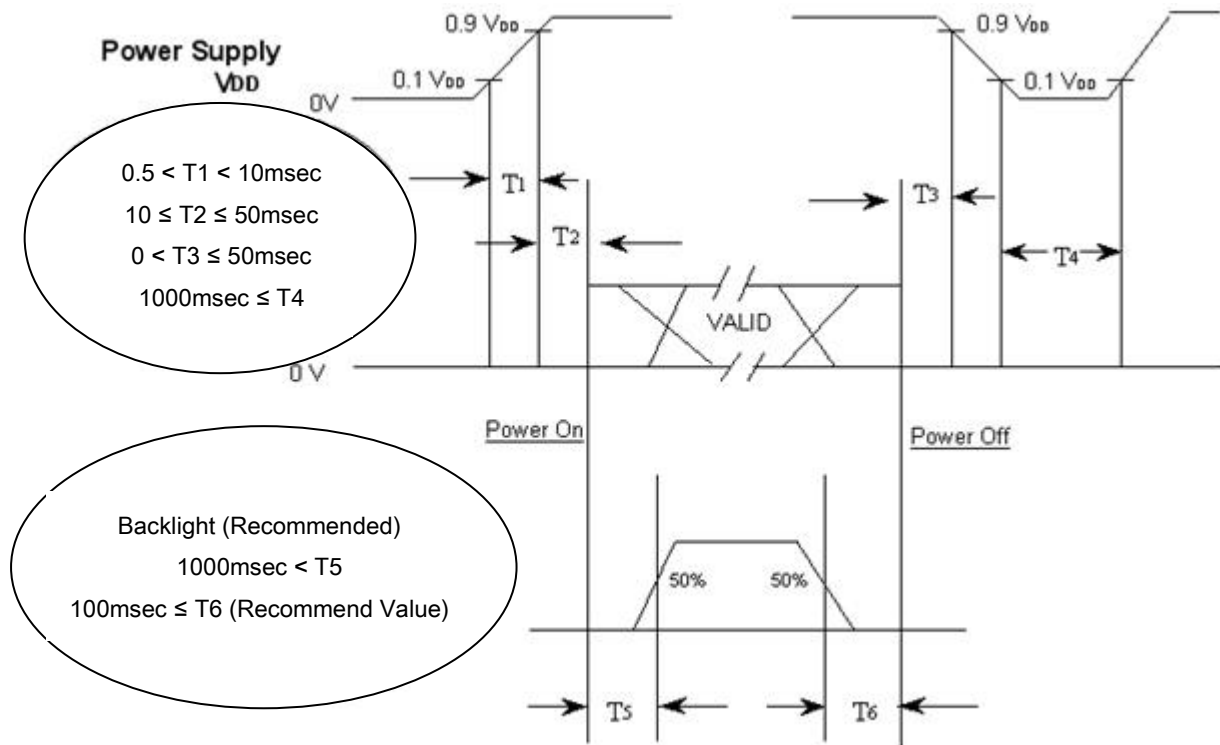

T1 : The V<sub>DD</sub> rising time from 10% to 90%

T2 : The time from the point which V<sub>DD</sub> reach to 90% of voltage to the point which the valid data is out when the power is on.

T3: The time from the point which the valid data is out to the point which V<sub>DD</sub> reach to the 90% of voltage when the power is off.

T4: the time from the point which the V<sub>DD</sub> decrease to the point which the V<sub>DD</sub> increase again for windows to restart.

※ The recommended operating condition of the back light system

T5: The time which takes for B/L to be turned on after the signal is entered when the time is on.


T6 : The time which takes until the signal is out after BL is turned off

- The condition of supply voltage to enter in the module from the external system should have the same condition as the definition of V<sub>DD</sub>.
- Apply the voltage for the lamp within the range which the LCD operates. when the back light is turned on before the LCD is operated or when the LCD is turned off before the back light is turned off, the display may show the abnormal screen momentarily.
  - While the V<sub>DD</sub> is off level, please keep the level of input signals low or keep a high impedance condition.
  - The figure of T4 should be measured after the module has been fully discharged between the periods when the power is on and off.
  - The interface signal must not keep the high impedance condition when the power is on.

### 7. Outline dimension

#### 7.1 The adhesive size of POL


The next figure shows the size of POL on the drawing sheet attached to the panel for BLU design.

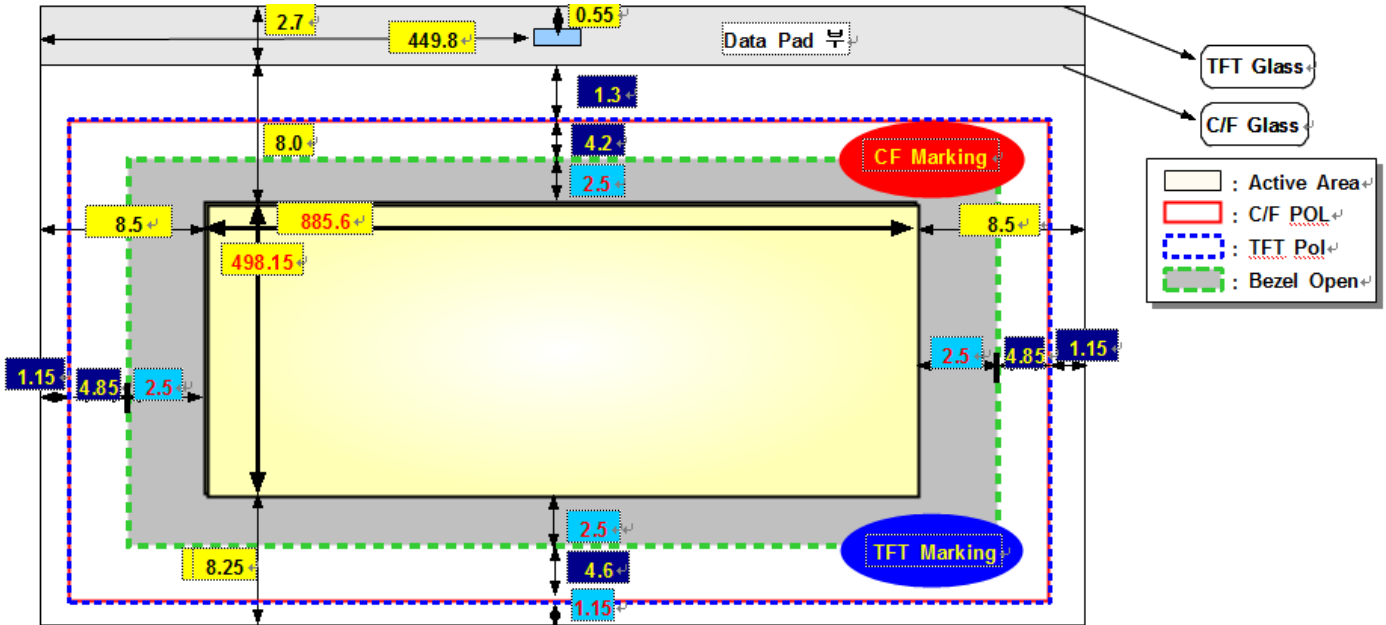

<Figure.>

- The POL size of CF : 900.3 X 511.95 ± 0.5mm
- The POL size of TFT: 900.3 X 511.95 ± 0.5mm
- The total adhesion allowance of POL is ± 1.15mm

#### 7.2 The drawing sheet for the size of the OLB bonding

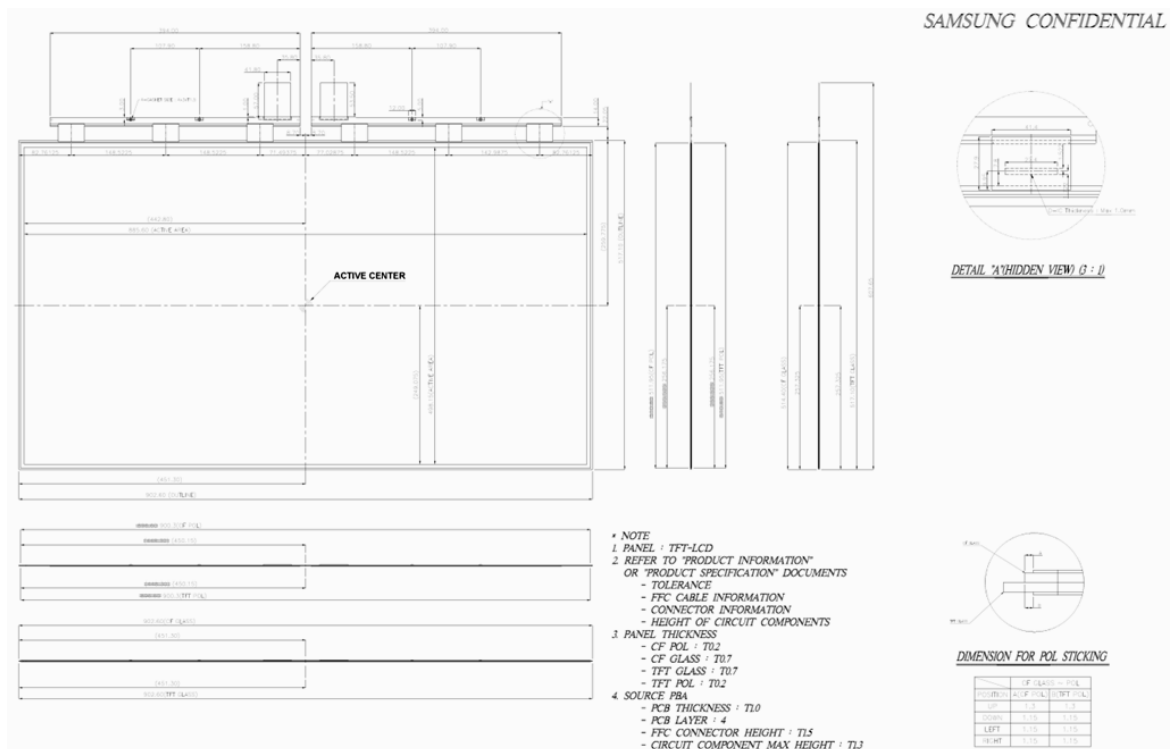

## 8. Reliability test

### 8.1 Panel

Item	Test Condition	Quantity	Note						
HTOL	60 °C (Panel change 500hr / circuit change 250hr)	8							
LTOL	-5 °C (Panel change 500hr / circuit change 250hr)	4							
THB	50 °C / 90 %RH(Panel change 500hr / circuit change 250hr)	10							
ASG Low temperature	Max. frequency 25°C~-40°C	Each Cell	ASG Product Only						
ASG High Temperature	Min. frequency 60°Coperation 96hr	Each Cell	ASG Product Only						
Image sticking	25 °C / Mosaic pattern(9*10) 12hrs	8							
	Rolling pattern 12hrs / 3cycles								
Decompression	-40~50°C, 0m(0ft) ~ 13,700m(45,000ft), 72.5Hr	4							
HTS	70 °C, Storage (Panel change 500hr / circuit change 250hr)	4							
LTS	-25 °C, Storage(Panel change 500hr / circuit change 250hr)	4							
Transportation condition	drop(20cm) → temperature/humidity(-30~60°C / 40°C 90%RH) → pressure → vibration(5~200Hz 1.05Grms, 2hr) → drop(20cm)	1pallet							
WHTS	60 °C / 75 %RH , Storage	4							
Noise	Electromagnetic noise: Overall 23dB 이하	2							
Complex stress	-20°C~60°C, 0~90%RH, 2cycle	4							
ESD	S-IC Input ±7KV, Output ±4KV Output 은 data TP 에 직접 인가 후 진행 Input 은 CKV,VCOM 등에 FFC CNT 를 통하여 TEST 를 진행	3							
EOS (optional)	<table border="1"> <thead> <tr> <th>Item</th> <th>Test condition</th> </tr> </thead> <tbody> <tr> <td>Vin Input step</td> <td>Surge combination (High impedance) Pass Condition: 5kV under</td> </tr> <tr> <td>Signal Input step</td> <td>Surge combination (High impedance) Pass Condition: 120V under</td> </tr> </tbody> </table>	Item	Test condition	Vin Input step	Surge combination (High impedance) Pass Condition: 5kV under	Signal Input step	Surge combination (High impedance) Pass Condition: 120V under	2	
	Item	Test condition							
	Vin Input step	Surge combination (High impedance) Pass Condition: 5kV under							
Signal Input step	Surge combination (High impedance) Pass Condition: 120V under								

#### [ Criteria on evaluation]

There should be no change of the product, which may affect to the practical display functions, when the display quality test is executed under the normal operation setting.

\* HTOL/ LTOL : The operating cycle on the high and low temperature

\* THB : Temperature humidity slant

\* HTS/LTS : The storage at the high and low temperature

\* WHTS : The storage in the high temperature with the high humidity

## 9. General precautions

### 9.1 Handling

- (a) When the panel kit and BLU kit are assembled, the panel kit and BLU kit should be attached to the set system firmly by combining each mounted holes. Be careful not to give the mechanical stress.
- (b) Be careful not to give any extra mechanical stress to the panel when designing the set, and BLU kit.
- (c) Be cautious not to give any strong mechanical shock and / or any forces to the panel kit.  
Applying the any forces to the panel may cause the abnormal operation or the damage to the panel kit and the back light unit kit.
- (d) Refrain from applying any forces to the source PBA and the drive IC in the process of the handling or installing to the set. If any forces are applied to the products, it may cause damage or a malfunction in the panel kit.
- (e) Refrain from applying any forces which cause a constant shock to the back side of panel kit, the set design and BLU kit. If any forces are applied to the products, it may cause an abnormal display, a functional failure and etc.
- (f) Note that polarizer could be damaged easily.  
Do not press or scratch the bare surface with the material which is harder than a HB pencil lead.
- (g) Wipe off water droplets or oil immediately. If you leave the droplets for a long time on the product, a staining or the discoloration may occur.
- (h) If the surface of the polarizer is dirty, clean it using the absorbent cotton or the soft cloth.
- (i) Desirable cleaners are water or IPA (Isopropyl Alcohol).  
Do not use Kenton type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. These might cause the permanent damage to the polarizer due to chemical reaction.
- (j) If the liquid crystal material leaks from the panel, this should be kept away from the eyes or mouth. If this contacts to hands, legs, or clothes, you must washed it away with soap thoroughly and see a doctor for the medical examination.
- (k) Protect the panel kit and BLU Kit out of the static electricity. Otherwise the circuit IC could be damaged.

- Reference : Process control standard of SDC

No.	Item	Control standard
1	Ionizer	All Equipment should be controlled under 150V.(Typ. 100V)
2	Carrying Roller	Carrying Roller should be controlled under 200V.
3	Equipment Ground Resistance	All Equipment Ground Should be less than 1ohm.

- (l) Remove the stains with finger-stalls wearing soft gloves in order to keep the display clean in the process of the incoming inspection and the assembly process.
- (m) Do not pull or fold the source drive IC which connects to the source PBA and the panel or the gate drive IC.
- (n) Do not pull, fold or bend the source drive IC and the gate drive IC in any processes.  
If not, the source drive IC could be bent one time in the process of assembling the panel Kit and the BLU Kit.
- (o) Do not adjust the variable resistor located on the panel kit and BLU kit except when adjusting the flicker.
- (p) Do not touch the pins of the interface connector directly with bare hands.
- (q) Be cautious not to be peeled off the protection film.

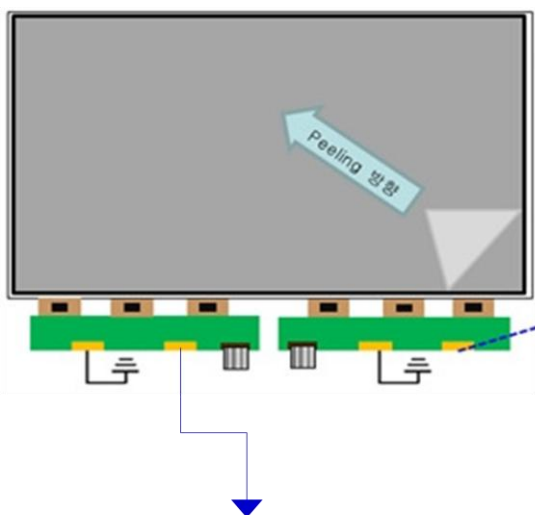


Fig. GND SR-Open Pattern – Be sure to be contacted to the ground while peeling of the protection film

- Make sure to peel off slowly  
(It is recommended to peel it off at the speed of more than 8sec. constantly.)
- The peeling direction is shown at the Fig
- Instruct the ground worker to work with the adequate methods such as the antistatic wrist band.
- Make sure to be grounded the source PBA while peeling of the protection film.
- Ionized air should be blown over during the peeling
- The protection film should not be contacted to the source drive IC.
- If the adhesive stains remain on the polarizer after the protection film is peeled off, please move stains with isopropyl-alcohol liquid.

- (r) The protection film for the polarizer on the panel kit should be slowly peeled off just before using so that the electrostatic charge can be minimized.
- (s) The panel kit and BLU kit have high frequency circuits. The sufficient suppression to the EMI should be done by the set manufacturers.
- (t) The set of which the panel is assembled shall not be twisted. If the product is twisted, it may cause the damage on the product.
- (u) Surface Temp. of IC should be controlled less than 100°C, operating over the Temp. can cause the damage or decrease of lifetime.



9.2 Storage

The storage condition for packing

ITEM	Unit	Min.	Max.
Storage Temperature	(°C)	5	40
Storage Humidity	(%RH)	35	75
Storage life	12 months Based on shipping date at SDC site		
Storage Condition ITEM Storage Temperature	(1) Design the warehouse to be ventilated efficiently with equipping the roof, the ventilation system, and the temp. controller. (2) Don't load the product on the floor and store the product with loaded on the pallet placed far away from the wall. (3) Avoid exposing the product to the direct light, moisture, and water and prevent the product from being condensed. (4) Don't store the product at the container located outside where it rains and the direct light shines. (5) Prevent the product from being exposed to the noxious gas such as the acid gas or alkali gas which may damage the electric device. (6) Don't store the product at the location surrounded by dangerous factors, which can deteriorate the quality of product.		

9.3 Operation

- (a) Do not connect or disconnect the FFC cable during the "Power On" condition.
- (b) Power supply should be always turned on and off by the "Power on/off sequence"
- (c) The module has high frequency circuits. The sufficient suppression to the electromagnetic interference should be done by the system manufacturers. The grounding and shielding methods is important to minimize the interference.
- (d) The cables between TV SET connector and Control PBA interface cable should be connected directly to have a minimized length. A longer cable between TV SET connector and Control PBA interface cable maybe operate abnormal display
- (e) Recommend to age for over 1 hour at least in the state, which the product is driving initially to stabilize the characteristic of the initial TFT.
- (f) Response time depends on the temperature.( In Lower temperature, it becomes longer)

#### 9.4 Operation condition guide

(a) The LCD product shall be operated under normal conditions.

The normal condition is defined as below;

- Temperature :  $20\pm 15^{\circ}\text{C}$
- Humidity :  $55\pm 20\%$
- Display pattern : continually changing pattern (Not stationary)

(b) If the product will be used under extreme conditions such as under the high temperature, humidity, display patterns or the operation time etc., it is strongly recommended to contact SDC for the advice about the application of engineering . Otherwise, its reliability and the function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock markets, and controlling systems.

#### 9.5 Others

(a) The ultra-violet ray filter is necessary for the outdoor operation.

(b) Avoid the condensation of water which may result in the improper operation of product or the disconnection of electrode.

(c) Do not exceed the limit on the absolute maximum rating. (For example, the supply voltage variation, the input voltage variation, the variation in content of parts and environmental temperature, and so on) If not, panel may be damaged.

(d) If the module keeps displaying the same pattern for a long period of time, the image may be remained to the screen. To avoid the image sticking, it is recommended to use a screen saver.

(e) This Panel has its circuitry of PCB's on the rear side, so it should be handled carefully in order for a force not to be applied.

(f) Please contact the SDC in advance when the same pattern is displayed for a long time

MODEL	LSF400HJ01-A	Doc. No		Page	26 / 27
-------	--------------	---------	--	------	---------



MODEL	LSF400HJ01-A	Doc. No		Page	27 / 27
-------	--------------	---------	--	------	---------