

## Linear Systems replaces discontinued Siliconix JPAD200

The LSJPAD200 is a low leakage Pico-Amp Diode packaged in TO-92

The LSJPAD200 extremely low-leakage diode provides a superior alternative to conventional diode technology when reverse current (leakage) must be minimized. The LSJPAD200 features a leakage current of  $\leq 200$  pA and is well suited for use in applications such as input protection for operational amplifiers.

### LSJPAD200 Benefits:

- Negligible Circuit Leakage Contribution
- Circuit "Transparent" Except to Shunt High-Frequency Spikes
- Simplicity of Operation

### LSJPAD200 Applications:

- Op Amp Input Protection
- Multiplexer Overvoltage Protection

### FEATURES

DIRECT REPLACEMENT FOR SILICONIX JPAD200

REVERSE BREAKDOWN VOLTAGE  $BV_R \geq -35V$

ULTRALOW LEAKAGE  $\leq 200$  pA

REVERSE CAPACITANCE  $C_{RSS} \leq 2.0pF$

### ABSOLUTE MAXIMUM RATINGS

@ 25°C (unless otherwise noted)

### Maximum Temperatures

Storage Temperature  $-65^\circ C$  to  $+150^\circ C$

Operating Junction Temperature  $-55^\circ C$  to  $+135^\circ C$

### Maximum Power Dissipation

Continuous Power Dissipation 350mW

### MAXIMUM CURRENT

Forward Current (Note 1) 10mA

### LSJPAD200 ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)

SYMBOL	CHARACTERISTICS	MIN.	TYP.	MAX.	UNITS	CONDITIONS
$BV_R$	Reverse Breakdown Voltage	-35	--	--	V	$I_R = -1\mu A$
$V_F$	Forward Voltage	--	0.8	1.5	V	$I_F = 5mA$
$C_{RSS}$	Total Reverse Capacitance	--	1.5	2	pF	$V_R = -5V, f = 1MHz$
$I_R$	Maximum Reverse Leakage Current	--	--	-200	pA	$V_R = -20V$

### Notes:

1. Absolute maximum ratings are limiting values above which LSJPAD200 serviceability may be impaired.


### Available Packages:

LSJPAD200 in TO-92  
LSJPAD200 available as bare die

Please contact Micross for full package and die dimensions



TO-92 (Bottom View)

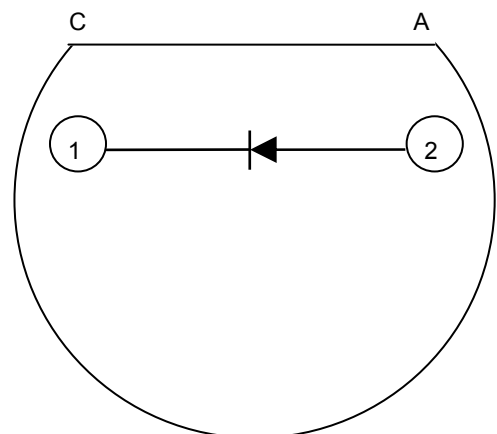

### Micross Components Europe

Tel: +44 1603 788967

Email: [chipcomponents@micross.com](mailto:chipcomponents@micross.com)

Web: <http://www.micross.com/distribution.com>