




Relay Type: LST1 - DC5V - S
 Coil Voltage:- 3 ~ 24VDC
 Type of Sealing:- S: Plastic Sealed Type

Features	Dimension L * W * H (mm)	12.5 * 7.5 * 10.3			
	Terminal Type	PCB			
	Weight	2.2 gm Approximately			
Contact Data	Contact Form/Resistance	1C / 100mΩ Max. @ 1A, 6VDC			
	Contact Material	Ag Alloy			
	Contact Capacity	2A @120VAC / 2A @24VDC			
Coil Data	Coil Voltage (DC)	3 ~ 24 VDC			
	Coil Power Consumption	0.2W			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage (VDC)	Drop Out Voltage (VDC)
		5 VDC	120	75%	10%
		12 VDC	720	75%	10%
24 VDC		2880	75%	10%	
General Data	Dielectric Strength	400VAC (Between open Contacts)			
		1000VAC (Between Coil and Contacts)			
	Insulation Resistance	100MΩ 500VDC			
	Electrical Life	1 x 10 ⁵			
	Mechanical Life	1 x 10 ⁷			
Operating Temperature	- 30 °C ~ + 70°C				

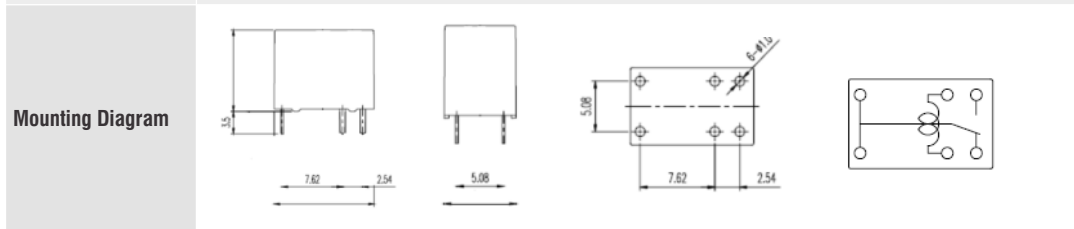

Application Telephone, Fax Machine, Cordless Phone, Server, Modem, etc.