

T1/CEPT/ISDN-PRI TRANSFORMER

Electrical Specifications: @25

Isolation Voltage: 1500 Vrms

Turns Ratio: 1CT:2.42CT $\pm 5\%$

OCL: 1.20mH Minimum @100KHz 20mV


Leakage Inductance : 0.6uH Maximum

Cw/w : 25pF Maximum


PRI DCR : 0.70 Ohms Maximum

SEC DCR : 1.20 Ohms Maximum

Mechanicals:

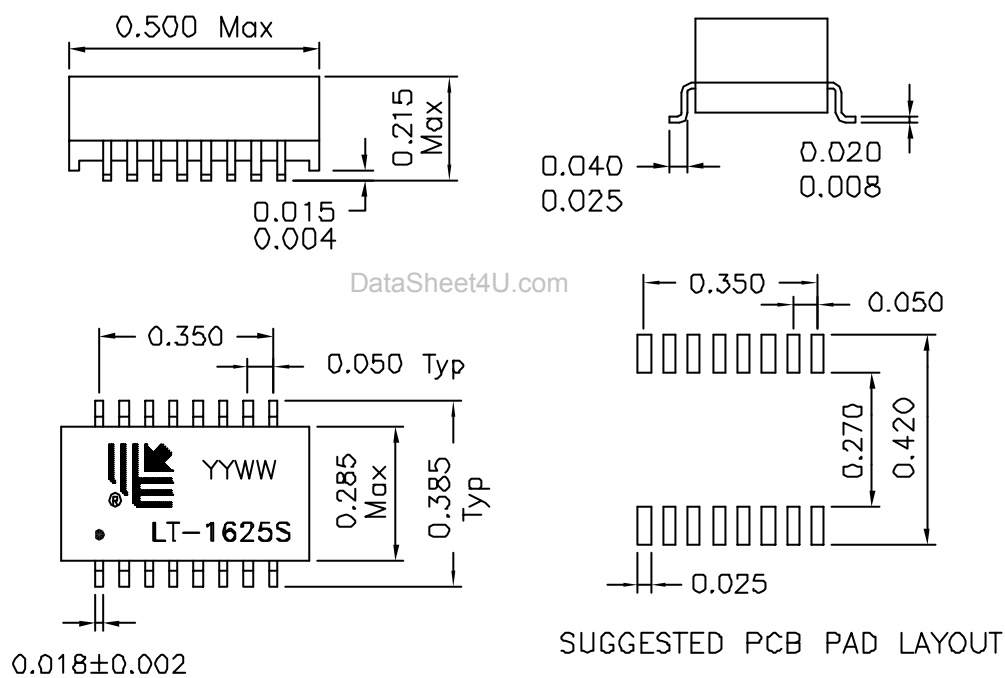

Schematics:

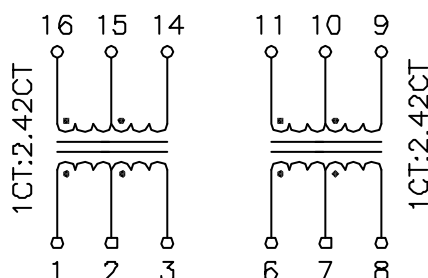

*Specification Subject to Change Without Notice

P/N: LT-1625S	DIMENSIONS IN INCH	Unless otherwise specified Dim. Tolerances are: .xxx ± 0.010	REV: A1	DRWN:	DATE: 03-08-05
	SCALE: NONE		PAGE: 1/1	APPD:	DATE: