



LT0323-41-SB96

3.0MM ROUND LAMP

Features

- * LOW CURRENT REQUIREMENTS
- * HIGH LIGHT OUTPUT
- * RELIABLE AND RUGGEN
- * IC COMPATIBLE

Absolute Maximum Ratings at $T_A=25^{\circ}\text{C}$

REVERSE VOLTAGE ($<100 \mu\text{A}$).....	4.0 V
D.C. FORWARD CURRENT.....	30 mA
PULSE CURRENT (1/10 DUTY CYCLE, 0.1 ms PULSE WIDTH).....	100 mA
OPERATING TEMPERATURE RANGE.....	-25°C TO +85°C
STORAGE TEMPERATURE RANGE.....	-25°C TO +100°C
LEAD SOLDERING TEMP. (1.6mm FROM BODY).....	260°C FOR 5 SEC.

Electrical/optical characteristics at $T_A=25^{\circ}\text{C}$

PART NUMBER	LED CHIP		LENS COLOR	WAVELENGTH TYP. I _F @20mA (nm)		FORWARD VOLTAGE @20mA(V)		LUMINOUS INTENSITY @20mA(mcd)		VIEW ANGLE 2 θ ^{1/2} (deg)
	MATERIAL	EMITTING COLOR		λ p	λ d	TYP.	MAX.	MIN.	TYP.	
LT0323-41-SB96	AlGaInP	GREENISH YELLOW	W.C.	573 ± 5	571 ± 5	2.1	2.4	150	300	25


(1) LENS COLOR

W.C.....WATER CLEAR


(2) SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

(3) ALL ABOVE COMPONENTS ARE CONSIDERED. DEVIATIONS FROM STATED SPECIFICATIONS WILL REQUIRE A NEW PART NUMBER BE ASSIGNED.

Package Dimensions

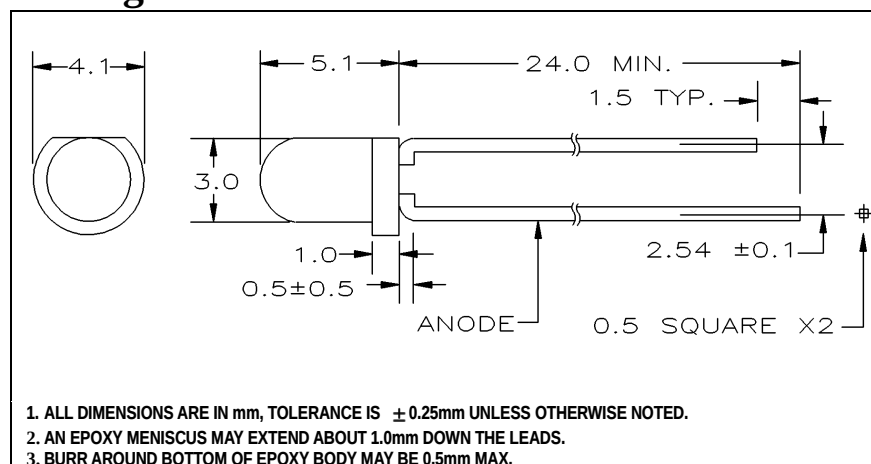

Radiation Pattern

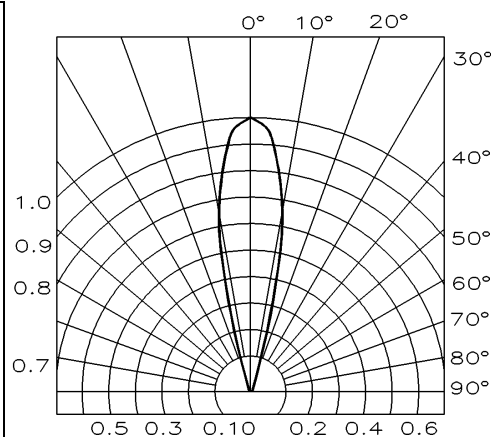





LT0323-41-SB96

3.0MM ROUND LAMP


Forward Current vs. Applied Voltage

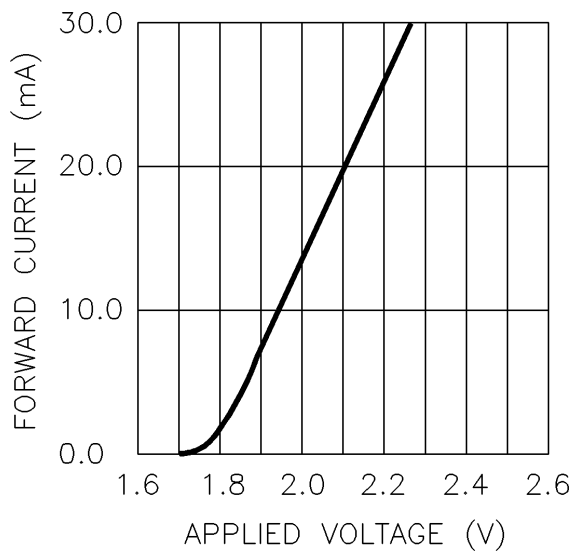

Luminous Intensity vs. Forward Current

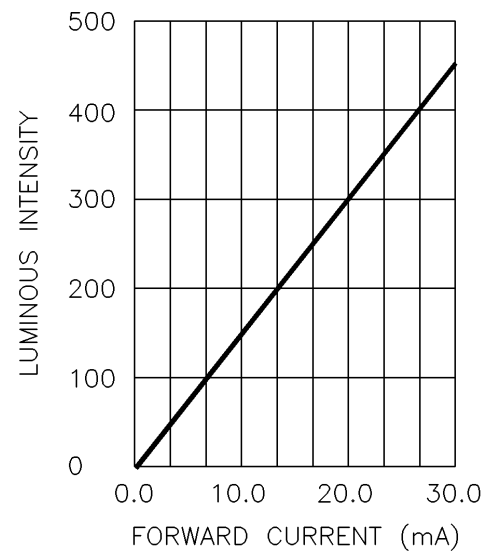

Forward Current vs. Ambient Temperature

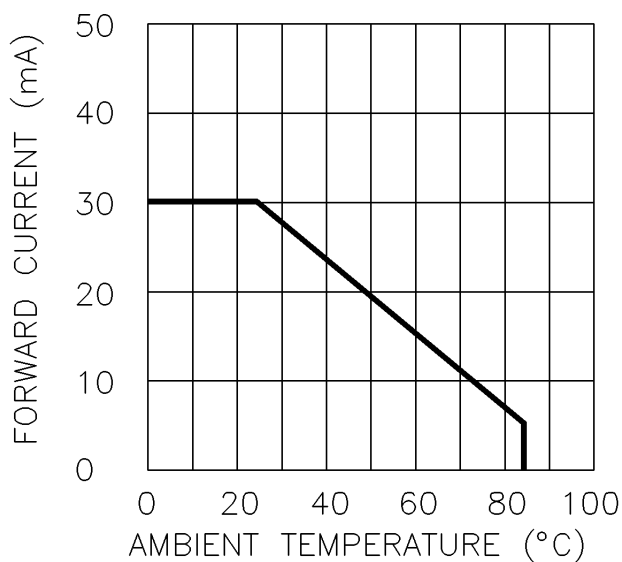

Relative Intensity vs. Wavelength

