

**Samsung Secret**

Approval

Customer : Mitsubishi**DATE : 2. Aug. 2011****SAMSUNG TFT-LCD****MODEL : LTA400HV01**

Customer's Approval		APPROVED BY <i>Heo Jeongmin</i>	DATE 2. Aug. 2011
		PREPARED BY <i>Bong U LEE</i>	DATE 2. Aug. 2011
SIGNATURE	DATE		

LCD Business**Samsung Electronics Co . , LTD.**

MODEL	LTA400HV01	Doc. No	06- 000- G- 110802	Page	1/34
--------------	-------------------	----------------	---------------------------	-------------	-------------

**Contents****Samsung Secret**

General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Optical Characteristics	(6)
3. Electrical Characteristics	(9)
3.1 TFT LCD Module	
3.2 Back Light Unit	
3.3 Inverter Input & Specification	
4. Input Terminal Pin Assignment	(13)
4.1 Input Signal & Power	
4.2 Converter Input Pin Configuration	
4.3 Converter Input Power Sequence	
4.4 Converter Input Pin Configuration	
4.5 Dimming Block Mapping	
4.6 LCON ↔ LED Converter Interface Requirement	
4.6 Timing Diagrams : 2D/Scan→3D Mode Conversion	
4.7 Timing Diagrams : 3D Mode→2D/Scan Conversion	
4.8 LVDS Interface	
4.9 Input Signals, Basic Display Colors and Gray Scale of Each Color	
5. Interface Timing	(22)
5.1 Timing Parameters (DE only mode)	
5.2 Timing Diagrams of interface Signal (DE only mode)	
5.3 LVDS Parameter Definition	
5.4 Power ON/OFF Sequence	
5.5 3D Mode Power Sequence	
6. Outline Dimension	(27)
7. Reliability Test	(29)
8. Packing	(30)
9. Marking & Others(UL No.)	(31)
10. General Precaution	(32)
10.1 Handling	
10.2 Storage	
10.3 Operation	
10.4 Operation Condition Guide	
10.5 Others	

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****2/34**

**Revision History****Samsung Secret**

Date	Rev. No	Page	Summary
2. Aug. 2011	000	all	First issued

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****3/34**

General Description

Samsung Secret

Description

LTA400HV01 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT(Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 46.0" is 1920 x 1080 and this model can display up to 1.07 Billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV and High Definition TV

Features

- RoHS compliance (Pb-free)
- High contrast ratio & aperture ratio with wide color gamut
- S-PVA (Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response
- FHD resolution (16:9)
- Low Power consumption
- Edge Type LED (Light Emitted Diode) BLU
- DE (Data Enable) mode
- 2D: 4ch LVDS 10bit Input Interface
- 3D: 4ch LVDS 10bit Input Interface (Left Eye: 2ch 60Hz FHD, Right Eye: 2ch 60Hz FHD)

General Information

Items	Specification	Unit	Note
Module Size	921.7(H _{TYP}) x 536.3(V _{TYP})	mm	$\pm 1.0\text{mm}$
	31.8 (Max)		
Weight	10000 (Max)	g	
Pixel Pitch	0.46(H) x 0.46(W)	mm	
Active Display Area	885.60(H) x 498.15(V)	mm	
Surface Treatment	Haze 0%, Hard Coating 2H		Glare
Display Colors	8bit + FRC – 1.07 Billion	colors	
Number of Pixels	1920 x 1080	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	450 (Typ.)	cd/m ²	

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****4/34**

Samsung Secret

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	V_{DD}	GND-0.5	13.2	V	(1)
Storage temperature	T_{STG}	-20	60	°C	(2)
Surface temperature	T_{SUR}	0	60	°C	
Operating temperature	T_{OPR}	0	50	°C	
Shock (non - operating)	X,Y,Z	-	50	G	(3)
Vibration (non - operating)	V_{NOP}	-	1.5	G	(4)

Note (1) $T_a = 25 \pm 2$ °C

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ($T_a \leq 39$ °C)

b. Relative Humidity is 90% or less. ($T_a > 39$ °C)

c. No condensation

(3) 11ms, sine wave, one time for $\pm X$, $\pm Y$, $\pm Z$ axis

(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis

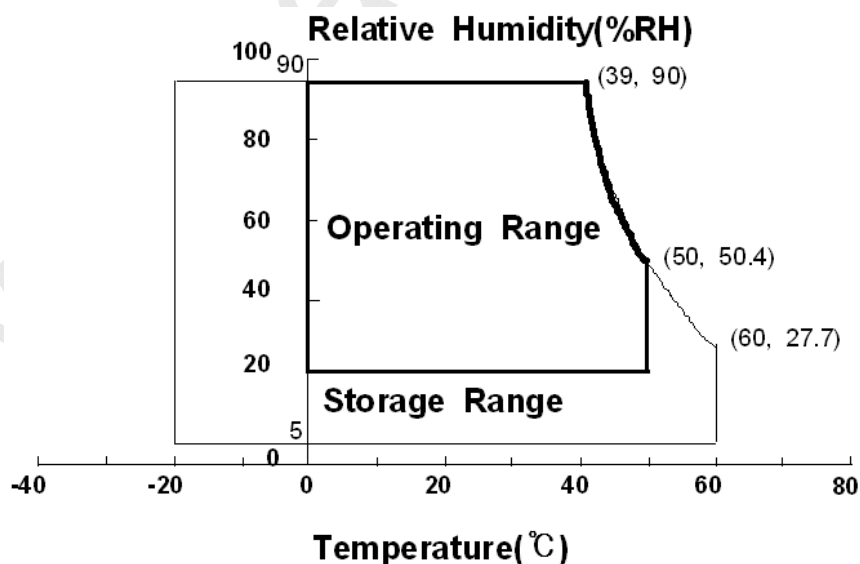


Fig. Temperature and Relative humidity range

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page

5/34

2. Optical Characteristics

Samsung Secret

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON RD-80S, TOPCON SR-3, ELDIM EZ-Contrast

(Ta = 25 ± 2 °C, VDD=12V, fv= 120Hz, f_{DCLK} = 297MHz, LED Current = 130mA)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R		3000	5000	-		(1) SR-3
Response Time	G-to-G	Tg	Normal q L,R =0 q U,D =0 Viewing Angle	-	-	15	msec	(3) RD-80S
Luminance of White (Center of screen)		Y _L		350	450	-	cd/m ²	(4) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.651	TYP. +0.03		(5),(6) SR-3
		Ry			0.334			
	Green	Gx			0.308			
		Gy			0.611			
	Blue	Bx			0.151			
		By			0.060			
	White	Wx			0.280			
		Wy			0.290			
Color Gamut		-		-	72	-	%	(5) SR-3
Color Temperature		-		-	10,000	-	K	
Viewing Angle	Hor.	q _L	C/R≥10	75	89	-	Degree	(6) EZ-Contrast
		q _R		75	89	-		
	Ver.	q _U		75	89	-		
		q _D		75	89	-		
White Brightness Uniformity (9 Points)		B _{uni}		-	-	30	%	(2) SR-3

- Test Equipment Setup


The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.

Environment condition : Ta = 25 ± 2 °C


MODEL	LTA400HV01	Doc. No	06- 000- G- 110802	Page	6/34
--------------	-------------------	----------------	---------------------------	-------------	-------------

Samsung Secret

Photo detector	Field
SR-3	2°
RD-80S	1°

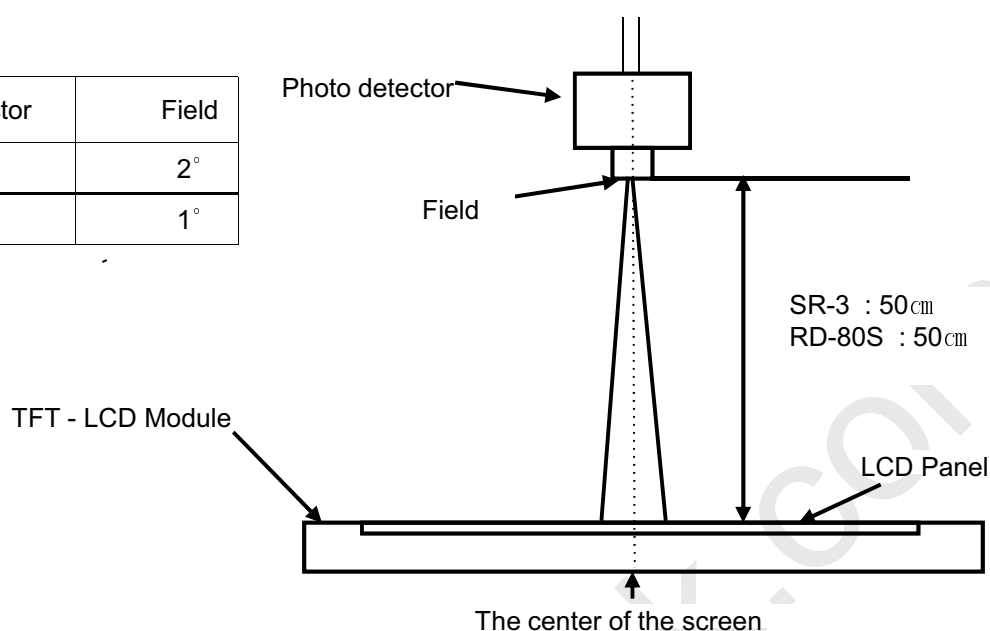

- Definition of test point

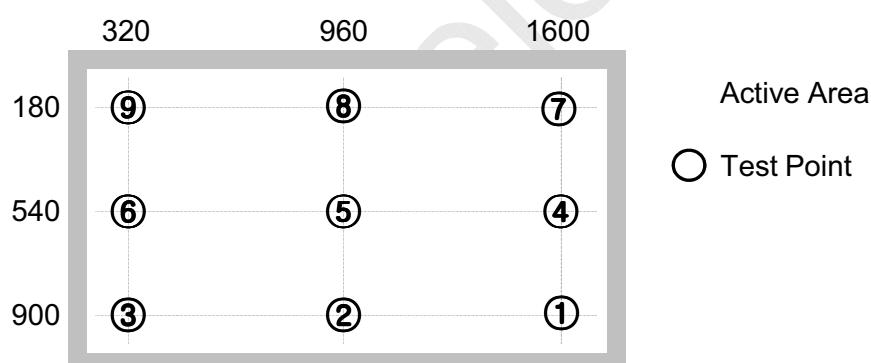

Note (1) Definition of Contrast Ratio (C/R)

: Ratio of gray max (Gmax) & gray min (Gmin) at the center point ⑤ of the panel

$$C/R = \frac{G_{\max}}{G_{\min}}$$

Gmax : Luminance with all pixels white

Gmin : Luminance with all pixels black

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****7/34**

Samsung Secret


Note (2) Definition of 9 points brightness uniformity (Test pattern : Full White)

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

Bmax : Maximum brightness

Bmin : Minimum brightness

Note (3) Definition of Response time : Sum of Tr, Tf

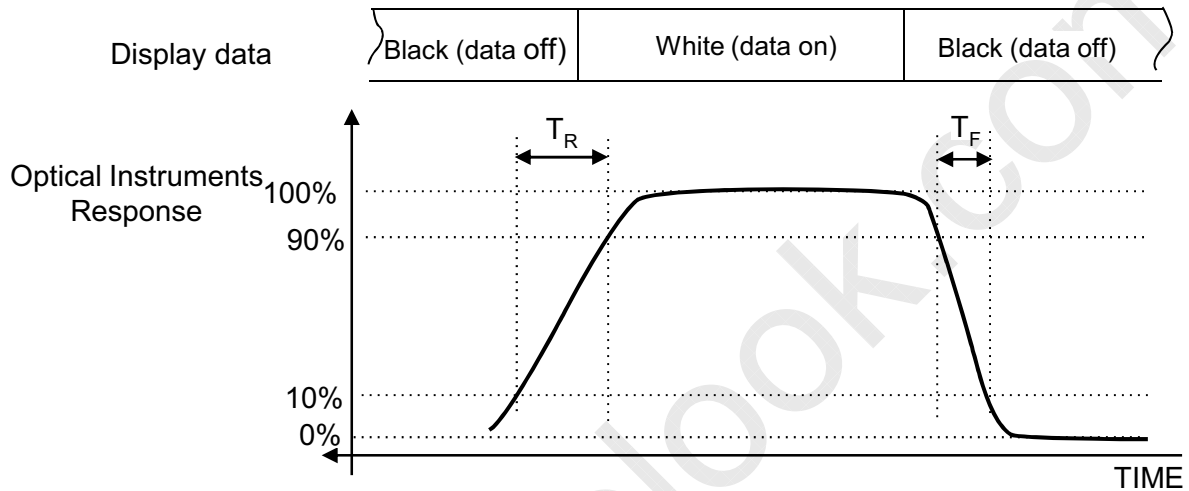


Note (4) Definition of Luminance of White : Luminance of white at center point ⑤

Note (5) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point ⑤

Note (6) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

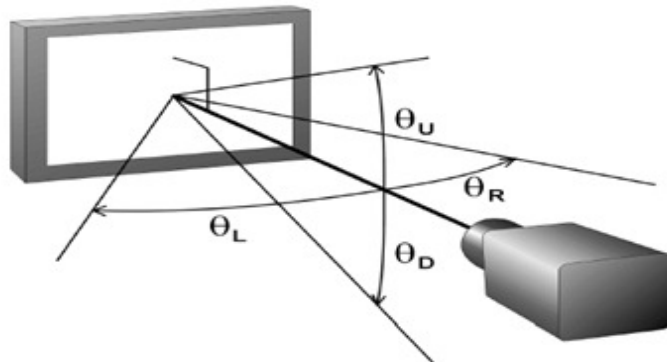

Samsung Secret

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V_{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I_{DD}	-	900	-	mA	(2),(3)
	(b) White		-	980	-	mA	
	(c) SUB V-Stripe		-	1280	-	mA	
Vsync Frequency		f_V	-	120	-	Hz	
Hsync Frequency		f_H	-	135	-	kHz	
Main Frequency		f_{DCLK}	-	297	-	MHz	
Rush Current		I_{RUSH}	-	-	3	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .

(2) $F_v=120\text{Hz}$, $f_{DCLK}=297\text{MHz}$, $V_{DD}=12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)


a) Black Pattern




b) White Pattern



c) SUB V-Stripe



(4) Measurement Conditions

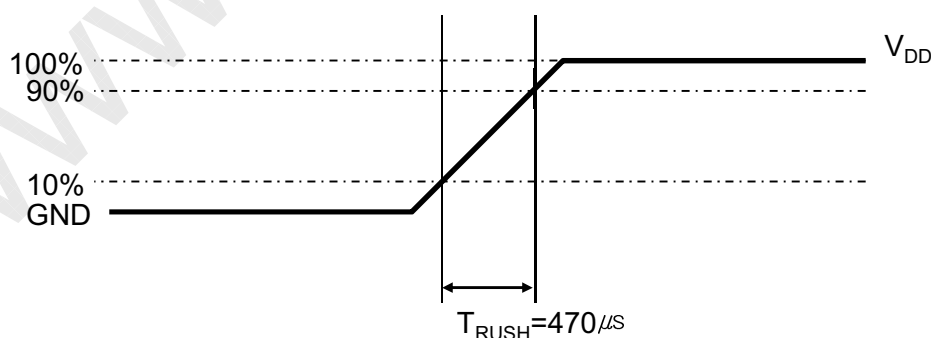

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.


MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****9/34**

Samsung Secret

3.2 Back Light Unit

The back light unit contains Edge type White LEDs (Light Emitting Diode)

$T_a = 25 \pm 2^\circ\text{C}$

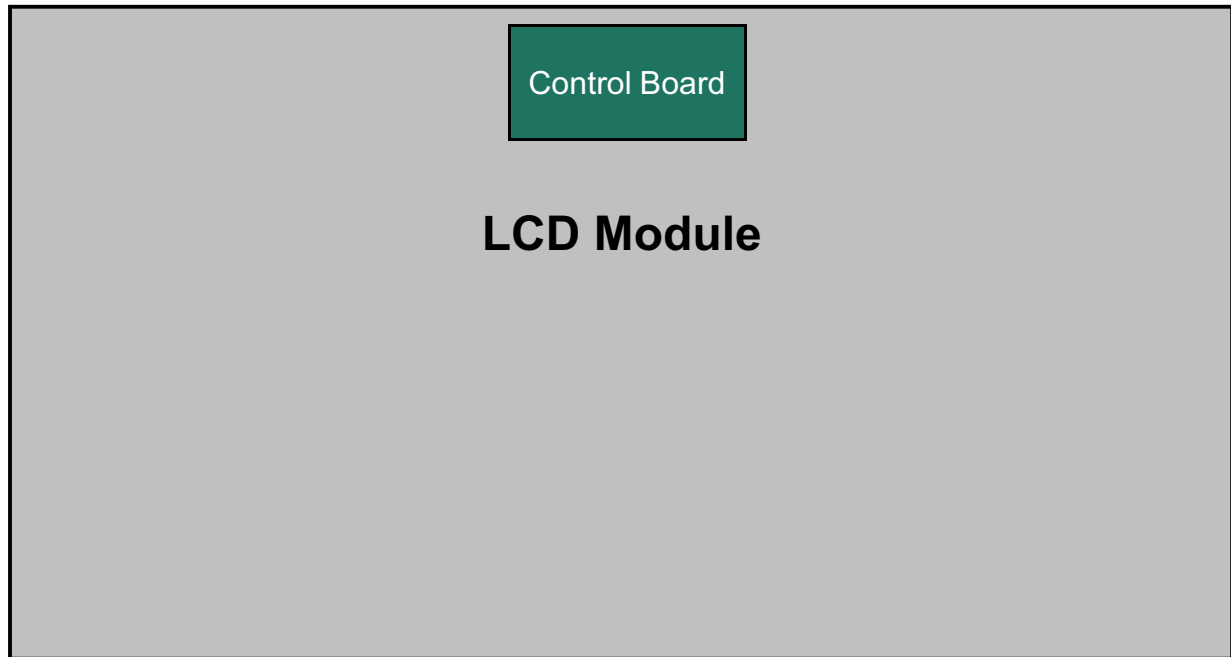

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Life Time	Hr	30,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value. [Operating condition : $T_a = 25 \pm 2^\circ\text{C}$, For LED Package only.]

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****10/34**

3.3 Converter Input Condition & Specification

Samsung Secret

Item	Symbol	Condition	Spec.			Unit	Remark
			Min	Typ	Max		
Input Voltage	V_{in}		22.0	24.0	26.0	V	
Input Current	$I_{inrush,N}$	$V_{in}=24.0V, dim=max$ 3D ENA=Off	-	-	6.5	A_{dc}	note ^{(*2)(*3)} Normal Mode
	$I_{inrush,3D}$	$V_{in}=24.0V, dim=max$ 3D ENA=On	-	-	5.5	A_{dc}	note ^{(*2)(*3)} 3D Mode
Output Current	$I_{LED,N}$	$V_{in}=22.0\sim 26.0V$ dim=max 3D ENA=Off	123	130	137	mA_{mean}	note ^(*1)
	$I_{LED,3D}$	$V_{in}=22.0\sim 26.0V$ dim=max 3D ENA=Off	237.5	250	262.5	mA_{DC}	3D Mode, note ^(*4) Active High Level
Backlight on/off Control	ENA	Enable	2.4	-	5.5	V	
		Disable	-0.3	-	0.8	V	
3D Mode on/off Control	3D ENA	On	2.4	-	5.5	V	
		Off	-0.3	-	0.8	V	
Error Out	Z_{Normal}	Normal	-	-	100	Ω	
	$Z_{Abnormal}$	Abnormal	1	-	-	$M\Omega$	open Collector
PWM Dimming Frequency	F_{PWM}	2D/Scan Mode	95	-	400	Hz	
		3D Mode	95	120	400	Hz	
PWM Dimming Duty Range	PWM Duty	2D/Scan Mode	1	-	100	%	
PWM Threshold Voltage	V_{PWM}	On	2.4	-	5.25	V	
		Off	0	-	0.8	V	
PWM Rising/Falling Time	Tr / Tf		-	-	200	ns	note ^(*5)
3D Selection	3D_ENA	3D On	2.4	-	5.25	V	
		3D Off	0	-	0.8	V	
		3D Off		Open			note ^(*6)

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page

11/34

Samsung Secret

Note) Power Consumption is measured when 450 [cd/m] of luminance which is the typical luminance. Lamp Current is measured at the point before Lamp.


(*1) All data was approved after running 120 minutes.

(*2) linrush is measured within BLU on 10_{ms} after leaving the BLU as it is at least 1hr or more at room temperature(25℃)


(*3) Additional Appendix for Input current

Item	Symbol	Condition	Spec.			Unit	Remark
			Min	Typ	Max		
Input Current Normal	$I_{\text{overshoot,N}}$	$V_{\text{in}}=24.0\text{V}$, dim=max	—	3.0	3.4	A_{dc}	Overshoot current Current after turn on
	$I_{\text{saturation,N}}$		—	2.8	3.2	A_{dc}	Saturation Current after 1hr aging
Input Current 3D	$I_{\text{overshoot,3D}}$	$V_{\text{in}}=24.0\text{V}$, dim=max	—	5.4	6.0	A_{dc}	Overshoot current Current after turn on
	$I_{\text{saturation,3D}}$		—	5.3	5.9	A_{dc}	Saturation Current after 1hr aging

(*4) duty=ton/ttotal

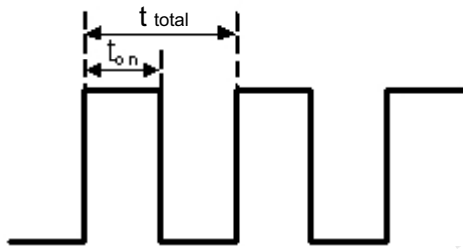

(*5) signal rising/falling time

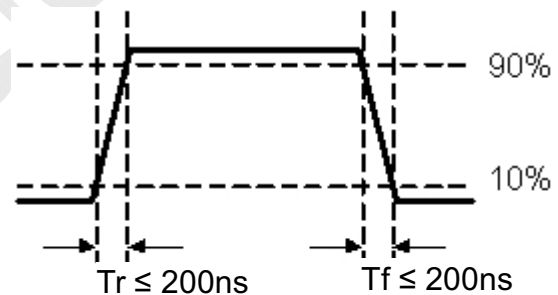

(*6) Open : Pull-down(Low) → Normal Operation (3D Off : 2D/SCAN)

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page

12/34

4. Input Terminal Pin Assignment

Samsung Secret

4.1 Input Signal & Power

Connector 1: FI-RE41S-HF (JAE)

Pin	Description		Pin	Description	
1	Vdd (12V)		24	GND	
2	Vdd (12V)		25	Odd LVDS Signal	LV3_AN
3	Vdd (12V)		26		LV3_AP
4	Vdd (12V)		27		LV3_BN
5	Vdd (12V)		28		LV3_BP
6	N.C		29		LV3_CN
7	GND		30		LV3_CP
8	GND		31		GND
9	GND		32		LV3_CLKN
10	Odd LVDS Signal	LV1_AN	33		LV3_CLKP
11		LV1_AP	34		GND
12		LV1_BN	35		LV3_DN
13		LV1_BP	36		LV3_DP
14		LV1_CN	37		LV3_EN
15		LV1_CP	38		LV3_EP
16		GND	39	GND	
17		LV1_CLKN	40	N.C	
18		LV1_CLKP	41	N.C	
19		GND			
20		LV1_DN			
21		LV1_DP			
22		LV1_EN			
23		LV1_EP			

Note) (1) No Connection: This PINS are only used for SAMSUNG internal using.

MODEL
LTA400HV01
Doc. No
06- 000- G- 110802
Page
13/34

Samsung Secret

Connector 2 : FI-RE51S-HF (JAE)

Pin	Description		Pin	Description	
1	Vdd (12V)		26	Even LVDS Signal	LV4_AP
2	Vdd (12V)		27		LV4_BN
3	Vdd (12V)		28		LV4_BP
4	Vdd (12V)		29		LV4_CN
5	Vdd (12V)		30		LV4_CP
6	N.C		31		GND
7	GND		32		LV4_CLKN
8	GND		33		LV4_CLKP
9	GND		34		GND
10	Even LVDS Signal	LV2_AN	35		LV4_DN
11		LV2_AP	36		LV4_DP
12		LV2_BN	37		LV4_EN
13		LV2_BP	38		LV4_EP
14		LV2_CN	39	GND	
15		LV2_CP	40	N.C	
16		GND	41	N.C	
17		LV2_CLKN	42	3D_EN *NOTE(2)	
18		LV2_CLKP	43	N.C	
19		GND	44	N.C	
20		LV2_DN	45	STV_O*NOTE(3)	
21		LV2_DP	46	V_SYNC_O*NOTE(4)	
22		LV2_EN	47	N.C	
23		LV2_EP	48	L/R_I*NOTE(5)	
24	GND		49	Shutter Out*NOTE(6)	
25	Even LVDS	LV4_AN	50	N.C	
			51	N.C	

Note) (1) No Connection: This PINS are only used for SAMSUNG internal using.

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****14/34**

Samsung Secret

Note(2) 3D EN - High(3.3V) : 3DMode / Low(GND) : 2DMode

Note(3) STV_O - Output signal from TCON, Real Vertical out for Panel

Note(4) V_SYNC_O - Output signal from TCON, Converter Synchronization

Note(5) L/R_I - Input from TV Set, L / R Signal Indicator in 3D Mode

Note(6) Shutter Out - L/R Shutter Out from TCON (Optional)

Note(7) Pin number starts from Right side

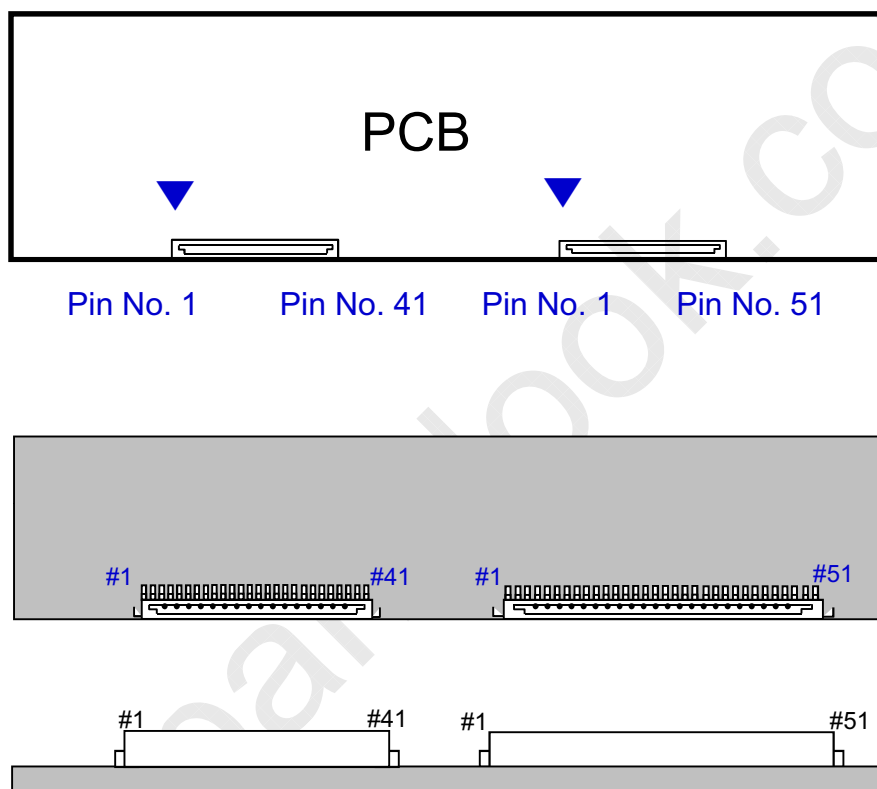


Fig. Connector diagram

- All GND pins should be connected together and also be connected to the LCD's metal chassis.
- All power input pins should be connected together.
- All NC pins should be separated from other signal or power.

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page

15/34


4.2. Converter Input Pin Configuration

Samsung Secret

Connector : Molex, 502046-3070

PIN NO.	PIN Configuration (Function)
1	24V
2	24V
3	24V
4	24V
5	24V
6	GND
7	GND
8	GND
9	GND
10	GND
11	ERROR OUT [Operation Status Output]
12	ENA (BLU On/Off Control Signal)
13	N.C
14	N.C

4.3. Converter Input Power Sequence

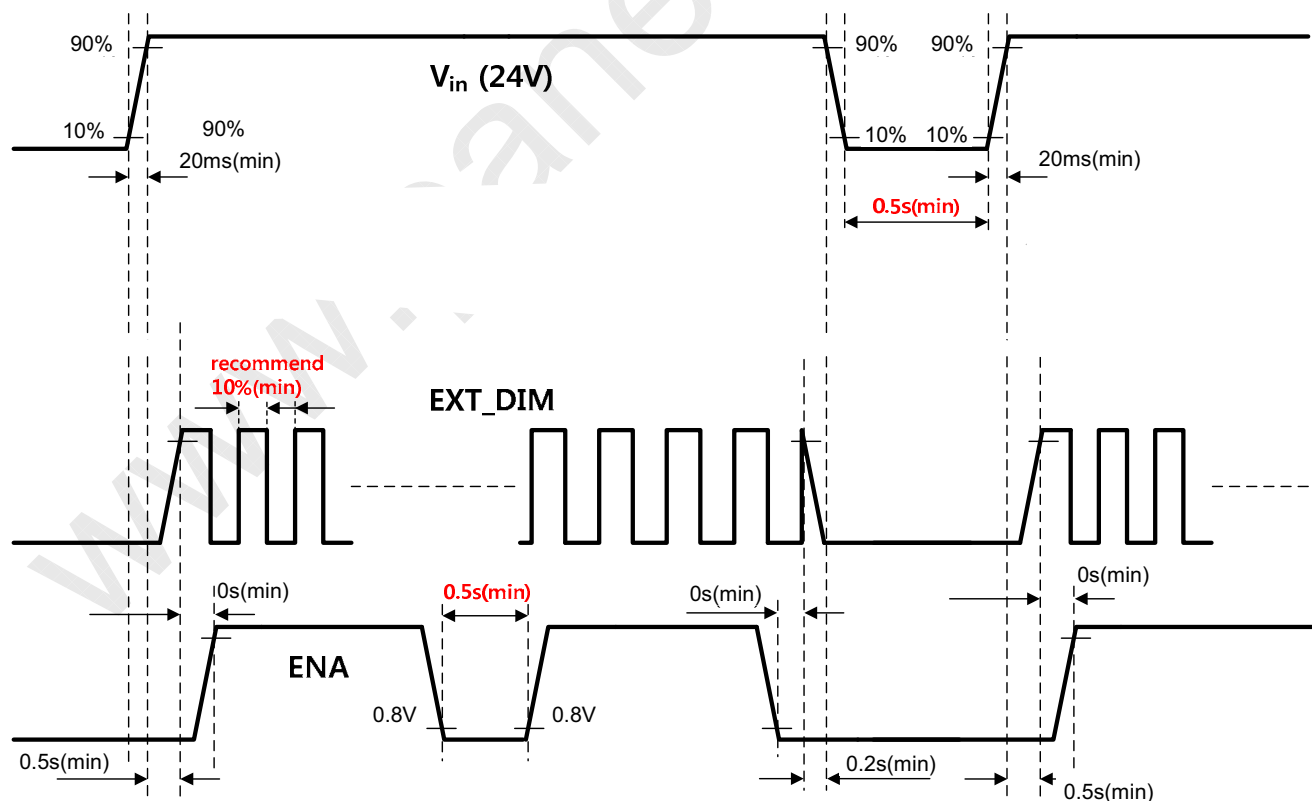
MODEL
LTA400HV01
Doc. No
06- 000- G- 110802
Page
16/34


4.4. Converter Input Pin Configuration

Samsung Secret

Connector : Molex, 502046-3070

PIN No.	PIN Configuration	PIN No.	PIN Configuration
1	GND	16	PWM_W1
2	PWM_W15	17	PWM_W0
3	PWM_W14	18	GND
4	PWM_W13	19	GND
5	PWM_W12	20	N.C.
6	PWM_W11	21	3D_ENA
7	PWM_W10	22	GND
8	PWM_W9	23	GND
9	PWM_W8	24	GND
10	PWM_W7	25	N.C.
11	PWM_W6	26	EXT_DIM
12	PWM_W5	27	N.C.
13	PWM_W4	28	N.C.
14	PWM_W3	29	N.C.
15	PWM_W2	30	GND

4.5. Dimming Block Mapping

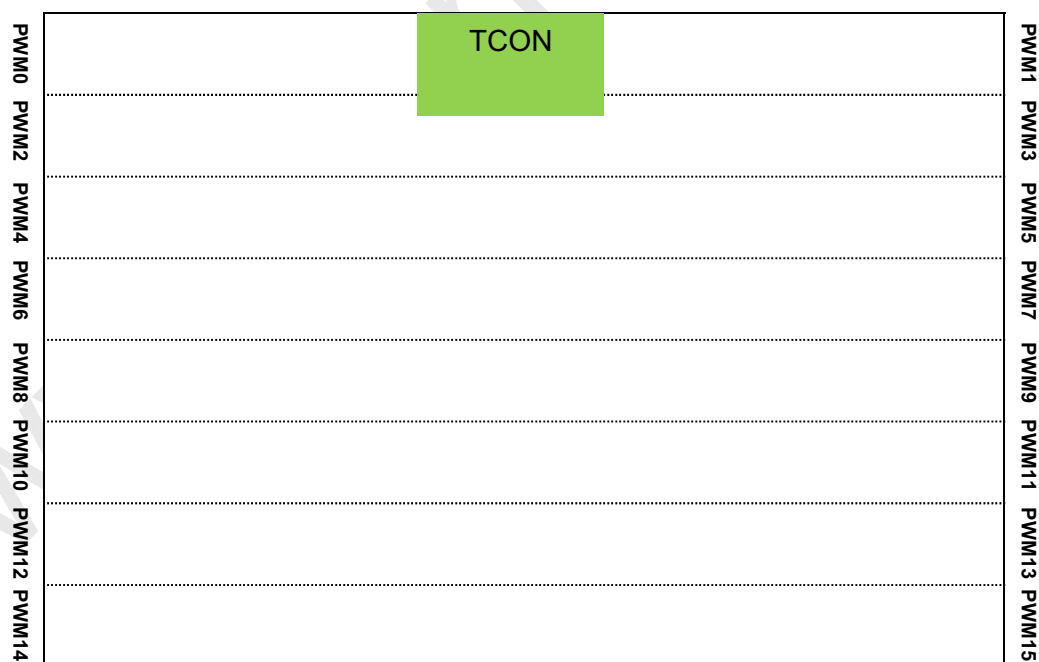

※ Based on LCD Panel Front View (Block Mapping)

MODEL
LTA400HV01
Doc. No
06- 000- G- 110802
Page
17/34

Samsung Secret**4.6. LCON ↔ LED Converter Interface Requirement****■ 3D On Mode (3D_ENA : High)**

3D_ENA is LED Current boosting operation signal with 3D PWM Duty.

In transient condition (2D ↔ 3D), PWMs Duty should be limited within 3D mode because of LED current boosting.

■ Recommendation

PWM Duty input in mode change period (L-CON PWM Control Duty Input)

: Converter Off(ENA Low) for stable mode conversion.

Case 1) 2D/SCAN Mode (1 ~ 100%, All of blocks) → Transient Period(Converter ENA(Off))

→ 3D Mode(ENA(On), 40%, All of blocks)

Case 2) 3D Mode(40%, All of blocks) → Transient Period(Converter ENA(Off))


→ 2D/SCAN Mode (ENA(On), 1 ~ 100%, All of blocks) 1

	2D/SCAN Mode	Transient Period	3D Mode	Remark
PWM duty by L-CON Control	1 ~ 100% (Converter ENA ON)	Converter ENA OFF (ENA : Input CNT Pin #12)	40% (Converter ENA ON)	For only stable mode Conversion


MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****18/34**

4.7. Timing Diagrams : 2D/Scan → 3D Mode Conversion

Samsung Secret

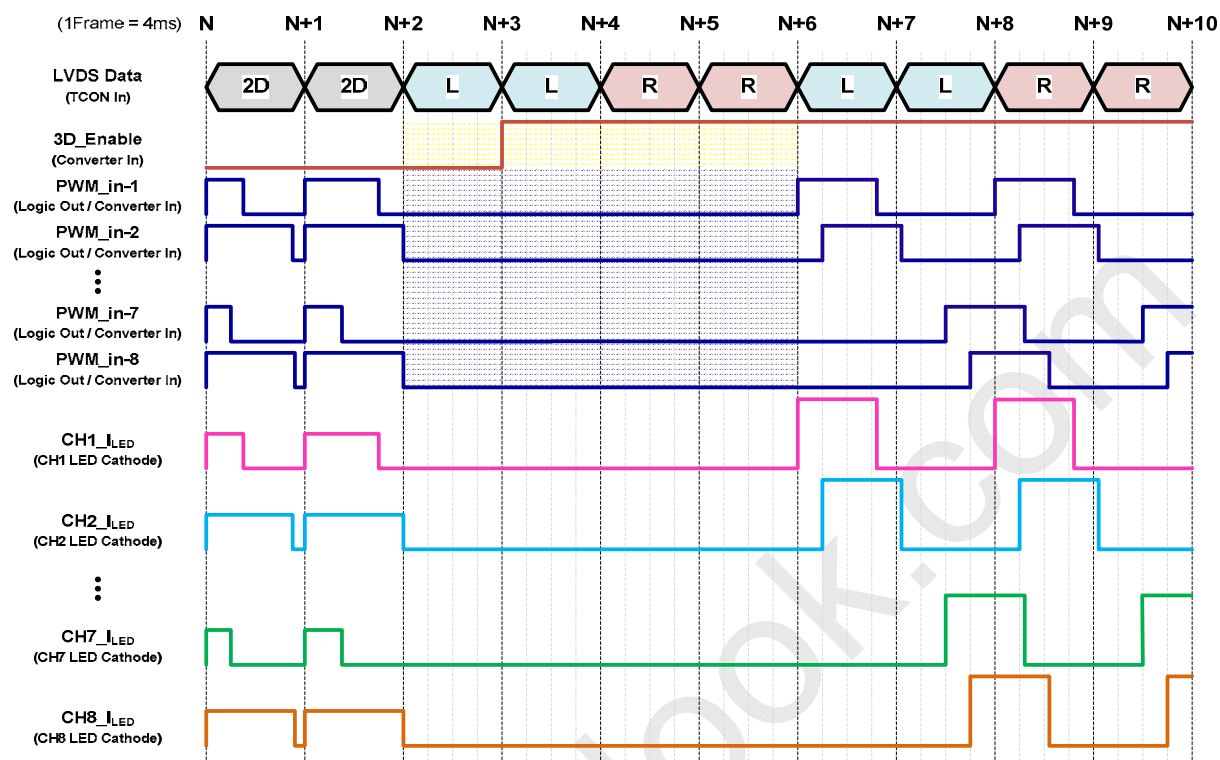

4.8. Timing Diagrams : 3D Mode → 2D/Scan Conversion

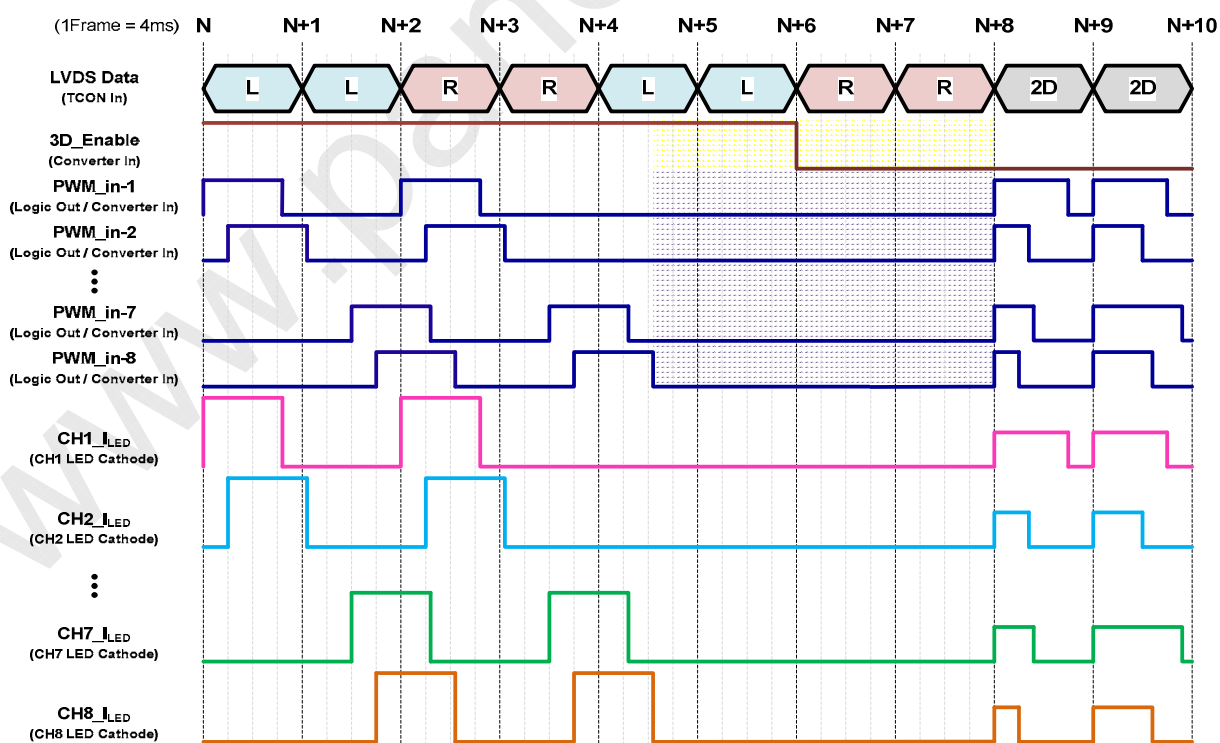

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page

19/34



4.9. LVDS Interface

Samsung Secret

- LVDS Receiver : Tcon (merged) - Data Format (JEIDA Only)

	LVDS pin	JEIDA -DATA
TxOUT/RxIN0	TxIN/RxOUT0	R4
	TxIN/RxOUT1	R5
	TxIN/RxOUT2	R6
	TxIN/RxOUT3	R7
	TxIN/RxOUT4	R8
	TxIN/RxOUT6	R9
	TxIN/RxOUT7	G4
TxOUT/RxIN1	TxIN/RxOUT8	G5
	TxIN/RxOUT9	G6
	TxIN/RxOUT12	G7
	TxIN/RxOUT13	G8
	TxIN/RxOUT14	G9
	TxIN/RxOUT15	B4
	TxIN/RxOUT18	B5
TxOUT/RxIN2	TxIN/RxOUT19	B6
	TxIN/RxOUT20	B7
	TxIN/RxOUT21	B8
	TxIN/RxOUT22	B9
	TxIN/RxOUT24	HSYNC
	TxIN/RxOUT25	VSYNC
	TxIN/RxOUT26	DEN
TxOUT/RxIN3	TxIN/RxOUT27	R2
	TxIN/RxOUT5	R3
	TxIN/RxOUT10	G2
	TxIN/RxOUT11	G3
	TxIN/RxOUT16	B2
	TxIN/RxOUT17	B3
	TxIN/RxOUT23	RESERVED
TxOUT/RxIN4	TxIN/RxOUT28	R0
	TxIN/RxOUT29	R1
	TxIN/RxOUT30	G0
	TxIN/RxOUT31	G1
	TxIN/RxOUT32	B0
	TxIN/RxOUT33	B1
	TxIN/RxOUT34	RESERVED

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****20/34**

Samsung Secret

4.10. Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																												GRAY SCALE LEVEL		
		RED										GREEN										BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	B0	B1	B2	B3	B4	B5	B6	B7		B8	B9
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-	
	CYAN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	MAGENTA	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	-
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0	
	DARK ↑ ↓ LIGHT	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1021
	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1022	
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1023
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑ ↓ LIGHT	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1
		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G1021
	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G1022	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	G1023
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0	
	DARK ↑ ↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	B1
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	B2
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B1020
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	B1021
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B1022	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	B1023

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****21/34**

Samsung Secret

5. Interface Timing

5.1. Timing Parameters (DE mode)


SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	260	297	305	MHz	-
Hsync		F_H	95	135	125	KHz	-
Vsync		F_V	95	120	125	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	1080	-	Lines	-
	Vertical Total	T_V	1092	1125	1380	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1920	-	Clocks	-
	Horizontal Total	T_H	2090	2200	2350	clocks	-

Note) This product is DE mode. But the Hsync & Vsync signal must be inputted

- (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
- (2) Internal VDD = 3.3V
- (3) Spread spectrum
 - Modulation rate (max) : $\pm 1.5\%$
 - Modulation Frequency : Max 300KHz

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****22/34**


5.2. Timing diagrams of interface signal (DE mode)

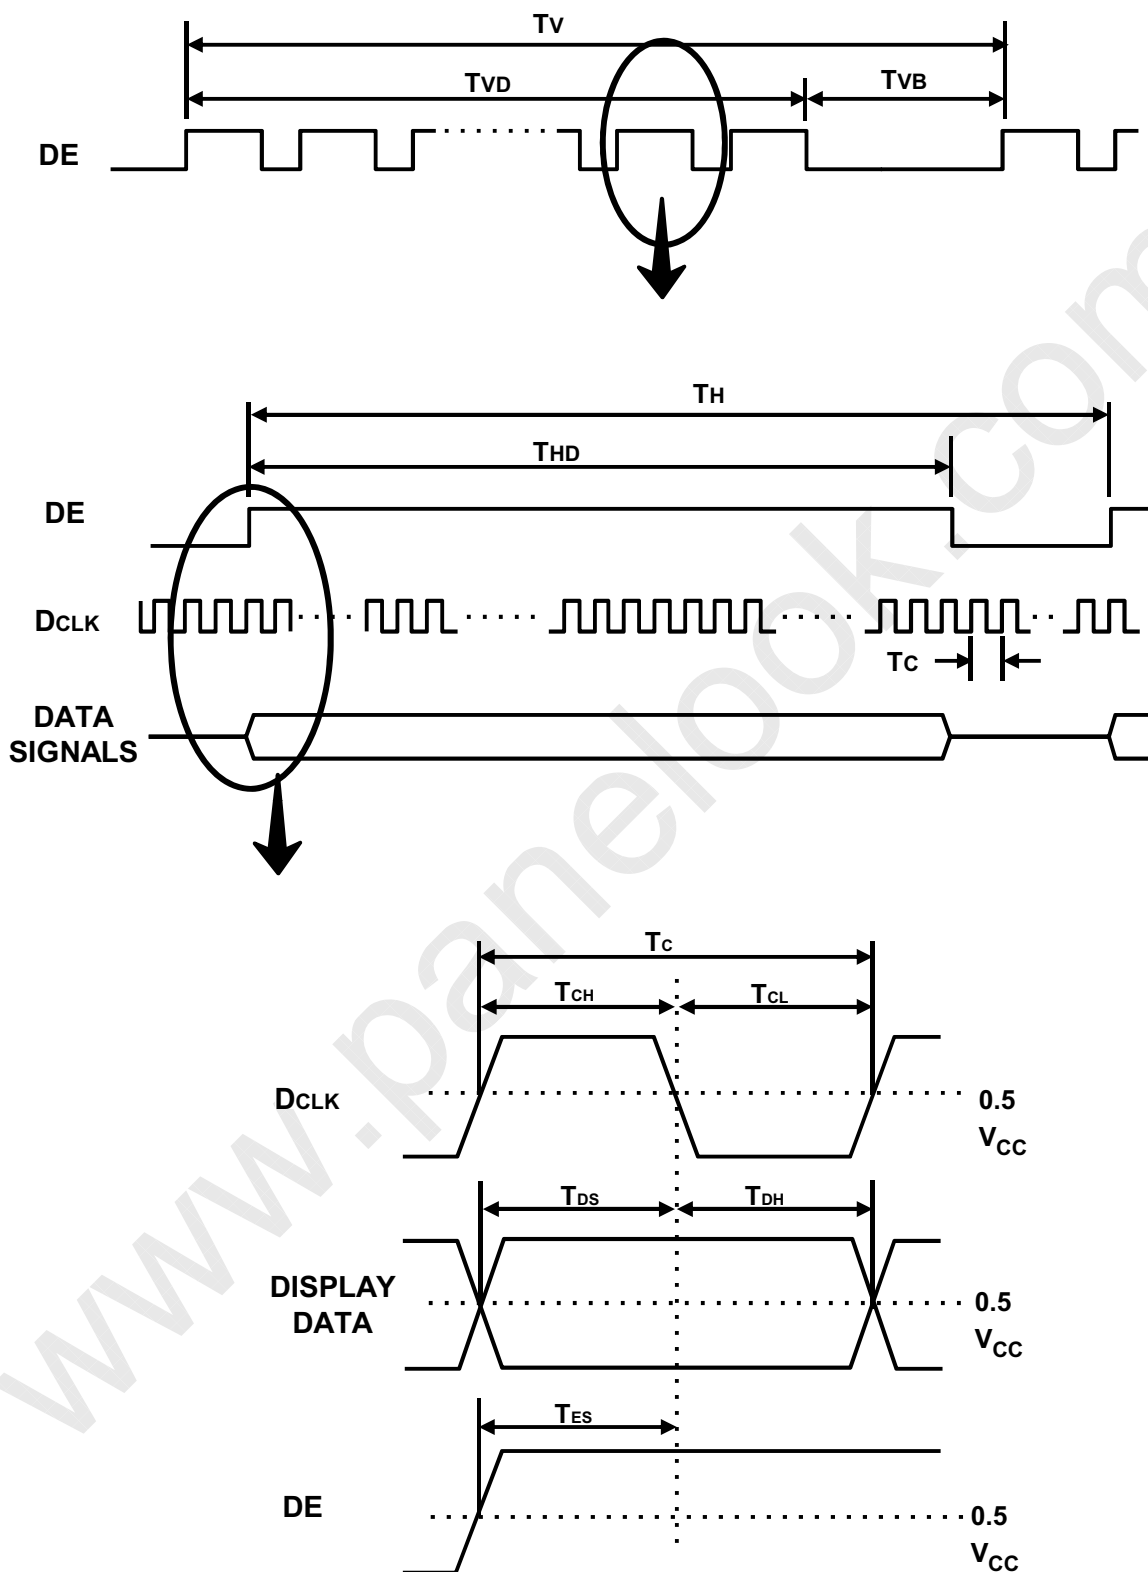Samsung Secret**MODEL****LTA400HV01****Doc. No****06- 000- G- 110802****Page****23/34**

5.3. LVDS Parameter Definition

Samsung Secret

$$\text{LVDS Skew} = \text{Static Skew} + \text{Dynamic Skew} = \text{Offset} \pm \text{Jitter}/2$$

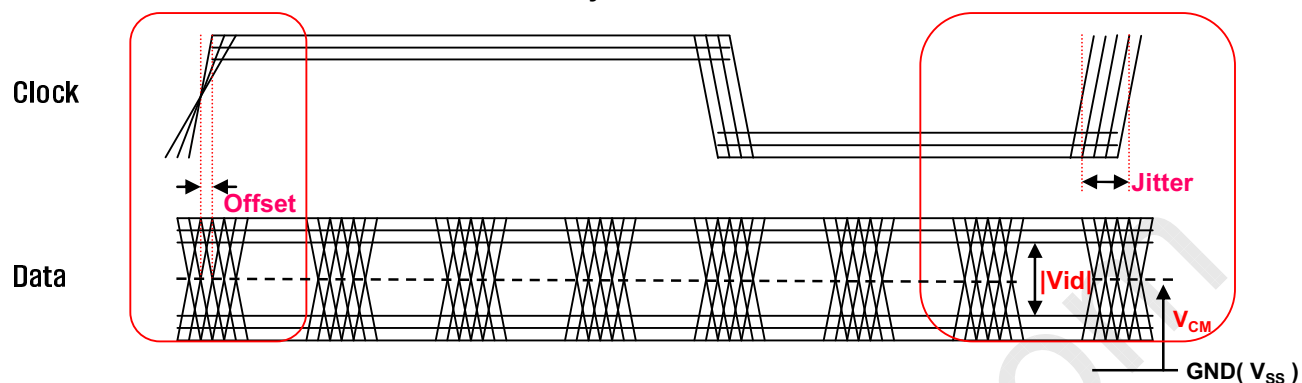


■ Test condition is during spread turn on

Items	SPEC		
	Min	Typ	Max
Skew [PS]	-500	-	+500
Vid [mV]	100	350	600
VCM [V]	0.3	-	1.8

5.4. Power ON/OFF Sequence

Samsung Secret

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

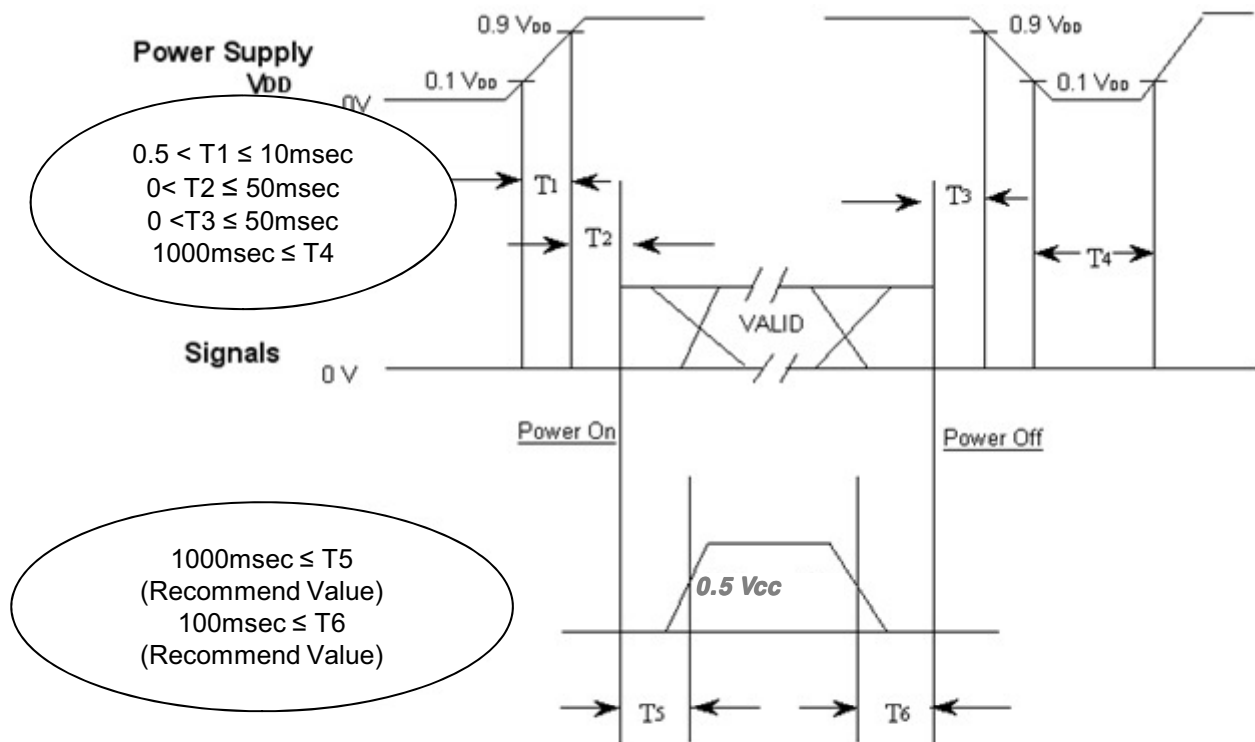

T₁ : V_{DD} rising time from 10% to 90%

T₂ : The time from V_{DD} to valid data at power ON.

T₃ : The time from valid data off to V_{DD} off at power Off.

T₄ : V_{DD} off time for Windows restart


T₅ : The time from valid data to B/L enable at power ON.

T₆ : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD}.
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T₄ should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.
- In Case T₅ is less than 1000msec and T₆ is less than 100msec, Garbage Display can be seen. (It is not related to electrical function issue, Just for recommendation to prevent Garbage Display)


Samsung Secret

5.5. 3D Mode Power Sequence

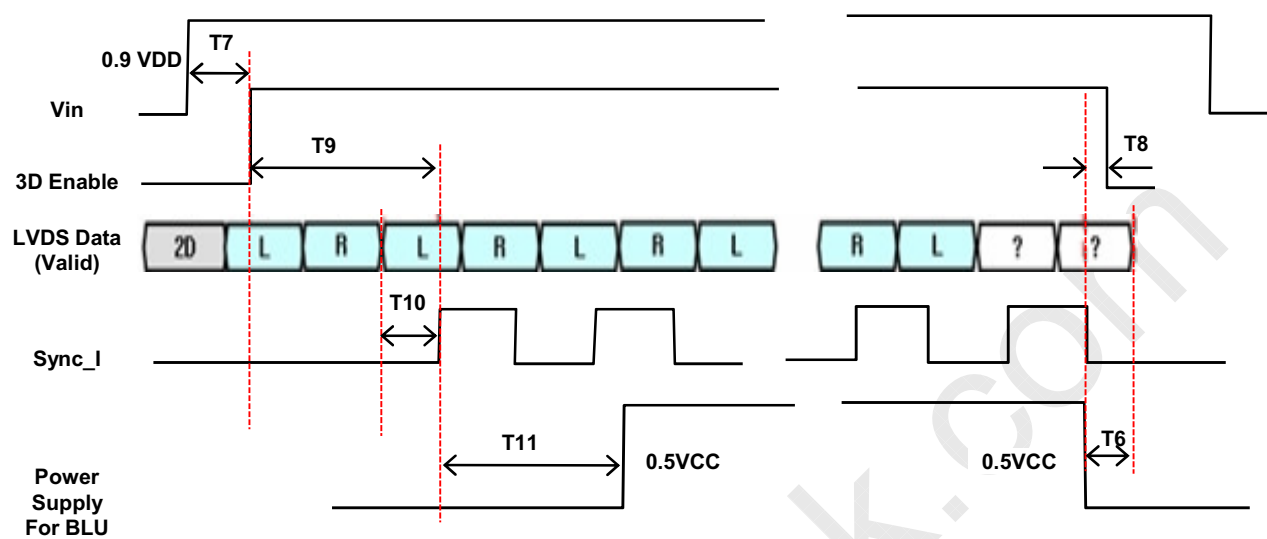


Items	SPEC
T6	≥100 msec
T7	≥2000 msec
T8	> 0 msec
T9	> 0 msec
T10	Min. 4.95 msec Typ. 5.00 msec Max. 5.05 msec
T11	≥1000 msec

6. Outline Dimension (Front View)

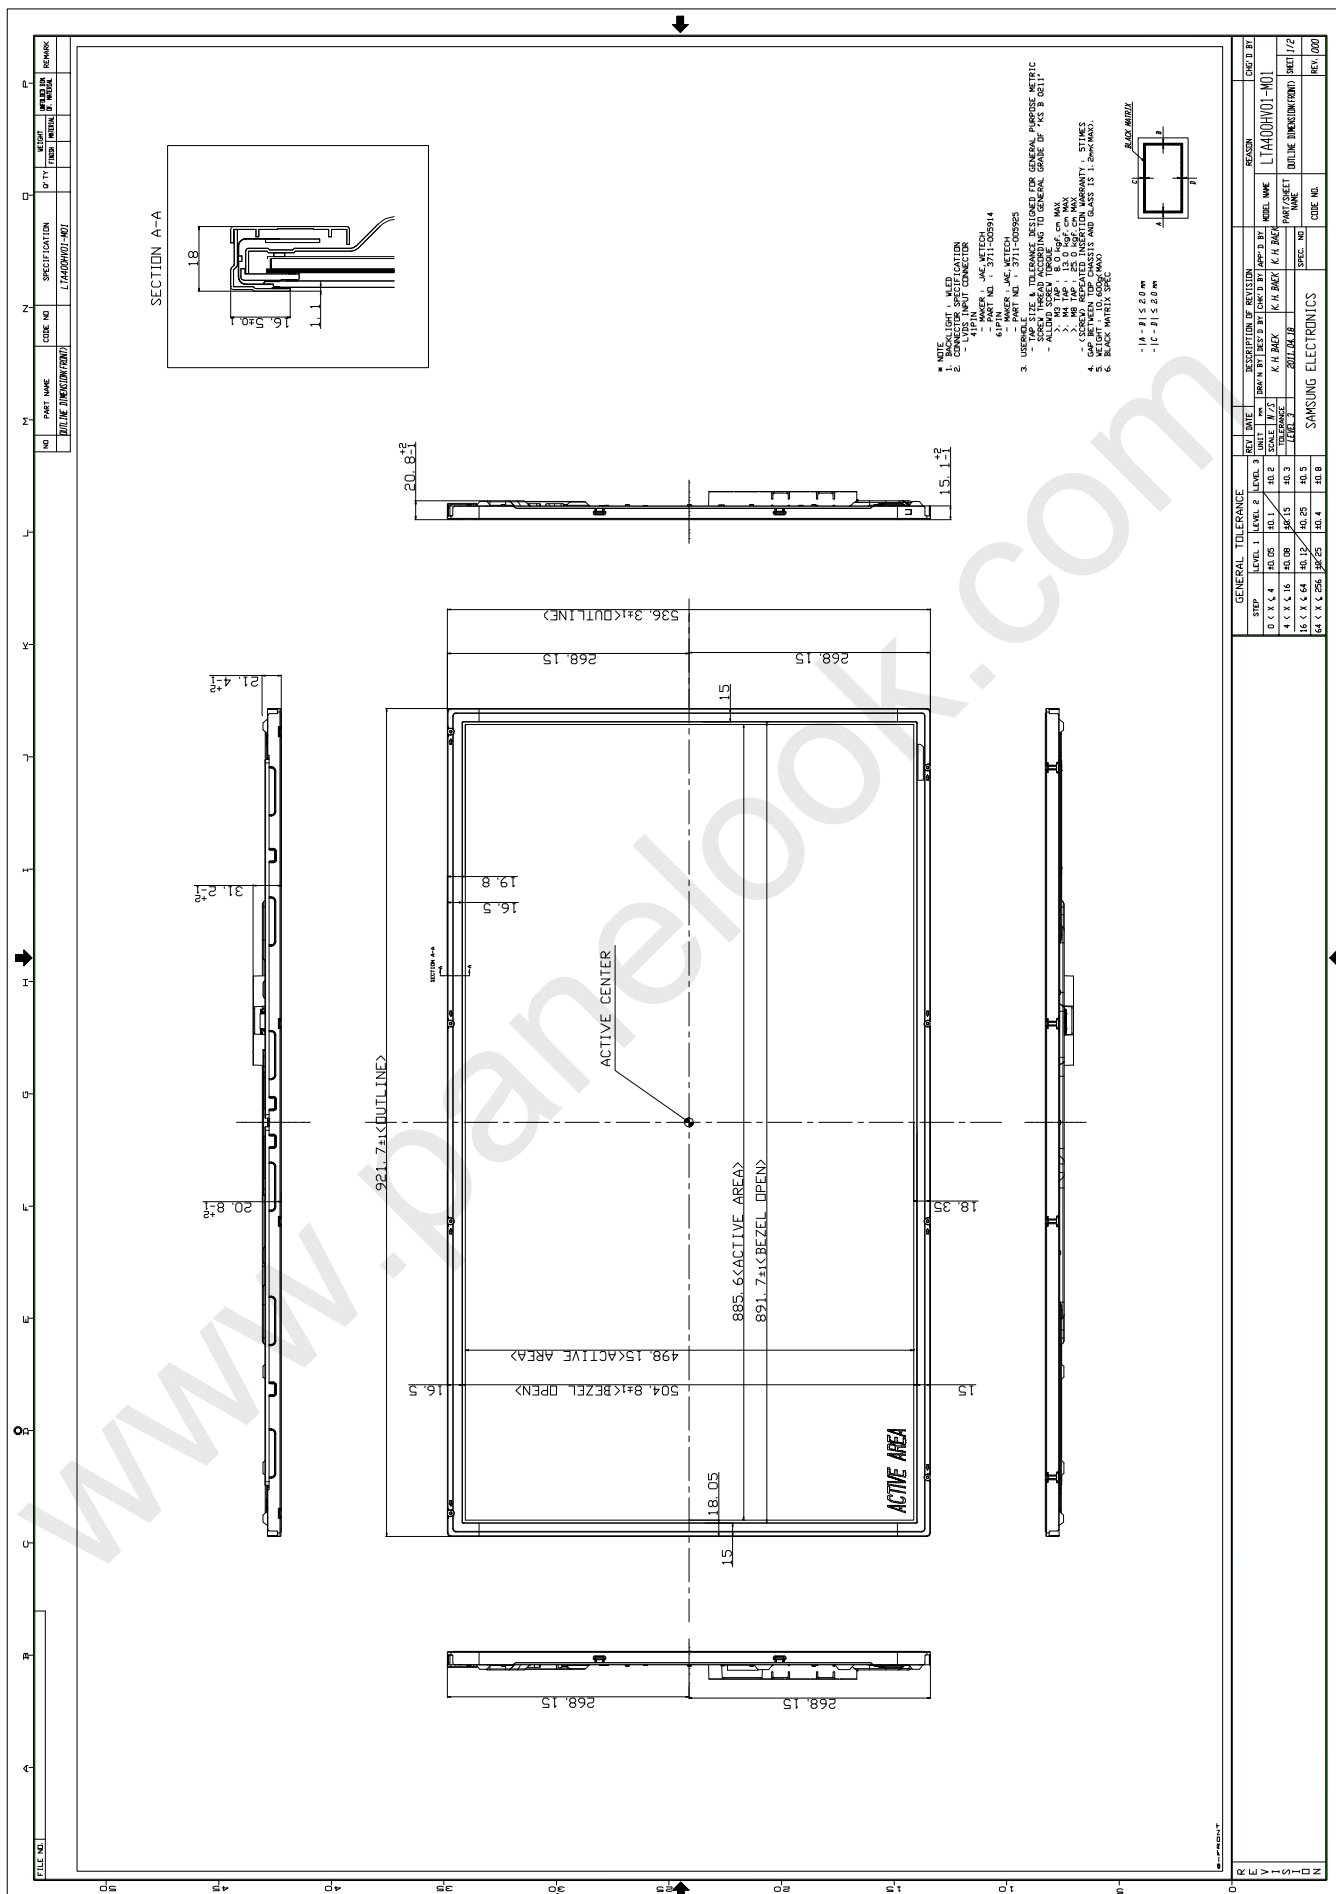

6. Outline Dimension (Rear View)

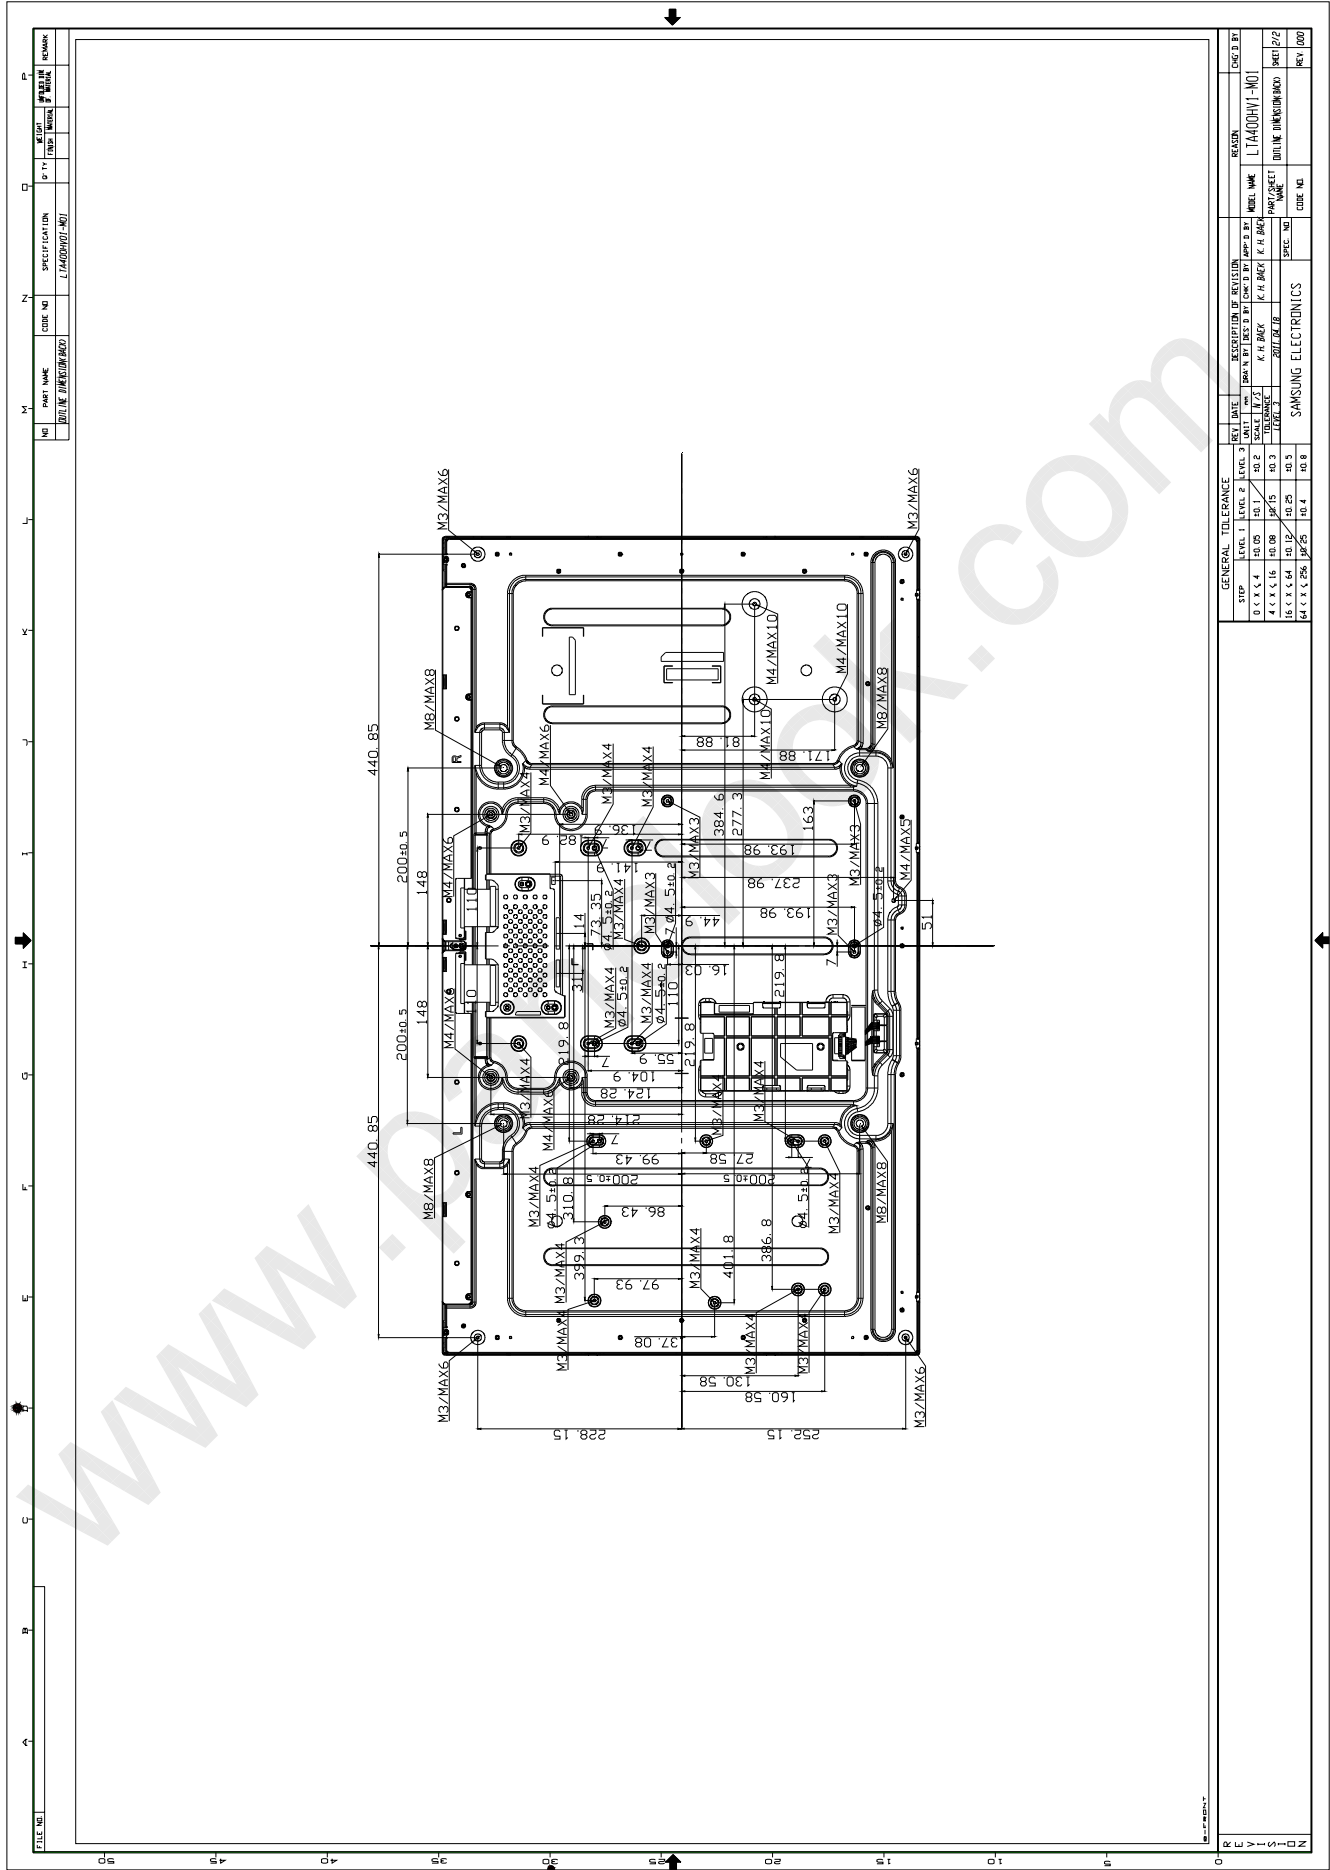

7. Reliability Test

Samsung Secret

Item	Test condition	Quantity
Temperature Step Stress	- 20~ 65℃ 1.9hr 440cycle determination	4EA
HTOL	50℃, 500hr determination	4EA
LTOL	0℃, 500hr determination	4EA
HTS	70℃, 500hr determination	4EA
LTS	-30℃, 500hr determination	4EA
THB	40℃ / 95%RH, 500hr determination	4EA
WHTS	60℃ / 75%RH, 250hr determination	4EA
Thermal Shock	-20℃ ~ 60℃, 200cycle determination	4EA
ESD(operation)	contact : ± 8 kV ,150pF/340Ω,200Point,1 time/Point non-contact : ± 15 kV,150pF/340Ω,200Point,1 time/Point	3EA
Inverter Input Con. ESD	contact : ± 2kV,150pF/340,Input Con.Pin,3 times/Pin	3EA
Vibration	10~300Hz/1.5G/10minSR, XYZ, 30min/axis	3EA
Shock	Half Sine, 50G, 11msec, ± X,Y,Z 1time/axis	3EA
PALLET Vibration	1.05Grms 5~200Hz 1hr	1PALLET(21EA)
PALLET Drop	4 edge 1face(bottom) 20 cm	1PALLET(21EA)

[Result Evaluation Criteria]

Under the display quality test conditions with normal operation state, these should be no change which may affect practical display functions.


- * HTOL/ LTOL : High/Low Temperature Operating Life
- ** THB : Temperature Humidity Bias
- *** HTS/LTS : High/Low Temperature Storage
- **** WHTS : Wet High Temperature Storage

MODEL
LTA400HV01
Doc. No
06- 000- G- 110802
Page
29/34

8. PACKING

Samsung Secret

8.1. Packing Flow

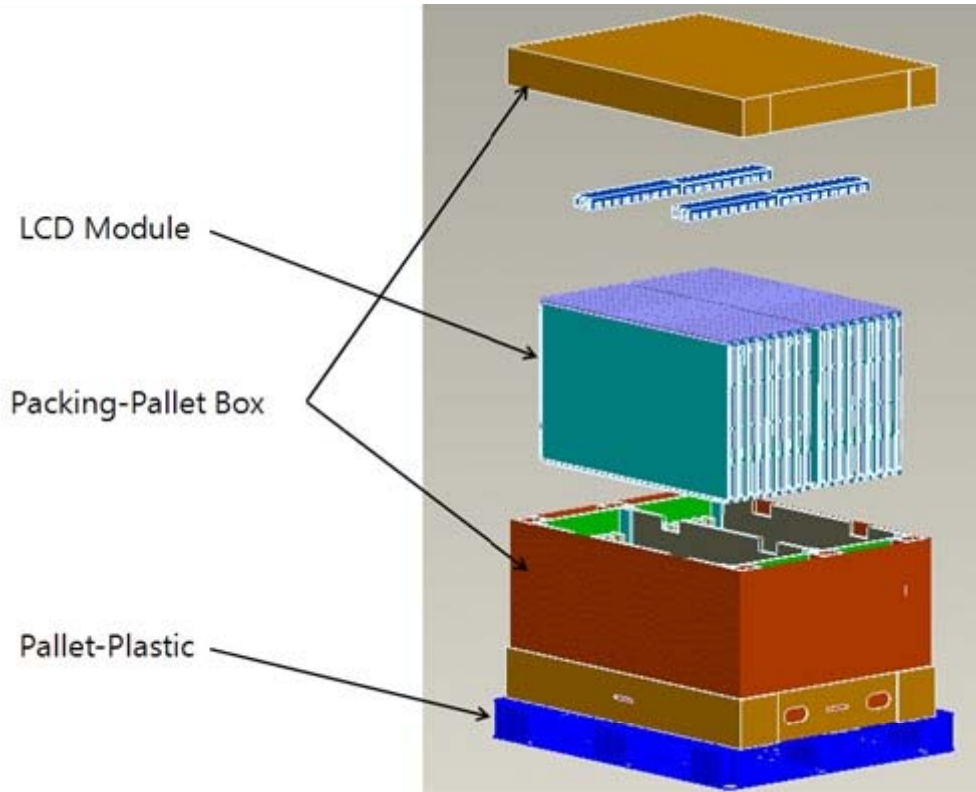

8.2. Packing Specification

Item	Specification	Remark
LCD Packing	21ea / (Packing-Pallet Box)	1. 210kg / LCD (max 10kg*21ea) 2. 14kg / Packing Pallet Box (1set) * Packing Box Material : KLB, AK, CK
Pallet	1Box / Pallet	1. Pallet weight = 5.3kg * Pallet Material : HDPE
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1150mm(H) x 985mm(V) x711mm(height)
Total Pallet Weight	229.3kg	Pallet (5.3kg) + Packing Box (14kg) + Module (210kg)

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page


30/34

9. MARKING & OTHERS(UL No.)


Samsung Secret

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


- (1) Part number : LTA400HV01
- (2) Revision: Three letters
- (3) Lot number : X X X X XXX XX X

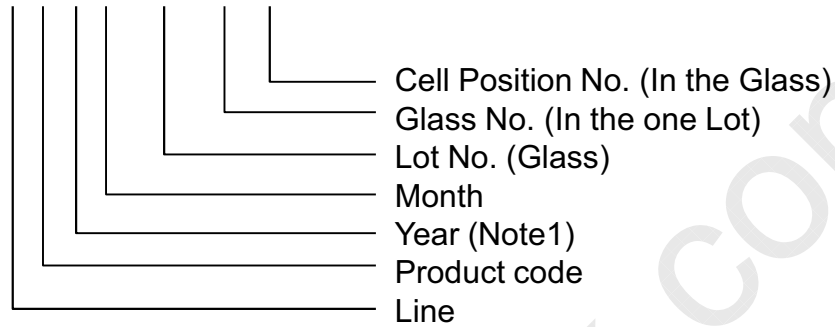

(4) Nameplate Indication

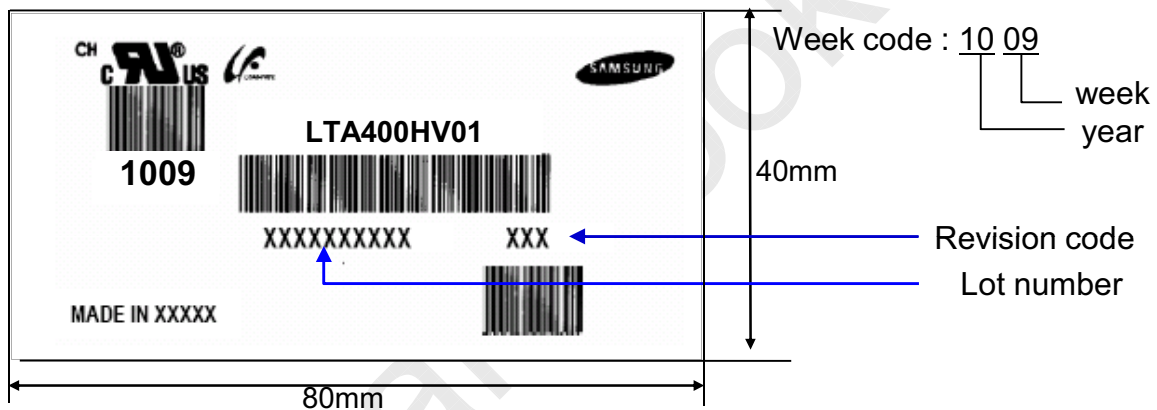

(5) Packing box attach

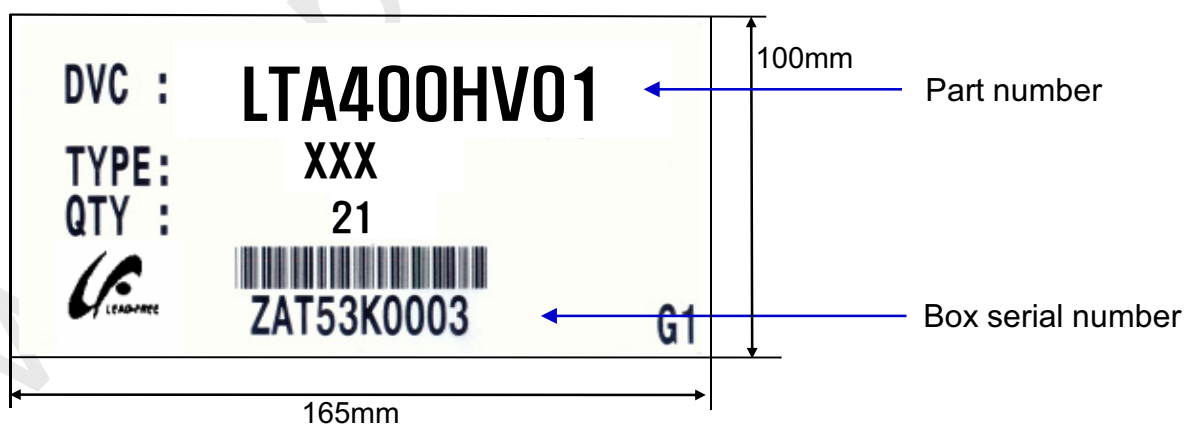

(6) UL Specification

- This panel follows UL File – E252633
- This panel achieved UL60065

MODEL

LTA400HV01

Doc. No

06- 000- G- 110802

Page

31/34

10. General Precautions

Samsung Secret

10.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the module from Electrostatic discharge. Otherwise the ASIC IC or semiconductor would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not disassemble shield case of inverter & LVDS board
- (m) Do not connect N.C pins. (Samsung internal use only)
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized. Must put on antistatic glove while handling a module
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA400HV01	Doc. No	06- 000- G- 110802	Page	32/34
--------------	-------------------	----------------	---------------------------	-------------	--------------

10.2 Storage

Samsung Secret

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 5 to 40°C and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.
- (d) Storage period is recommended not to exceed 1 year.

10.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of LED and may require higher startup voltage(Vs).

10.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : $20 \pm 15^{\circ}\text{C}$
 - Humidity : $55 \pm 20\%$
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****33/34**

10.5 Others

Samsung Secret

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL**LTA400HV01****Doc. No****06- 000- G- 110802****Page****34/34**