



ELECTRONICS

Product Information

DATE : 26.Apr.2006

SAMSUNG TFT-LCD**MODEL : LTA400WH-LH1**Any Modification of Specification is not allowed without SEC's Permission.

NOTE :

Customer's Approval

SIGNATURE

DATE

APPROVAED BY

DATE

26.Apr.2006

PREPARED BY

DATE

26.Apr.2006

LCD Product Planning 3, LCD Business

Samsung Electronics Co . , LTD.

MODEL

LTA400WH-LH1

Doc. No

05-000-G-060426

Page

1 / 29

Contents

Revision History	(3)
General Description	(4)
General Information	(4)
1. Absolute Maximum Ratings	(5)
2. Optical Characteristics	(7)
3. Electrical Characteristics	(10)
3.1 TFT LCD Module	
3.2 Back Light Unit	
4. Block Diagram	(12)
5. Input Terminal Pin Assignment	(13)
5.1 Input Signal & Power	
5.2 Hot Board Unit	
5.3 Balance Board	
5.4 LVDS Interface	
5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color	
6. Interface Timing	(20)
6.1 Timing Parameters (DE only mode)	
6.2 Timing Diagrams of interface Signal (DE only mode)	
6.3 Power ON/OFF Sequence	
7. Outline Dimension	(23)
8. Packing	(25)
9. Marking & Others	(26)
10. General Precaution	(27)
10.1 Handling	
10.2 Storage	
10.3 Operation	
10.4 Operation Condition Guide	
10.5 Others	

*** Revision History**

Date	Rev. No	Page	Summary
26, Apr 2006	000	all	First issued

General Description

Description

LTA400WH-LH1 is a color active matrix liquid crystal display (LCD) that uses amorphous silicon TFT (Thin Film Transistor) as switching components. This model is composed of a TFT LCD panel, a driver circuit and a back light unit. The resolution of a 40.0" is 1366 x 768 and this model can display up to 1.07 billion colors with wide viewing angle of 89° or higher in all directions. This panel is intended to support applications to provide a excellent performance for Flat Panel Display such as Home-alone Multimedia TFT-LCD TV, Display terminals for AV application products, and High Definition TV (HDTV).

Features

- RoHS compliance (Pb-free)
- High contrast ratio, high aperture ratio, fast response time
- SPVA (Super Patterned Vertical Align) mode
- Wide viewing angle ($\pm 178^\circ$)
- High speed response
- WXGA (1366 x 768 pixels) resolution (16:9)
- Low Power consumption
- Direct Type 20 CCFTs (Cold Cathode Fluorescent Tube)
- DE (Data Enable) mode
- LVDS (Low Voltage Differential Signaling) interface (2pixel/clock)

General Information

Items	Specification	Unit	Note
Module Size	952.0(H _{TYP}) x 551.0(V _{TYP})	mm	± 1.0mm
	48.6(D _{MAX})		
Weight	11,500(Max.)	g	
Pixel Pitch	0.648(H) x 0.216(W)*3	mm	
Active Display Area	885.168(H) x 497.664(V)	mm	
Surface Treatment	Haze 40% , Hard-coating (3H)		
Display Colors	10 bit - 1.07Billion	colors	
Number of Pixels	1366 x 768	pixel	
Pixel Arrangement	RGB vertical stripe		
Display Mode	Normally Black		
Luminance of White	500 (Typ.)	cd/m ²	

1. Absolute Maximum Ratings

If the condition exceeds maximum ratings, it can cause malfunction or unrecoverable damage to the device.

Item		Symbol	Min.	Max.	Unit	Note
Power Supply Voltage		V_{DD}	GND-0.5	16.5	V	(1)
Storage temperature		T_{STG}	-20	60		(2)
Glass surface temperature (Operation)	Center	T_{OPR}	0	50		(2),(5)
	T. Uniformity	T	-	10		
Shock (non - operating)		S_{nop}	-	50	G	(3)
Vibration (non - operating)		V_{nop}	-	1.5	G	(4)

Note (1) $T_a = 25 \pm 2^\circ\text{C}$

(2) Temperature and relative humidity range are shown in the figure below.

a. 90 % RH Max. ($T_a \leq 39^\circ\text{C}$)

b. Relative Humidity is 90% or less. ($T_a > 39^\circ\text{C}$)

c. No condensation

(3) 11ms, sine wave, one time for $\pm X$, $\pm Y$, $\pm Z$ axis

(4) 10-300 Hz, Sweep rate 10min, 30min for X,Y,Z axis


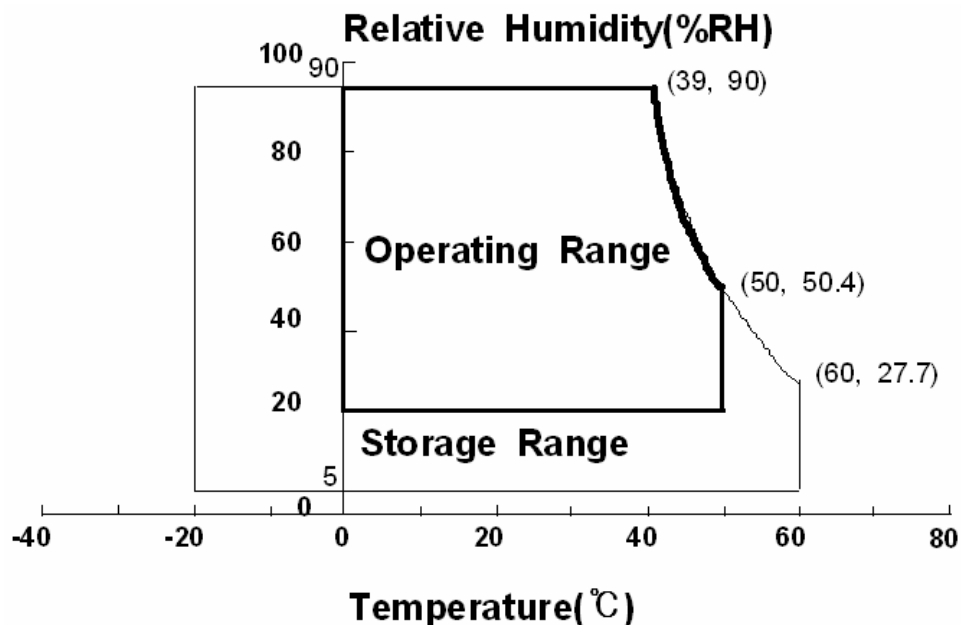


Fig. Temperature and Relative humidity range

(5) Definition of test point

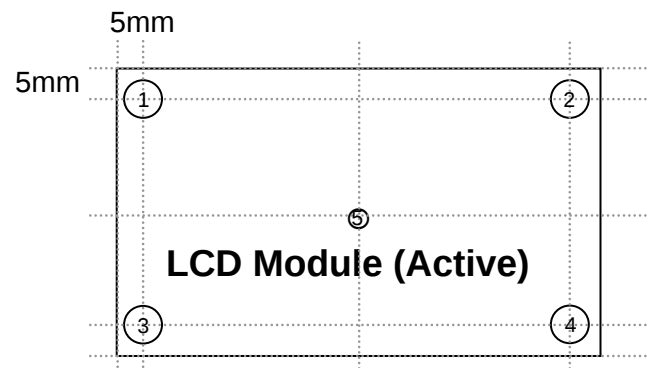

T should be less than 10 ($T = |T_{\text{OPR}} - T_{\text{MAX}}|$)

T_{OPR} : Temperature of the center of the glass surface (Test point 5)

$T_1 \sim T_4$: Temperature of each edge of the glass surface

T_{MAX} : The highest temperature of the glass surface

2. Optical Characteristics

The optical characteristics should be measured in a dark room or equivalent.

Measuring equipment : TOPCON BM-7,SPECTRORADIOMETER SR-3

(Ta = 25 ± 2°C, VDD=12V, fv= 120Hz, f_{DCLK}=160MHz, I_T = 180mA)

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio (Center of screen)		C/R	Normal $\theta_{\mathbf{L,R}}=0$ $\theta_{\mathbf{U,D}}=0$ Viewing Angle	900	1200	-		(3) SR-3
Response Time	G-to-G	Tg		-	6(Avg.)	-	msec	(5) BM-7
Luminance of White (Center of screen)		Y _L		400	500	-	cd/m ²	(6) SR-3
Color Chromaticity (CIE 1931)	Red	Rx		TYP. -0.03	0.667	TYP. +0.03		(7),(8) SR-3
		Ry			0.317			
	Green	Gx			0.192			
		Gy			0.649			
	Blue	Bx			0.141			
		By			0.080			
	White	Wx			0.280			
		Wy	0.290					
Color Gamut		-		-	90	-	%	(7) SR-3
Color Temperature		-		-	10000	-	K	(7) SR-3
Viewing Angle	Hor.	$\theta_{\mathbf{L}}$	C/R ≥ 10	75	89	-	Degree	(8) SR-3
		$\theta_{\mathbf{R}}$		75	89	-		
	Ver.	$\theta_{\mathbf{U}}$		75	89	-		
		$\theta_{\mathbf{D}}$		75	89	-		
Brightness Uniformity (9 Points)		B _{uni}		-	-	25	%	(4) SR-3


Note (1) Test Equipment Setup

The measurement should be executed in a stable, windless and dark room between 40min and 60min after lighting the back light at the given temperature for stabilization of the back light. This should be measured in the center of screen.


Total lamp current : 180mA(Hot)

Environment condition : Ta = 25 ± 2 °C

MODEL	LTA400WH-LH1	Doc. No	05-000-G-060426	Page	7 / 29
-------	--------------	---------	-----------------	------	--------

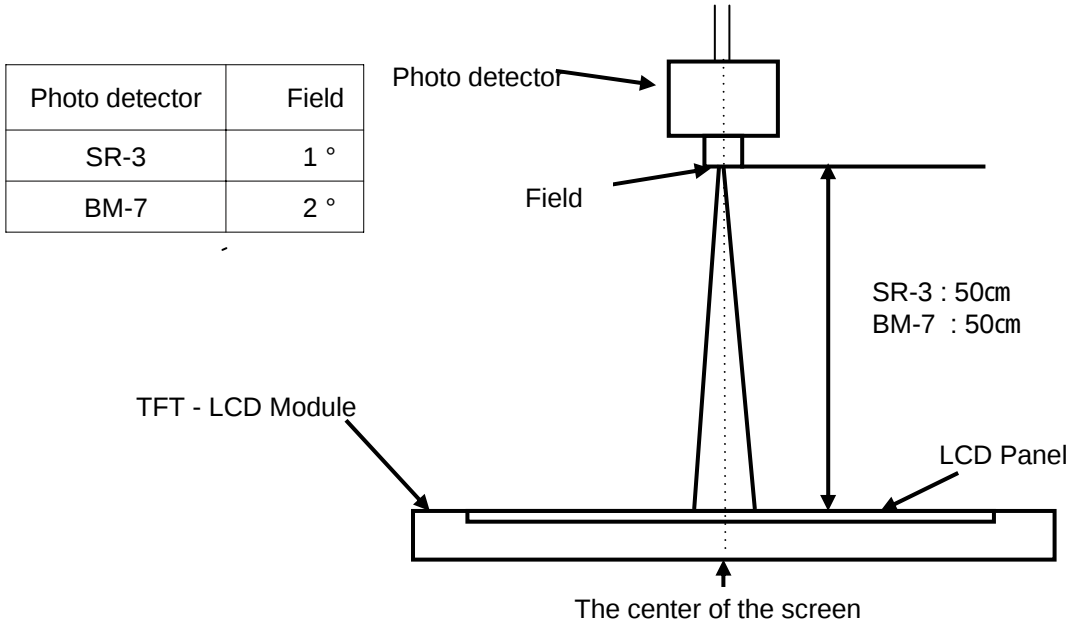

Note (2) Definition of test point

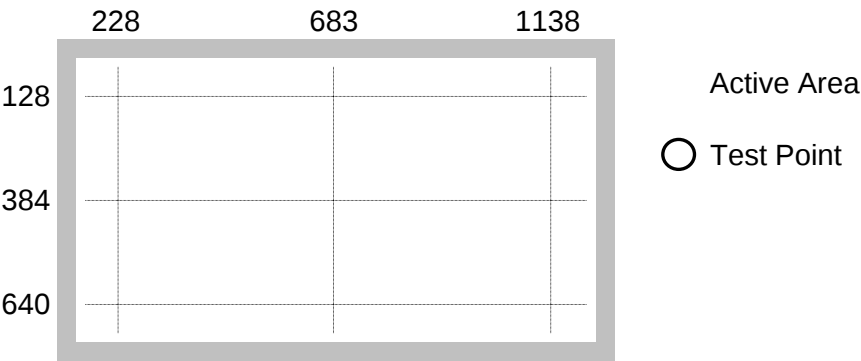

Note (3) Definition of Contrast Ratio (C/R)
: Ratio of gray max (Gmax) & gray min (Gmin) at the center point of the panel

$$C / R = \frac{G \max}{G \min}$$

Gmax : Luminance with all pixels white
Gmin : Luminance with all pixels black


Note (4) Definition of 9 points brightness uniformity

$$B_{uni} = 100 * \frac{(B_{max} - B_{min})}{B_{max}}$$

B_{max} : Maximum brightness

B_{min} : Minimum brightness

Note (5) Definition of Response time : Sum of T_r, T_f

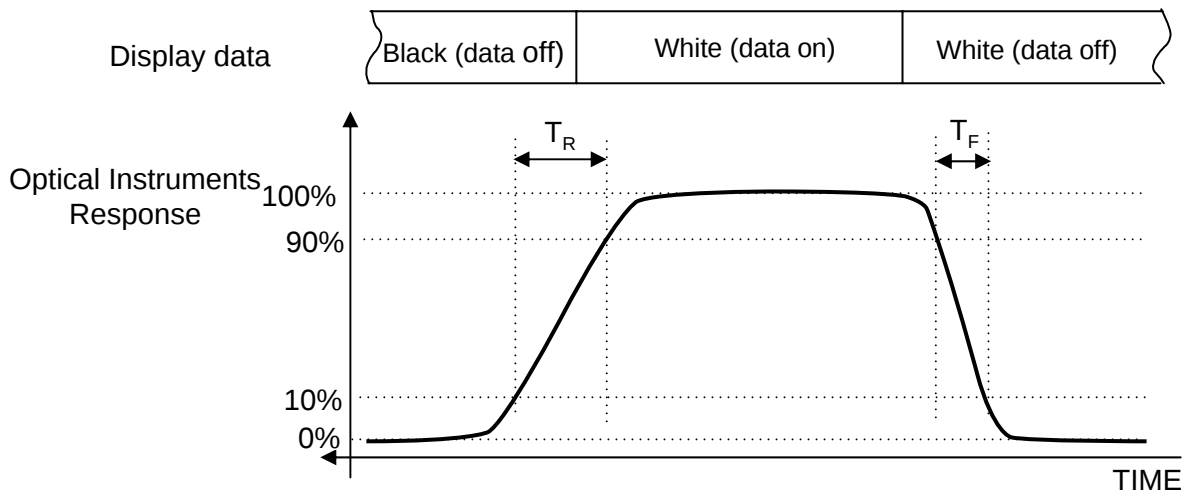


Note (6) Definition of Luminance of White : Luminance of white at center point

Note (7) Definition of Color Chromaticity (CIE 1931)

Color coordinate of Red, Green, Blue & White at center point

Note (8) Definition of Viewing Angle

: Viewing angle range (C/R ≥ 10)

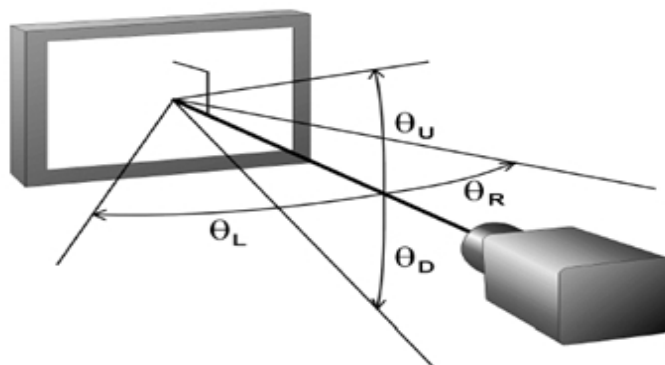

3. Electrical Characteristics

3.1 TFT LCD Module

The connector for display data & timing signal should be connected.

$T_a = 25^{\circ}\text{C} \pm 2^{\circ}\text{C}$

Item		Symbol	Min.	Typ.	Max.	Unit	Note
Voltage of Power Supply		V _{DD}	10.8	12.0	13.2	V	(1)
Current of Power Supply	(a) Black	I _{DD}	-	750	-	mA	(2),(3)
	(b) White		-	800	-	mA	
	(c) N-Pattern		-	900	1100	mA	
Vsync Frequency		f _V	-	120	-	Hz	
Hsync Frequency		f _H	85	94.8	98	kHz	
Main Frequency		f _{DCLK}	140	160	162	MHz	
Rush Current		I _{RUSH}	-	-	4.5	A	(4)

Note (1) The ripple voltage should be controlled under 10% of V_{DD} .

(2) $f_V=120\text{Hz}$, $f_{DCLK} = 160\text{MHz}$, $V_{DD} = 12.0\text{V}$, DC Current.

(3) Power dissipation check pattern (LCD Module only)



a) Black Pattern




b) White Pattern



c) N-Pattern

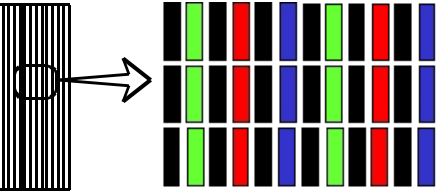

(4) Measurement Conditions

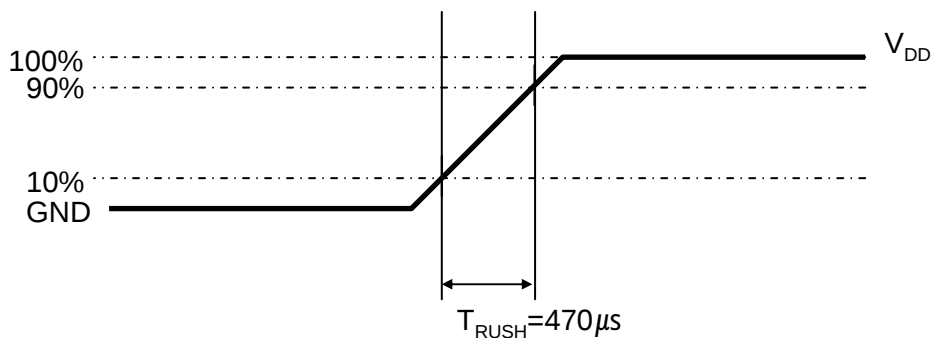

Rush Current I_{RUSH} can be measured when T_{RUSH} is $470\mu\text{s}$.

3.2 Back Light Unit


The back light unit contains 20 direct-lighting type CCFTs (Cold Cathode Fluorescent Tube). The characteristics of lamps are shown in the following tables.

$T_a = 25 \pm 2^\circ\text{C}$


Item	Symbol	Min.	Typ.	Max.	Unit	Note
Total Lamp Current	I_T	170	180	190	mArms	
Lamp Frequency	f_L	-	60	-	Hz	
Operating Life Time	Hr	30,000	-	-	Hour	(1)

Note (1) It is defined as the time to take until the brightness reduces to 50% of its original value.

[Operating condition : $T_a = 25 \pm 2$, $I_L = 180\text{mArms}(\text{typ.})$, For single lamp only.]

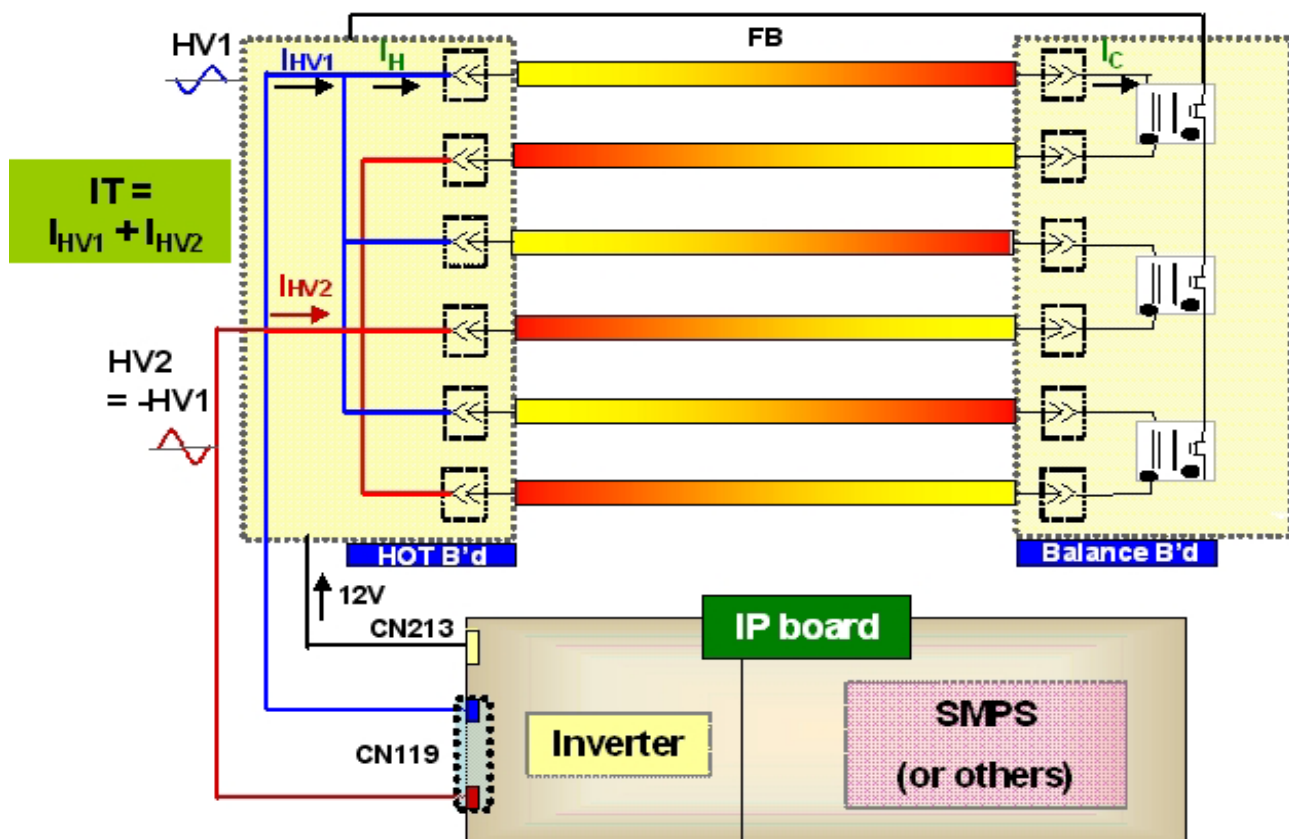

4. Block Diagram

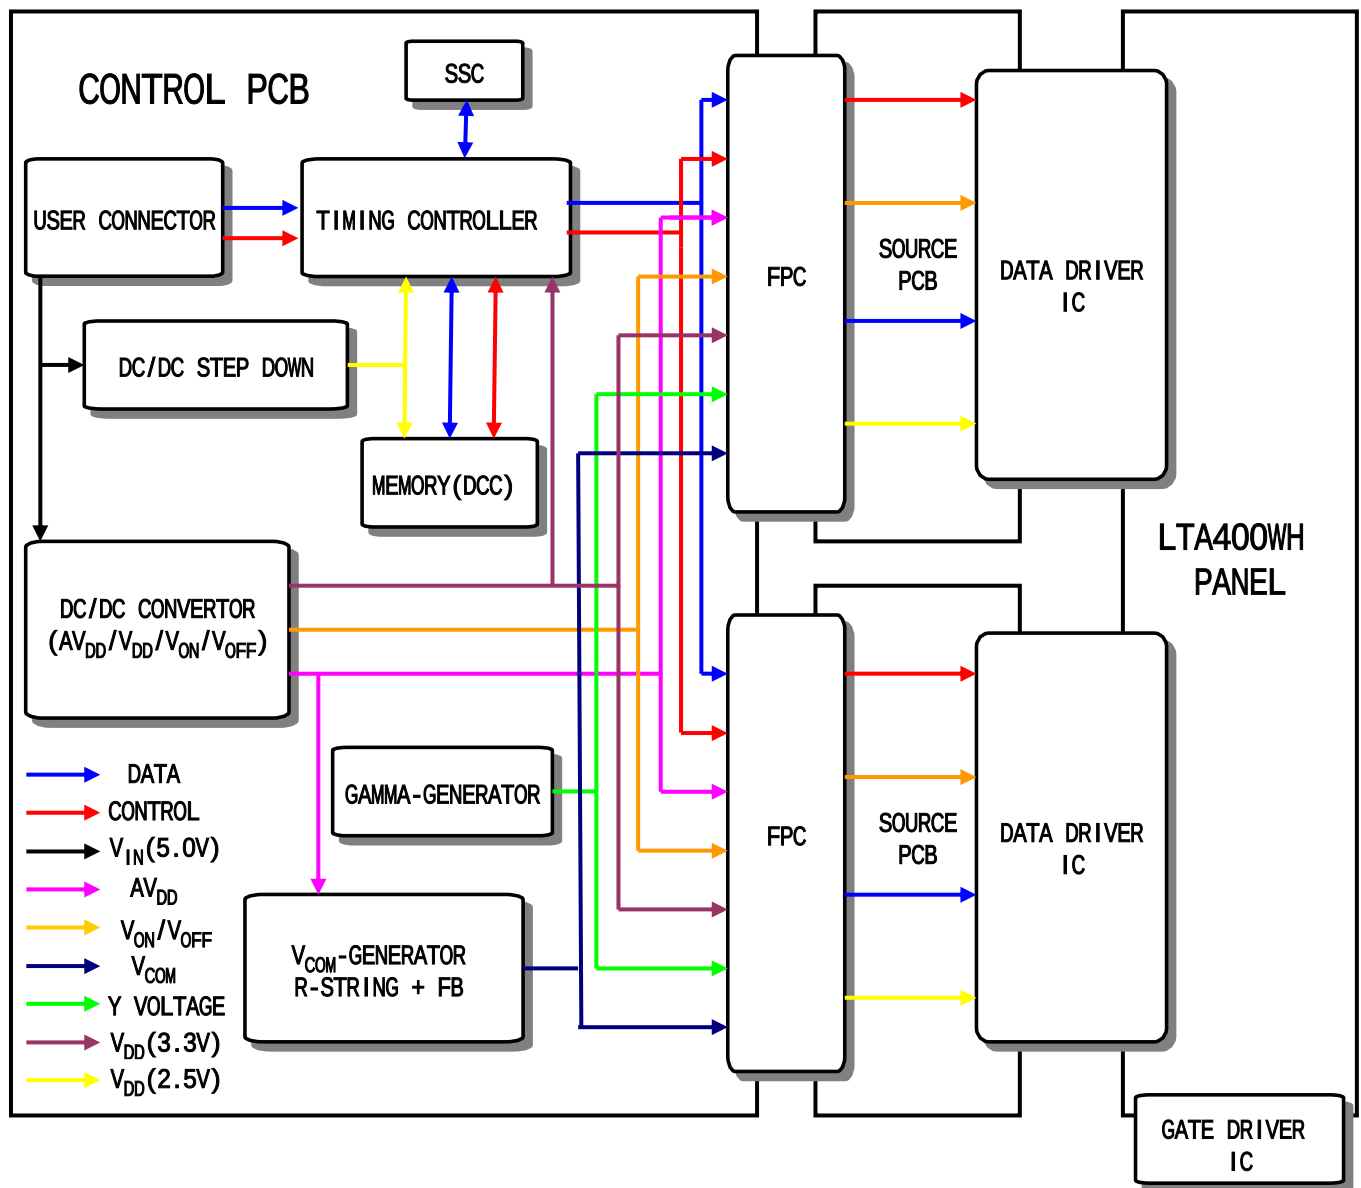

5. Input Terminal Pin Assignment

5.1. Input Signal & Power

Connector : FI-RE51S-HF (JAE)

Pin	Symbol	Description	Pin	Symbol	Description
1	Power	DC 12V	26	RE[0]P	Even LVDS Signal +
2	Power	DC 12V	27	RE[0]P	Even LVDS Signal -
3	Power	DC 12V	28	RE[0]P	Even LVDS Signal +
4	Power	DC 12V	29	RE[0]P	Even LVDS Signal -
5	Power	DC 12V	30	RE[0]P	Even LVDS Signal +
6	GND	GND	31	GND	GND
7	GND	GND	32	ROCLK -	Even LVDS Signal -
8	GND	GND	33	ROCLK+	Even LVDS Signal +
9	GND	GND	34	GND	GND
10	RO[0]N	Odd LVDS Signal -	35	RO[3]N	Even LVDS Signal -
11	RO[0]P	Odd LVDS Signal +	36	RO[3]P	Even LVDS Signal +
12	RO[1]N	Odd LVDS Signal -	37	RO[4]N	Even LVDS Signal -
13	RO[1]P	Odd LVDS Signal +	38	RO[4]P	Even LVDS Signal +
14	RO[2]N	Odd LVDS Signal -	39	GND	GND
15	RO[2]P	Odd LVDS Signal +	40	NC	NC
16	GND	GND	41	NC	NC
17	ROCLK -	Odd LVDS Signal -	42	NC	NC
18	ROCLK+	Odd LVDS Signal +	43	NC	NC
19	GND	GND	44	NC	NC
20	RO[3]N	Odd LVDS Signal -	45	LVDS_SEL	LVDS JEIDA/NS Option
21	RO[3]P	Odd LVDS Signal +	46	DCC_SEL	DCC ON/OFF Option
22	RO[4]N	Odd LVDS Signal -	47	NC	NC
23	RO[4]P	Odd LVDS Signal +	48	NC	NC
24	GND	GND	49	NC	NC
25	RE[0]N	Even LVDS Signal -	50	NC	NC
			51	NC	NC

Note (1) Do Not Connect : This PINS are only used for SAMSUNG internal using.

Note (2) LVDS OPTION : If this PIN : HIGH (3.3 V) → Normal LVDS format
: LOW (GND) → JEIDA LVDS format


SEQUENCE : On = $V_{DD}(T1) \geq \text{LVDS Option} \geq \text{Interface Signal}(T2)$
OFF = $\text{Interface Signal}(T3) \geq \text{LVDS Option} \geq V_{DD}$

MODEL	LTA400WH-LH1	Doc. No	05-000-G-060426	Page	13 / 29
-------	--------------	---------	-----------------	------	---------

5.2. Hot Board Unit

5.2.1 Hot Board Input Pin Configuration

	Connector	PIN	Symbol	Description	I/O
High Voltage Connector	CN119	1	HV1	+ High Voltage	Input
		2	HV2	- High Voltage	Input
	CN121	1	HV1	+ High Voltage	Input
		2	-	N.C	-
Feedback Connector	CN213	1	Vcc	Supply Voltage	Input
		2	FB	Current Feedback Signal	Output
		3	GND	GND	-
		4	OLP	Open Lamp Protected	Output
		5	LD	Lamp Detected	Output

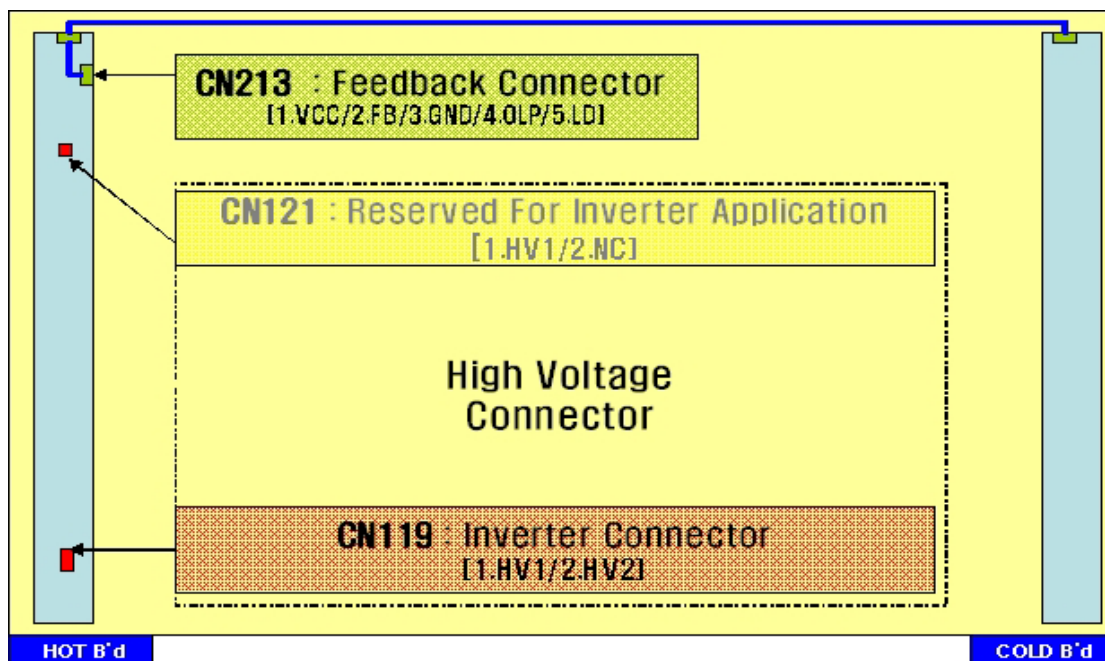

Note(1) Pin number starts from Right side

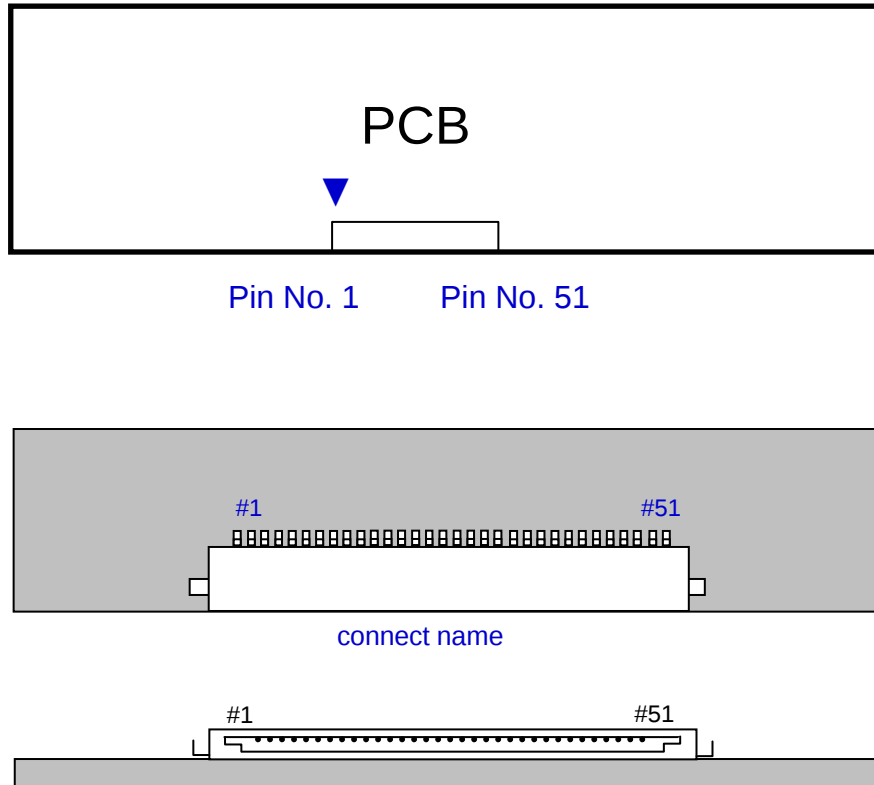


Fig. Connector diagram


- All GND pins should be connected together and also be connected to the LCD's metal chassis.
- All power input pins should be connected together.
- All NC pins should be separated from other signal or power.

5.3. Balance Board

5.3.1 Recommended Operation Condition

Item	Symbol	Recommendation			Unit	Note	Remark
		Min.	Typ.	Max.			
Total Input Current	I_T	170	180	190	mA	(1)	Cold Current $I_c = 6.2\text{mA}$
Inverter Frequency	F_{OP}	55	60	65	kHz		Switching Frequency
Dimming Frequency	F_{DIM}	145	150	155	Hz		
Dim Duty Ratio	D_{PWM}	20	-	100	%		Bright Control
Striking Voltage	HV_{STRIKE}	-	-	0 :2080	Vrms	(2)	
				20 :1600			



Note (1) Asymmetric ratio must less than 10 % ($|I_P - I_{-P}| / (I_{rms@T} < 0.1)$)
Crest factor must be from 90 % to 110 % ($0.9 < I_P / I_{rms@T/2 \times \sqrt{2}} < 1.1$)

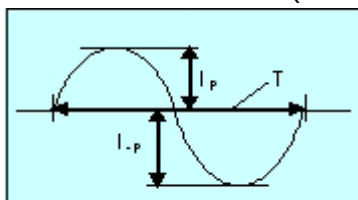

(2) Striking Voltage(HV_{STRIKE}) based on CCFL spec. for ambient temperature.

* Soft rising time must be

- at starting time $T_{soft} > 300\text{msec}$
- at PWM dimming condition $T_{rise} < 100\text{usec}$



5.3.2 Feedback I/O Specification


ITEM	SYMBOL	Recommendation			UNIT	REMARKS
		Min.	Typ.	Max.		
Supply Voltage	V_{CC}	6	12	15	V	-
Input Current	I_C	-	20	-	mA	at Recommended Load Condition
Current Feedback	I_{FB}	2.43	2.7	2.97	V	at $I_T = 180\text{mA}$
Open Lamp Protection	V_{OLP}	0.8	-	12	V	Normal : Min OLP status : Max
Lamp Detection	V_{LD}	0.8	-	12	V	Normal : Max Abnormal : Min

5.4 LVDS Interface


- LVDS Receiver : Tcon (merged)
- Data Format (JEIDA & Normal)

LVDS OPTION(21pin) : IF THIS PIN : HIGH (3.3 V) → NORMAL NS LVDS FORMAT
OTHERWISE : LOW (GND) → JEIDA LVDS FORMAT

JEIDA FORMAT (Each Channel)

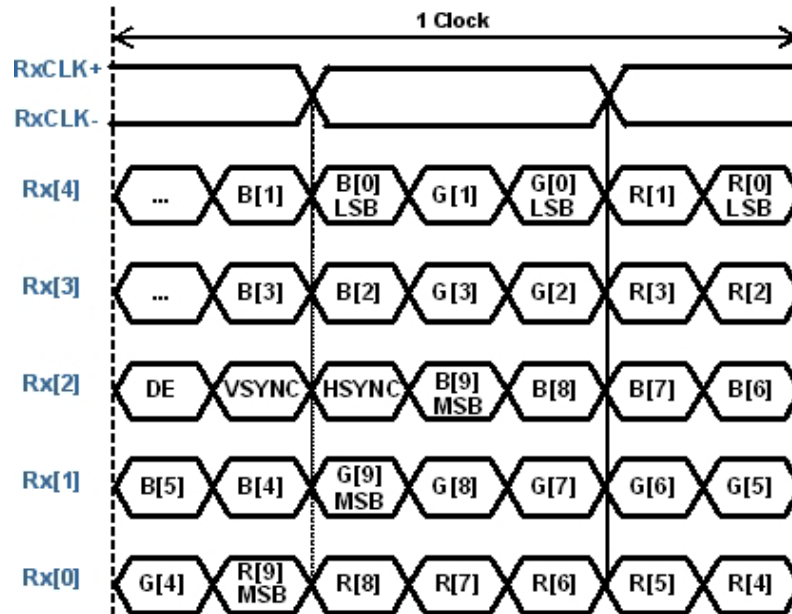

NORMAL FORMAT (Each Channel)

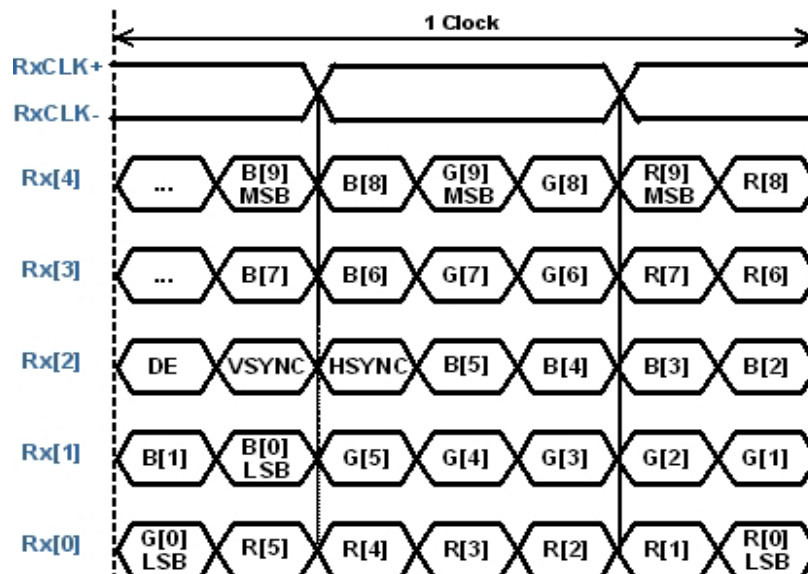

5.5 Input Signals, Basic Display Colors and Gray Scale of Each Color

COLOR	DISPLAY (8bit)	DATA SIGNAL																												GRAY SCALE LEVEL		
		RED										GREEN										BLUE										
		R0	R1	R2	R3	R4	R5	R6	R7	R8	R9	G0	G1	G2	G3	G4	G5	G6	G7	G8	G9	B0	B1	B2	B3	B4	B5	B6	B7		B8	B9
BASIC COLOR	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	-	
	CYAN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	
	MAGENTA	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	-	
	YELLOW	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	-
	WHITE	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	-	
GRAY SCALE OF RED	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R0		
	DARK ↑	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1	
		0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	R3~ R1020	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓ LIGHT	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1021	
		0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1022	
	RED	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	R1023	
GRAY SCALE OF GREEN	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G0	
	DARK ↑	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G1	
		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	G2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	G3~ G1020	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G1021	
		0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G1022	
	GREEN	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	G1023	
GRAY SCALE OF BLUE	BLACK	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	B0		
	DARK ↑	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	B1	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	B2	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	B3~ B1020	
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	↓ LIGHT	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1	1	1	1	B1021	
		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	B1022	
	BLUE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	B1023	

Note) Definition of Gray :

Rn : Red Gray, Gn : Green Gray, Bn : Blue Gray (n = Gray level)

Input Signal : 0 = Low level voltage, 1 = High level voltage

6. Interface Timing


6.1 Timing Parameters (DE only mode)

SIGNAL	ITEM	SYMBOL	MIN.	TYP.	MAX.	Unit	NOTE
Clock	Frequency	$1/T_C$	140	160	162	MHz	-
Hsync		F_H	85	94.8	98	KHz	-
Vsync		F_V	-	120	-	Hz	-
Vertical Display Term	Active Display Period	T_{VD}	-	768	-	Lines	-
	Vertical Total	T_{VB}	785	790	1350	Lines	-
Horizontal Display Term	Active Display Period	T_{HD}	-	1366	-	Clocks	-
	Horizontal Total	T_H	1470	1688	1700	clocks	-

Note) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.


- (1) Test Point : TTL control signal and CLK at LVDS Tx input terminal in system
- (2) Internal $V_{DD} = 3.3V$

6.2 Timing diagrams of interface signal (DE only mode)

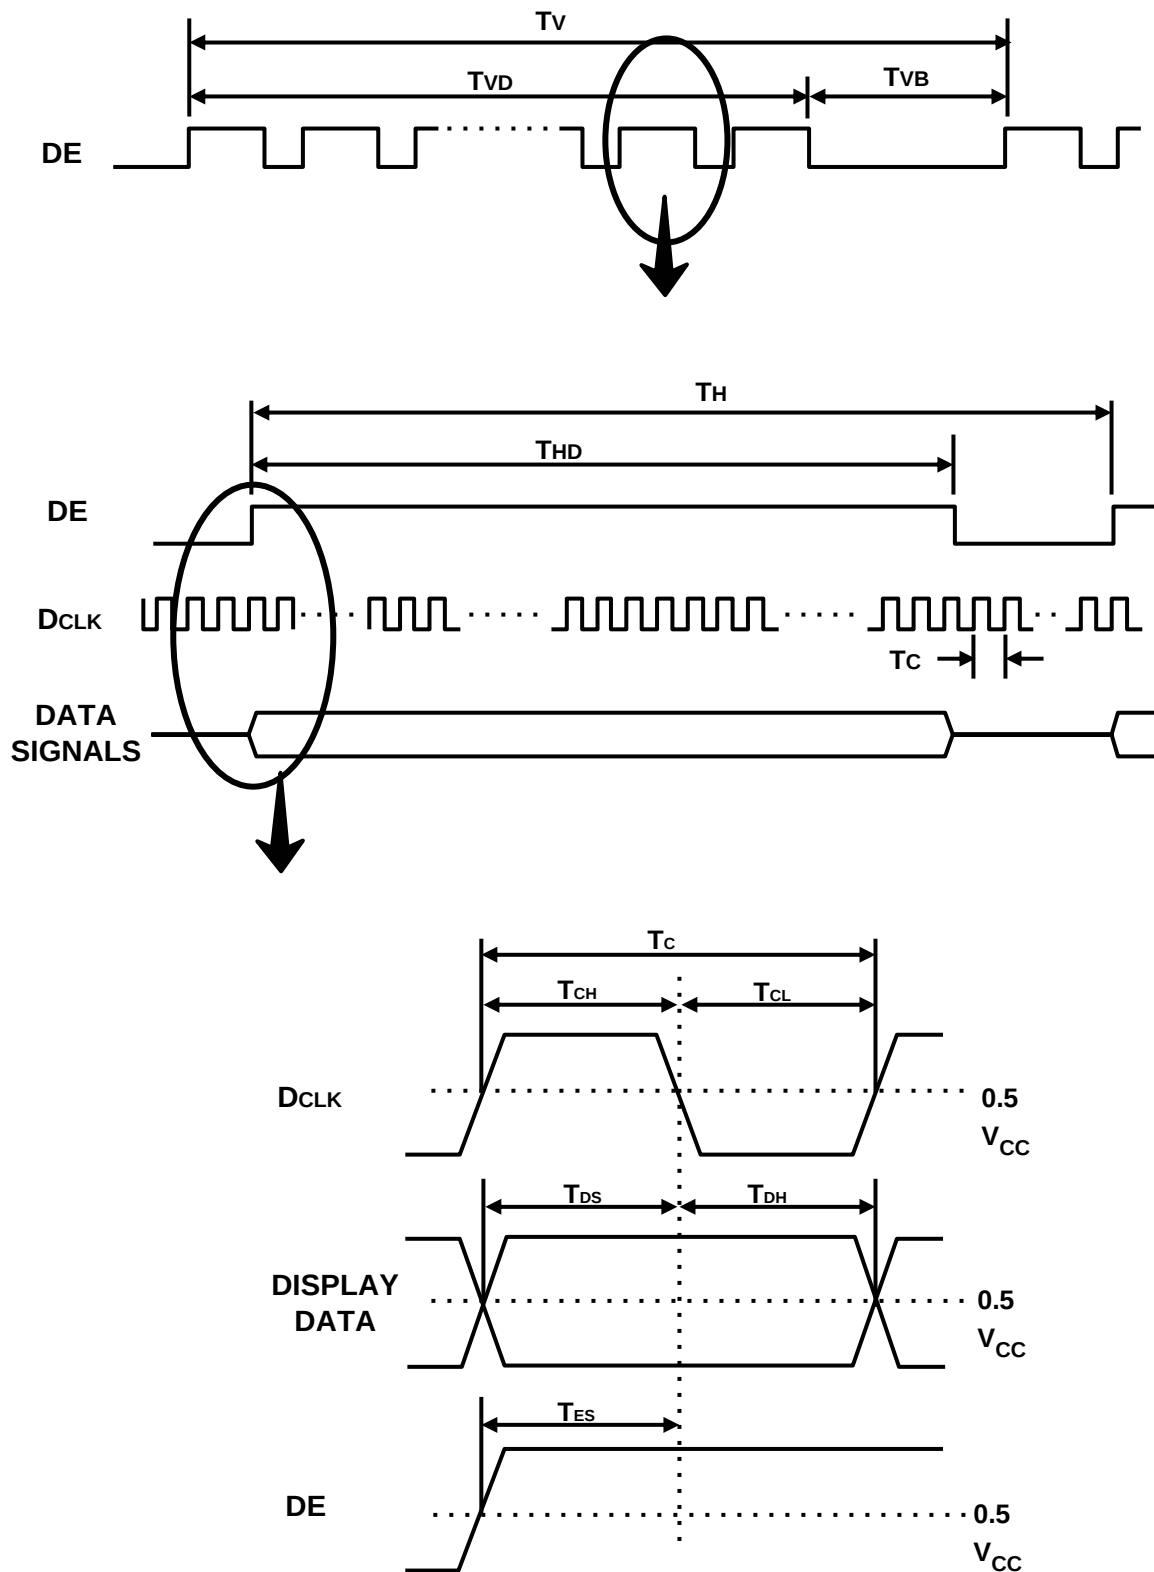

6.3 Power ON/OFF Sequence

To prevent a latch-up or DC operation of the LCD Module, the power on/off sequence should be as the diagram below.

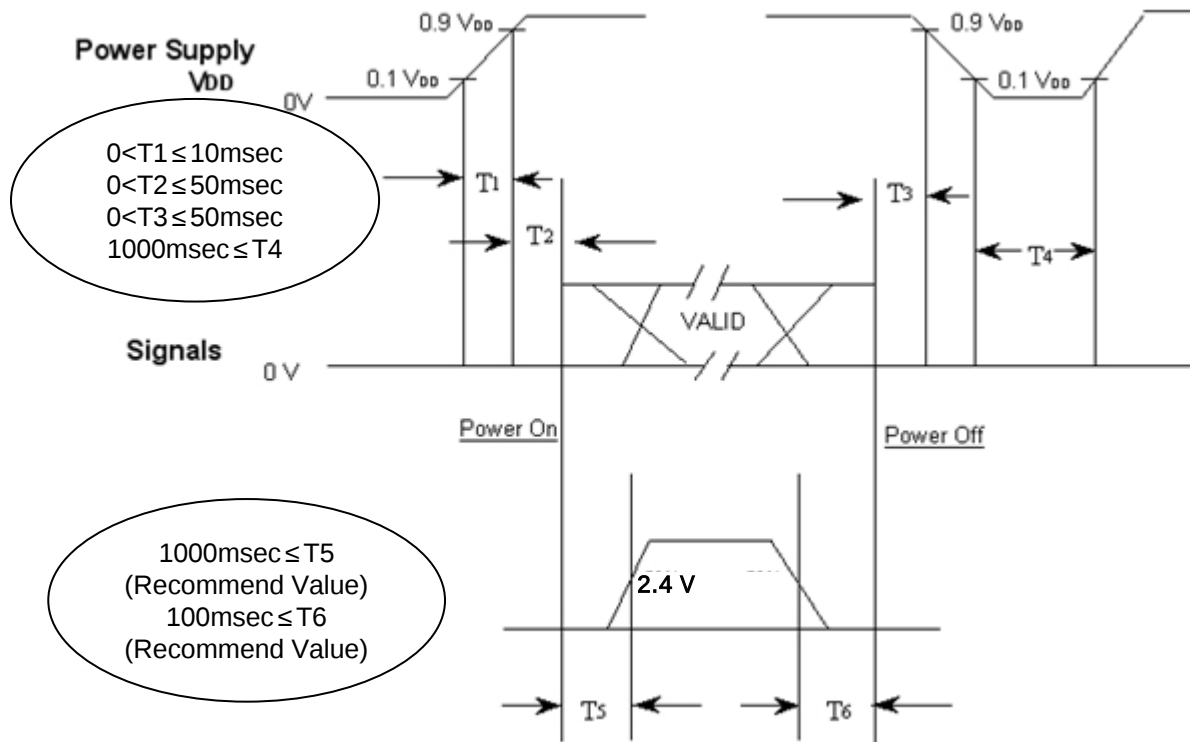

T1 : V_{DD} rising time from 10% to 90%

T2 : The time from V_{DD} to valid data at power ON.

T3 : The time from valid data off to V_{DD} off at power Off.


T4 : V_{DD} off time for Windows restart

T5 : The time from valid data to B/L enable at power ON.


T6 : The time from valid data off to B/L disable at power Off.

- The supply voltage of the external system for the Module input should be the same as the definition of V_{DD}.
- Apply the lamp voltage within the LCD operation range. When the back light turns on before the LCD operation or the LCD turns off before the back light turns off, the display may momentarily show abnormal screen.
- In case of V_{DD} = off level, please keep the level of input signals low or keep a high impedance.
- T4 should be measured after the Module has been fully discharged between power off and on period.
- Interface signal should not be kept at high impedance when the power is on.

7. Outline Dimension (Front View)

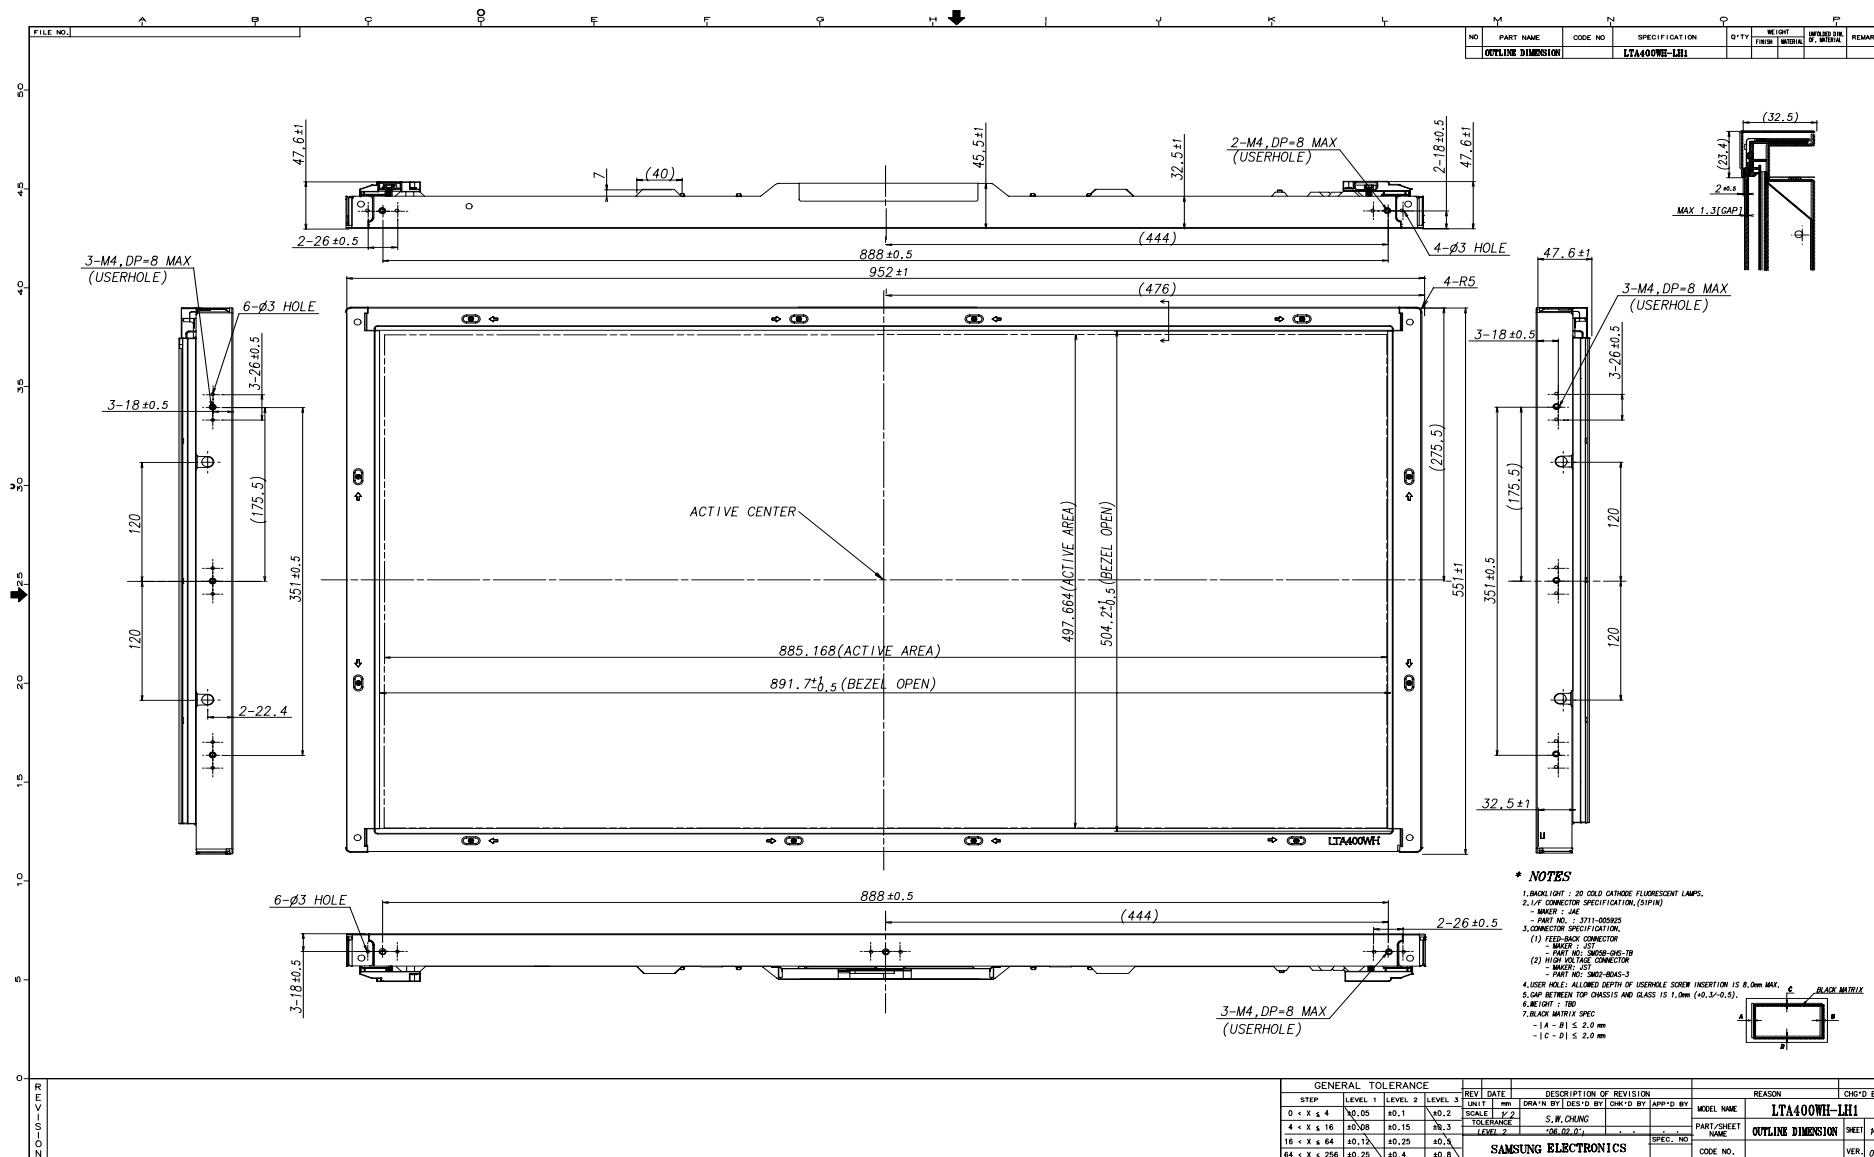

7. Outline Dimension (Rear View)

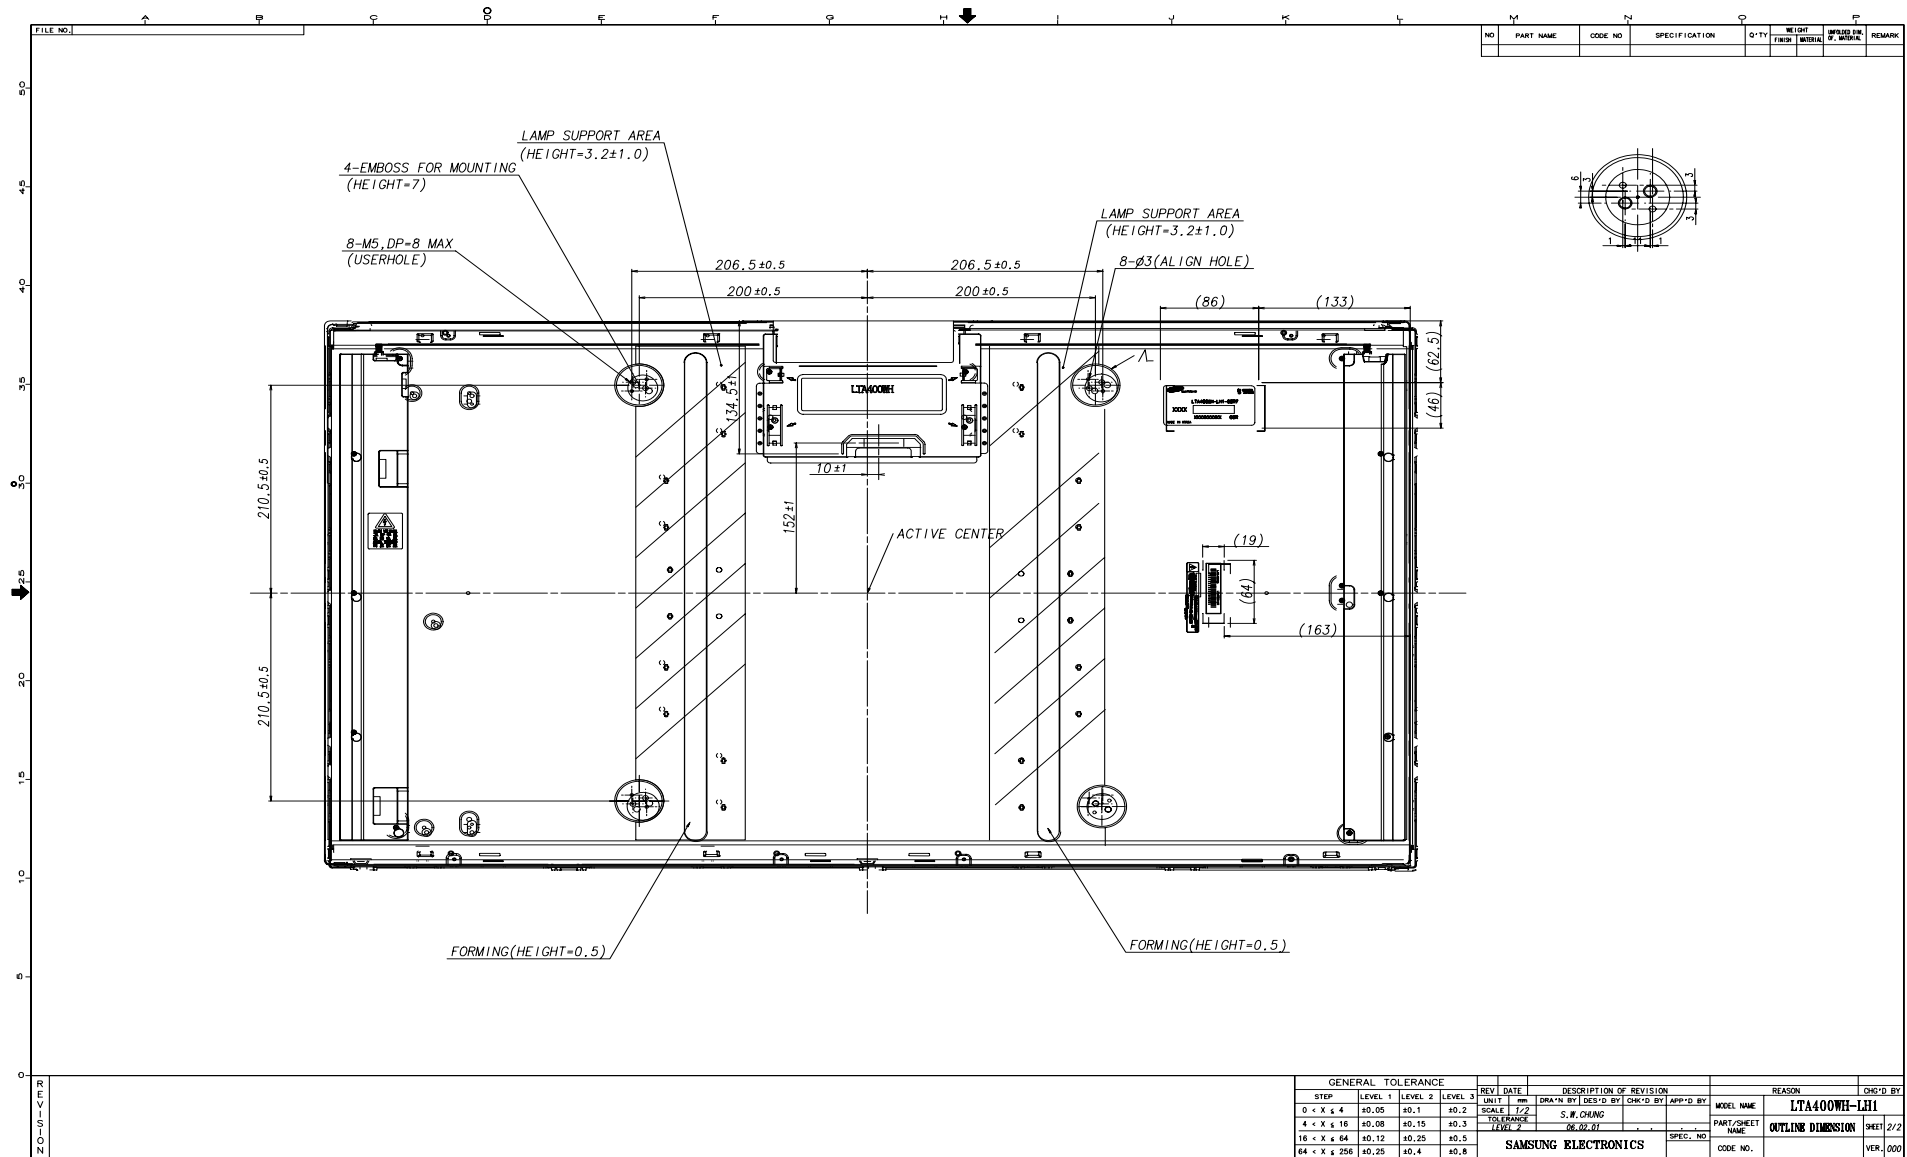


8. PACKING

8.1 CARTON (Internal Package)

(1) Packing Form

Corrugated fiberboard box and corrugated cardboard as shock absorber

(2) Packing Method

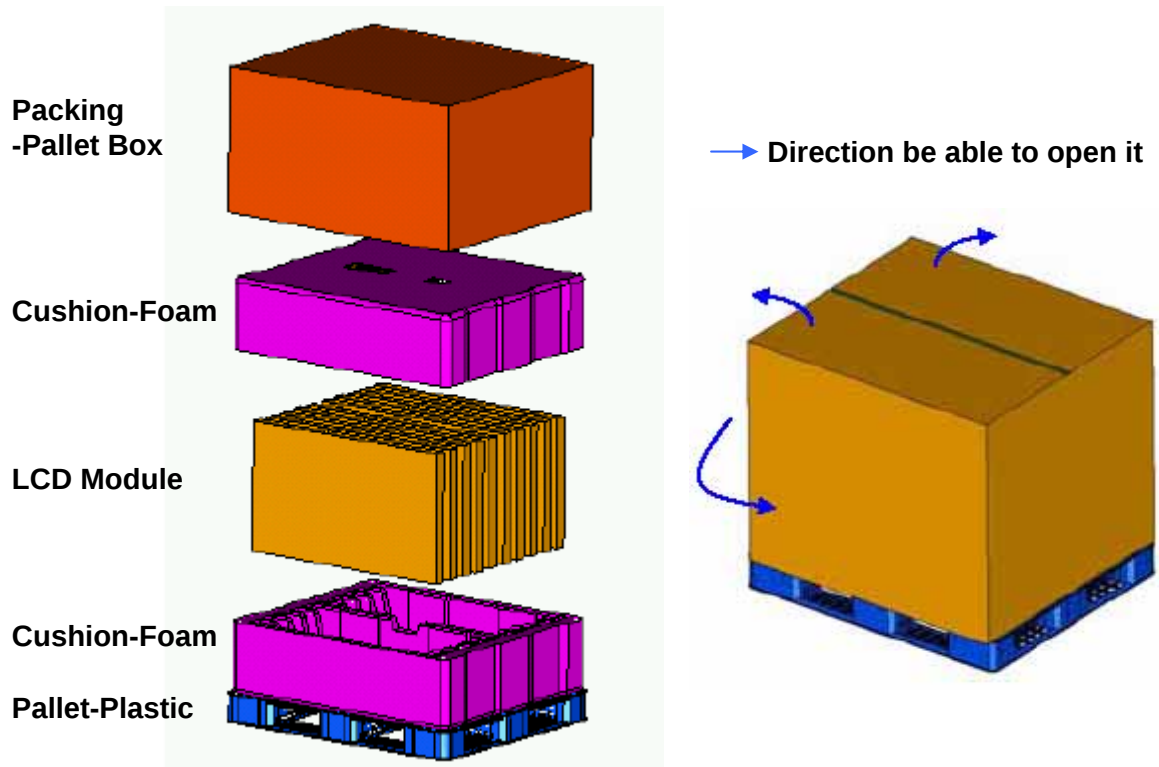

8.2 Packing Specification

Item	Specification	Remark
LCD Packing	10ea / (Packing-Pallet Box)	1. 110 Kg / LCD (10ea) 2. 7 Kg / Cushion-pallet (2ea) 3. 6.7 Kg / Packing-Pallet Box (1ea) 4. Cushion-pallet Material : EPS 5. Packing-Pallet Box Material : DW4
Pallet	1Box / Pallet	1. Pallet weight = 8kg 2. 8Kg/Pallet
Packing Direction	Vertical	
Total Pallet Size	H x V x height	1150mm(H) x 985mm(V) x 609mm(height)
Total Pallet Weight	131.7kg	Pallet(8kg) + Module(11*10=110) + Cushion (up + bottom=7kg) + Pallet-BOX(6.7kg)


9. MARKING & OTHERS

A nameplate bearing followed by is affixed to a shipped product at the specified location on each product.


(1) Part number : LTA400WH-LH1

(2) Revision: letters


(3) Lot number : X X X X XXX XX X

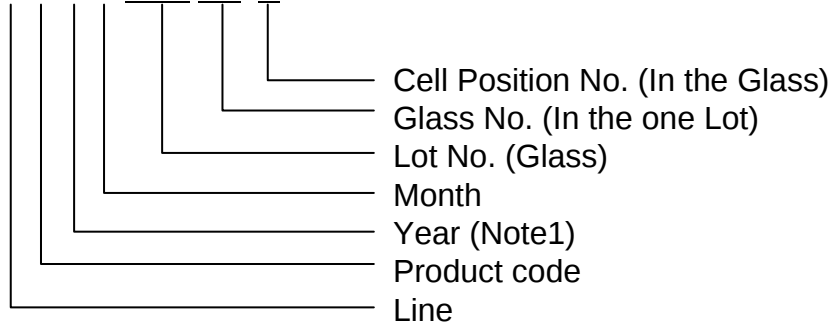

(4) Nameplate Indication

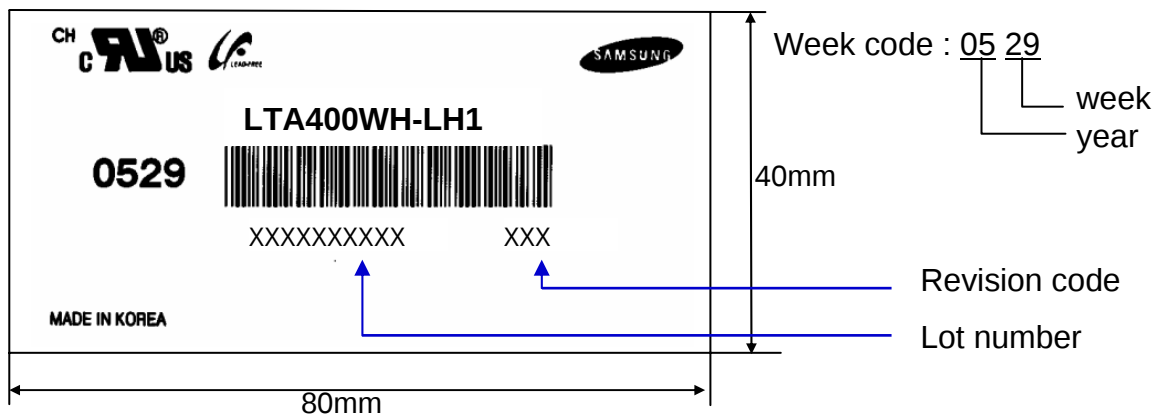

(5) Packing box attach

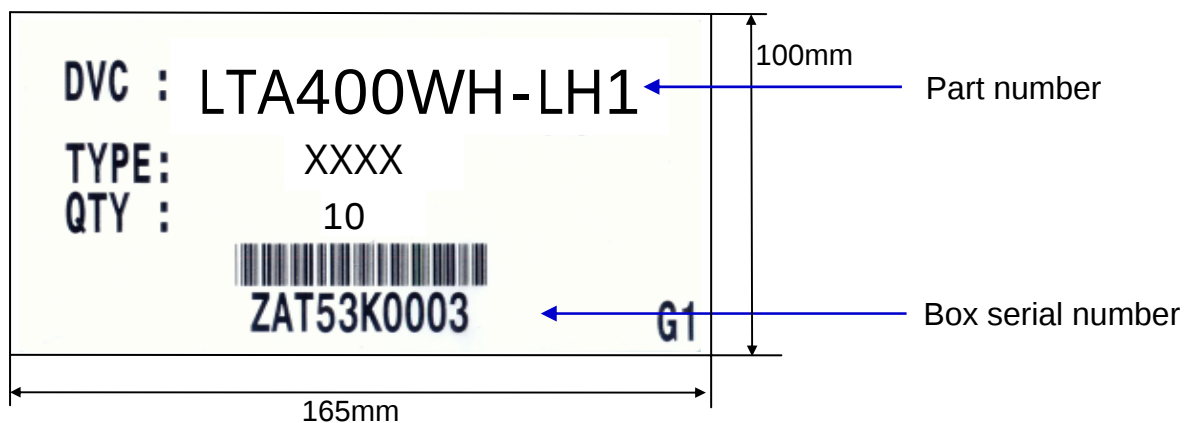

(6) Others

1. After service part

Lamps cannot be replaced because of the narrow bezel structure.

MODEL	LTA400WH-LH1	Doc. No	05-000-G-060426	Page	26 / 29
-------	--------------	---------	-----------------	------	---------

10. General Precautions

10.1 Handling

- (a) When the Module is assembled, it should be attached to the system firmly using all mounting holes. Be careful not to twist and bend the Module.
- (b) Because the inverter use high voltage, it should be disconnected from power before it is assembled or disassembled.
- (c) Refrain from strong mechanical shock and / or any force to the Module.
In addition to damage, this may cause improper operation or damage to the Module and CCFT back light.
- (d) Note that polarizers are very fragile and could be damage easily.
Do not press or scratch the surface harder than a HB pencil lead.
- (e) Wipe off water droplets or oil immediately. If you leave the droplets for a long time, staining or discoloration may occur.
- (f) If the surface of the polarizer is dirty, clean it using absorbent cotton or soft cloth.
- (g) Desirable cleaners are water, IPA(Isopropyl Alcohol) or Hexane.
Do not use Ketone type materials(ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanent damage to the polarizer due to chemical reaction.
- (h) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth . In case of contact with hands, legs or clothes, it must be washed away with soap thoroughly.
- (i) Protect the Module from static, or the CMOS Gate Array IC would be damaged.
- (j) Use finger-stalls with soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (k) Do not disassemble the Module.
- (l) Do not pull or fold the lamp wire.
- (m) Do not adjust the variable resistor located on the Module.
- (n) Protection film for polarizer on the Module should be slowly peeled off just before use so that the electrostatic charge can be minimized.
- (o) Pins of I/F connector should not be touched directly with bare hands.

MODEL	LTA400WH-LH1	Doc. No	05-000-G-060426	Page	27 / 29
-------	--------------	---------	-----------------	------	---------

10.2 Storage

- (a) Do not leave the Module in high temperature, and high humidity for a long time. It is highly recommended to store the Module with temperature from 0 to 35 and relative humidity of less than 70%.
- (b) Do not store the TFT-LCD Module in direct sunlight.
- (c) The Module should be stored in a dark place. It is prohibited to apply sunlight or fluorescent light in storing.

10.3 Operation

- (a) Do not connect or disconnect the Module in the "Power On" condition.
- (b) Power supply should always be turned on/off by the "Power on/off sequence"
- (c) Module has high frequency circuits. Sufficient suppression to the electromagnetic interference should be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- (d) The cable between the back light connector and its inverter power supply should be connected directly with a minimized length. A longer cable between the back light and the inverter may cause lower luminance of lamp(CCFT) and may require higher startup voltage(Vs).

10.4 Operation Condition Guide

- (a) The LCD product should be operated under normal conditions.
Normal condition is defined as below;
 - Temperature : 20 ± 15
 - Humidity : $55 \pm 20\%$
 - Display pattern : continually changing pattern (Not stationary)
- (b) If the product will be used in extreme conditions such as high temperature, humidity, display patterns or operation time etc., It is strongly recommended to contact SEC for Application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at Airports, Transit Stations, Banks, Stock market, and Controlling systems.

MODEL	LTA400WH-LH1	Doc. No	05-000-G-060426	Page	28 / 29
-------	--------------	---------	-----------------	------	---------

10.5 Others

- (a) Ultra-violet ray filter is necessary for outdoor operation.
- (b) Avoid condensation of water. It may result in improper operation or disconnection of electrode.
- (c) Do not exceed the absolute maximum rating value. (supply voltage variation, input voltage variation, variation in part contents and environmental temperature, and so on)
Otherwise the Module may be damaged.
- (d) If the Module keeps displaying the same pattern for a long period of time, the image may be "sticked" to the screen.
To avoid image sticking, it is recommended to use a screen saver.
- (e) This Module has its circuitry PCB's on the rear side and should be handled carefully in order not to be stressed.
- (f) Please contact SEC in advance when you display the same pattern for a long time.

MODEL	LTA400WH-LH1	Doc. No	05-000-G-060426	Page	29 / 29
-------	--------------	---------	-----------------	------	---------