

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LTBE9S372JCKS

SPEC. NO.: LM372-0F-

CUSTOMER
APPROVED BY
DATE :

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw


EDITED ON. : AUG.17, 2006

Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			J.P. Weng

1. MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTBE9S372JCKS	-
2	Module Size	142.6 (W) x 92.6 (H) x MAX 7.5 (D)	mm
3	Dot Size	0.285 (W) x 0.285 (H)	mm
4	Dot Pitch	0.3 (W) x 0.3 (H)	mm
5	Number of Dots	320 (W) x 240 (H)	Dot
6	Duty	1/240	-
7	LCD Display Mode	FSTN:Black and White (Normally White/Positive Image)	-
8	Rear Polarizer	Transmission	-
9	Viewing Direction	6	O'clock
10	Backlight	CCFL	-
11	Weight	120 (approx.)	g
12	Soldering	Lead Free	-

Note :

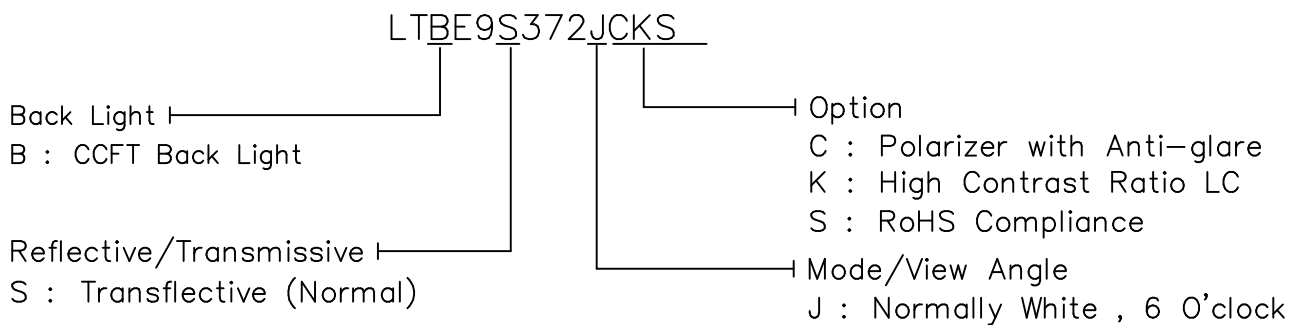

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

2. ABSOLUTE MAXIMUM RATINGS

(1) ELECTRICAL ABSOLUTE RATINGS

VSS=0V

	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	5.5	V	
Power Supply for LCD Driver	VDD-VEE	0	20.0	V	
Input Voltage	VI	-0.3	VDD	V	
Static Electricity	-	-	-	-	Note 1

Note 1 LCM should be grounded during handling LCM.

(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	WIDE TEMP.			
	OPERATING		STORAGE	
	MIN.	MAX.	MIN.	MAX.
Ambient Temperature	-20	70	-40	80
Humidity (Without Condensation)	Note 2,4		Note 3,4	

Note 2 $T_a \leq 70^\circ\text{C}$: 75%RH max


Note 3 Please refer to item of reliability test

Note 4 Background color will change slightly depending on ambient temperature.

That phenomenon is reversible.

3. ELECTRICAL CHARACTERISTICS

3-1. ELECTRICAL CHARACTERISTICS OF LCM

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Power Supply for Logic		VDD-VSS	-	4.5	5.0	5.5	V	
Recommended LC Driving Voltage		VDD-VEE	Duty=1/240	-20°C	25.4	25.8	26.2	V
				0°C	24.0	24.4	24.8	
				25°C	23.0	23.4	23.8	
				50°C	22.1	22.5	22.9	
				70°C	21.4	21.8	22.2	
Input Voltage		VIH	H level	0.8VDD	-	VDD	V	
		VIL	L level	0	-	0.2VDD	V	
Power Supply Current		IDD	FLM = 70 Hz VDD = 5.0 V VDD-VEE = 23.4 V	-	12	18	mA	
		IEE	PATTERN : 	-	12	18	mA	
LCM	Surface Luminance	L(ALL ON)	IL=5mA at Vin=10.5V for Inverter TDK CXA-L10L	-	20	-	cd/m ²	
		L(ALL OFF)		40	70	-		

3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used CCFL Rating

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Lamp voltage	V _L	-	289	-	Vrms	-
Lamp current	I _L	4.0	5.0	6.0	mArms	-
Lamp power consumption	P _L	-	1.44	-	W	(*1)
Starting voltage	V _s	-	-	490	Vrms	At 25°C
		-	-	620	Vrms	At 0°C
Lamp life time	L _L	15000	-	-	hrs	IL = 5.0mArms(*2)

(*1) Power consumption excluded inverter loss .

(*2) Lamp life time is defined as follows : The final brightness is at 50% of original brightness .

3-3.ELECTRICAL CHARACTERISTICS OF RECOMMENDED INVERTER TDK CXA-L10L

3-3-1 GENERAL SPECIFICATIONS

OPERATION TEMPERATURE : -10°C~60°C

STORAGE TEMPERATURE : -20°C~85°C

DIMENSION : MAX.44 (L)mm x MAX. 21(W)mm x MAX. 18(H)mm

3-3-2 PIN ASSIGNMENTS

INPUT (CN1) CONNECTOR :

OUTPUT (CN2) CONNECTOR :

NO.	FUNCTION
1	VIN
2	GND

NO.	FUNCTION
3	OUT1
4	OUT2
5	OUT GND

3-3-3 RELATIONSHIP BETWEEN VIN & TUBE CURRENT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Input Voltage	VIN	-	10.5	-	V	
Tube Current	IL	-	5	-	mA	

4. OPTICAL CHARACTERISTICS

AT Vop

ITEM MODE		Cr(Contrast Ratio)										θ (Viewing Angle)		ϕ (Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
S	J	4.5	7	5	8	5	8	4	6	2.5	4	-	38-36	-	32-34
Note		NOTE 6										NOTE 5			

Note:

S: TRANSFLECTIVE


J: NORMALLY WHITE

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	2800	3500	5400	ms	NOTE 2
		0℃	650	800	1200		
		25℃	160	200	300		
		50℃	80	100	150		
		70℃	65	80	120		
Response Time (fall)	Tf	-20℃	1600	2000	3000	ms	NOTE 2
		0℃	350	400	600		
		25℃	120	150	230		
		50℃	65	80	120		
		70℃	50	60	90		

(NOTE 1)

Definition of Operation Voltage(Vop)

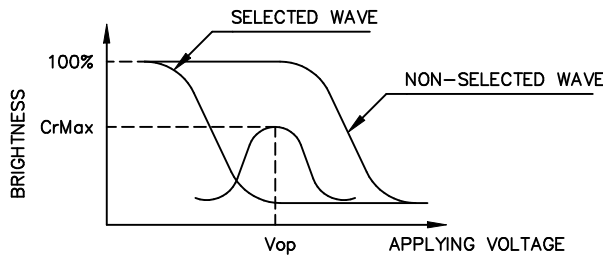

(positive type)

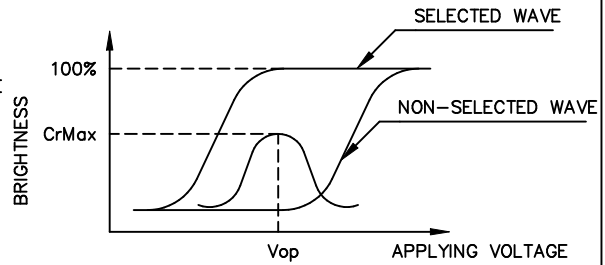


(negative type)

*Conditions


Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

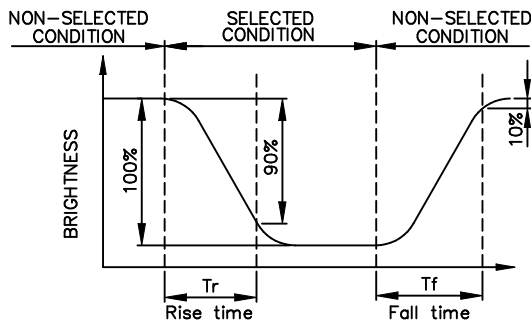

(positive type)

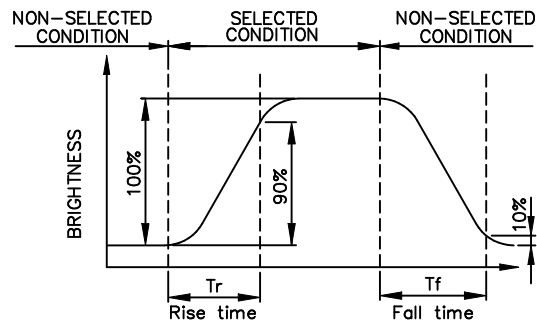



(negative type)

*Conditions

Operating Voltage : Vop
Viewing Angle (θ, ϕ) : (0,0)
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

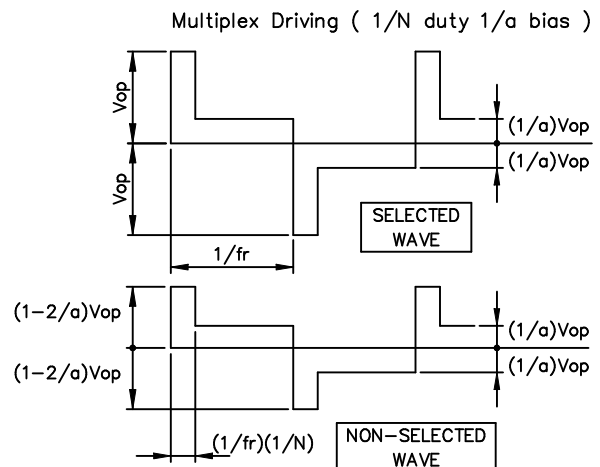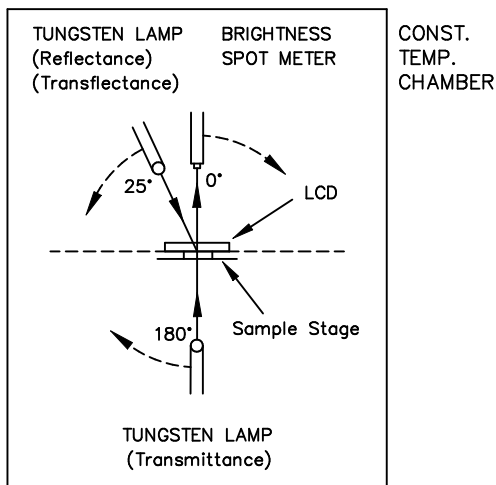



(NOTE 4)

Definition of Viewing Direction

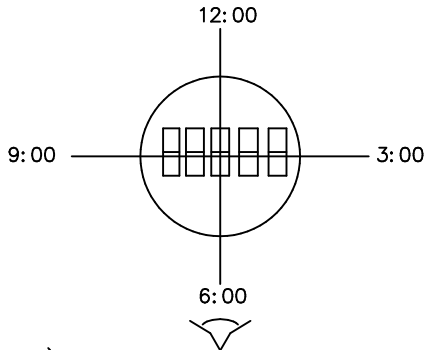

(NOTE 5)

Definition of Viewing Angle

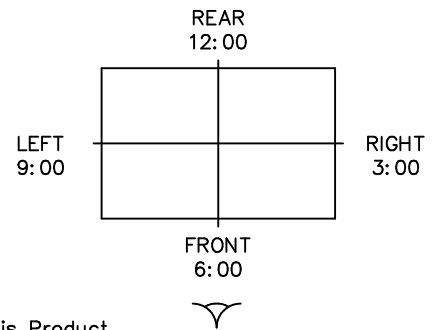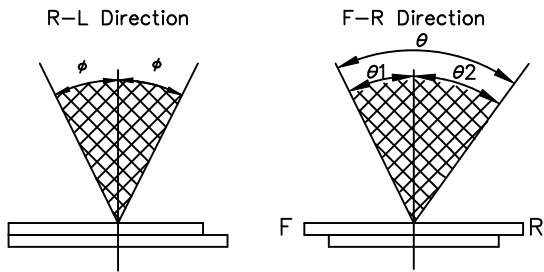

*For This Product
 The Viewing Direction Is 6 O'clock
 So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : V_{op}
 Frame Frequency : 70Hz
 Applying Waveform : 1/N duty 1/a bias
 Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

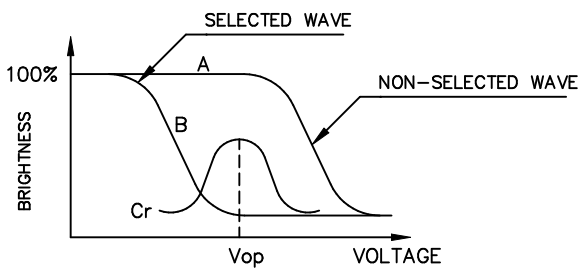

(positive type)

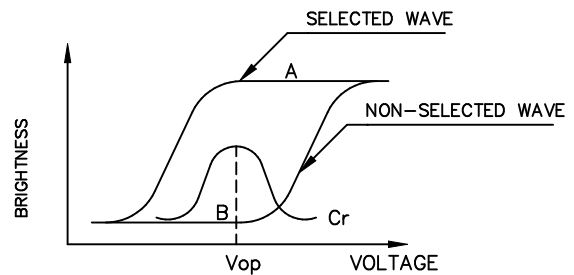


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
 Frame Frequency : 70Hz
 Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

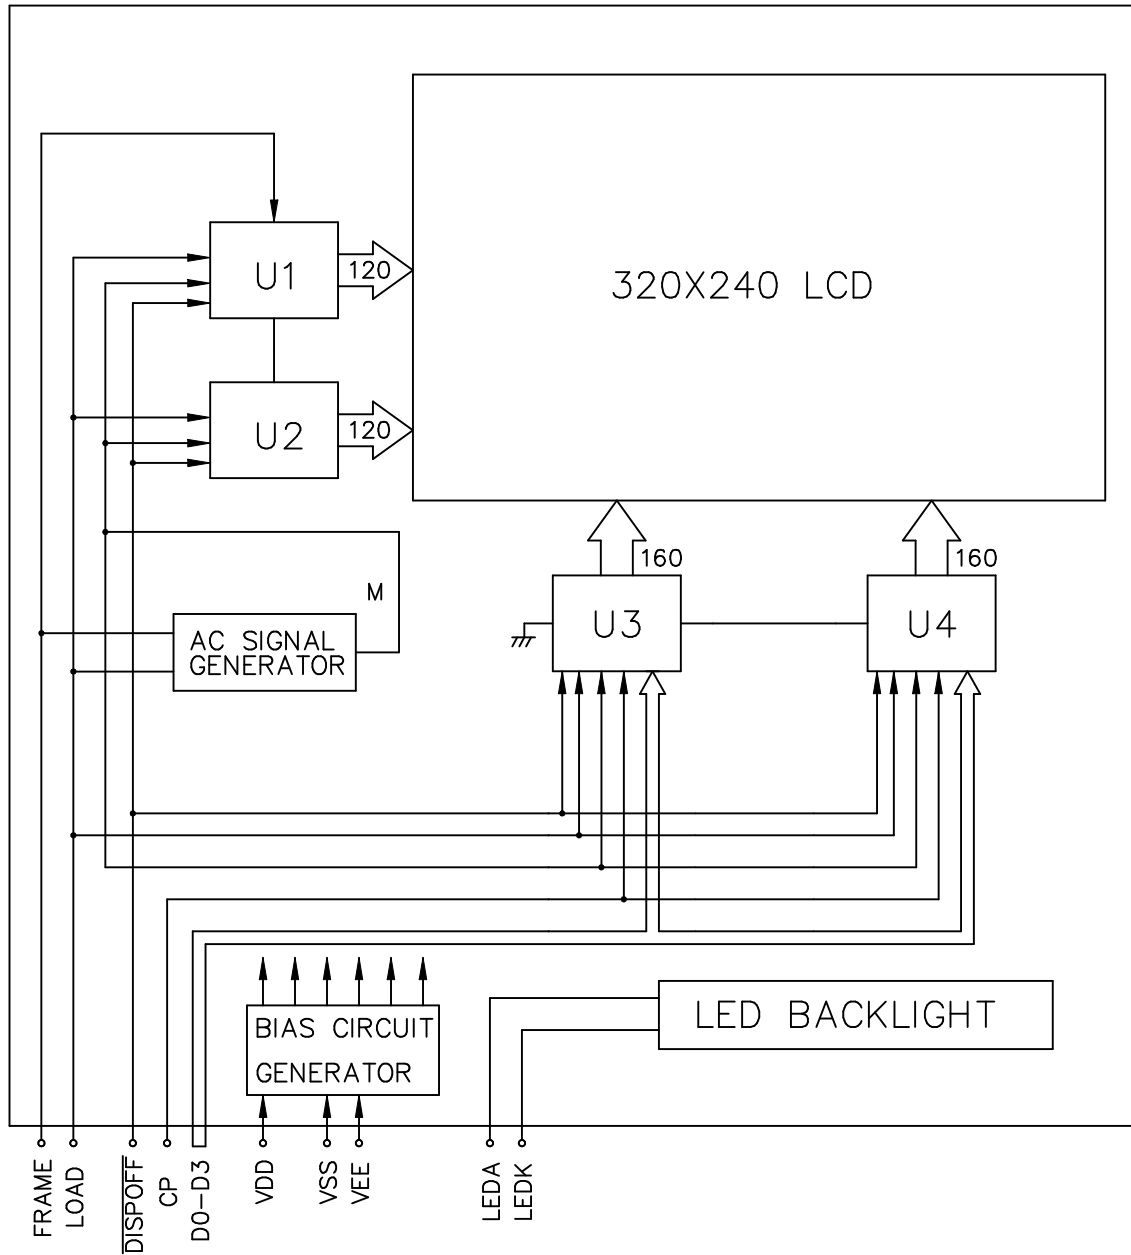

* AC SIGNAL SETTING

J1	J2	J3	J4	J5	J6	J7	J8
H	L	L	H	H	L	L	L

6. INTERNAL PIN CONNECTION

PIN CONNECTOR : CN1:ELC0/6224-12P-S-A OR EQUIVALENT

Mating FFC/FPC : Pitch 1.0mm, 12pin

<i>PIN NO.</i>	<i>SYMBOL</i>	<i>LEVEL</i>	<i>FUNCTION</i>
<i>1</i>	<i>FRAME</i>	<i>H</i>	<i>FIRST LINE MARKER</i>
<i>2</i>	<i>LOAD</i>	<i>H→L</i>	<i>DATA LATCH</i>
<i>3</i>	<i>CP</i>	<i>H→L</i>	<i>DATA SHIFT</i>
<i>4</i>	<i>VDD</i>	<i>-</i>	<i>POWER SUPPLY FOR LOGIC</i>
<i>5</i>	<i>VSS</i>	<i>-</i>	<i>GND</i>
<i>6</i>	<i>VEE</i>	<i>-</i>	<i>POWER SUPPLY FOR LC</i>
<i>7</i>	<i>D0</i>	<i>H/L</i>	<i>DISPLAY DATA</i>
<i>8</i>	<i>D1</i>		
<i>9</i>	<i>D2</i>		
<i>10</i>	<i>D3</i>		
<i>11</i>	<i>$\overline{DISPOFF}$</i>	<i>H/L</i>	<i>H:ON/L:OFF</i>
<i>12</i>	<i>NC</i>	<i>-</i>	<i>-</i>

CCFL

Used connector : M63M83-04 (MITSUMI)


Mating connector : M60-04-30-114P (MITSUMI)

M60-04-30-134P (MITSUMI)

M61M73-04 (MITSUMI)

<i>PIN NO.</i>	<i>SYMBOL</i>	<i>LEVEL</i>	<i>FUNCTION</i>
<i>1</i>	<i>GND</i>	<i>-</i>	<i>GND FOR CCFT BACKLIGHT</i>
<i>2</i>	<i>NC</i>	<i>-</i>	<i>-</i>
<i>3</i>	<i>NC</i>	<i>-</i>	<i>-</i>
<i>4</i>	<i>HV</i>	<i>-</i>	<i>POWER SUPPLY FOR CCFT BACKLIGHT</i>

7. POWER SUPPLY

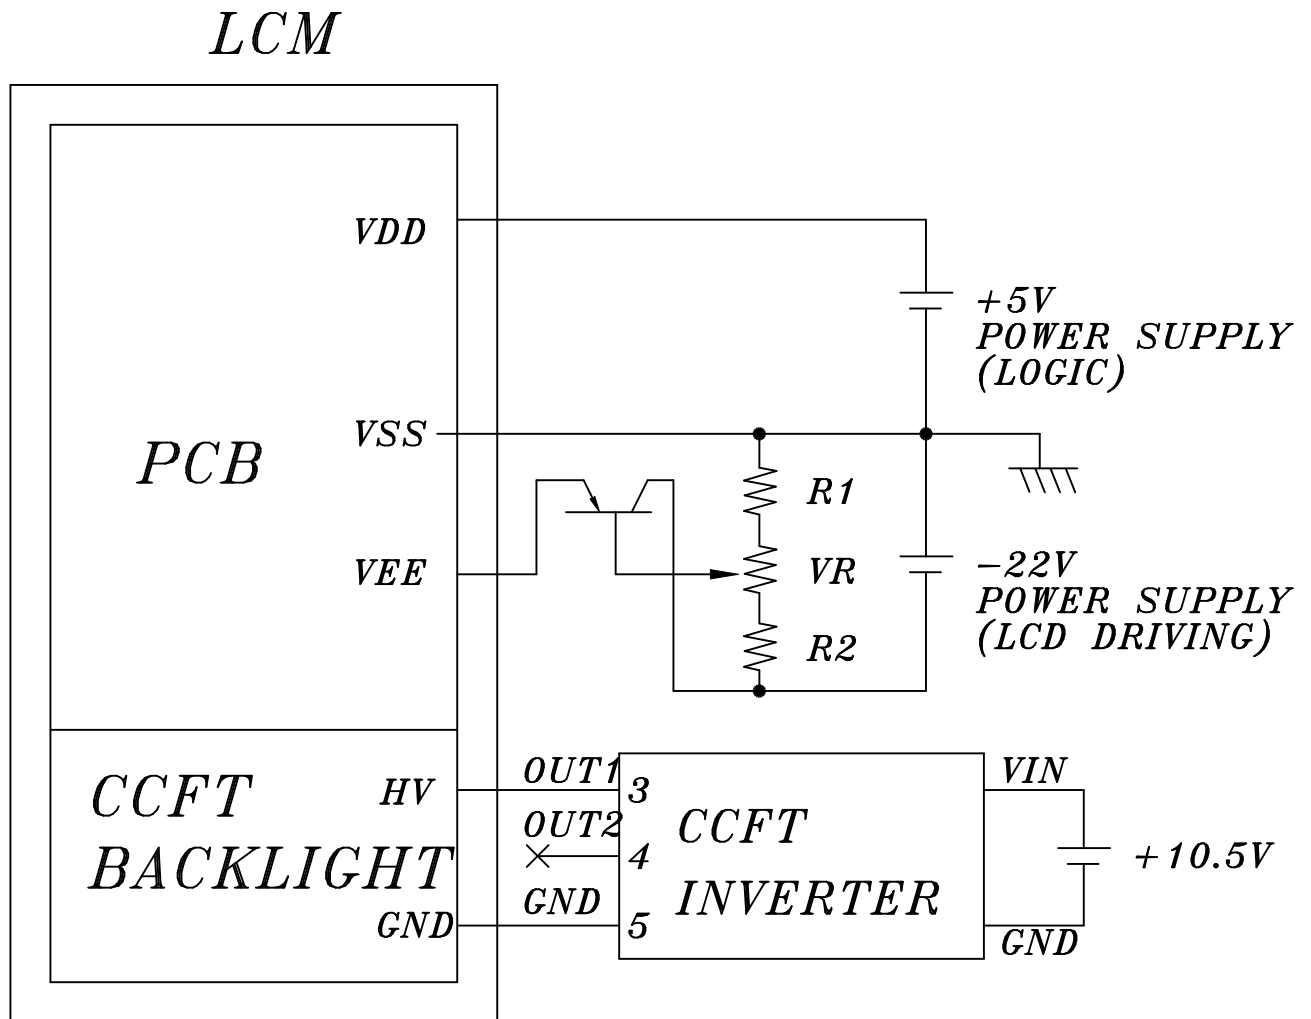

1. $R1 + VR + R2 = 10K \sim 20K \Omega$


2. RECOMMENDED CCFT INVERTER : CXA-L10L(TDK)

8. TIMING CHARACTERISTICS


8-1. INTERFACE TIMING

@VDD=2.5~5.5V


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Shift Clock Period	t_{cp}	220	-	-	ns
"CP" PULSE WIDTH	t_w	90	-	-	ns
CLOCK RISE, FALL TIME	t_r, t_f	-	-	20	ns
DATA SETUP TIME	t_{dsu}	80	-	-	ns
DATA HOLD TIME	t_{dhd}	65	-	-	ns
"CP" → "LOAD" FALL TIME	t_{lsu}	100	-	-	ns
"LOAD" → "CP" FALL TIME	t_{lc}	100	-	-	ns
"FRAME" SETUP TIME	t_{setup}	100	-	-	ns
"FRAME" HOLD TIME	t_{hold}	100	-	-	ns
"LOAD" PULSE WIDTH	t_{wc}	110	-	-	ns

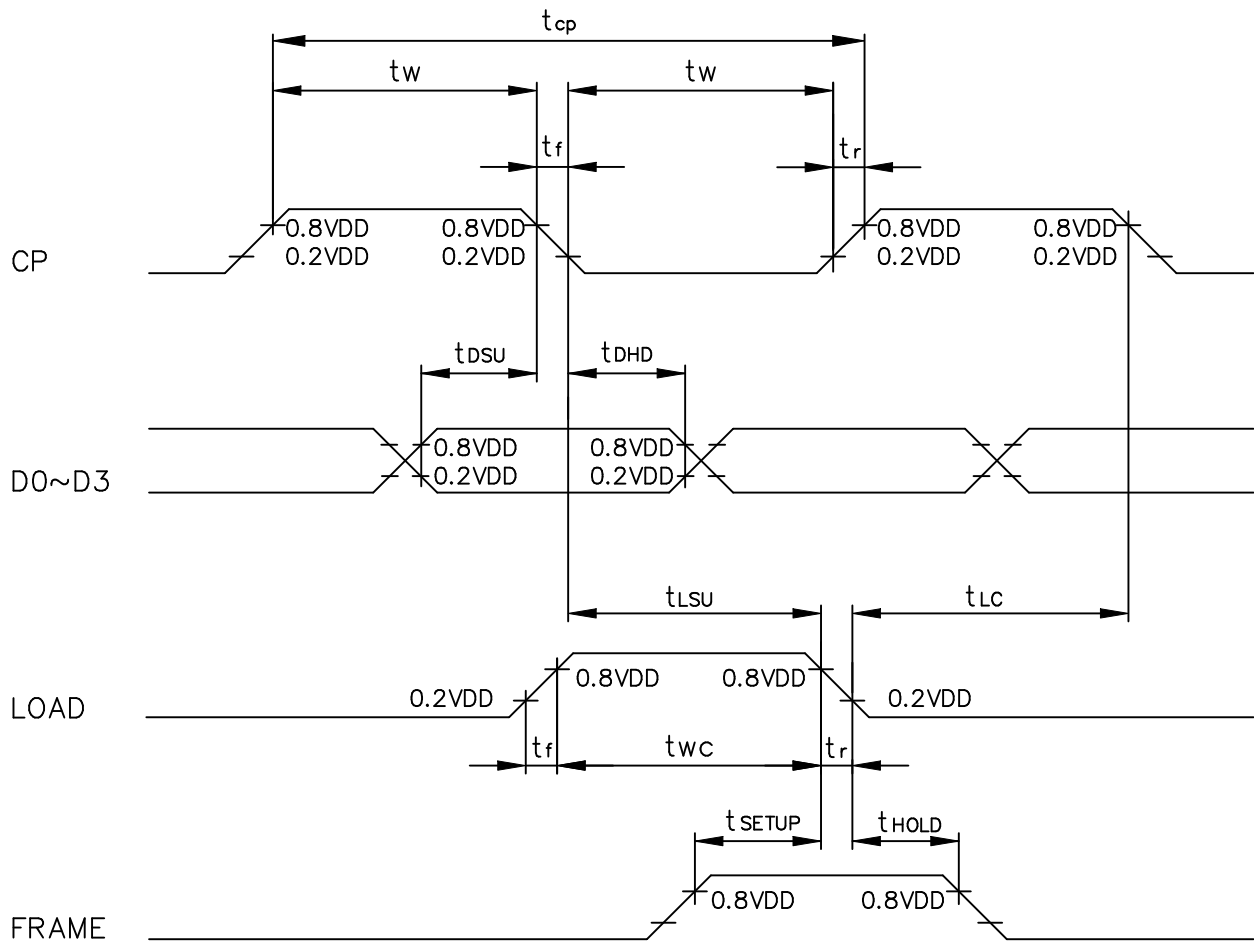


8-2. TIMING CHART OF INPUT SIGNALS

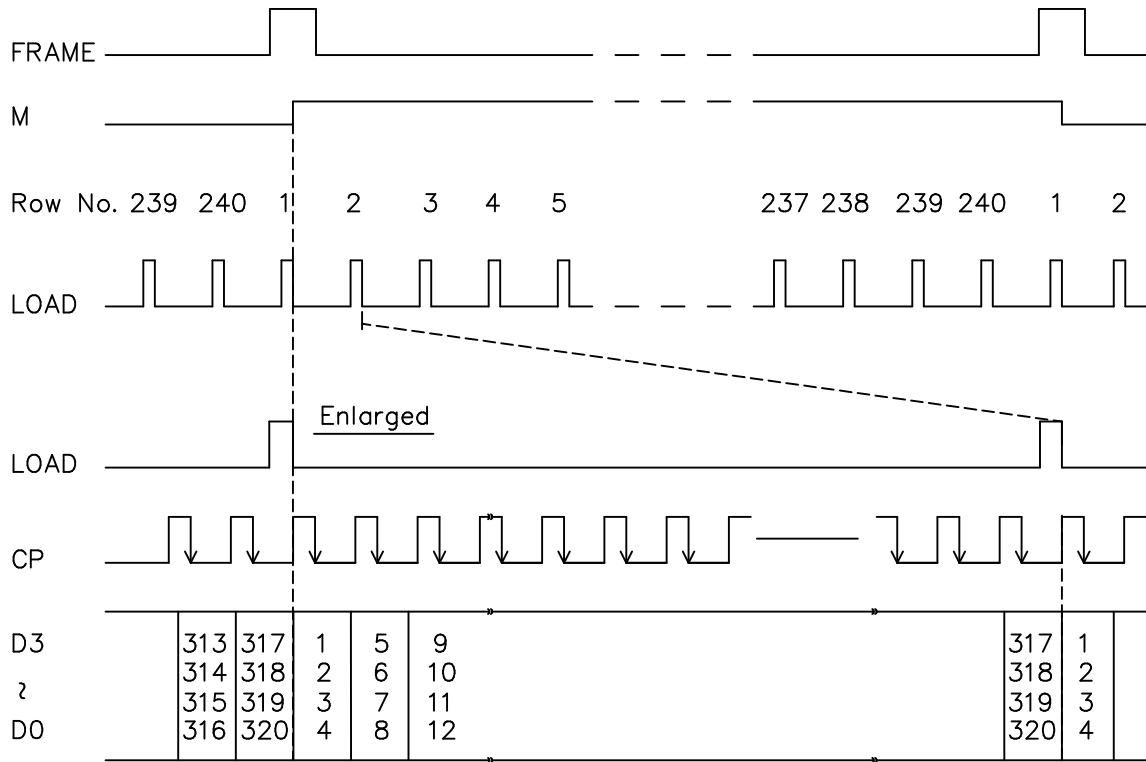

8-3. DISPLAY PATTERN

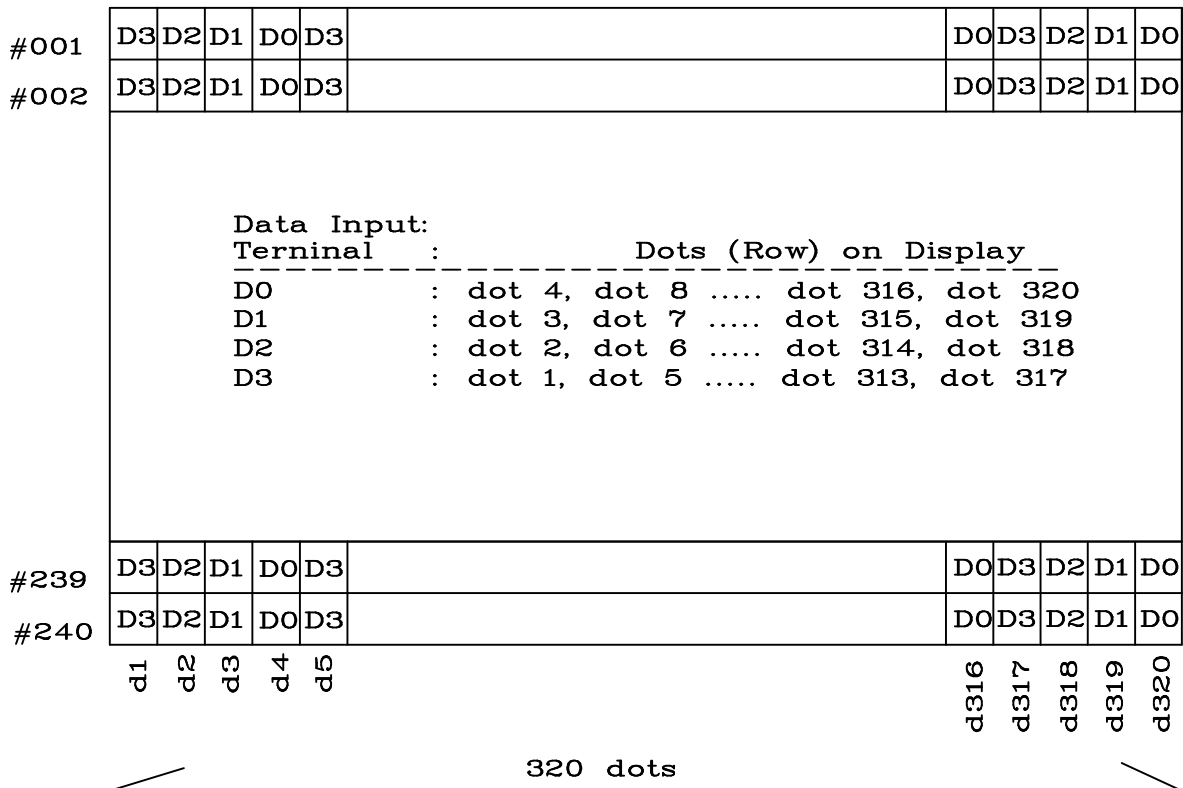


8-4. POWER ON/OFF TIMING

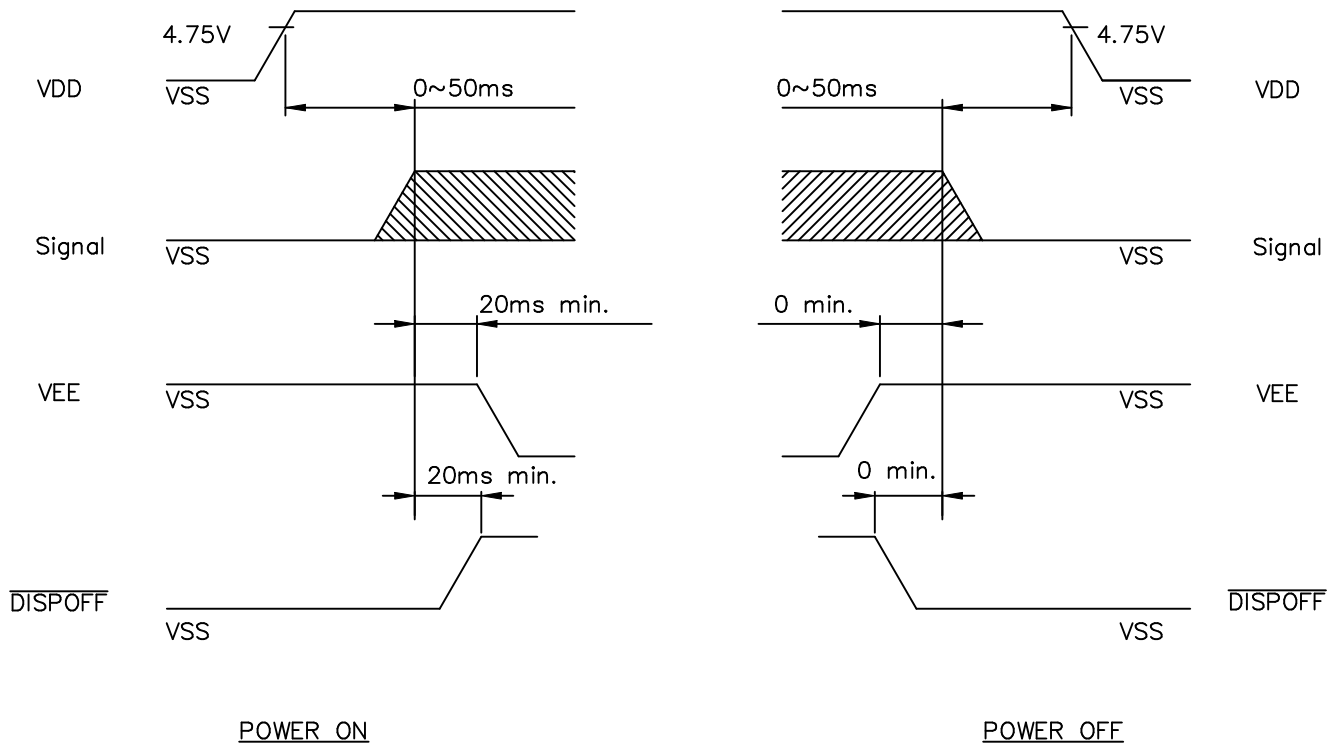

The missing pixels may occur when the LCM is driven beyond above power timing sequence.

9. RELIABILITY TEST

WIDE TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	80°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-40°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	60°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	70°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	-20°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C, 30min → 70°C, 30min  (1cycle)			Appearance without defect	10 cycles

Inspection Provision

1.Purpose


The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2.Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3.Technical Terms

3-1 NAN YA Technical Terms

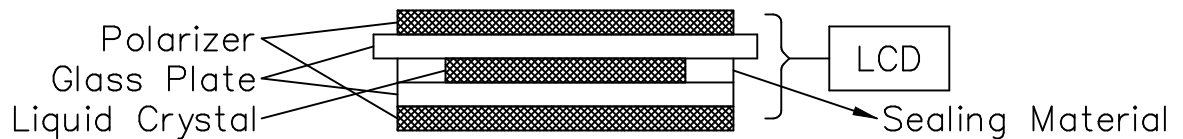

4.Outgoing Inspection

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection


4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions
*Viewing Area Definition

Fig. 1

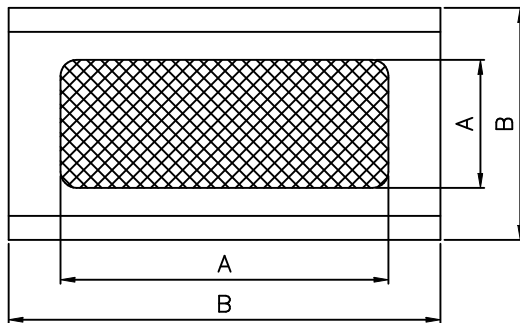

A : Zone Viewing Area
B : Zone Glass Plate Out Line

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.

*Test and measurement are performed under the following conditions, unless otherwise specified.

Otherwise specified.

Temperature 20± 15°C
 Humidity 65± 20%R.H..
 Pressure 860~1060hPa(mmbar)

In case of doubtful judgment, it is performed under the following conditions.

Temperature 20± 2°C
 Humidity 65± 5%R.H..
 Pressure 860~1060hPa(mmbar)













5.Specification for quality check
 5-1 Electrical characteristics

NO.	Item	Criterion
1.	Non operational	Fail
2.	Miss operating	Fail
3.	Missing dot	Fail
4.	Contrast irregular	Fail
5.	Response time	Within Specified value
6.	CCFL backlight turn on/off	Within Specified value

5-2 External Appearance Defect




NO.	Item	Criterion																		
1.	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	<p>(1)-1-Spots</p> <table border="1" data-bbox="711 477 1356 763"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$0.1 < D \leq 0.2$</td> <td>5</td> </tr> <tr> <td>$0.2 < D \leq 0.3$</td> <td>2</td> </tr> <tr> <td>$0.3 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p> <p>(1)-2-Blurred Spots(At lighting condition)</p> <table border="1" data-bbox="711 1187 1356 1426"> <thead> <tr> <th>Average Diameter(mm):D</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$D \leq 0.3$</td> <td>Ignore</td> </tr> <tr> <td>$0.3 < D \leq 0.75$</td> <td>5</td> </tr> <tr> <td>$0.75 < D$</td> <td>0</td> </tr> </tbody> </table> <p>Number of total pieces is set to within 5 pieces.</p> <p>Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2</p>	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.1$	Ignore	$0.1 < D \leq 0.2$	5	$0.2 < D \leq 0.3$	2	$0.3 < D$	0	Average Diameter(mm):D	Number of pieces permitted	$D \leq 0.3$	Ignore	$0.3 < D \leq 0.75$	5	$0.75 < D$	0
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.1$	Ignore																			
$0.1 < D \leq 0.2$	5																			
$0.2 < D \leq 0.3$	2																			
$0.3 < D$	0																			
Average Diameter(mm):D	Number of pieces permitted																			
$D \leq 0.3$	Ignore																			
$0.3 < D \leq 0.75$	5																			
$0.75 < D$	0																			

1.	Line	<p>(1)-1-Lines</p> <table border="1" data-bbox="715 421 1455 707"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 4$</td> <td>2</td> </tr> <tr> <td>$0.08 < W \leq 0.1$</td> <td>$L \leq 1$</td> <td>1</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p> <p>(1)-2-Blurred Lines(At lighting condition)</p> <table border="1" data-bbox="715 1012 1455 1299"> <thead> <tr> <th>Width(mm): W</th> <th>Length(mm): L</th> <th>Number of pieces permitted</th> </tr> </thead> <tbody> <tr> <td>$W \leq 0.03$</td> <td>Ignore</td> <td>Ignore</td> </tr> <tr> <td>$0.03 < W \leq 0.08$</td> <td>$L \leq 3$</td> <td>6</td> </tr> <tr> <td>$0.08 < W$</td> <td>$3 < L$</td> <td>None</td> </tr> </tbody> </table> <p>Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.</p>	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2.	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3.	Color irregular	Not remarkable color irregular.																								
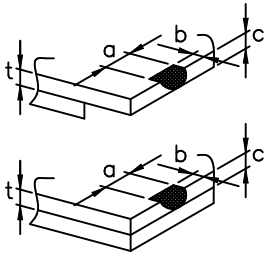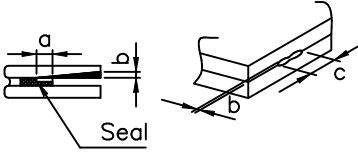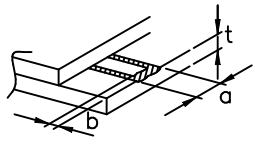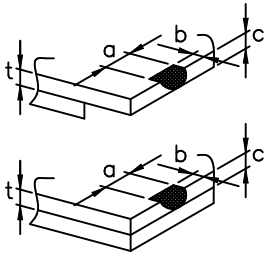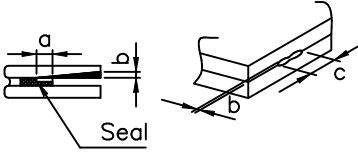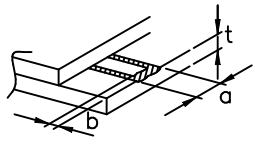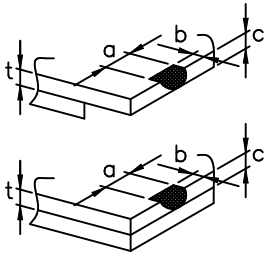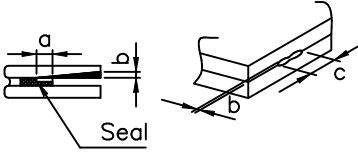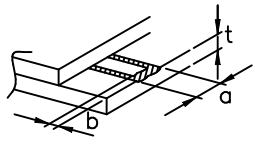
<p>4. Air bubbles polarizing plates, and reflection plates</p>	<table border="1" data-bbox="710 376 1225 667"> <tr> <th data-bbox="710 376 970 521">Average Diameter (mm): D</th> <th data-bbox="970 376 1225 521">Number of pieces permitted</th> <th data-bbox="1225 376 1474 667" rowspan="2">Average diameter = (Long diameter + Short diameter)/2</th> </tr> <tr> <td data-bbox="710 521 970 667">D ≤ 0.3 0.3 < D</td> <td data-bbox="970 521 1225 667">Ignore 0</td> </tr> </table> <p data-bbox="710 683 1474 779">Note that when there are 4 pieces or more, they are not to be concentrated.</p>		Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	D ≤ 0.3 0.3 < D	Ignore 0					
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2										
D ≤ 0.3 0.3 < D	Ignore 0											
<p>5. Cracks</p>	<table border="1" data-bbox="662 779 1474 1964"> <tr> <td data-bbox="662 779 1066 1167"> <p>(1) General crack</p>  </td> <td data-bbox="1066 779 1474 1167"> <p>a ≤ 5 b ≤ 2 c ≤ t</p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="662 1167 1066 1361"> <p>(2) Corner crack</p>  </td> <td data-bbox="1066 1167 1474 1361"> <p>a ≤ 2.5 b ≤ 2.5 c ≤ t a + b ≤ 4</p> </td> </tr> <tr> <td data-bbox="662 1361 1066 1630"> <p>(3) Seal portion crack</p>  </td> <td data-bbox="1066 1361 1474 1630"> <p>a ≤ The seal width × 1/3 b ≤ t × 2/3 c ≤ 5</p> <p>The numbers of pieces are set at up to 5 pieces.</p> </td> </tr> <tr> <td data-bbox="662 1630 1066 1870"> <p>(4) ITO Pin crack</p>  </td> <td data-bbox="1066 1630 1474 1870"> <p>a ≤ 5 b ≤ 1/3 pin length c ≤ t</p> </td> </tr> <tr> <td data-bbox="662 1870 1066 1964"> <p>(5) Progressive cracks</p> </td> <td data-bbox="1066 1870 1474 1964"> <p>All taken to be unacceptable.</p> </td> </tr> </table>		<p>(1) General crack</p> 	<p>a ≤ 5 b ≤ 2 c ≤ t</p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p>	<p>(2) Corner crack</p> 	<p>a ≤ 2.5 b ≤ 2.5 c ≤ t a + b ≤ 4</p>	<p>(3) Seal portion crack</p> 	<p>a ≤ The seal width × 1/3 b ≤ t × 2/3 c ≤ 5</p> <p>The numbers of pieces are set at up to 5 pieces.</p>	<p>(4) ITO Pin crack</p> 	<p>a ≤ 5 b ≤ 1/3 pin length c ≤ t</p>	<p>(5) Progressive cracks</p>	<p>All taken to be unacceptable.</p>
<p>(1) General crack</p> 	<p>a ≤ 5 b ≤ 2 c ≤ t</p> <p>Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.</p>											
<p>(2) Corner crack</p> 	<p>a ≤ 2.5 b ≤ 2.5 c ≤ t a + b ≤ 4</p>											
<p>(3) Seal portion crack</p> 	<p>a ≤ The seal width × 1/3 b ≤ t × 2/3 c ≤ 5</p> <p>The numbers of pieces are set at up to 5 pieces.</p>											
<p>(4) ITO Pin crack</p> 	<p>a ≤ 5 b ≤ 1/3 pin length c ≤ t</p>											
<p>(5) Progressive cracks</p>	<p>All taken to be unacceptable.</p>											

6.	Outer dimensions	Should be with in the tolerance.
7.	Newton ring(touch panel)	Orbicular of interference fringes is not allowed in the optimum contrast within the active area under viewing angle.
8.	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.

5-3 Dot Appearance Defect

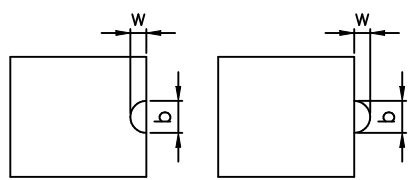NO.	Item	Criteria
1.	Pinhole	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.</p>
2.	Missing	 <p>Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.</p>
3.	Thick and thin display	 <p>Taken to be within $\pm 1.5\%$ of display character width(a) and height(b).</p>

NOTE:

- SAFETY

- 1.If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 2.If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

- HANDLING



- 1.Avoid static electricity which can damage the CMOS LSI.
- 2.Do not remove the panel or frame from the module.
- 3.The polarizing plate of the display is very fragile. So, please handle it very carefully.
- 4.Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.Do not use ketonics solvent & Aromatic solvent, use a soft cloth soaked with a cleaning naphtha solvent.

- STORAGE

- 1.Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 2.Do not place the module near organics solvents or corrosive gases.
- 3.Do not crush, shake, or jolt the module.

- TERMS OF WARRANT

- 1.Acceptance inspection period
The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- 2.Applicable warrant period
The period is within twelve months since the date of shipping out under normal using and storage conditions.

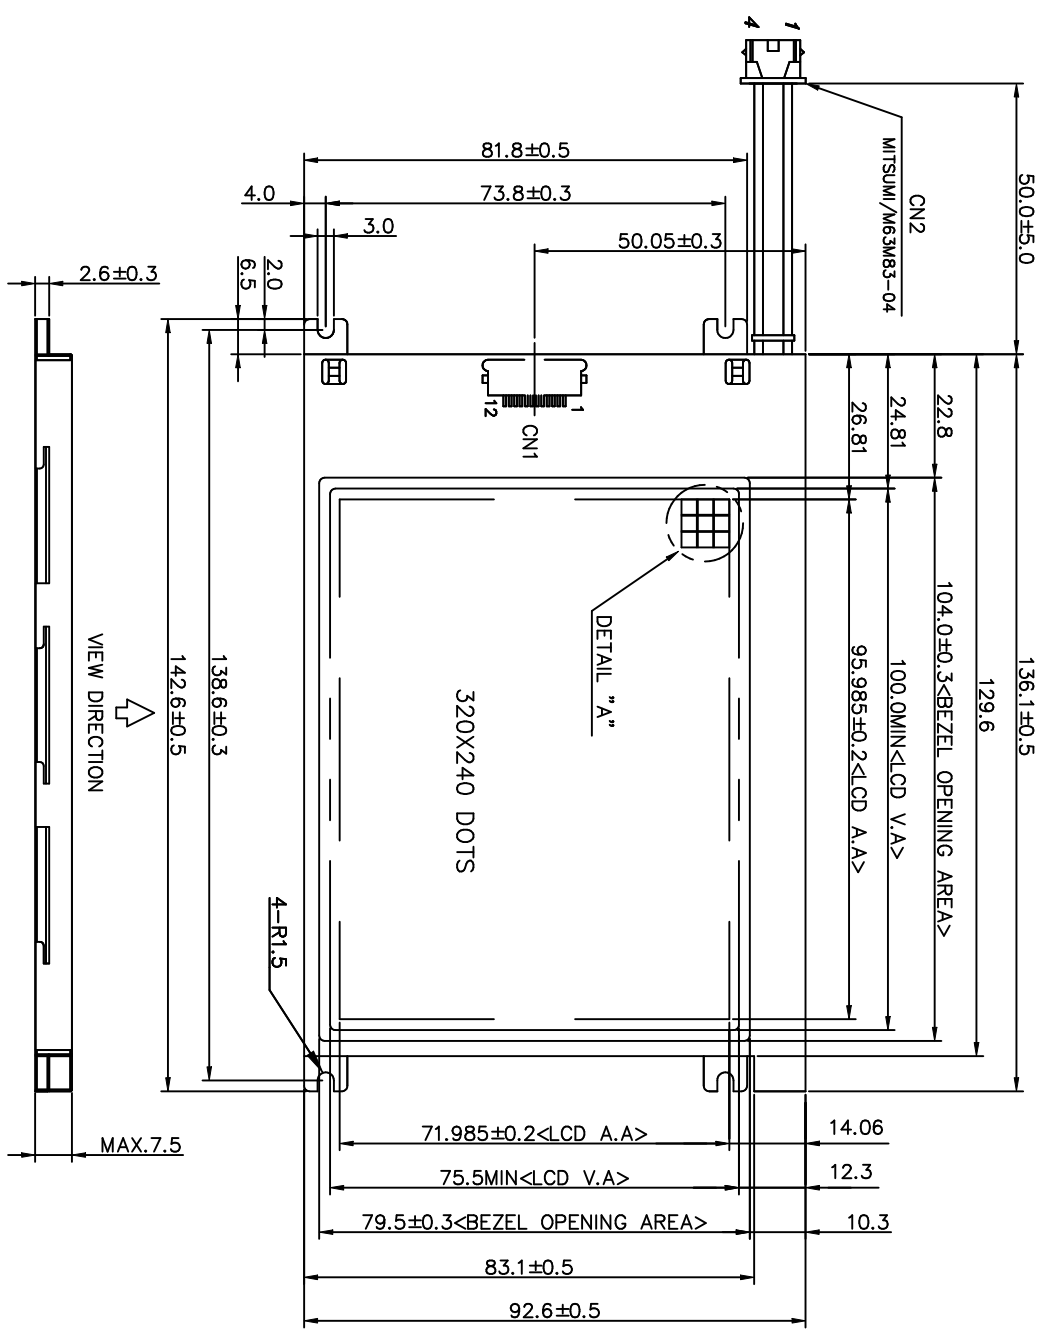

- NOTES :
- 1.RESOLUTION : 320 X 240 DOTS
 - 2.BACKLIGHT : CCFT (WHITE)
 - 3.FRAME : SUS 430

GENERAL TOLERANCE LIST

DIMENSION	TOLERANCE
L ≤ 6	±0.25 (mm)
6 < L ≤ 18	±0.3 (mm)
18 < L ≤ 50	±0.4 (mm)
50 < L ≤ 125	±0.5 (mm)
125 < L	±0.6 (mm)
ANGLE	±1° (DEG)

CN1:ELCO/6224-12P-S-A OR EQUIVALENT

Pin NO.	SYMBOL	LEVEL	FUNCTION
1	FRAME	H	FIRST LINE MARKER
2	LOAD	H-L	DATA LATCH
3	CP	H-L	DATA SHIFT
4	VDD	-	POWER SUPPLY FOR LOGIC
5	VSS	-	GND
6	VEE	-	POWER SUPPLY FOR LC
7	DO		
8	D1		
9	D2	H/L	DISPLAY DATA
10	D3		
11	DISPOFF	H/L	H:ON/L:OFF
12	NC	-	-

CN2(CCFT CONNECTOR):MITSUMI/M63M83-04 OR EQUIVALENT

Pin NO.	SYMBOL	FUNCTION
1	GND	GROUND LINE(INVERTER)
2	NC	NO CONNECTION
3	NC	NO CONNECTION
4	HV	HIGH VOLTAGE LINE (INVERTER)

REV. NO.	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE
△					
△					
△					
△					

南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

製品圖

LITBE9S372JCKS

APPROVE	DATE	THIRD ANGLE P.
CHECK		
DESIGN	95.08.08	SCALE UNIT
DRAWN	95.08.08	1/1 mm



DWG NO. M372FD0A

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

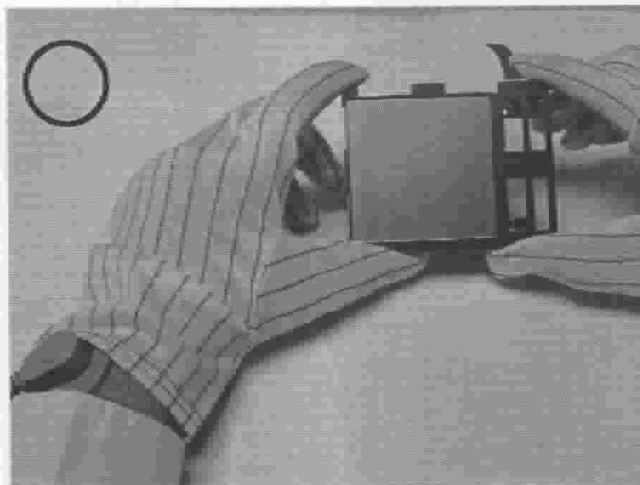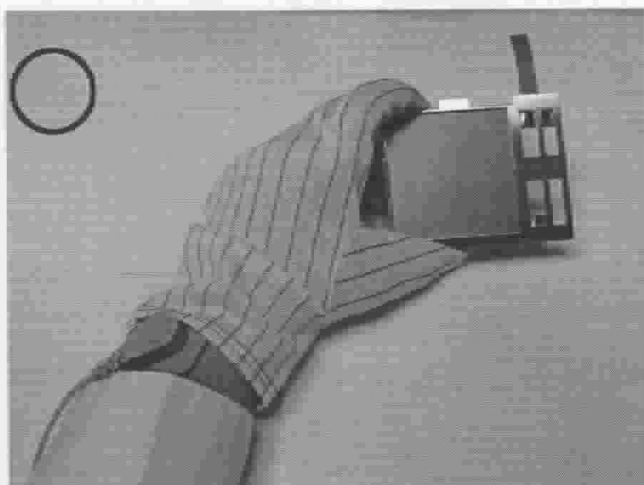


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

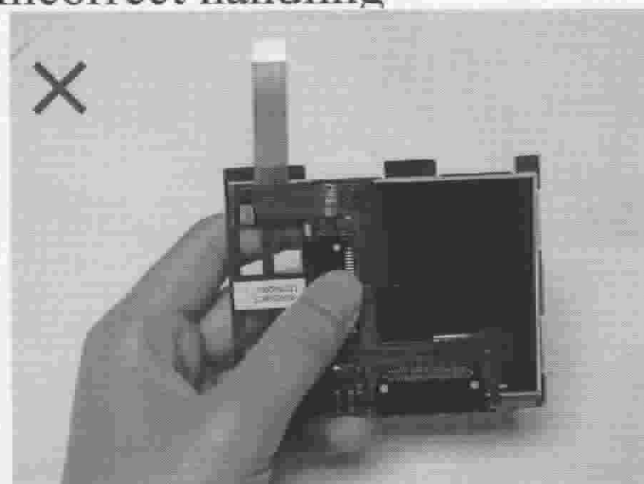


Please don't touch IC directly.

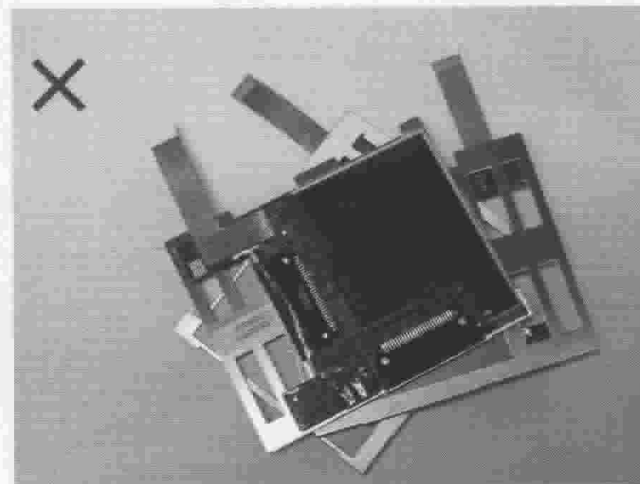

Please don't put one on another LCM.

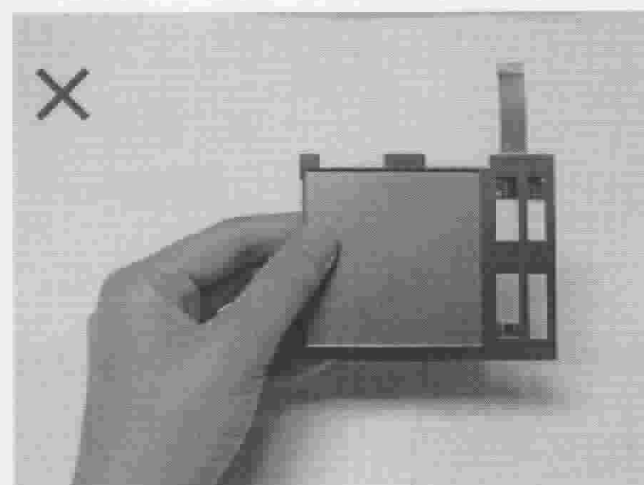

Please don't hold the surface of LCM.

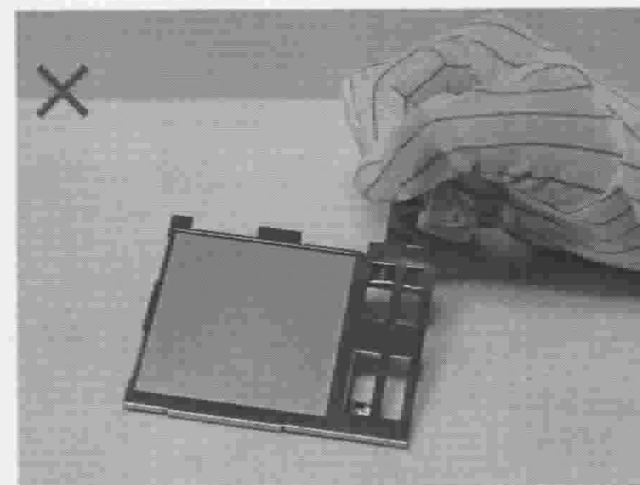



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

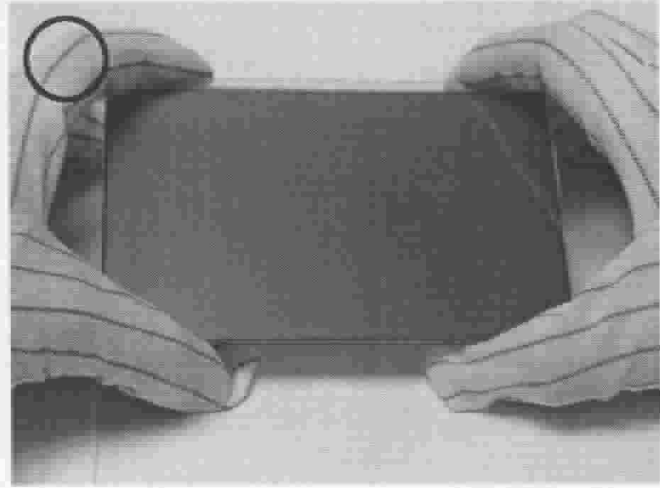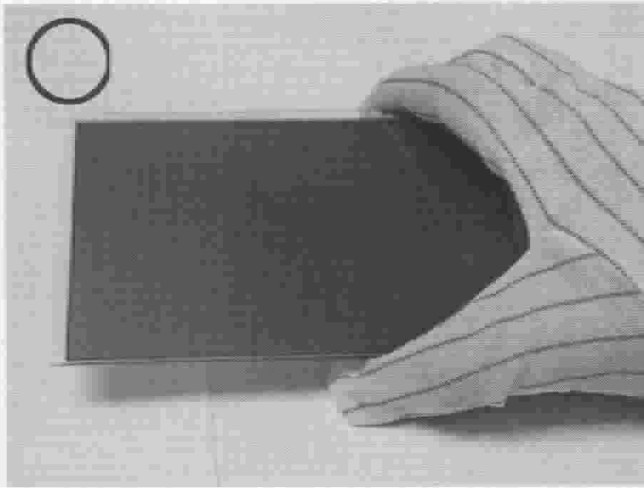


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

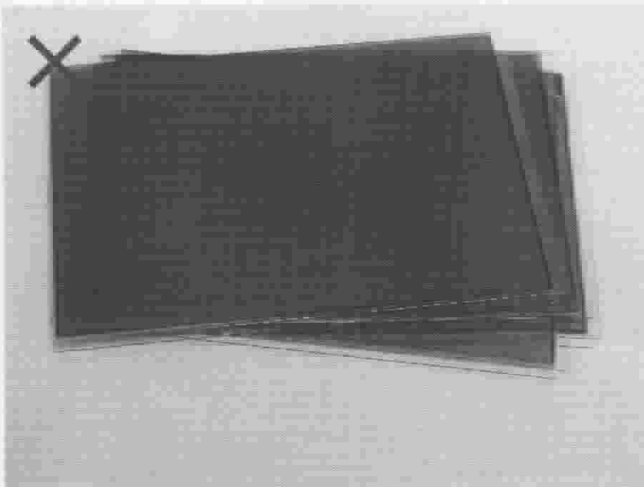


Please don't put one on another LCD.

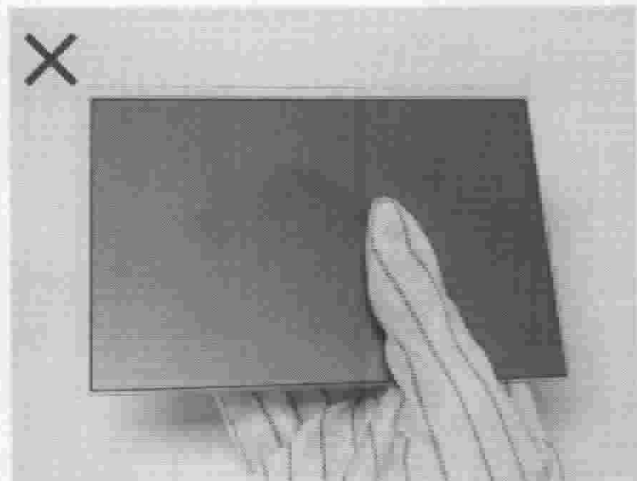

Please don't hold the surface of LCD.

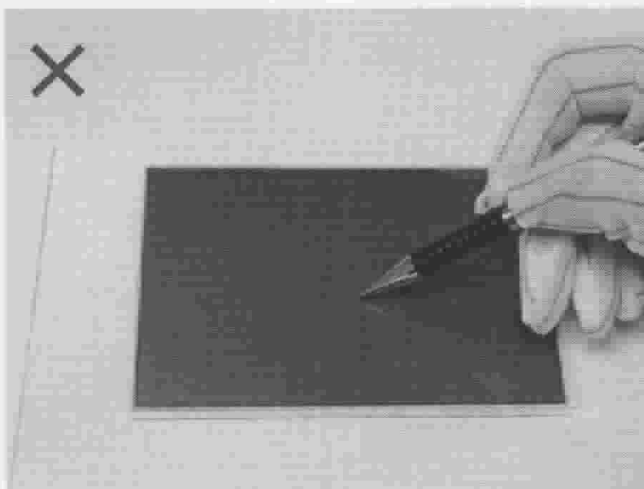

Please don't operate with sharp stick such as sharp pencil.

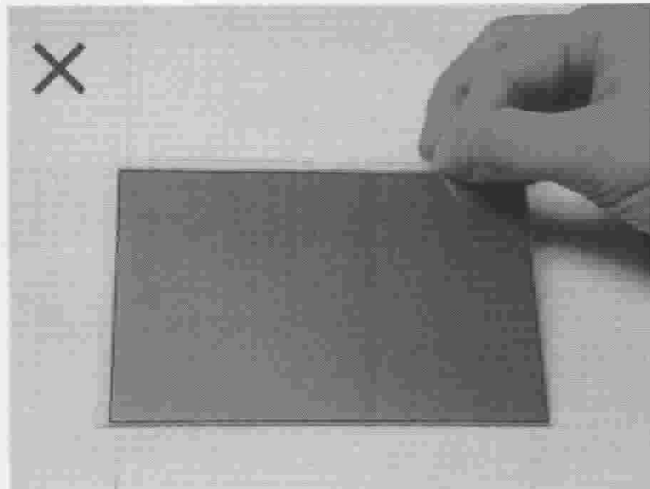

Please don't touch ITO glass without anti-static gloves.

