



# **LED Display**

## **Product Data Sheet**

### **LTC-36C5S**

Spec No.: DS30-2013-0061

Effective Date: 10/03/2015

Revision: C

**LITE-ON DCC**

**RELEASE**

**BNS-OD-FC001/A4**

**LED DISPLAY  
LTC-36C5S**

**LED DISPLAY**

LTC-36C5S

<u>Rev</u>	<u>Description</u>	<u>By</u>	<u>Date</u>
01	Preliminary Spec.	Reo Lin	03/15/2013
<b>Above data for PD and Customer tracking only</b>			
-	NPPR Received and Upload on System	Reo Lin	07/06/2013
A	Revised error in Page 4 and 5: Pin 6 should be no connection not no pin	Reo Lin	08/08/2013
B	Add Protective tape in Finished good in Page 3	Reo Lin	07/03/2015
C	Change Pin 6 to no pin from customer request	Reo Lin	08/27/2015

## LED DISPLAY LTC-36C5S

### 1. Description

The LTC-36C5S is a 0.39 inch (9.2 mm) digit height triple digit seven-segment display. This device utilizes AlGaAs red LED chips, which are made from AlGaAs on a non-transparent GaAs substrate. The display has black face and white segments.

#### 1.1 Features


- 0.36 inch (9.2 mm) DIGIT HEIGHT
- CONTINUOUS UNIFORM SEGMENTS
- LOW POWER REQUIREMENT
- EXCELLENT CHARACTERS APPEARANCE
- HIGH BRIGHTNESS & HIGH CONTRAST
- WIDE VIEWING ANGLE
- SOLID STATE RELIABILITY
- CATEGORIZED FOR LUMINOUS INTENSITY.
- LEAD-FREE PACKAGE (ACCORDING TO ROHS)

#### 1.2 Device

Part No	Description
AlGaAs RED	Multiplex Common Anode Rt. Hand Decimal
LTC-36C5S	

## LED DISPLAY LTC-36C5S

### 2. Package Dimensions

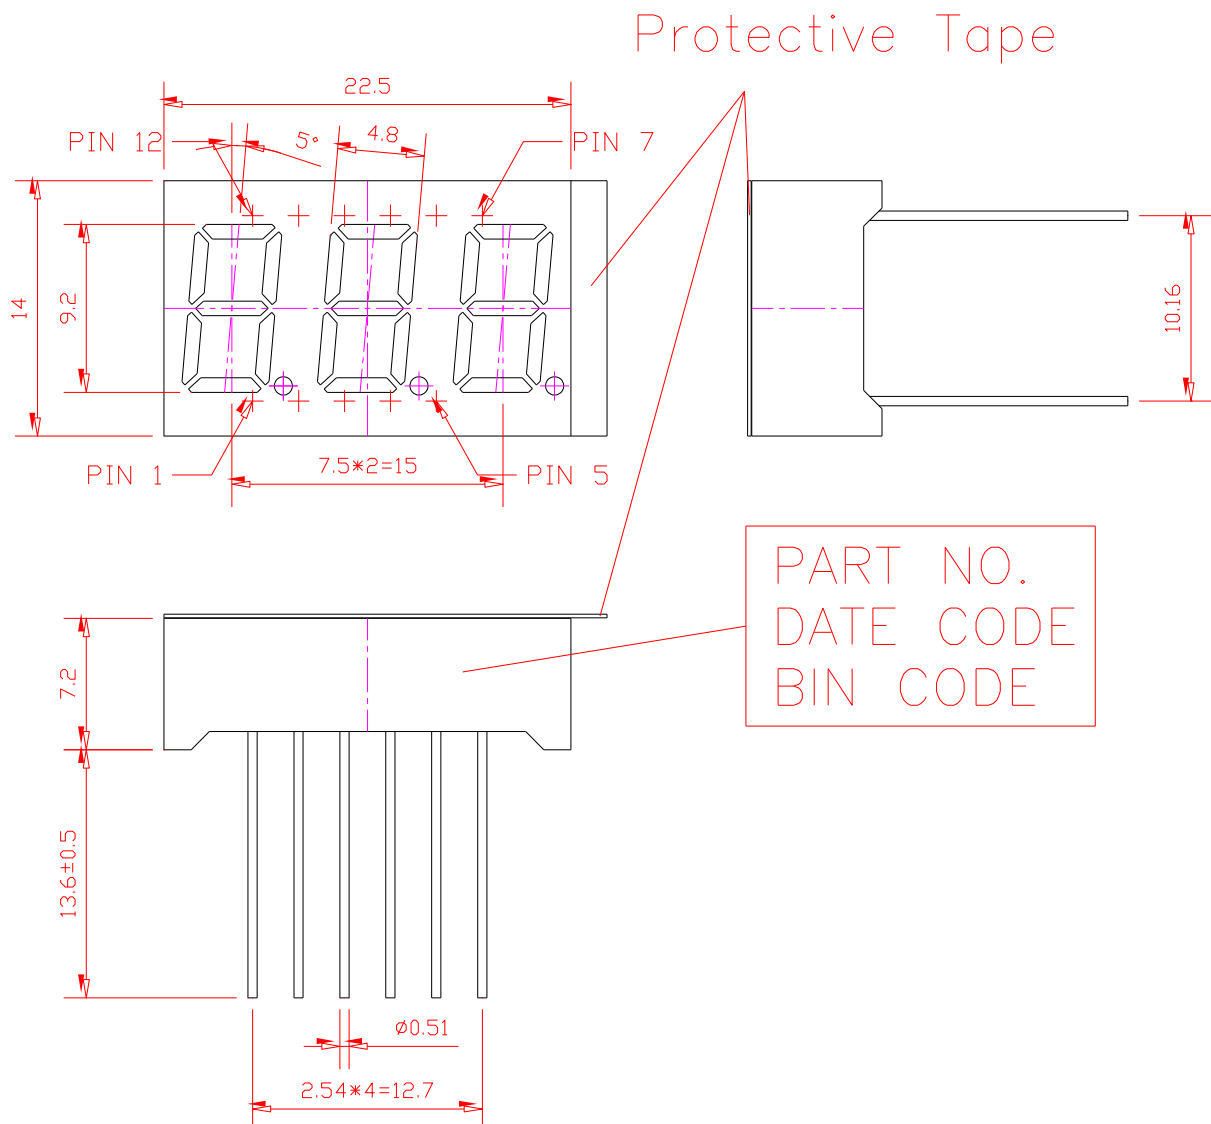


#### Notes :

1. All dimensions are in millimeters. Tolerances are  $\pm 0.25$  mm (0.01") unless otherwise noted
2. Pin tip's shift tolerance is  $\pm 0.4$  mm
3. Foreign material on segment  $\leq 10$ mil
4. Ink contamination (surface)  $\leq 20$ mil
5. Bubble in segment  $\leq 10$ mil
6. Bending  $\leq 1\%$  of reflector length
7. Recommend the best PCB hole: Diameter 1.0 mm

## LED DISPLAY LTC-36C5S

### 3. Internal Circuit Diagram

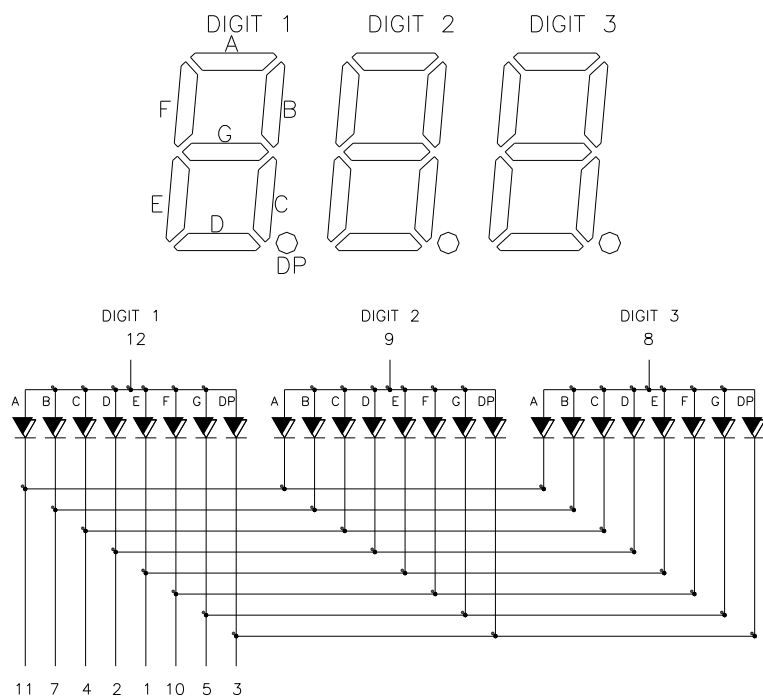

## LED DISPLAY LTC-36C5S

### 4. Pin Connection

No	Connection
1	CATHODE E
2	CATHODE D
3	CATHODE DP
4	CATHODE C
5	CATHODE G
6	NO PIN
7	CATHODE B
8	COMMON ANODE DIGIT 3
9	COMMON ANODE DIGIT 2
10	CATHODE F
11	CATHODE A
12	COMMON ANODE DIGIT 1

## LED DISPLAY LTC-36C5S

### 5. Rating and Characteristics

#### 5.1. Absolute Maximum Rating at Ta=25°C

Parameter	Maximum Rating	Unit
Power Dissipation Per Segment	75	mW
Peak Forward Current Per Segment ( 1/10 Duty Cycle, 0.1ms Pulse Width )	125	mA
Continuous Forward Current Per Segment	30	mA
Derating Linear From 25°C Per Segment	0.4	mA/°C
Operating Temperature Range	-35°C to +85°C	
Storage Temperature Range	-35°C to +85°C	
Solder Condition: 1/16 inch below seating plane for 3 seconds at 260°C or temperature of unit (during assembly) not over max. temperature rating above		

#### 5.2. Electrical / Optical Characteristics at Ta=25°C

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Test Condition
Average Luminous Intensity Per Segment	IV	1300	3300		μcd	IF=10mA
Peak Emission Wavelength	λp		660		nm	IF=20mA
Spectral Line Half-Width	Δλ		35		nm	IF=20mA
Dominant Wavelength	λd		638		nm	IF=20mA
Forward Voltage Per Chip	VF		1.8	2.6	V	IF=20mA
Reverse Current Per Segment <sup>(*)</sup>	IR			100	μA	VR=5V
Luminous Intensity Matching Ratio (Similar Light Area)	IV-m			2:1		IF=1mA

#### Notes :

- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission International De L'Eclairage) eye-response curve
- Reverse voltage is only for IR test. It cannot continue to operate at this situation
- Cross talk specification  $\leq 2.5\%$

## LED DISPLAY LTC-36C5S

### 5.3. Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

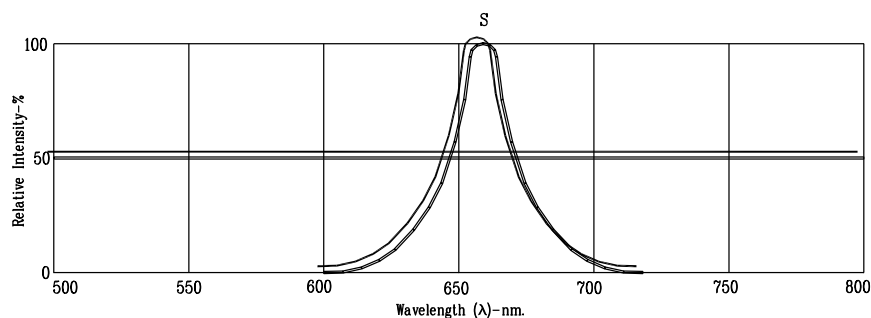


Fig1. RELATIVE INTENSITY VS. WAVELENGTH




Fig2. RELATIVE LUMINOUS EFFICIENCY  
(LUMINOUS INTENSITY PER UNIT  
CURRENT) VS. PEAK CURRENT  
(REFRESH RATE 1KHz)




Fig3. FORWARD CURRENT VS.  
FORWARD VOLTAGE




Fig4. RELATIVE LUMINOUS INTENSITY  
VS. FORWARD CURRENT




Fig5. MAX. ALLOWABLE DC CURRENT  
VS. AMBIENT TEMPERATURE.




Fig6. MAX. PEAK CURRENT VS.  
DUTY CYCLE %  
(REFRESH RATE 1KHz)

NOTE: S=AlGaAs RED