

NAN YA PLASTICS CORPORATION

SPECIFICATION OF
LCD MODULE
PRODUCT NO.: LTC79H202L65KS_

SPEC. NO.: LM202-65-△

CUSTOMER
APPROVED BY
DATE:

LCD DEPARTMENT
ELECTRONIC MATERIALS DIVISION
NAN YA PLASTICS CORPORATION
201, TUNG HWA N. ROAD, TAIPEI
TEL: 886-2-27122211 EXT. 5993~5995
FAX: 886-2-27178253
E-mail: lcdsales@npc.com.tw

EDITED ON : June 05, 2007


Q.C. DEPT.	DESIGN MANAGER	DESIGN CHECK	DESIGNER
			M. H. YUAN

[illegible]

1.MECHANICAL DATA

NO	ITEM	CONTENTS	UNIT
1	Product No.	LTC79H202L65KS_	—
2	Module Size	MAX.71.5(W) X 94.1(H) X MAX.7.9(D)	mm
3	Dot Size	0.225 (W) x 0.225 (H)	mm
4	Dot Pitch	0.24 (W) x 0.24 (H)	mm
5	Number of Dots	240 (W) x 320 (H)	Dot
6	Duty	1/240	—
7	LCD Display Mode	FSTN, Normally White	—
8	Rear Polarizer	Transflective Type	—
9	Viewing Direction	6	O'clock
10	Backlight	LED	—
11	Controller	Excluded	—
12	DC/DC Converter	Excluded	—
13	Weight	57 (approx.)	g
14	Soldering	Lead Free	—

Note :

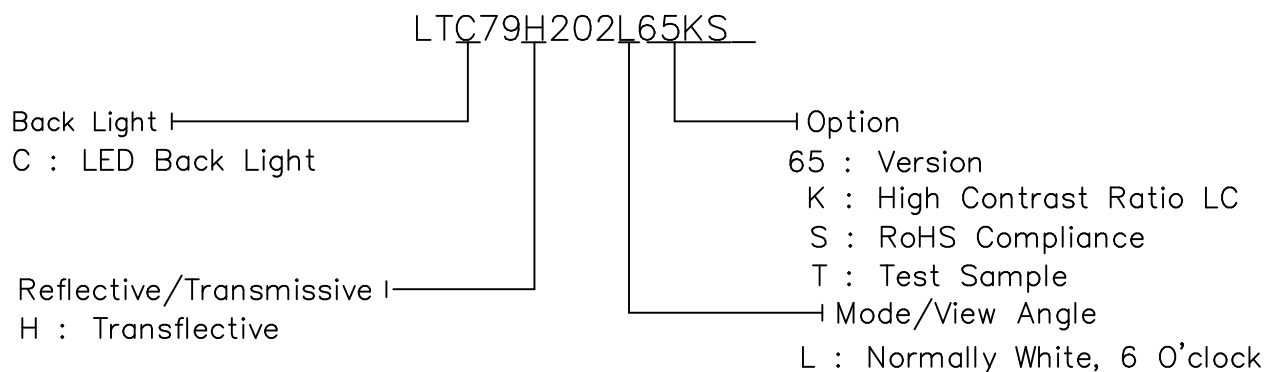

RoHS Compliance.

Nan Ya guarantees that this project doesn't include any materials (6 materials) or includes less than specified quantities which are regulated by RoHS Compliance.

NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION			SPEC. NO. : LM202-65 DATE : June 05. 2007 SHEET NO. : 2 /22	
2.ABSOLUTE MAXIMUM RATINGS						
(1) ELECTRICAL ABSOLUTE RATINGS				Vss=0V Standard		
ITEM	SYMBOL	MIN	MAX	UNIT	COMMENT	
Power Supply for Logic	VDD-VSS	-0.3	7.0	V		
Power Supply For LC Drive	VLCD-VSS	-0.3	30	V		
Input Voltage	VI	-0.3	VDD+0.3	V		
Static Electricity	-	-	-	-	Note 1	
Note 1 : LCM should be grounded during handling LCM.						
(2) ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS						
ITEM	WIDE TEMP.					
	OPERATING			STORAGE		
	MIN.	MAX.		MIN.	MAX.	
Ambient Temperature	-20	70		-40	80	
Humidity (Without Condensation)	Note 2,4			Note 3,4		
Note 2 Ta ≤ 70℃ : 75%RH max						
Note 3 Please refer to item of reliability test						
Note 4 Background color will change slightly depending on ambient temperature. That phenomenon is reversible.						
REV/DATE	R0/ 06.05.'07					BY M.H.YUAN

3. ELECTRICAL CHARACTERISTICS

3-1.ELECTRICAL CHARACTERISTICS OF LCM

ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT
Power Supply For Logic		VDD	25°C		3.0	3.3	3.6	V
Input Voltage		VIH	H level		0.8VDD	—	VDD	V
		VIO	L level		0	—	0.2VDD	V
Recommended LC Driving Voltage (Temperature Compensation Included)		VLCD-VSS (Vop)	1/240 Duty	$\left. \begin{array}{l} -20^{\circ}\text{C} \\ 70^{\circ}\text{C} \end{array} \right\}$	25.5	26.0	26.5	v
Power Supply Current (T _a =25°C)		IDD	VDD=3.3V VSS=0V VLCD-VSS=26.0V FLM=70Hz PATTERN: □ ■ □ ■ □ ■ ■ □ ■ □ ■ □		—	1.5	2.0	mA
		IEE			—	10	15	
LCM	Surface Luminance (T _a =25°C)	VDD= 3.3V VSS= 0V VLCD-VSS=26.0V ILED=55mA	(Dots All Off)		15	20	—	cd/m ²
			(Dots All On)		—	5	—	


3-2.ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Used LED Rating (Constant Current Driving)

Temp.=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Peak forward current	I_P	—	—	100	mA	—
Maximum reverse voltage	V_R	—	—	5	V	—
Applied forward current	I_F	—	55	—	mA	—
Applied forward voltage	V_{AK}	—	3.5	4	V	—
LED power consumption	P_F	—	—	0.48	W	—
LED life time	LL	—	10000	—	hrs	at $I_F = 55mA$ (*1)

(*1) LED life time is defined as follows : The final brightness is at 50% of original brightness.

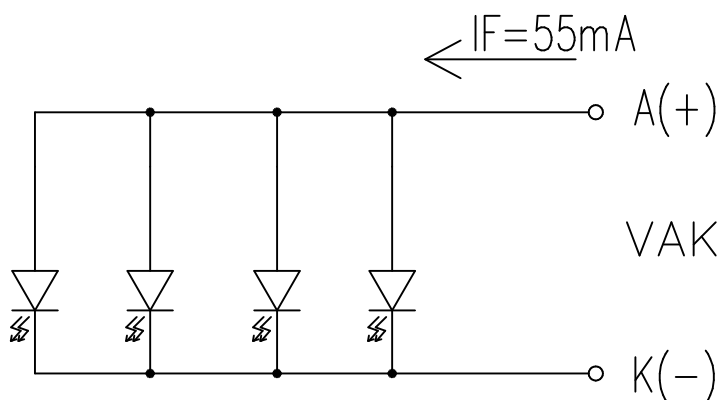

4.OPTICAL CHARACTERISTICS

AT Vop

ITEM MODE		Cr(Contrast Ratio)										θ (Viewing Angle)		ϕ (Viewing Angle)	
		-20℃		0℃		25℃		50℃		70℃		25℃		25℃	
		MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.	MIN.	TYP.
H	L	2.0	3.0	3.5	5.0	4.0	6.0	2.0	3.0	1.5	2.0	—	(F) 40 (R) 30	—	(L) 35 (R) 35
Note		NOTE 6										NOTE 5			

NOTE :

H : Transflective


L : Normally White, 6 O'clock

AT $\phi=0^\circ$ $\theta=0^\circ$


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Response Time (rise)	Tr	-20℃	2400	3000	4500	ms	NOTE 2
		0℃	900	1100	1650		
		25℃	200	250	380		
		50℃	120	150	230		
		70℃	80	100	150		
Response Time (fall)	Tf	-20℃	2200	2800	4200	ms	NOTE 2
		0℃	400	500	750		
		25℃	160	200	300		
		50℃	80	100	150		
		70℃	65	80	120		

(NOTE 1)

Definition of Operation Voltage(Vop)

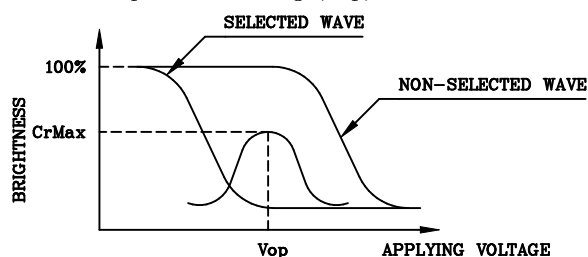

(positive type)

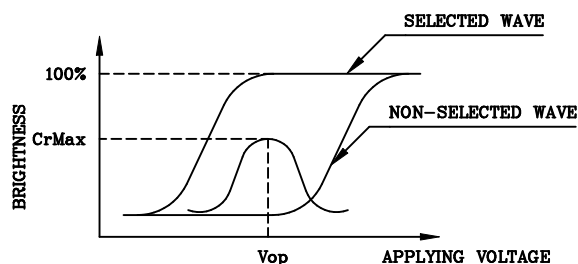

(negative type)

*Conditions


Viewing Angle : 0

Frame Frequency : 70Hz


Applying Waveform : 1/N duty 1/a bias

(NOTE 2)

Definition of Response Time(Tr,Tf)

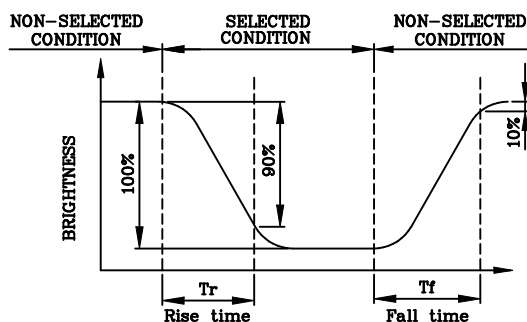

(positive type)

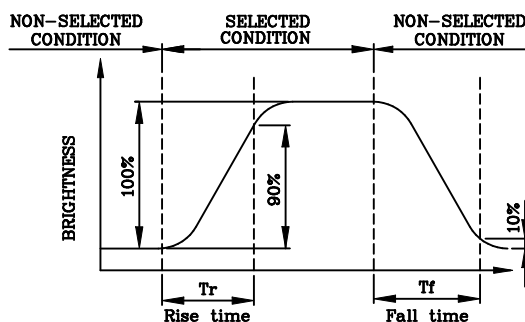

(negative type)

*Conditions

Operating Voltage : Vop


Viewing Angle (θ,φ) : (0,0)

Frame Frequency : 70Hz

Applying Waveform : 1/N duty 1/a bias


(NOTE 3)

Description of Measuring Equipment and Driving Waveforms

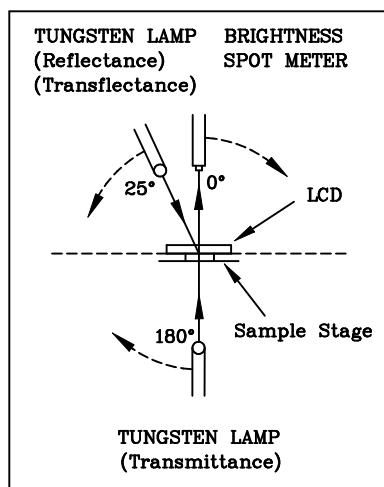


CONST.
TEMP.
CHAMBER

Multiplex Driving (1/N duty 1/a bias)

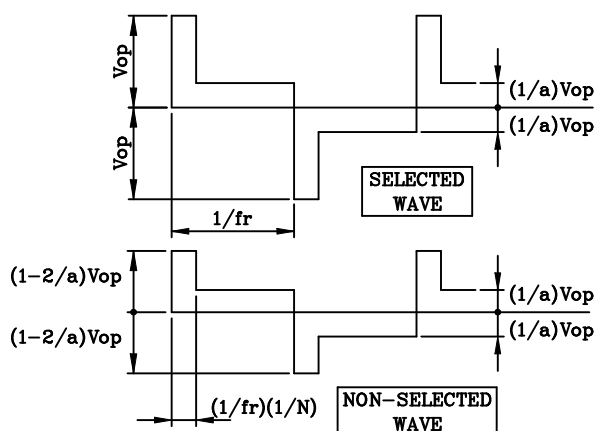



(NOTE 4)

Definition of Viewing Direction

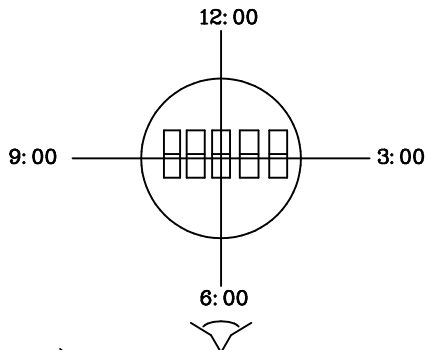

(NOTE 5)

Definition of Viewing Angle

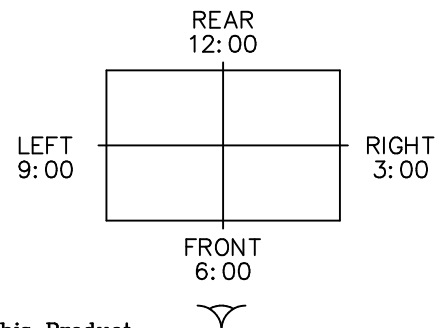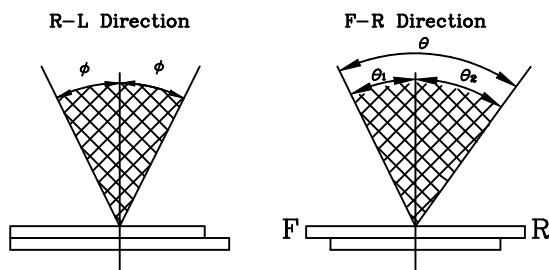

*For This Product
The Viewing Direction Is 6 O'clock
So $\theta_1 > \theta_2$


$$\theta = \theta_1 + \theta_2$$

*Conditions


Operating Voltage : Vop
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias
Contrast Ratio : larger than 2

(NOTE 6)

Definition of Contrast Ratio (Cr)

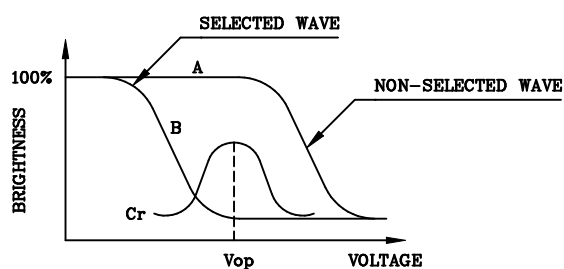

(positive type)

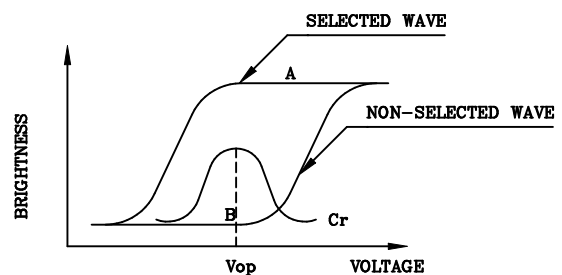


(negative type)

$$\text{Contrast Ratio : } Cr = A/B$$

*Conditions

Viewing Angle : 0
Frame Frequency : 70Hz
Applying Waveform : 1/N duty 1/a bias

5. BLOCK DIAGRAM

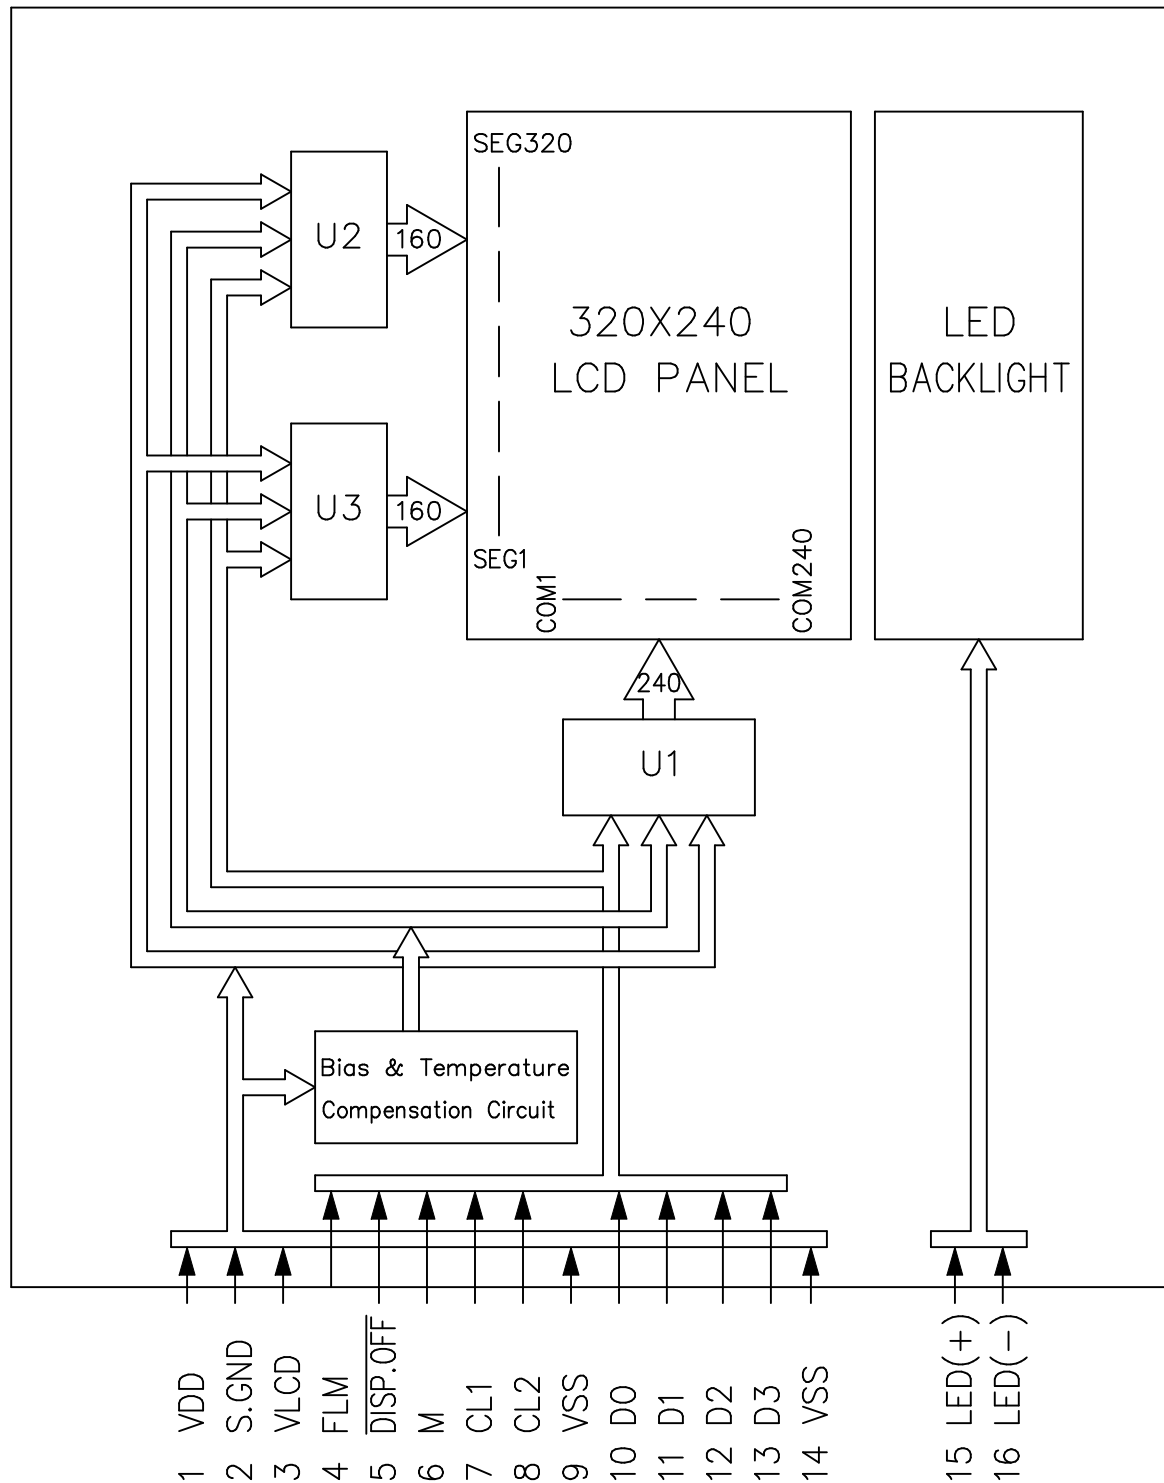


6.INTERNAL PIN CONNECTION

FFC ,20 pins,pitch 1.0mm

Mating Connector : ELCO 6227 020 100 800+

PIN NO	SYMBOL	LEVEL	FUNCTION
1	VDD	H	POWER SUPPLY FOR LOGIC
2	S.GND	—	SHIELD GROUND
3	VLCD	H	POWER SUPPLY FOR LCD
4	FLM	H	FIRST LINE MARKER
5	DISP.OFF	H/L	H: ON/L: OFF
6	M	H/L	SWITCH SIGNAL TO CONVERT LIQUID CRYSTAL DRIVE WAVEFORM INTO AC
7	CL1	H→L	DATA LATCH
8	CL2	H→L	SHIFT CLOCK
9	VSS	—	LOGIC GROUND
10	DO	H/L	DISPLAY DATA
11	D1		
12	D2		
13	D3		
14	VSS	—	LOGIC GROUND
15	LED(+)	—	POWER SUPPLY FOR LED
16	LED(—)	—	POWER SUPPLY FOR LED
17	NC	—	NC
18			
19			
20			

7. POWER SUPPLY

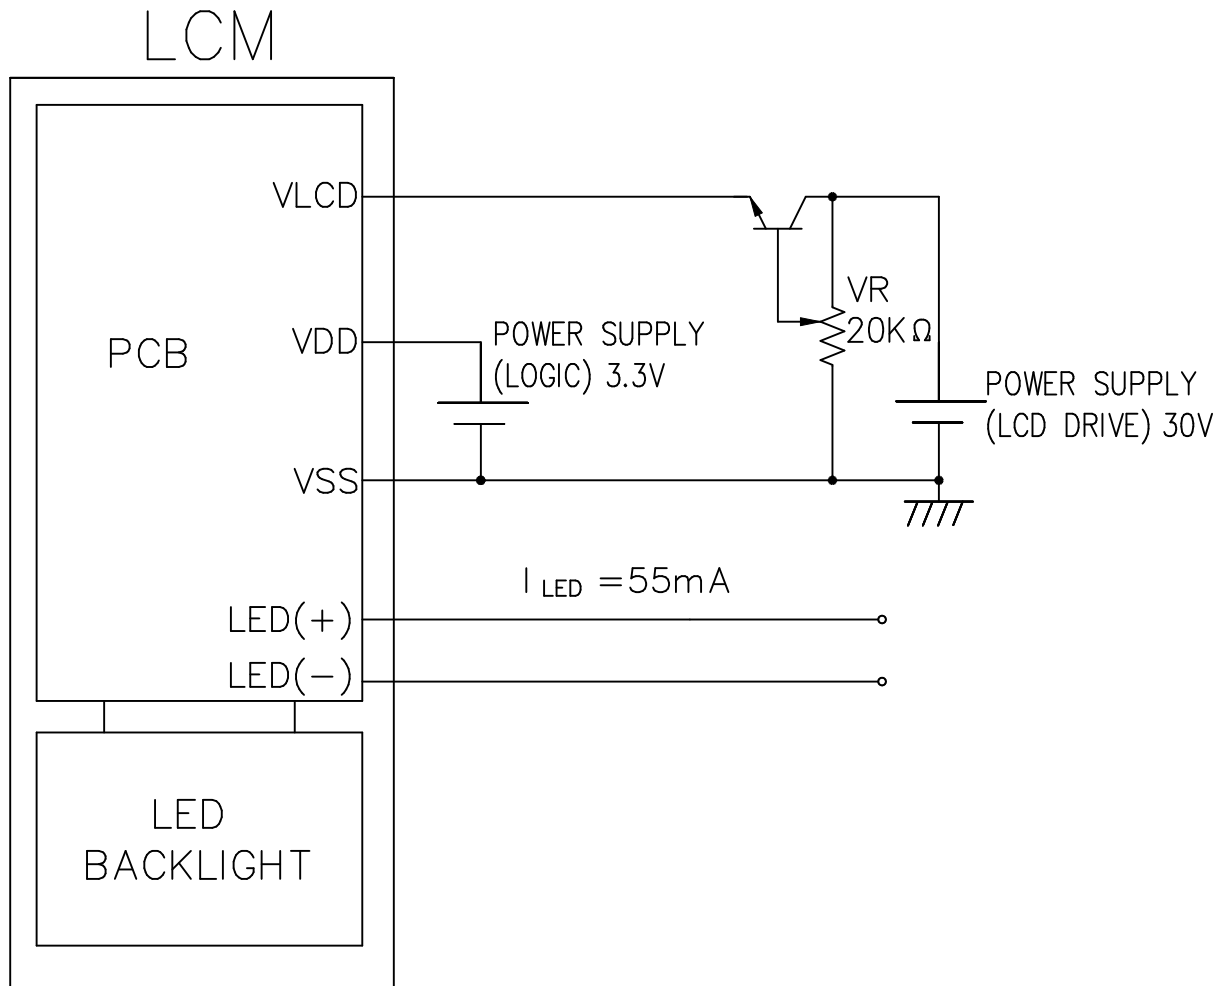

8.TIMING CHARACTERISTICS

8-1. INTERFACE TIMING

@ VDD=3.0V±5%, Ta=-20~85℃

Item	Symbol	Test condition	Min.	Typ.	Max.	Unit
CL2 Cycle Time	tC	Fig.a	125	—	—	ns
CL2 Pulse Width	tSWH,tSWL	Fig.a	51	—	—	ns
CL2 Rise/Fall Time	tCR,tCF	Fig.a	—	—	50	ns
Data Set Up Time	tDSU	Fig.a	30	—	—	ns
Data Hold Time	tDHD	Fig.a	40	—	—	ns
CL1 Cycle Time	tL	Fig.b	250	—	—	ns
CL1 "H" Pulse Width	tLWH	Fig.a , Fig.b	51	—	—	ns
CL1 Rise/Fall Time	tLR,tLF	Fig.b	—	—	50	ns
CL2 To CL1 Delay Time	tCL	Fig.a	51	—	—	ns
CL1 To CL2 Delay Time	tLC	Fig.a	51	—	—	ns
FLM TO CL1 SETUP TIME	tFLS	Fig.b	30	—	—	ns
FLM TO CL1 HOLD TIME	tFLH	Fig.b	50	—	—	ns

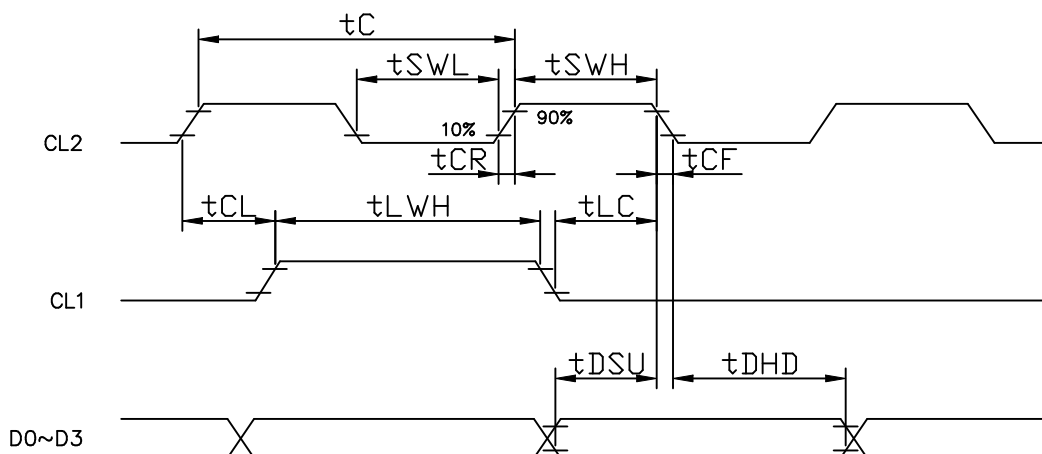


Fig . a Interface timing (SEGMENT)



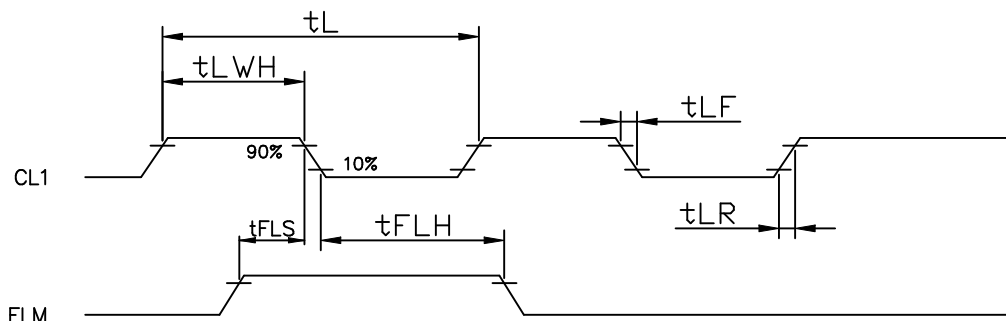


Fig . b Interface timing (COMMON)

8-2. TIMING CHART OF INPUT SIGNAL

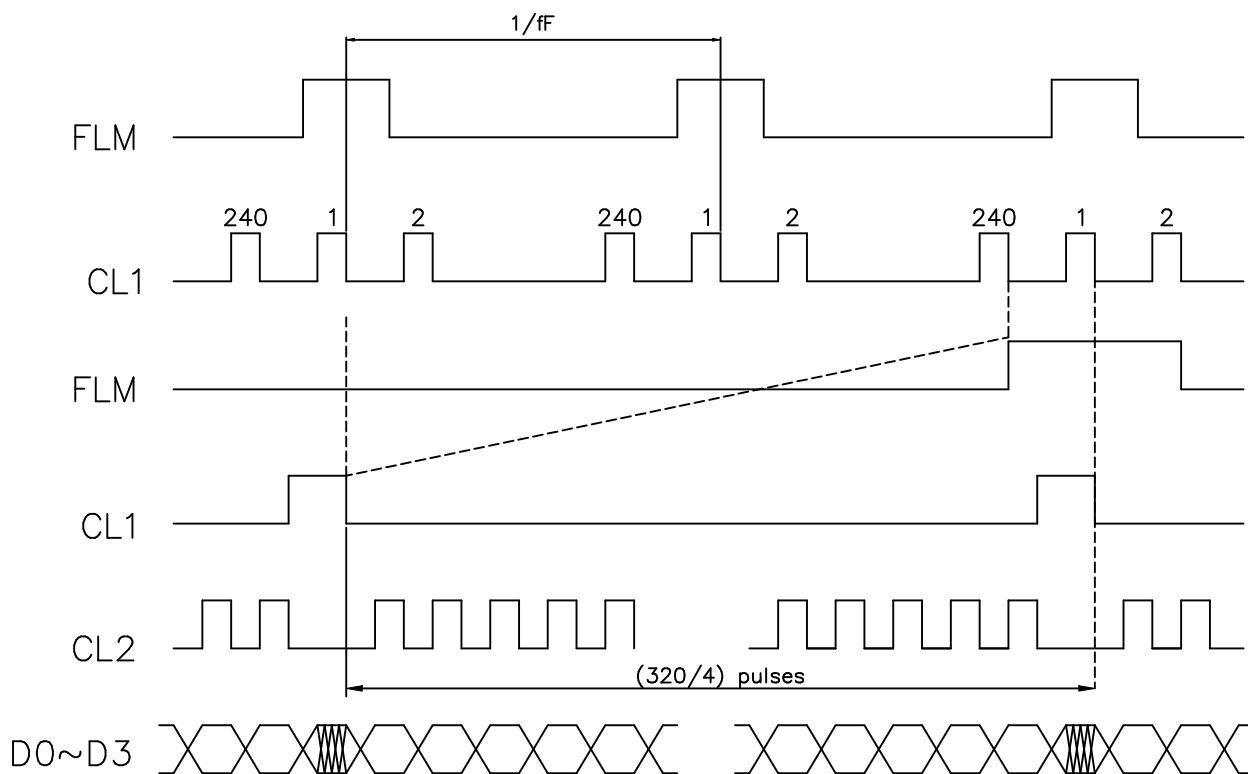


8-3. POWER ON/OFF TIMING

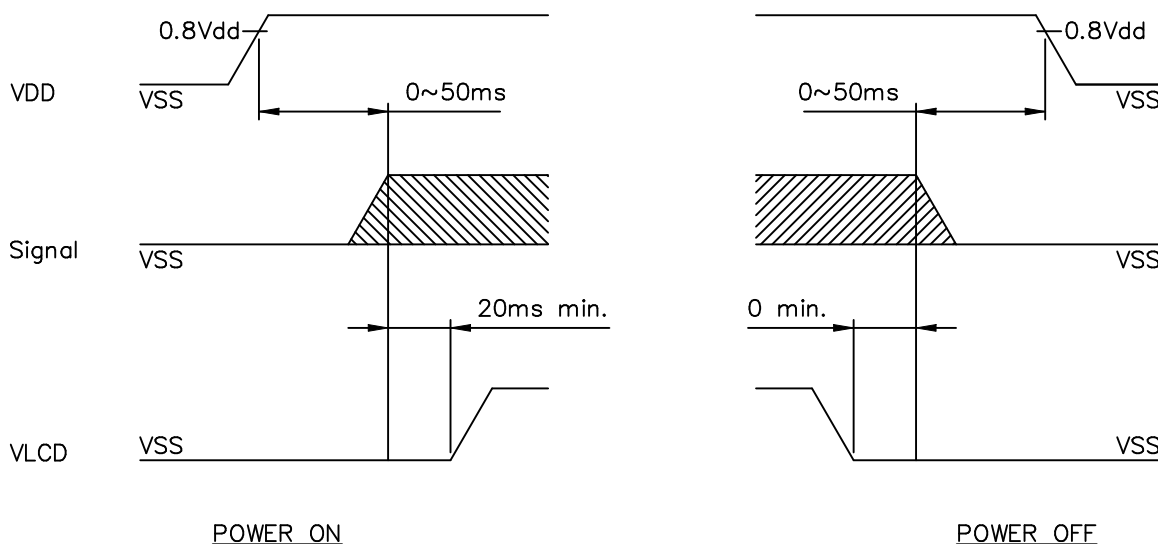

The missing pixels may occur when the LCM is driven beyond above power interface sequence.

9.RELIABILITY TEST

WIDE TEMPERATURE RELIABILITY TEST

NO	ITEM	CONDITION			STANDARD	NOTE
1	High Temp. Storage	80°C	120Hrs		Appearance without defect	
2	Low Temp. Storage	-40°C	120Hrs		Appearance without defect	
3	High Temp. & High Humi. Storage	60°C 90%RH	120Hrs		Appearance without defect	
4	High Temp. Operating Display	70°C	120Hrs		Appearance without defect	
5	Low Temp. Operating Display	-20°C	120Hrs		Appearance without defect	
6	Thermal Shock	-20°C,30min → 70°C,30min 			Appearance without defect	10 cycles

Inspection Provision

1.Purpose


The NAN YA inspection provision provides outgoing inspection provision and its expected quality level based on our outgoing inspection of NAN YA LCD produces.

2.Applicable Scope

The NAN YA inspection provision is applicable to the arrangement in regard to outgoing inspection and quality assurance after outgoing.

3.Technical Terms

3-1 NAN YA Technical Terms

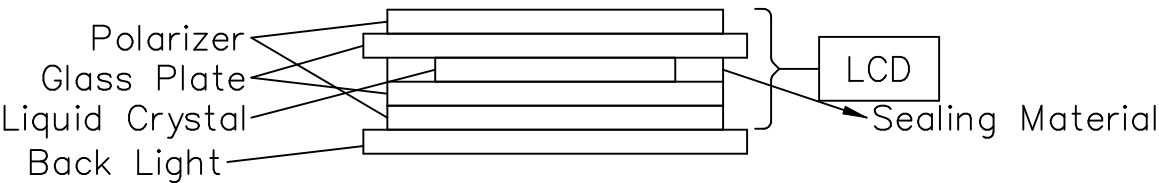

4.Outgoing Inspection

4-1 Inspection Method

MIL-STD-105E Level II Regular inspection

4-2 Inspection Standard

	Item		AQL(%)	Remarks
Major Defect	Dots	Opens Shorts Erroneous operation	0.4	faults which substantially lower the practicality and the initial purpose difficult to achieve.
	Solder appearance	Shorts Loose		
	Cracks	Display surface cracks		


NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT	SPECIFICATION	SPEC. NO. : LM202-65 DATE : June 05. 2007 SHEET NO. : 15 /22
---	---------------	--

	Dimensions	External from Dimensions	0.4	
Minor Defect	Inside the glass	Black spots	0.65	faults which appear to pose almost no obstacle to the practicality, effective use, and operation.
	Polarizing plate	Scratches, foreign Matter, air bubbles, and peeling		
	Dots	Pinhole, deformation		
	Color tone	Color unevenness		
	Solder appearance	Cold solder Solder projections		

4-3 Inspection Provisions

*Viewing Area Definition

Fig. 1

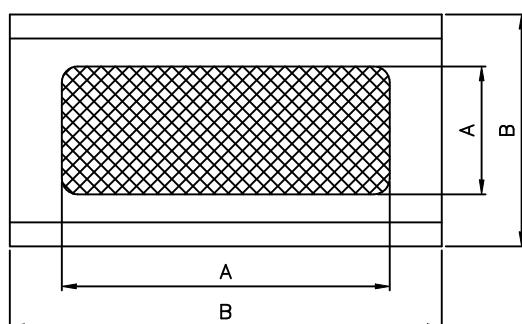

A : Zone Viewing Area
B : Zone Glass Plate Out Line

*Inspection place to be 500 to 1000 lux illuminance uniformly without glaring.
The distance between luminous source(daylight fluorescent lamp and cool white fluorescent lamp) and a sample to be 30cm to 50cm.

REV/DATE	R0/ 06.05.'07					BY M.H.YUAN
----------	------------------	--	--	--	--	----------------





NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION			SPEC. NO. : LM202-65 DATE : June 05. 2007 SHEET NO. : 16 /22																																		
*Test and measurement are performed under the following conditions, unless otherwise specified. <table> <tr> <td>Temperature</td> <td>20± 15℃</td> </tr> <tr> <td>Humidity</td> <td>65± 20%R.H..</td> </tr> <tr> <td>Pressure</td> <td>860~1060hPa(mmmbar)</td> </tr> </table> In case of doubtful judgment, it is performed under the following conditions. <table> <tr> <td>Temperature</td> <td>20± 2℃</td> </tr> <tr> <td>Humidity</td> <td>65± 5%R.H..</td> </tr> <tr> <td>Pressure</td> <td>860~1060hPa(mmmbar)</td> </tr> </table> 5.Specification for quality check 5-1 Electrical characteristics <table border="1"> <thead> <tr> <th>NO.</th> <th>Item</th> <th>Criterion</th> </tr> </thead> <tbody> <tr> <td>1.</td> <td>Non operational</td> <td>Fail</td> </tr> <tr> <td>2.</td> <td>Miss operating</td> <td>Fail</td> </tr> <tr> <td>3.</td> <td>Missing dot</td> <td>Fail</td> </tr> <tr> <td>4.</td> <td>Contrast irregular</td> <td>Fail</td> </tr> <tr> <td>5.</td> <td>Response time</td> <td>Within Specified value</td> </tr> <tr> <td>6.</td> <td>LED backlight turn on/off</td> <td>Within Specified value</td> </tr> </tbody> </table>							Temperature	20± 15℃	Humidity	65± 20%R.H..	Pressure	860~1060hPa(mmmbar)	Temperature	20± 2℃	Humidity	65± 5%R.H..	Pressure	860~1060hPa(mmmbar)	NO.	Item	Criterion	1.	Non operational	Fail	2.	Miss operating	Fail	3.	Missing dot	Fail	4.	Contrast irregular	Fail	5.	Response time	Within Specified value	6.	LED backlight turn on/off	Within Specified value
Temperature	20± 15℃																																						
Humidity	65± 20%R.H..																																						
Pressure	860~1060hPa(mmmbar)																																						
Temperature	20± 2℃																																						
Humidity	65± 5%R.H..																																						
Pressure	860~1060hPa(mmmbar)																																						
NO.	Item	Criterion																																					
1.	Non operational	Fail																																					
2.	Miss operating	Fail																																					
3.	Missing dot	Fail																																					
4.	Contrast irregular	Fail																																					
5.	Response time	Within Specified value																																					
6.	LED backlight turn on/off	Within Specified value																																					
REV/DATE	R0/ 06.05.'07					BY M.H.YUAN																																	










5-2 External Appearance Defect

NO.	Item	Criterion																		
1.	Black spots, foreign matter, and white spots (Including light leakage due to pinholes of polarizing plates, etc.)	(1)–1–Spots <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>D≤0.1</td><td>Ignore</td></tr><tr><td>0.1<D≤0.2</td><td>5</td></tr><tr><td>0.2<D≤0.3</td><td>2</td></tr><tr><td>0.3<D</td><td>0</td></tr></table> Number of total pieces is set to within 5 pieces. Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2 (1)–2–Blurred Spots(At lighting condition) <table><tr><th>Average Diameter(mm):D</th><th>Number of pieces permitted</th></tr><tr><td>D≤0.3</td><td>Ignore</td></tr><tr><td>0.3<D≤0.75</td><td>5</td></tr><tr><td>0.75<D</td><td>0</td></tr></table> Number of total pieces is set to within 5 pieces. Note that when there are 2 pieces or more, they are not to be concentrated. Set as: Average diameter = (Long diameter + Short diameter)/2	Average Diameter(mm):D	Number of pieces permitted	D≤0.1	Ignore	0.1<D≤0.2	5	0.2<D≤0.3	2	0.3<D	0	Average Diameter(mm):D	Number of pieces permitted	D≤0.3	Ignore	0.3<D≤0.75	5	0.75<D	0
Average Diameter(mm):D	Number of pieces permitted																			
D≤0.1	Ignore																			
0.1<D≤0.2	5																			
0.2<D≤0.3	2																			
0.3<D	0																			
Average Diameter(mm):D	Number of pieces permitted																			
D≤0.3	Ignore																			
0.3<D≤0.75	5																			
0.75<D	0																			



SPECIFICATION

1.	Line	(1)-1-Lines <table> <tr> <th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 4$</td><td>2</td></tr> <tr> <td>$0.08 < W \leq 0.1$</td><td>$L \leq 1$</td><td>1</td></tr> </table> Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated. (1)-2-Blurred Lines(At lighting condition) <table> <tr> <th>Width(mm): W</th><th>Length(mm): L</th><th>Number of pieces permitted</th></tr> <tr> <td>$W \leq 0.03$</td><td>Ignore</td><td>Ignore</td></tr> <tr> <td>$0.03 < W \leq 0.08$</td><td>$L \leq 3$</td><td>6</td></tr> <tr> <td>$0.08 < W$</td><td>$3 < L$</td><td>None</td></tr> </table> Object exceeding 0.1mm follow the standards of the spots form. Note that when there are 2 pieces or more, they are not to be concentrated.	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 4$	2	$0.08 < W \leq 0.1$	$L \leq 1$	1	Width(mm): W	Length(mm): L	Number of pieces permitted	$W \leq 0.03$	Ignore	Ignore	$0.03 < W \leq 0.08$	$L \leq 3$	6	$0.08 < W$	$3 < L$	None
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 4$	2																								
$0.08 < W \leq 0.1$	$L \leq 1$	1																								
Width(mm): W	Length(mm): L	Number of pieces permitted																								
$W \leq 0.03$	Ignore	Ignore																								
$0.03 < W \leq 0.08$	$L \leq 3$	6																								
$0.08 < W$	$3 < L$	None																								
2.	Scratches(Glass, reflection plates, and polarizing plates)	In accordance with black spots. (At non lighting condition)																								
3.	Color irregular	Not remarkable color irregular.																								

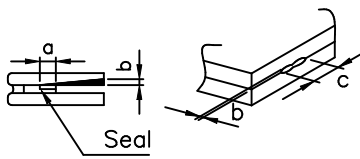
4.	Air bubbles polarizing plates, and reflection plates	<table><tr><td>Average Diameter (mm): D</td><td>Number of pieces permitted</td><td rowspan="2">Average diameter = (Long diameter + Short diameter)/2</td></tr><tr><td>$D \leq 0.3$ $0.3 < D$</td><td>Ignore 0</td></tr></table> Note that when there are 4 pieces or more, they are not to be concentrated.	Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2	$D \leq 0.3$ $0.3 < D$	Ignore 0
Average Diameter (mm): D	Number of pieces permitted	Average diameter = (Long diameter + Short diameter)/2					
$D \leq 0.3$ $0.3 < D$	Ignore 0						
5.	Cracks	(1)General crack		$a \leq 5$ $b \leq 2$ $c \leq t$ Where, a and b are ignored when less than or equal 0.5. The numbers of pieces are set at up to 5 pieces.			
		(2)Corner crack		$a \leq 2.5$ $b \leq 2.5$ $c \leq t$ $a + b \leq 4$			
		(3)Seal portion crack		$a \leq \text{The seal width} \times 1/3$ $b \leq t \times 2/3$ $c \leq 5$ The numbers of pieces are set at up to 5 pieces.			
		(4)ITO Pin crack		$a \leq 5$ $b \leq 1/3 \text{ pin length}$ $c \leq t$			
		(5)Progressive cracks	All taken to be unacceptable.				

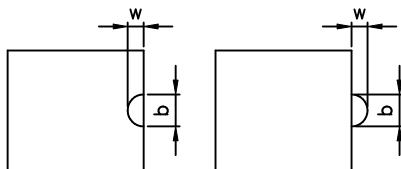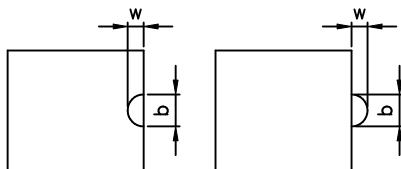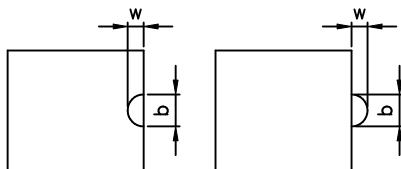NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION		SPEC. NO. : LM202-65 DATE : June 05. 2007 SHEET NO. : 20 /22																									
<table><tr><td>6.</td><td>Outer dimensions</td><td colspan="4">Should be with in the tolerance.</td></tr><tr><td>7.</td><td>Newton ring</td><td colspan="4">Orbicular of interference fringes. To be non. In case of doubtful judgenemt, agreement shall be reachment.</td></tr><tr><td>8.</td><td>Soldering</td><td colspan="4">Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.</td></tr></table>						6.	Outer dimensions	Should be with in the tolerance.				7.	Newton ring	Orbicular of interference fringes. To be non. In case of doubtful judgenemt, agreement shall be reachment.				8.	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.									
6.	Outer dimensions	Should be with in the tolerance.																											
7.	Newton ring	Orbicular of interference fringes. To be non. In case of doubtful judgenemt, agreement shall be reachment.																											
8.	Soldering	Should be no defective soldering such as shorting, loose terminal cold solder, peeling of printed circuit board pattern, improper mouting position, etc.																											
5-3 Dot Appearance Defect																													
<table><tr><td>NO.</td><td>Item</td><td colspan="4">Criteria</td></tr><tr><td>1.</td><td>Pinhole</td><td colspan="4">  Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated. </td></tr><tr><td>2.</td><td>Missing</td><td colspan="4">  Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units. </td></tr><tr><td>3.</td><td>Thick and thin display</td><td colspan="4">  Taken to be within$\pm 1.5\%$ of display character width(a) and height(b). </td></tr></table>						NO.	Item	Criteria				1.	Pinhole	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.				2.	Missing	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.				3.	Thick and thin display	 Taken to be within$\pm 1.5\%$ of display character width(a) and height(b).			
NO.	Item	Criteria																											
1.	Pinhole	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken be with in 10 units. Note that they are not to be concentrated.																											
2.	Missing	 Dot display a and b are each $\leq 0.2\text{mm}$ The overall total is taken to be with in 10 units.																											
3.	Thick and thin display	 Taken to be within$\pm 1.5\%$ of display character width(a) and height(b).																											
REV/DATE		R0/ 06.05.'07		BY M.H.YUAN																									



NAN YA PLASTICS CORP. ELEC. MATERIALS DIV. LCD DEPARTMENT		SPECIFICATION			SPEC. NO. : LM202-65 DATE : June 05. 2007 SHEET NO. : 21 /22	
NOTICE: - SAFETY - If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin. - If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water. - HANDLING - Avoid static electricity which can damage the CMOS LSI. - Do not remove the panel or frame from the module. - The polarizing plate of the display is very fragile. So, please handle it very carefully. - Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate. - Do not use ketonics solvent & Aromatic solvent, use a soft cloth soaked with a cleaning naphtha solvent. - STORAGE - Store the panel or module in a dark place where the temperature is 25°C±5°C and the humidity is below 65% RH. - Do not place the module near organics solvents or corrosive gases. - Do not crush, shake, or jolt the module. - TERMS OF WARRANT - Acceptance inspection period The period is within one month after the arrival of contracted commodity at the buyer's factory site. - Applicable warrant period The period is within twelve months since the date of shipping out under normal using and storage conditions.						
REV/DATE	R0/ 06.05.'07					BY M.H.YUAN

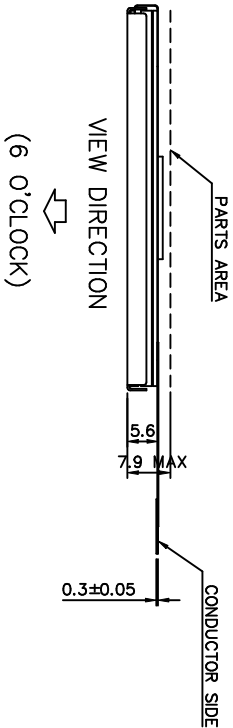

DETAIL A



DETAIL B

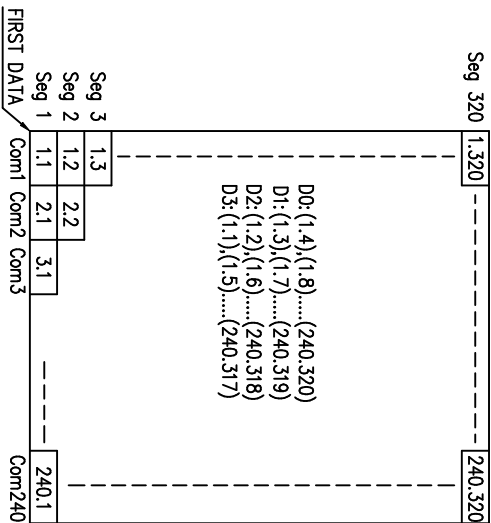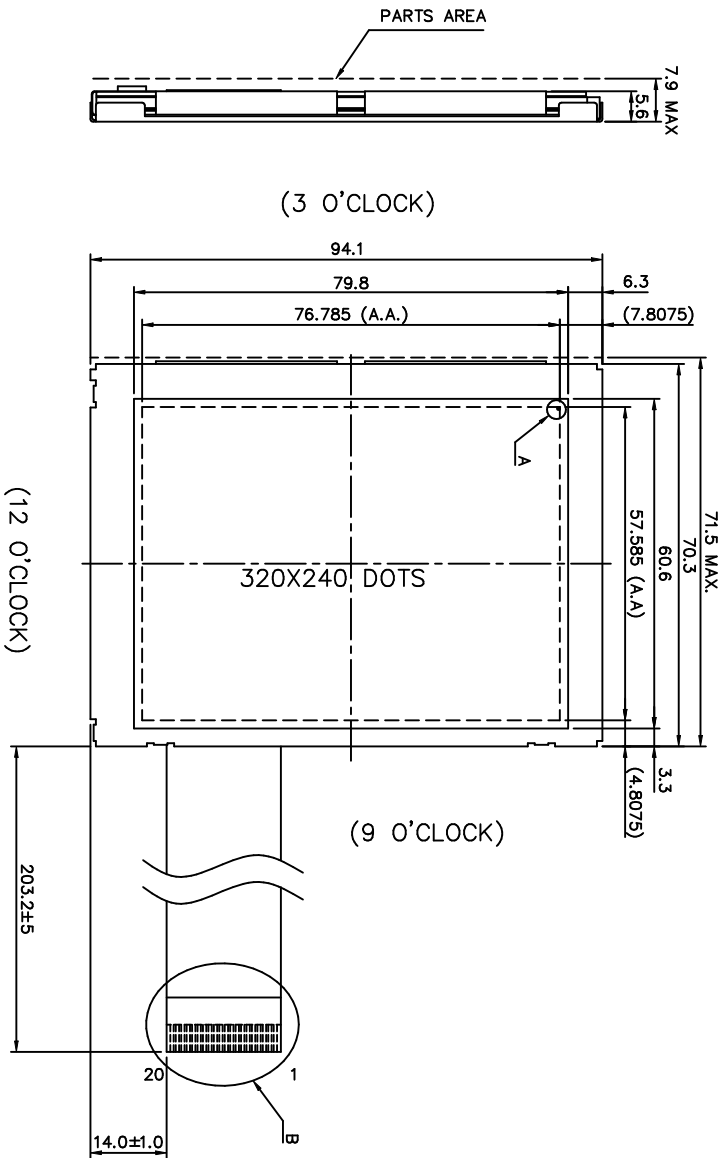

- NOTES:
- 1.RESOLUTION: 320X240 DOTS
- 2.BACKLIGHT: LED (WHITE)
- 3.FRAME MATERIAL: SECC
- 4.GLASS THICKNESS: 0.7 mm

GENERAL TOLERANCE LIST

DIMENSION	TOLERANCE
L ≤ 6	±0.25 (mm)
6 < L ≤ 18	±0.3 (mm)
18 < L ≤ 50	±0.4 (mm)
50 < L ≤ 125	±0.5 (mm)
125 < L	±0.6 (mm)
ANGLE	±1° (DEG)



南亞塑膠工業股份有限公司
NAN YA PLASTICS CORPORATION

製品圖

LTC79H202165KS_

NAME	DATE	THIRD ANGLE P
------	------	---------------

APPROVE	CHECK	T.S.HO	SCALE	UNIT
---------	-------	--------	-------	------

DRAWN	T.S.HO	96.05.24	1/1	mm
-------	--------	----------	-----	----

DWG NO.	M202165A	D65A	3	A
---------	----------	------	---	---

PIN NO	SYMBOL	LEVEL	FUNCTION	PIN NO	SYMBOL	LEVEL	FUNCTION
1	VDD	H	POWER SUPPLY FOR LOGIC	10	DO		
2	S.GND	-	SHIELD GROUND	11	D1	H/L	DISPLAY DATA
3	VLCD	H	POWER SUPPLY FOR LCD	12	D2		
4	FLM	H	FIRST LINE MARKER	13	D3		
5	DISP OFF	H/L	H: ON/L: OFF	14	VSS	-	LOGIC GROUND
6	M	H/L	SWITCH SIGNAL TO CONVERT LIQUID CRYSTAL DRIVE WAVEFORM INTO AC	15	LED(+)	-	POWER SUPPLY FOR LED
7	CL1	H/L	DATA LATCH	16	LED(-)	-	POWER SUPPLY FOR LED
8	CL2	H/L	SHIFT CLOCK	17			
9	VSS	-	LOGIC GROUND	18	NC	-	NC
				19			
				20			



REV. NO	DESCRIPTION	DATE	DESIGN	CHECK	APPROVE	DWG NO.
						M202165A
						D65A
						3
						A

THE NOTES OF LCM USING

LCM is easy to damage.


Please follow the notes as bellows, and be careful of handling!

Correct handling

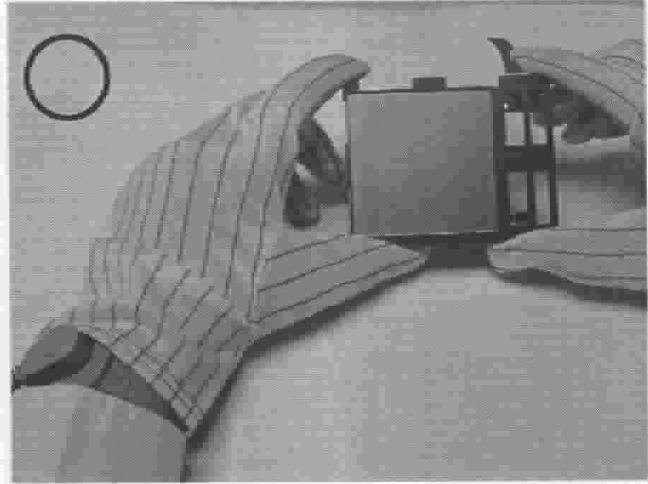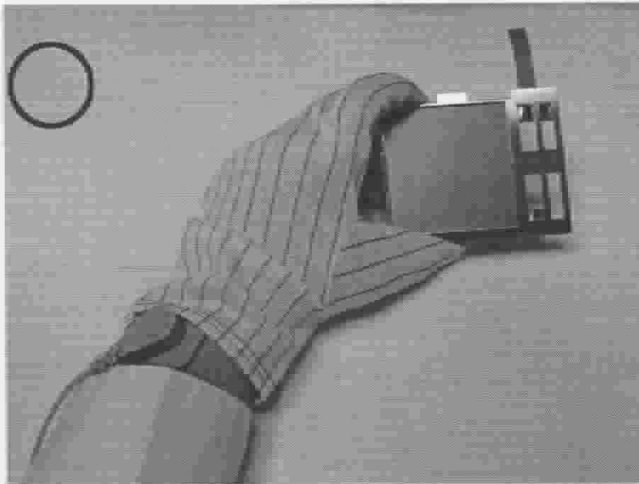


As above picture, please handle with glove by LCM edges and full EOS/ESD protection.


Incorrect handling

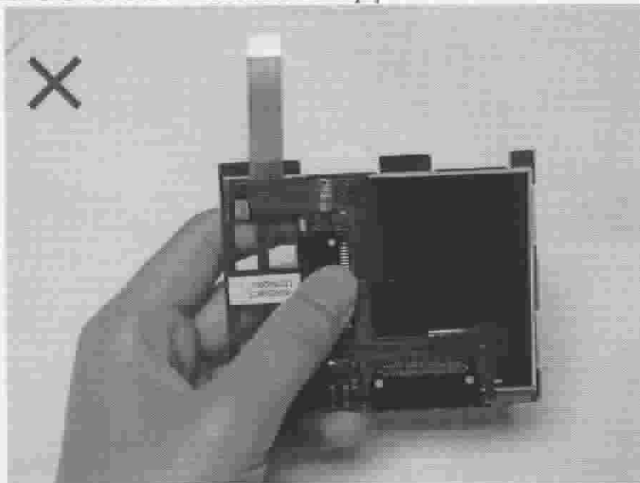


Please don't touch IC directly.

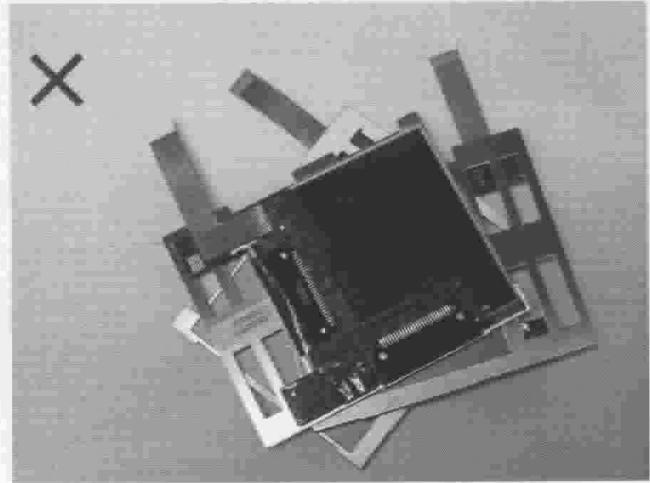

Please don't put one on another LCM.

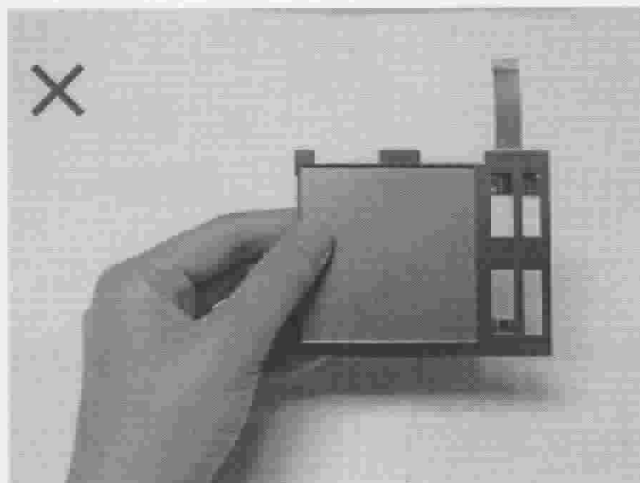

Please don't hold the surface of LCM.

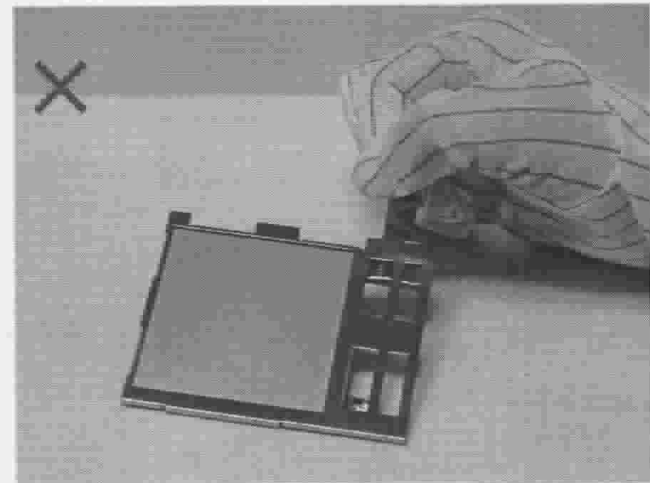



Please don't stretch interface of output.

THE NOTES OF LCD USING

LCD is easy damage.


Please follow notes as bellows, and be careful of handling!

Correct handling

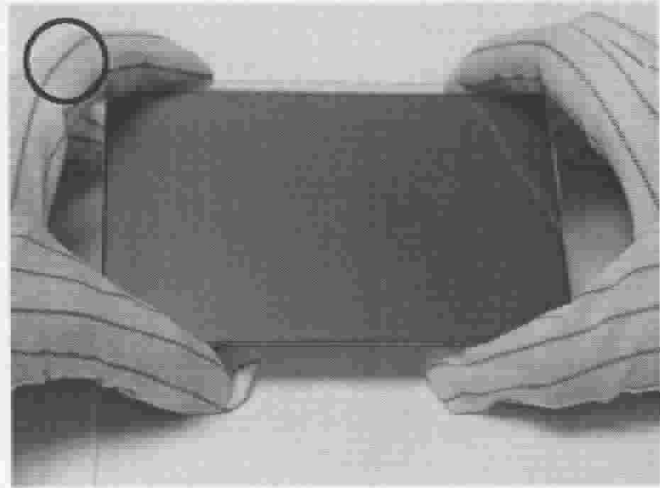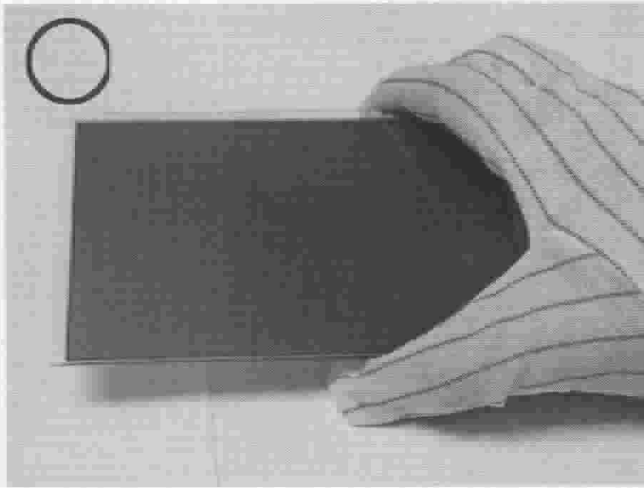


As above picture, please handle with glove by LCD edges and full EOS/ESD protection.


Incorrect handling

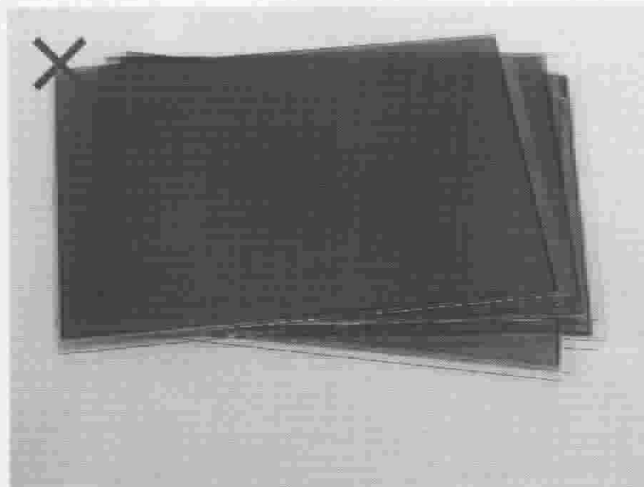


Please don't put one on another LCD.

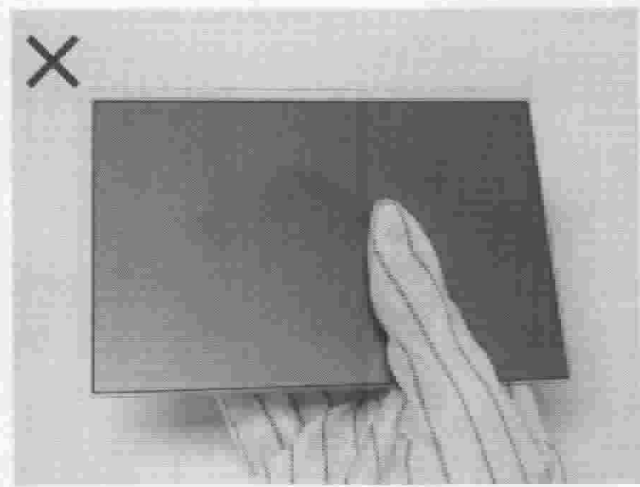

Please don't hold the surface of LCD.

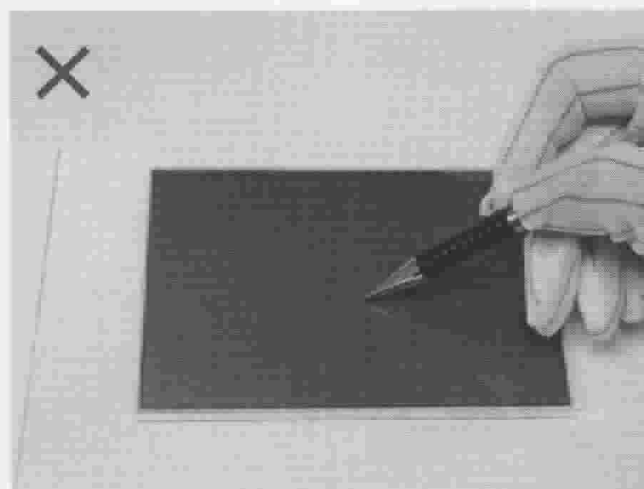

Please don't operate with sharp stick such as sharp pencil.

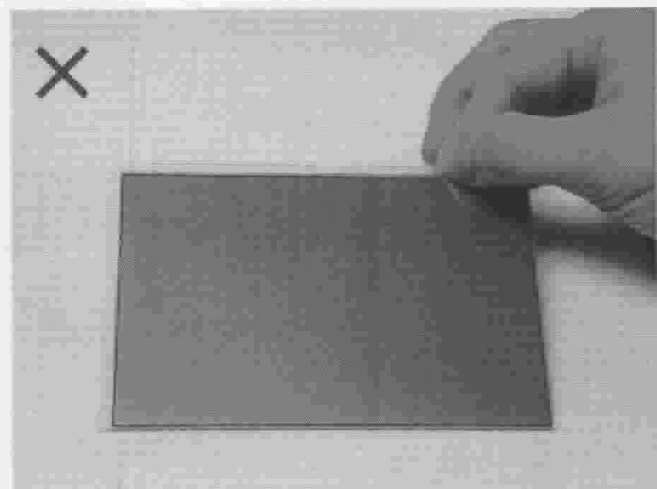

Please don't touch ITO glass without anti-static gloves.

